


REV	DESCRIPTION	APPROVED BY	PREPARED BY	DATE

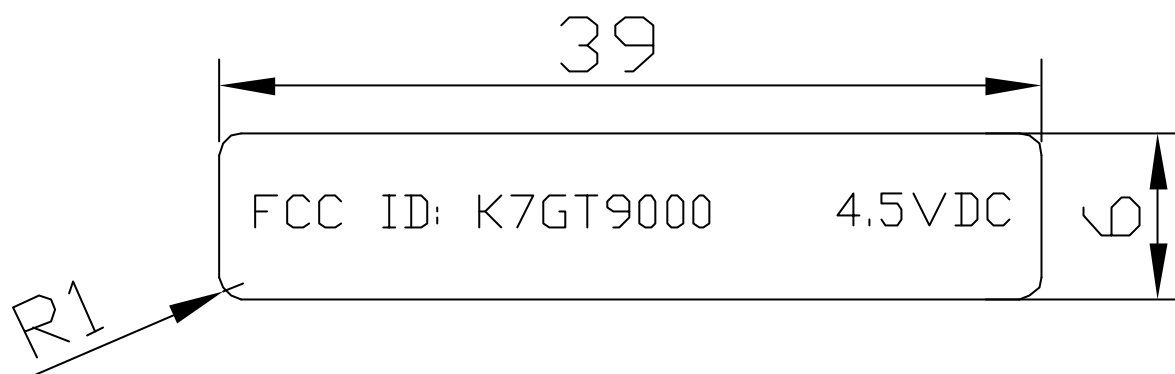

-ADHESIVE TAPE ON
ONE SIDE

NOTES:

1. MATERIAL:

FACESTOCK: 2.0MIL GLOSS WHITE CAST VINYL NONTOPCOATED

ADHESIVE: 0.8MIL #350 HIGH-MODULUS ACRYLIC ADHESIVE

LINER: 3.2MIL 55# WHITE CENSIFIED KRAFT PAPER, SILICONE COATED

2. PLEASE PROVIDE THE BLANK LABEL IN ROLL FORM.

3.THE MATERIALMUST PASS TEST AS THE MOTOROLA'S QA SPECIFICATION REQUEST. THE DETAIL AS FOLLOWS:

A)THE RUBBING TEST: INCLUDE USE THE WATER AND PETROLEUM.


B)THE HIGH AND LOW TEMPERATURE TEST.

C)THE HUMIDITY TEST.

4.PRINTING COLOR: BLACK.

5.FILM SUPPLIED BY NT.ENG

GIANT ELECTRONICS LTD.

TITLE FCC LABEL FOR T9000					MODEL T9000	
MATERIAL				DRAWING NO.		
TOLERANCE TABLE FOR UNTOLERANCED DIMENSIONS		PROJECTION 	UNIT MM	SCALE FREE	DRAWN BY KELLY ZHU	DATE NOV 12, 04
DIMENSIONS	TOLERANCE				CHECKED BY BIRD CHENG	DATE NOV 12, 04
0.00 TO 25.00	±0.10	GENERAL DRAFT ANGLE (MAX)				
25.01 TO 50.00	±0.15	GENERAL WALL THICKNESS				
50.01 TO 100.00	±0.20	DO NOT SCALE DRAWING				
100.00 AND ABOVE	±0.30	SHEET 1 OF 1			APPROVED BY ZEUS CHAN	DATE NOV 12, 04
ANGLES	±1.00°	SIZE A4				

THE CONTENT OF THIS DOCUMENT IS GIANT INTELLECTUAL PROPERTY AND IS THE PROPERTY OF GIANT. IT IS TO BE TREATED AS STRICTLY CONFIDENTIAL AND IS NOT TO BE DISCLOSED, REPRODUCED, OR USED EXCEPT AS AUTHORIZED IN WRITING BY GIANT ELECTRONICS LTD, IN CONNECTION WITH THE MANUFACTURE, MAINTENANCE AND USE OF THE GIANT EQUIPMENT TO WHICH IT PERTAINS. COPYRIGHT © GIANT ELECTRONICS LTD, ALL RIGHTS RESERVED

The label content and size follow the specification of page1 in this file.

