


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	62%
Test Engineer	Serway Li	Configurations	2.4G+5G / Normal Link

Horizontal

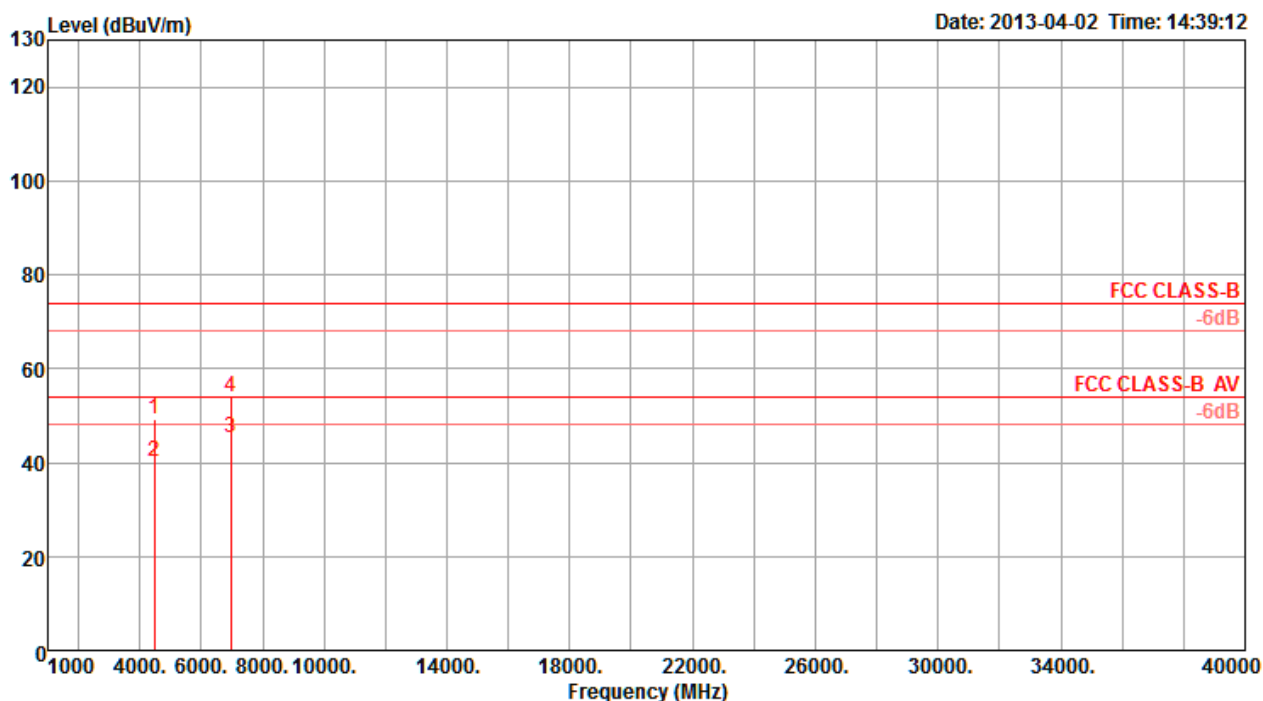

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	4479.91	49.29	74.00	-24.71	48.07	4.13	34.80	31.89	Peak	223	100	HORIZONTAL
2	4479.95	40.33	54.00	-13.67	39.11	4.13	34.80	31.89	Average	223	100	HORIZONTAL
3 a	6973.32	45.15	54.00	-8.85	38.20	5.26	34.85	36.54	Average	231	169	HORIZONTAL
4 p	6973.40	53.89	74.00	-20.11	46.94	5.26	34.85	36.54	Peak	231	169	HORIZONTAL

Vertical

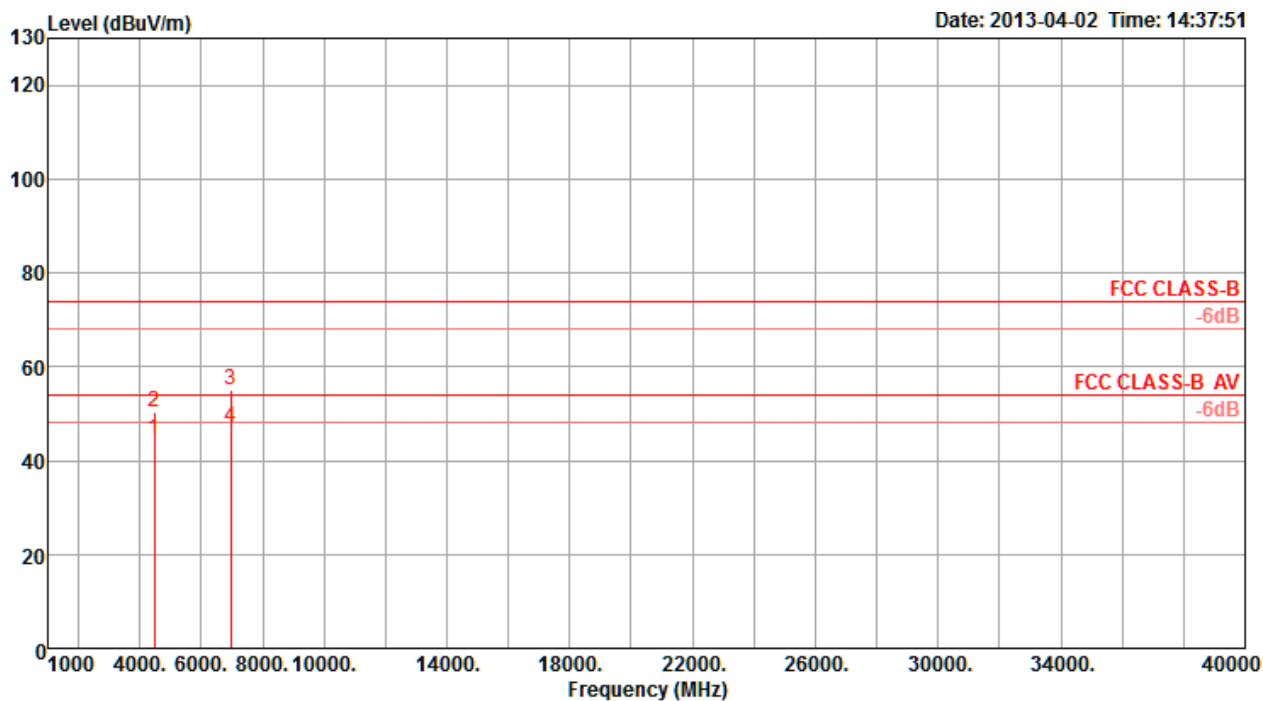

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	4479.95	44.52	54.00	-9.48	43.30	4.13	34.80	31.89	Average	55	158	VERTICAL
2	4480.11	50.41	74.00	-23.59	49.19	4.13	34.80	31.89	Peak	55	158	VERTICAL
3 p	6973.33	54.88	74.00	-19.12	47.93	5.26	34.85	36.54	Peak	208	100	VERTICAL
4 a	6973.33	47.17	54.00	-6.83	40.22	5.26	34.85	36.54	Average	208	100	VERTICAL