



MEASUREMENT REPORT

(FCC: Part 15 Subpart C / ANSI C63.10-2013)





Product : Remote Control Transmitter

Trade Name : Skytech II, Inc., Inc.

Model No.____: SMART-STAT-IV / SMART-BATT-II /

RCT-MLT-IV / RCTS-MLT-IV

Applicant_____: Skytech II, Inc.

Applicant Address : 9230 Conservation Way Fort Wayne, Indiana, 46809, USA





Report Number	MLT1907P15002		
Applicant Skytech II, Inc.			
Product	Remote Control Transmitter		
Sample Received Date	2019/7/22		
Sample Tested Date	2019/7/22 ~2020/2/11		

Report Prepared By	sse Tien			
Signature	Jesse Tien			
Date Prepared	2020/2/12			

Report Authorized By	Roger Chen				
Signature	Typer Ch				
Date Authorized	2020/2/12				

Test By

Max Light Technology Co., Ltd. Xi Shiding Dist. New Taipei City 223 Taiwan R.O.C

Office: Tel: 886-2-2363-2447 Fax: 886-2-2363-2597 Lab.: Tel: 886-2-2663-3486 Fax: 886-2-2663-3582

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory.

This test report not include the evalution of M.U

The test results only relate to the submitted test sample specified above.





Table of Contents:

History of	of Test Report	4
1.	General	5
2.	Conducted Emissions Requirements	7
3.	Radiated Emissions Requirements	8
4.	Transmitter Bandwidth Measurements	.18
5.	Transmitter Duty Cycle Measurements	.20
6.	Verification of De-activation after 5 seconds	.24
Appendi	ix I - EUT Test Setup	. 27
Appendi	ix II – Brand / Trade Name & Model No. Multiple Listee	. 29





History of Test Report

Original Report Issue ■ No additional attac □ additional attachme	chment	d as in the following record:
Attachment No.	Issue Date	Description
MLT1907P15002	2020/2/12	Original report



1. General

1.1 Introduction

The following measurement report is submitted on behalf of Skytech II, Inc. In support of an Intentional Periodic Radiator certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's and Regulations.

1.2 Customer Details

Applicant Name	Skytech II, Inc.
Applicant Address	9230 Conservation Way Fort Wayne, Indiana, 46809, USA
Manufacturer Name	FEGO PRECISION INDUSTRIAL CO., LTD.
Manufacturer Address	No. 947 LINSEN RD., WUFONG 41352 TAICHUNG CITY,
Manufacturer Address	TAIWAN

1.3 Technical data of EUT

Equipment	Remote Control Transmitter						
Model No	SMART-STAT-IV / SMART-BATT-II / RCT-MLT-IV / RCTS-MLT-IV						
FCC ID	9L3001-1TX						
Power Type	Powered by 1.5V x2 Battery (AAA)						


The EUT is a remote transmitter. The operation frequency is 303.8MHz.

1.4 Description of Support Equipment

The EUT itself forms a system. No support equipment is required for its normal operation.



1.5 Configuration of System Under Test

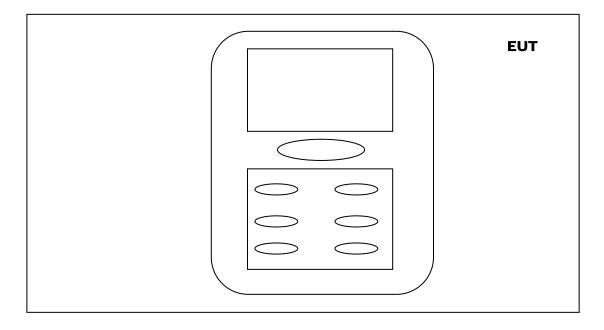

1.6 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.10: 2013 "Measurement of Intentional Radiators."

1.7 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated.

The EUT is a automatic activated device and it will follow the 15.231(e) requirement.

1.8 Test environment:

Temperature: 27 Degrees Celsius

Relative Humidity: 63 %





2. Conducted Emissions Requirements

The EUT operates solely by the battery. According to the rule of Section 15.207(c), the EUT exempt to the power line conducted test.



3. Radiated Emissions Requirements

3.1 General Configuration:

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

3.2 General Configuration:

Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 300 MHz to 6 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

The field strength below 1 GHz was measured by EMCO Biconilog Antenna (mode 3142C) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 40 GHz at a distance of 3 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation factor (20dB/decade).





For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m)= FI(dBuV)+AF(dBm)+CL(dBuV)-Gain(dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m)= Amplitude (dBuV)-Duty(dB)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:



Page: 10 / 29

(1) For fundamental frequency:

(1.1) For the manual transmission, according to 15.231(b)

FUNDAMENTAL FREQUENCY (MHz), excluding restricted band frequencies of Table 2	FIELD STRENGTH OF FUNDAMENTAL microvolts/m at 3 metres, (watts, EIRP)(1)	FIELD STRENGTH OF UNWANTED EMISSIONS(1) microvolt/metre at 3 metres	
40.66-40.70	2250	225	
70-130	1,250	125	
130-174	1,250 to 3,750*	125 to 375*	
174-260 (note 1)	3,750	375	
260-470 (note 1)	3,750 to 12,500*	375 to 1,250*	
Above 470	12,500	1250	

Note: Use quasi-peak or averaging meter.

*Linear interpolation with frequency F in MHz:

For 130-174 MHz: FS (microvolts/m) = (56.82 x F) - 6136 For 260-470 MHz: FS (microvolts/m) = (41.67 x F) - 7083

(1.2) For the automatic transmission, according to 15.231(e)

FUNDAMENTAL FREQUENCY (MHz), excluding restricted band frequencies of Table 2	FIELD STRENGTH OF FUNDAMENTAL microvolts/m at 3 metres, (watts_FIRP)(1)	
40.66-40.70	1000	100
70-130	500	50
130-174	500 to 1,500*	50 to 150*
174-260 (note 1)	1,500	150
260-470 (note 1)	1,500 to 5,000*	150 to 500*
Above 470	5,000	500

Note: Use quasi-peak or averaging meter.

* Linear interpolation with frequency F in MHz:

For 130-174 MHz: FS (microvolts/m) = (22.73 x F) - 2454.55For 260-470 MHz: FS (microvolts/m) = (16.67 x F) - 2833.33

(2) For spurious frequency:

Spurious emission limits = fundamental emission limit /10



Page: 11 / 29

3.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cal. Date
1.	HP	Spectrum Analyzer	US40240137	7403A	2019/03/25	2020/03/25
2.	EMCO	Biconilog Antenna	00059739	3142C	2019/09/23	2020/09/23
3.	Agilent	Spectrum Analyzer	US44300422	E4446A	2019/03/13	2020/03/13
4.	MLT	Pre Amplifier	TA010-190-30	RF03	2019/07/25	2020/07/25
5.	SCHWARZBECK	Horn Antenna	304	BBHA 9120 D	2019/01/07	2020/01/07
6.	EMCO	Biconilog Antenna	00044568	3142C	2019/09/23	2020/09/23
7.	MLT	Pre Amplifier	20110209	PREAMP6G-01	2019/03/19	2020/03/19



Page: 12 / 29

3.4 Measurement Data Of Radiated Emissions:

3.4.1 Open Field Radiated Emissions (Horizontal/X-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : Transmit

	Radiated Emissions (Fundamental Frequency)										
Freq (MHz)	Read (dBuV/m)	Factor	Amplitude (Pk) (dBuV/m)	Ant	nt Table Duty Actual Amp(AV) (dBuV/m) Margi						
304.20	84.29	-30.23	54.06	1	170	8.06	46.00	66.97	-20.97		
Freq (MHz)	Read (dBuV/m)	Factor (dB)	(Pk)	Ant (m)	Table (D	egree)	Actual Amp(PK) (dBuV/m)	Limit (dBuV/m)	Margin (dB)		
304.20	84.29	-30.23	54.06	1	170		54.06	86.97	-32.91		

	Radiated Emissions (Unwanted Frequency)									
Freq (MHz) (ABuV/m) Factor (Pk) (ABuV/m) (Amplitude (Pk) (MHz) (Amp(AV) (Am							Margin (dB)			
608.00	48.87	-22.53	26.34	1	220	8.06	18.28	46.97	-28.69	

			Radiated Emissions (Unwanted Frequency)											
Freq (MHz)	Read (dBuV/m)	Factor (dB)	Amplitude (Pk) (dBuV/m)	Ant (m)	Table (Degree)	Duty (dB)		Limit (dBuV/m)	Margin (dB)					
2736.0	2736.0 50.76 -6.10 44.66 1 210 8.06 36.60 54.00 -17.40													

Notes: 1.Margin = Actual Amp – Limits. 2. Distance of Measurement: 3 Meter.

- 3. Height of table for EUT placed: 0.8 m(< 1GHz), 1.5m(>1GHz).
- 4. ANT = Antenna height.
- 5. Duty = Duty cycle correction factor.
- 6. Pre amplifier Gain :36dB to 40dB (30MHz to 1GHz)
- 7. Pre amplifier Gain :31dB to 33dB (1GHz to 6GHz)
- 8. Amplitude (Pk) = Read Factor =. Actual Amp (Pk)
- 9. Actual Amp (AV) = Amplitude (Pk) Duty.
- 10. EUT Orthogonal Axes: X denotes Laid on Table; Z denotes Side Stand; Y denotes Vertical Stand.
- 11.Margin<0 is Pass, Margin≥0 is Fail,



Page: 13 / 29

3.4.2 Open Field Radiated Emissions (Vertical/X-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : Transmit

		Radia	ted Emissic	ns (Fundame	ntal Fr	equency)				
Freq (MHz)	Read (dBuV/m)	Factor	Amplitude (Pk) (dBuV/m)	Ant	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)		
304.20	95.73	-29.55	66.18								
Freq (MHz)	Read (dBuV/m)	Factor	Amplitude (Pk) (dBuV/m)	Ant (m)	Table (Degree)		Actual Amp(PK) (dBuV/m)	Limit (dBuV/m)	Margin (dB)		
304.20	95.73	-29.55	66.18 1 200 66.18 86.97 -20.7								

			ated Emiss		•		quency)				
Freq (MHz)	Read (dBuV/m)	Factor (dB)	1001	Ant (m)	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)		
608.00											

		Radia	ted Emission	ons (Unwante	d Fred	quency)					
I I I I I I I I I I I I I I I I I I I									Margin (dB)			
1216.0	51.75	-13.57	38.18	1	40	8.06	30.12	54.00	-23.88			
2736.0	736.0 49.05 -6.10 42.95 1 280 8.06 34.89 54.00 -19.11											

Notes: 1.Margin = Actual Amp – Limits. 2. Distance of Measurement: 3 Meter.

- 3. Height of table for EUT placed: 0.8 m(< 1GHz), 1.5m(>1GHz).
- 4. ANT = Antenna height.
- 5. Duty = Duty cycle correction factor.
- 6. Pre amplifier Gain :36dB to 40dB (30MHz to 1GHz)
- 7. Pre amplifier Gain :31dB to 33dB (1GHz to 6GHz)
- 8. Amplitude (Pk) = Read Factor =. Actual Amp (Pk)
- 9. Actual Amp (AV) = Amplitude (Pk) Duty.
- 10. EUT Orthogonal Axes: X denotes Laid on Table; Z denotes Side Stand; Y denotes Vertical Stand.
- 11.Margin<0 is Pass, Margin≥0 is Fail,



Page: 14 / 29

3.4.3 Open Field Radiated Emissions (Horizontal/Y-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : Transmit

		Radia	ted Emissic	ns (Fundame	ntal Fr	equency)		
Freq (MHz)	Read (dBuV/m)	Factor (dB)	/PK1	Ant	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)
304.20	99.58	-30.23	69.35	1	20	8.06	61.29	66.97	-5.68
Freq (MHz)	Read (dBuV/m)	Factor (dB)	Amplitude (Pk) (dBuV/m)	Ant (m)	Table (D	egree)	Actual Amp(PK) (dBuV/m)	Limit (dBuV/m)	Margin (dB)
304.20	304.20 99.58 -30.23 69.35 1 20 69.35 86.97 -17.62								

		Radi	ated Emiss	ions	(Unwant	ed Fred	quency)				
Freq (MHz)	Read (dBuV/m)	ractor	1001	Ant	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)		
608.00	608.00 60.64 -22.53 38.11 1 190 8.06 30.05 46.97 -16.92										

		Radia	Radiated Emissions (Unwanted Frequency)												
Freq (MHz)	. 1061				Table (Degree)	Duty (dB)		Limit (dBuV/m)	Margin (dB)						
1216.0	50.48	-13.57	36.91	1	35	8.06	28.85	54.00	-25.15						
2410.0															

Notes: 1.Margin = Actual Amp – Limits. 2. Distance of Measurement: 3 Meter.

- 3. Height of table for EUT placed: 0.8 m(< 1GHz), 1.5m(>1GHz).
- 4. ANT = Antenna height.
- 5. Duty = Duty cycle correction factor.
- 6. Pre amplifier Gain :36dB to 40dB (30MHz to 1GHz)
- 7. Pre amplifier Gain :31dB to 33dB (1GHz to 6GHz)
- 8. Amplitude (Pk) = Read Factor =. Actual Amp (Pk)
- 9. Actual Amp (AV) = Amplitude (Pk) Duty.
- 10. EUT Orthogonal Axes: X denotes Laid on Table; Z denotes Side Stand; Y denotes Vertical Stand.
- 11.Margin<0 is Pass, Margin≥0 is Fail,



Page: 15 / 29

3.4.4 Open Field Radiated Emissions (Vertical/Y-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : Transmit

		Radia	ted Emissic	ns (Fundame	ntal Fr	equency)				
Freq (MHz)	Read (dBuV/m)	Factor	Amplitude (Pk) (dBuV/m)	Ant	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)		
304.20	83.49	-29.55	53.94								
Freq (MHz)	Read (dBuV/m)	Factor	Amplitude (Pk) (dBuV/m)	Ant (m)	Table (D	egree)	Actual Amp(PK) (dBuV/m)	Limit (dBuV/m)	Margin (dB)		
304.20	83.49	-29.55	5 53.94 1 230 53.94 86.97 -33.0								

			ated Emiss		•		quency)				
Freq (MHz)	Read (dBuV/m)	Factor (dB)	1001	Ant (m)	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)		
911.80	911.80 50.74 -23.36 27.38 1 150 8.06 19.32 46.97 -27.65										

		Radia	ted Emission	ons (Unwante	d Free	quency)					
TOKY TOKY TO TOKY TO THE TOTAL THE TOTAL TO THE THE TOTAL TO THE TOTAL THE TOTAL TO THE TOTAL TOTAL TO THE TO									Margin (dB)			
2410.0	49.20	-7.17	42.03	1	280	8.06	33.97	54.00	-20.03			
2734.0	734.0 46.90 -6.11 40.79 1 80 8.06 32.73 54.00 -21.27											

Notes: 1.Margin = Actual Amp – Limits. 2. Distance of Measurement: 3 Meter.

- 3. Height of table for EUT placed: 0.8 m(< 1GHz), 1.5m(>1GHz).
- 4. ANT = Antenna height.
- 5. Duty = Duty cycle correction factor.
- 6. Pre amplifier Gain :36dB to 40dB (30MHz to 1GHz)
- 7. Pre amplifier Gain :31dB to 33dB (1GHz to 6GHz)
- 8. Amplitude (Pk) = Read Factor =. Actual Amp (Pk)
- 9. Actual Amp (AV) = Amplitude (Pk) Duty.
- 10. EUT Orthogonal Axes: X denotes Laid on Table; Z denotes Side Stand; Y denotes Vertical Stand.
- 11.Margin<0 is Pass, Margin≥0 is Fail,



Page: 16 / 29

3.4.5 Open Field Radiated Emissions (Horizontal/Z-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : Transmit

		Radia	ted Emissic	ns (Fundame	ntal Fr	equency)		
Freq (MHz)	Read (dBuV/m)	Factor	Amplitude (Pk) (dBuV/m)	Ant	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)
304.20	100.05	-30.23	69.82	1	150	8.06	61.76	66.97	-5.21
Freq (MHz)	Read (dBuV/m)	Factor	(PK)	Ant (m)	Table (D	egree)	Actual Amp(PK) (dBuV/m)	Limit (dBuV/m)	Margin (dB)
304.20	100.05	-30.23	69.82	1	150)	69.82	86.97	-17.15

			ated Emiss		•		quency)				
Freq Read Factor Amplitude Ant Table Duty Actual Limit Margi							Margin (dB)				
608.00											

Radiated Emissions (Unwanted Frequency)									
Freq (MHz)	Read (dBuV/m)	Factor (dB)	Amplitude (Pk) (dBuV/m)	Ant (m)	Table (Degree)	Duty (dB)		Limit (dBuV/m)	Margin (dB)
2466.0	52.14	-7.62	44.52	1	200	8.06	36.46	54.00	-17.54

Notes : 1.Margin = Actual Amp – Limits. 2. Distance of Measurement : 3 Meter.

- 3. Height of table for EUT placed: 0.8 m(< 1GHz), 1.5m(>1GHz).
- 4. ANT = Antenna height.
- 5. Duty = Duty cycle correction factor.
- 6. Pre amplifier Gain :36dB to 40dB (30MHz to 1GHz)
- 7. Pre amplifier Gain :31dB to 33dB (1GHz to 6GHz)
- 8. Amplitude (Pk) = Read Factor =. Actual Amp (Pk)
- 9. Actual Amp (AV) = Amplitude (Pk) Duty.
- 10. EUT Orthogonal Axes: X denotes Laid on Table; Z denotes Side Stand; Y denotes Vertical Stand.
- 11.Margin<0 is Pass, Margin≥0 is Fail,



Page: 17 / 29

3.4.6 Open Field Radiated Emissions (Vertical/Z-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following

Test Mode : Transmit

	Radiated Emissions (Fundamental Frequency)									
Freq (MHz)	Read (dBuV/m)	Factor (dB)	Amplitude (Pk) (dBuV/m)	Ant	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
304.20	79.44	-29.55	49.89	1	190	8.06	41.83	66.97	-25.14	
Freq (MHz)	Read (dBuV/m)	Factor	(PK)	Ant (m)	Table (D	egree)	Actual Amp(PK) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
304.20	79.44	-29.55	49.89	1	190)	49.89	86.97	-37.08	

	Radiated Emissions (Unwanted Frequency)								
Freq (MHz)	Read (dBuV/m)	Factor (dB)	1001	Ant (m)	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)
608.00	48.81	-24.39	24.42	1	280	8.06	16.36	46.97	-30.61

Radiated Emissions (Unwanted Frequency)									
Freq (MHz)	Read (dBuV/m)	Factor (dB)	Amplitude (Pk) (dBuV/m)	Ant (m)	Table (Degree)	Duty (dB)	Actual Amp(AV) (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2414.0	51.53	-7.17	44.36	1	290	8.06	36.30	54.00	-17.70

Notes : 1.Margin = Actual Amp – Limits. 2. Distance of Measurement : 3 Meter.

- 3. Height of table for EUT placed: 0.8 m(< 1GHz), 1.5m(>1GHz).
- 4. ANT = Antenna height.
- 5. Duty = Duty cycle correction factor.
- 6. Pre amplifier Gain :36dB to 40dB (30MHz to 1GHz)
- 7. Pre amplifier Gain :31dB to 33dB (1GHz to 6GHz)
- 8. Amplitude (Pk) = Read Factor =. Actual Amp (Pk)
- 9. Actual Amp (AV) = Amplitude (Pk) Duty.
- 10. EUT Orthogonal Axes: X denotes Laid on Table; Z denotes Side Stand; Y denotes Vertical Stand.
- 11.Margin<0 is Pass, Margin≥0 is Fail,



Page: 18 / 29


4. Transmitter Bandwidth Measurements

4.1 Test Condition & Setup:

The transmitter bandwidth measurements were performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height and a near field probe was used at a distance about 20 cm for receiving. While testing, EUT was set to transmit continuously.


The resolution bandwidth of the spectrum analyzer was set to 10KHz. The detector function was set to peak and hold mode to clearly observe the components. The maximum permitted bandwidth at –20dB with respect to the reference level specified by the rule was 0.25 % of the center frequency of the EUT.

4.2 Test Instruments Configuration:

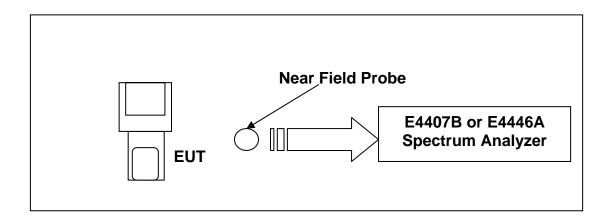

4.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cal. Date
1.	Agilent	Spectrum Analyzer	US44300422	E4446A	2019/03/13	2020/03/13
2.	Agilent	Spectrum Analyzer	US39240419	E4407B	2019/05/09	2020/05/09
3.	EMCO	Biconilog Antenna	00044568	3142C	2019/09/23	2020/09/23
4.	EM	Probe	107328	EM-6992	N/A	N/A






4.4 Test Result:

Permitted Maximum Bandwidth	759.70	KHz
Bandwidth Measurement	60.60	KHz

4.5 Test Graphs:

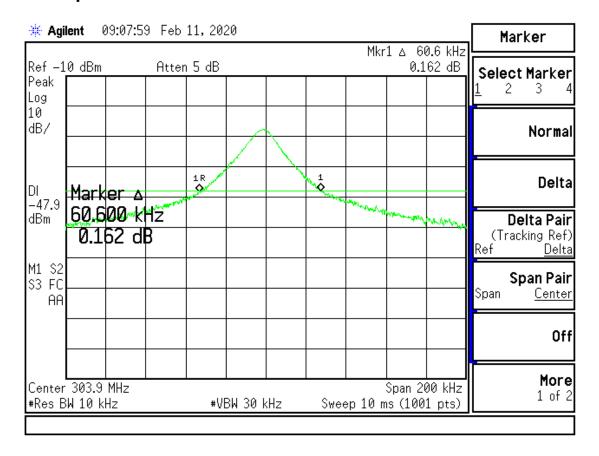

Page: 20 / 29

5. Transmitter Duty Cycle Measurements

5.1 Test Condition & Setup:

The transmitter bandwidth measurements were performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height and a near field probe was used at a distance about 20 cm for receiving. While testing, EUT was set to transmit continuously. Various key configurations were also investigated to find the maximum duty cycle.


The spectrum analyzer resolution bandwidth and video bandwidth were all set to 1 MHZ to encompass all Significant spectral components during the test. The analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency. A digital oscilloscope was connected to the aux video output of the spectrum analyzer for measuring pulse width. The pulse width was determined by the difference between the half voltage points on a pulse.

The duty cycle was determined by the following equation:

TO calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion :

Duty Cycle Correction Factor (dB)= 20 X Log10 (Duty Cycle(%))

5.2 Test Instruments Configuration:

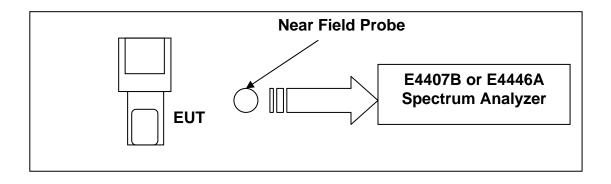



Page: 21 / 29

5.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cal. Date
1.	Agilent	Spectrum Analyzer	US44300422	E4446A	2019/03/13	2020/03/13
2.	Agilent	Spectrum Analyzer	US39240419	E4407B	2019/05/09	2020/05/09
3.	EMCO	Biconilog Antenna	00044568	3142C	2019/09/23	2020/09/23
4.	EM	Probe	107328	EM-6992	N/A	N/A

5.4 Test Result:

Pulse Train	Number of Pulse	T(ms)	Total Time (ms)	
Long Pulse	10	0.9	9	msec
Middle Pulse	0	0	0	msec
Short Pulse	22	0.525	11.55	msec

Total ON interval in a complete pulse train	20.55	msec
Length of a complete pulse train	51.975	msec
Duty Cycle (%)	39.54	%
Duty Cycle Correction Factor (dB)	-8.06 * ¹	dB


Note 1: The data of duty cycle correction factor is the highest test result (worst case) in all different functions.

5.5 Test Graphs: See next page.






Length of a Complete Pulse Train

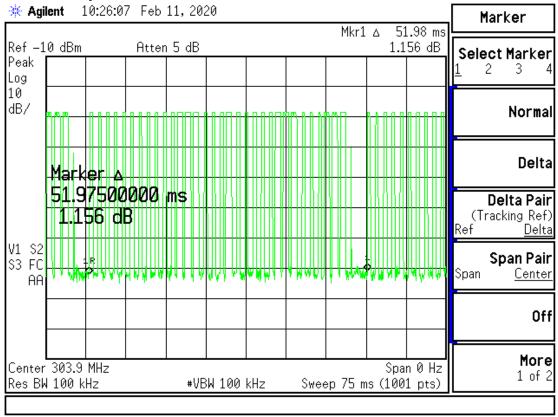


Long Pulse

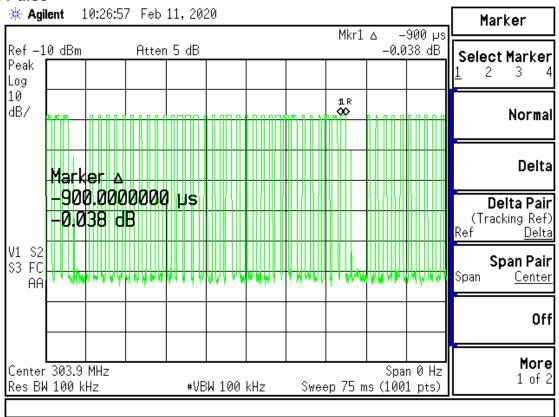







Short Pulse

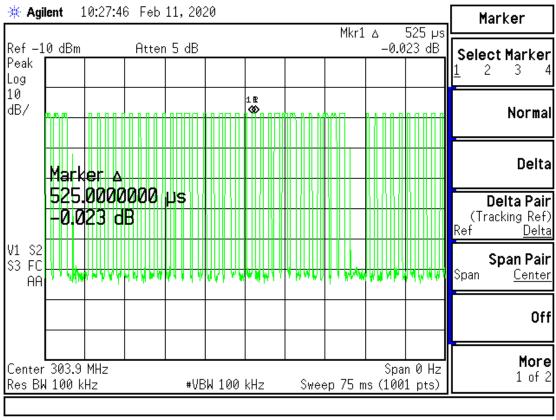

Long & Short Pulse (Number of Pulse)

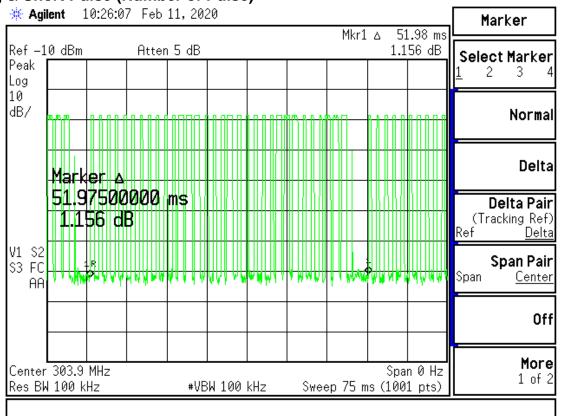






6. Verification of De-activation after 5 seconds

6.1 Test Condition & Setup:

Verification of the transmitter de-activation after 5 seconds was performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height and a near field probe was used at a distance about 20 cm for receiving.


The spectrum analyzer resolution bandwidth and video bandwidth were all set to 100KHZ to encompass all Significant spectral components during the test. The analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

6.2 Test Instruments Configuration:

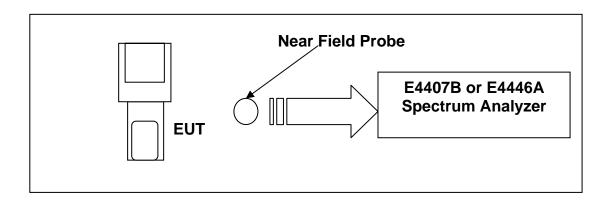

6.3 Test Equipment List:

Item	Mfr/Brand	Instruments	Serial No.	Model/Type No.	Calibrated Date	Next Cal. Date
1.	Agilent	Spectrum Analyzer	US44300422	E4446A	2019/03/13	2020/03/13
2.	Agilent	Spectrum Analyzer	US39240419	E4407B	2019/05/09	2020/05/09
3.	EMCO	Biconilog Antenna	00044568	3142C	2019/09/23	2020/09/23
4.	EM	Probe	107328	EM-6992	N/A	N/A






6.4 Test Result:

Compliant Conditions (Section 15.231)	EUT Status			
1. The EUT was manually operated	X	Yes		No
Requirement:				
The EUT employs a switch that would automatically deactivat	e the	transm	itter	no more
than 5 seconds of being released.				
2. The EUT was automatically activated	X	Yes		No
Requirement:				

The EUT operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Duration of each transmission	0.415	sec
Silent period between transmission	120	sec


Duration of each transmission

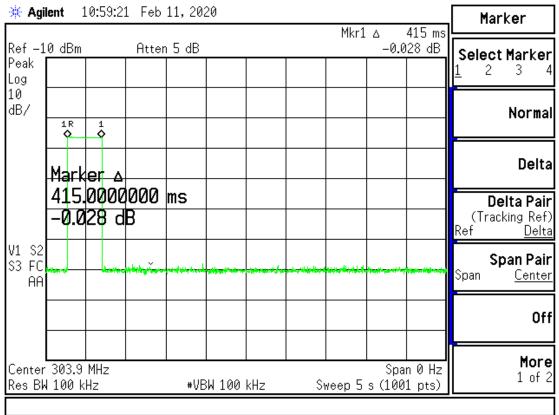






Silent period between transmission

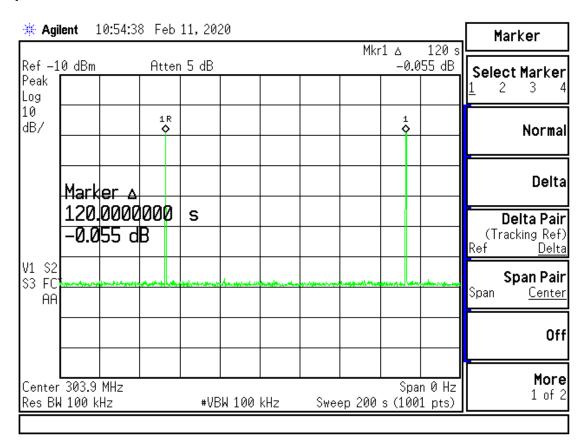

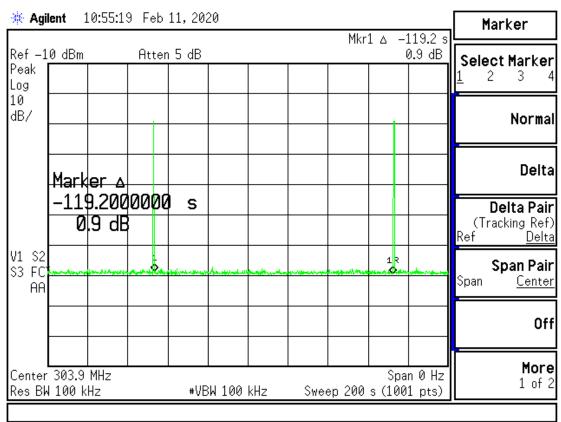







Appendix I - EUT Test Setup


MEASUREMENT OF RADIATED EMISSION

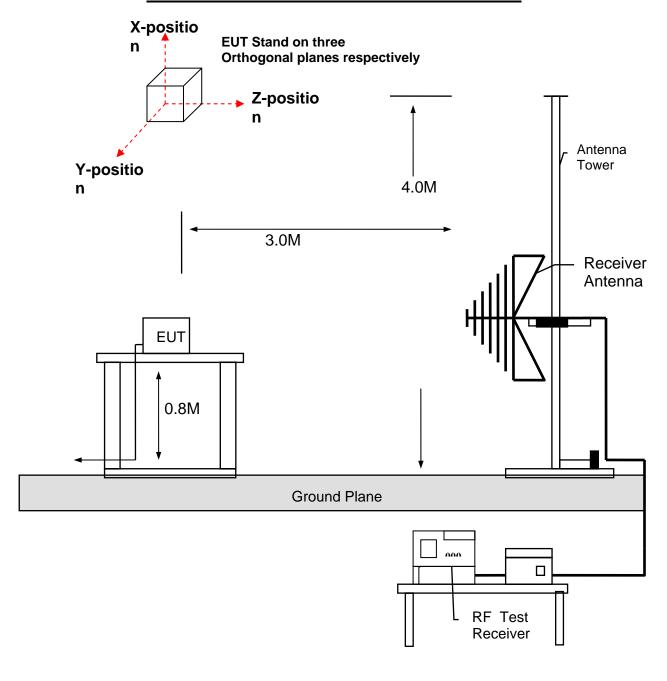





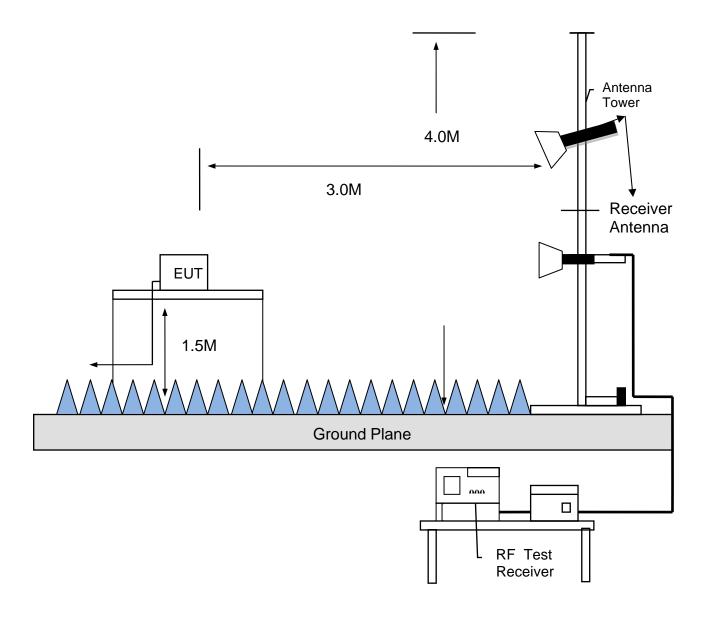





Appendix II – Brand / Trade Name & Model No. Multiple Listee

Brand /Trade Name	Model Name
Skytech II, Inc.	SMART-STAT-IV
	SMART-BATT-II
	RCT-MLT-IV
	RCTS-MLT-IV

Note: This all model are identical in design and construction, the difference is just for sale marketing.