



TRL Compliance
part of TRAC global

**REPORT ON THE CERTIFICATION TESTING OF A
AERIAL FACILITIES LIMITED
55-199102 CELL ENHANCER
WITH RESPECT TO
THE FCC RULES CFR 47, PART 90 Subpart I
PRIVATE LAND MOBILE REPEATER.**



TEST REPORT NO: RU1380/8135
COPY NO: 2
ISSUE NO: 1
FCC ID: NEO55-1991SERIES

**REPORT ON THE CERTIFICATION TESTING OF A
AERIAL FACILITIES LIMITED
55-199102 CELL ENHANCER
WITH RESPECT TO
THE FCC RULES CFR 47, PART 90 Subpart I
PRIVATE LAND MOBILE REPEATER.**

TEST DATE: 20th – 24th September 2007

TESTED BY: _____ D WINSTANLEY

APPROVED BY: _____ p.p. J CHARTERS
RADIO SECTION
LEADER

DATE: 24th October 2007

Distribution:

- Copy Nos:
1. Aerial Facilities Limited
 2. TCB: TRL Compliance Limited
 3. TRL Compliance Ltd

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

CONTENTS

	PAGE	
CERTIFICATE OF CONFORMITY & COMPLIANCE	3	
APPLICANT'S SUMMARY	4	
EQUIPMENT TEST CONDITIONS	5	
TESTS REQUIRED	5	
TEST RESULTS	6-40	
		ANNEX
PHOTOGRAPHS	A	
PHOTOGRAPH No. 1: Test setup		
PHOTOGRAPH No. 2: Test setup		
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B	
EQUIPMENT CALIBRATION	C	
MEASUREMENT UNCERTAINTY	D	
 Notes:		
1. Component failure during test	YES	<input type="checkbox"/>
	NO	<input checked="" type="checkbox"/>
2. If Yes, details of failure:		
3. The facilities used for the testing of the product contain in this report are FCC Listed.		



TRL Compliance

part of TRAC global

CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY:	NEO55-1991SERIES
PURPOSE OF TEST:	Certification
TEST SPECIFICATION:	FCC RULES CFR 47, Part 90 Subpart I
TEST RESULT:	Compliant to Specification
EQUIPMENT UNDER TEST:	55-199102 Cell Enhancer
EQUIPMENT TYPE:	Private Land Mobile Repeater
MAXIMUM GAIN:	Uplink = 91.69dB Downlink = 97.34dB
MAXIMUM INPUT:	Uplink = -60.2dBm Downlink = -57.5dBm
MAXIMUM OUTPUT CONDUCTED:	Uplink = 31.65dBm Downlink = 39.67dBm
ANTENNA TYPE:	Uplink Directional Yagi Antenna Downlink Distributed Antenna System
CHANNEL SPACING:	Not Applicable, Wideband
FREQUENCY GENERATION:	N/A
MODULATION TYPE:	F3E
POWER SOURCE(s):	+110Vac
TEST DATE(s):	20 th – 24 th September 2007
ORDER No(s):	46501
APPLICANT:	Aerial Facilities Limited
ADDRESS:	Aerial House Asheridge Road Chesham Buckinghamshire HP5 1TU
TESTED BY:	----- D WINSTANLEY
APPROVED BY:	----- p.p. J CHARTERS RADIO SECTION LEADER

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): 55-199102 Cell Enhancer

EQUIPMENT TYPE: Cell Enhancer

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC RULES CFR 47, Part 90 Subpart I

TEST RESULT: COMPLIANT Yes
No

APPLICANT'S CATEGORY: MANUFACTURER
IMPORTER
DISTRIBUTOR
TEST HOUSE
AGENT

APPLICANT'S ORDER No(s): 46501

APPLICANT'S CONTACT PERSON(s): Mr Peter Bradfield

E-mail address: Peterb@aerial.co.uk

APPLICANT: Aerial Facilities Limited

ADDRESS: Aerial House
Asheridge Road
Chesham
Buckinghamshire
HP5 1TU
United Kingdom

TEL: +44 (0)1494 777000

FAX: +44 (0)1494 778456

MANUFACTURER: Aerial Facilities Limited

EUT(s) COUNTRY OF ORIGIN: United Kingdom

TEST LABORATORY: TRL Compliance Ltd

UKAS ACCREDITATION No: 0728

TEST DATE(s): 20th – 24th September 2007


TEST REPORT No: RU1380/8135

COMPLIANCE TESTS

AMPLIFIER GAIN – CONDUCTED – PART 2.1046 – UPLINK

Ambient temperature = 21°C
 Relative humidity = 66%
 Supply voltage = +110Vac
 Channel number = See test results

Radio Laboratory

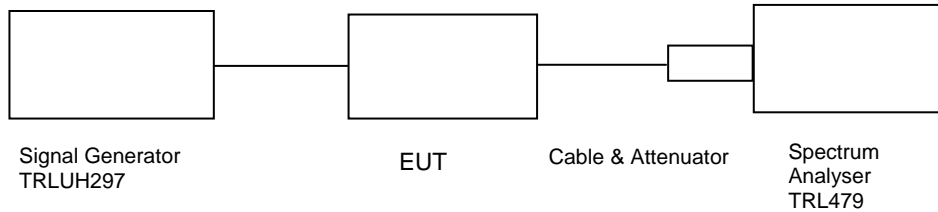

Frequency MHz	Signal Generator input level dBm	Input Cable Loss dB	Output Cable & Attenuator loss dB	Level at Spectrum Analyser dBm	Gain dB	Conducted Output Power dBm	Gain after 10dB input level increase dB
415.0MHz	-60.0	0.04	36.37	-6.64	89.77	29.73	80.77
416.5MHz	-60.2	0.04	36.37	-4.72	91.69	31.65	82.61
418.0MHz	-60.0	0.04	36.37	-5.56	90.85	30.81	81.82


Notes: 1. The signal generator input was increased by 10dBs and the level of the output signal remeasured.

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
ATTENUATOR	BIRD	8304-300-N	N/A	220	X
ATTENUATOR	BIRD	8308-100	N/A	112	X
SIGNAL GENERATOR	RHODE & SCHWARZ	SML 03	102268	UH297	X

AMPLIFIER INTERMODULATION SPURIOUS EMISSIONS – CONDUCTED – PART 2.1053– UPLINK

Ambient temperature = 20°C
 Relative humidity = 65%
 Supply voltage = +110Vac

Radio Laboratory

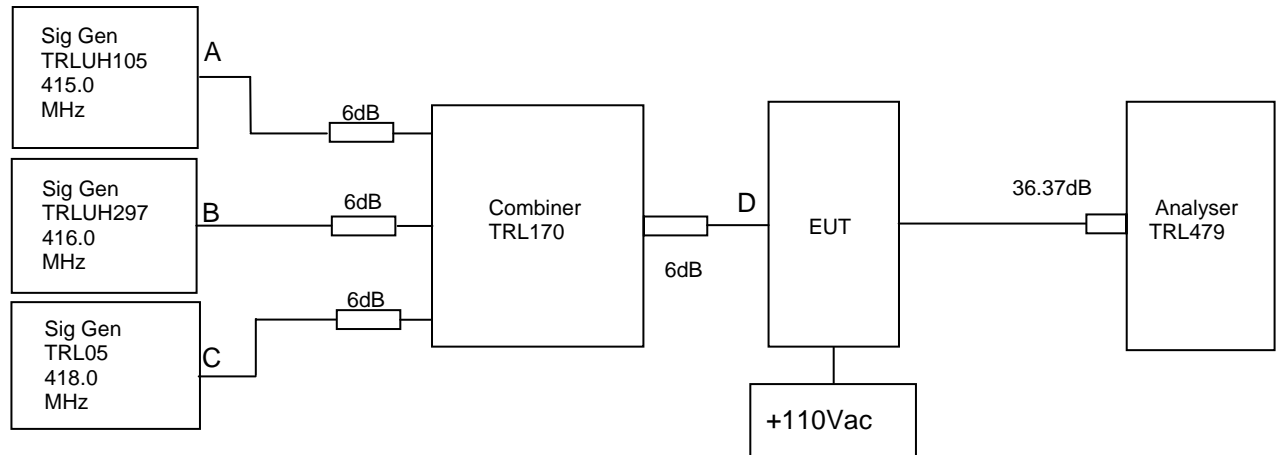

The intermodulation and spurious products were measured with the amplifier operating at maximum gain. A three tone test was conducted using the equipment as above. The input power level was adjusted so the level at point D was 10dB above the maximum input of -60.0dBm. The cable and attenuator loss between the EUT and the spectrum analyser was 36.37dB.


RF Input Frequency (MHz)			Highest Intermodulation Product Level (dBm)	Limit (dBm)
415.0	416.0	418.0	-13.31 @ 417.0MHz	-13

Sweep data is shown on the next page:

Test equipment used for intermodulation test



TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
SPECTRUM ANALYSER	R&S	FSU46	200034	UH281	
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	
SIGNAL GENERATOR	R&S	SML 03	102268	UH297	X
SIGNAL GENERATOR	MARCONI	2022D	119215/058	UH75	
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	X
CMTA	ROHDE & SCHWARZ	CMTA52	894715/033	05	X
COMBINER	ELCOM	RC-4-50	N/A	170	X

Intermodulation Inband

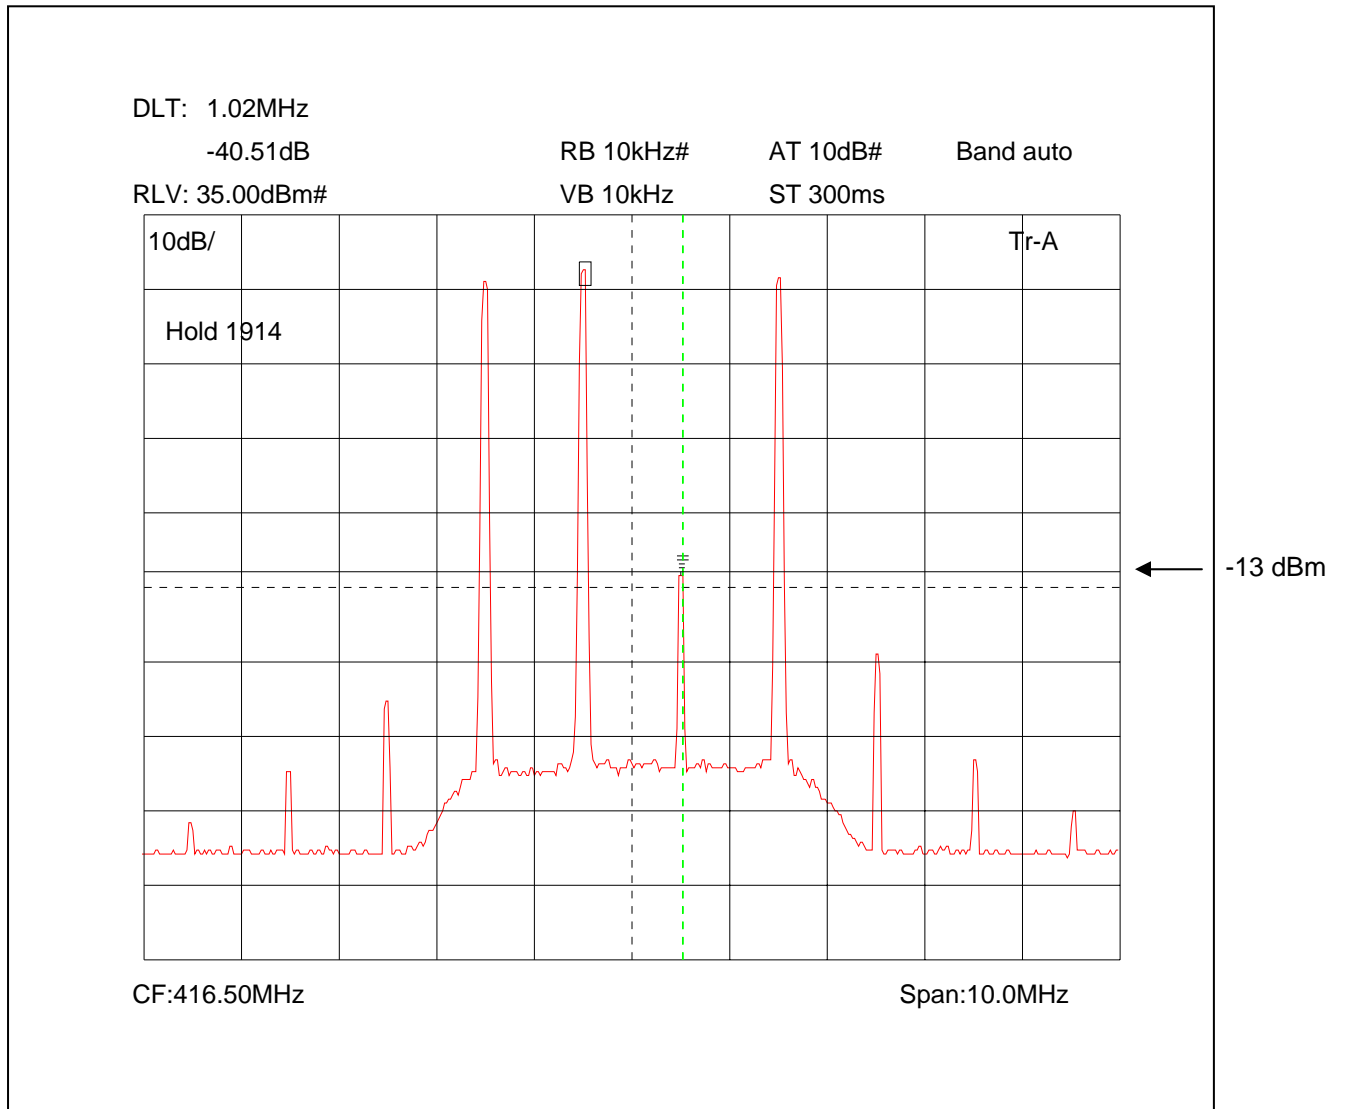

The above plot shows that all products (designated by ☆) are below the spurious limit.

Intermodulation Wideband

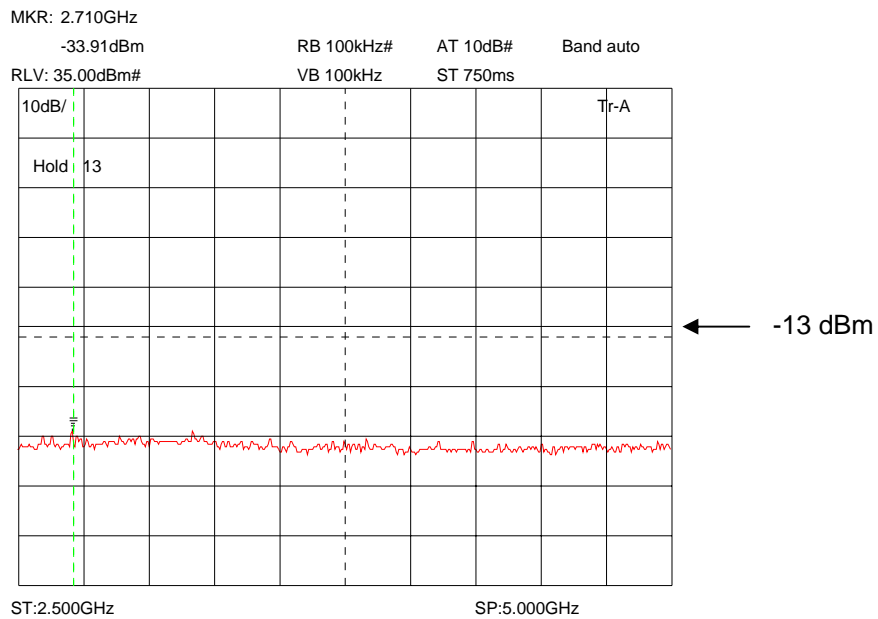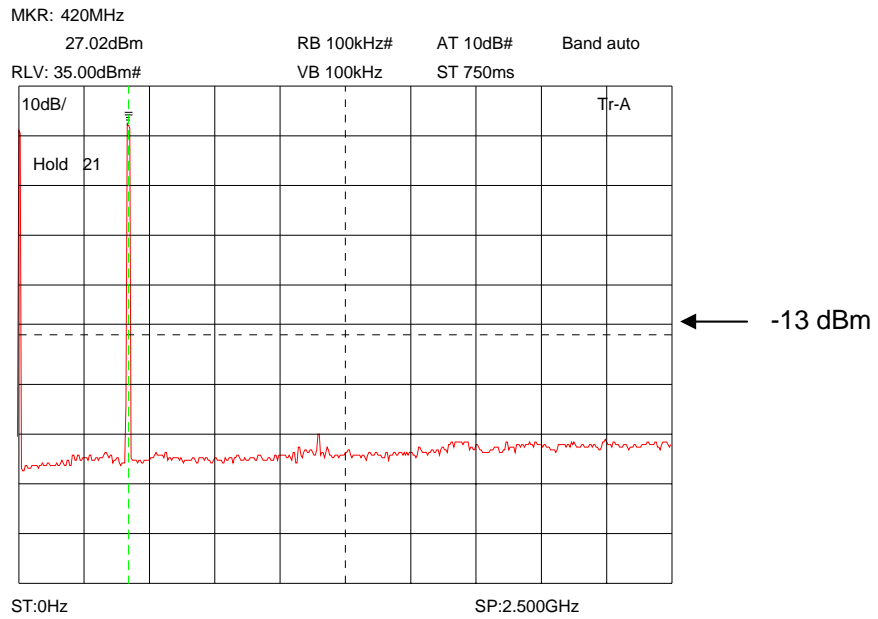


The above plot shows that there are no products outside the bands.

TRANSMITTER TESTS

AMPLIFIER MODULATED CHANNEL TEST – CONDUCTED – Part 2.1049– UPLINK

Ambient temperature = 22°C Radio Laboratory
 Relative humidity = 63%
 Supply voltage = +110Vac
 Channel number = See test results

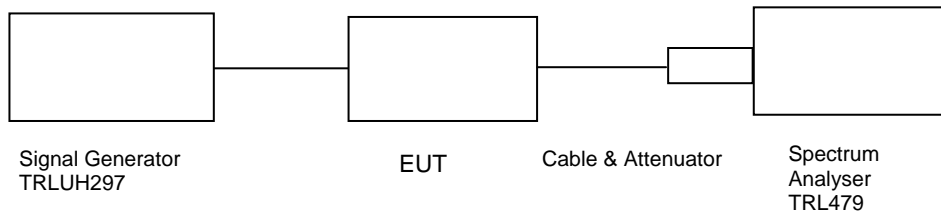


This test was performed to show that the amplifier does not alter the input signal in any way. The input signal was set to the maximum input level (-60.0dBm) and modulated with a 2500Hz tone. The plots show the signal measured at the signal generator and the signal measured at the output of the EUT.

Note: The cables and attenuators had the following losses.


1. Cable and attenuator between EUT and spectrum analyser 36.37dB
2. Cable between signal generator and EUT 0.04dB

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
ATTENUATOR	BIRD	8304-300-N	N/A	220	X
ATTENUATOR	BIRD	8308-100	N/A	112	X
SIGNAL GENERATOR	RHODE & SCHWARZ	SML 03	102268	UH297	X

415.0MHz Signal Generator, deviation set to 5kHz

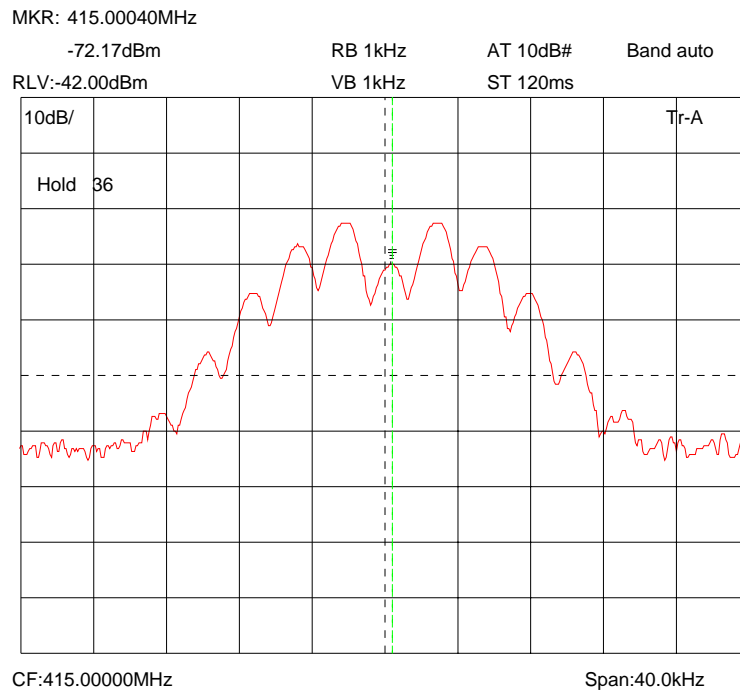


415.0MHz Signal Generator and EUT, deviation set to 5kHz

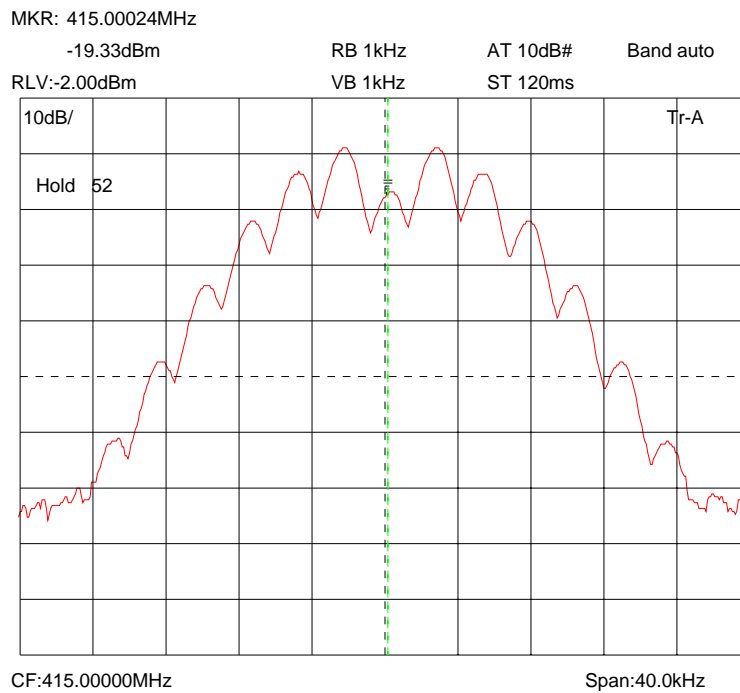


The above plots depicting the output wavelshape show no measurable distortion visible when compared to the input signal.

416.5MHz Signal Generator, deviation set to 5kHz

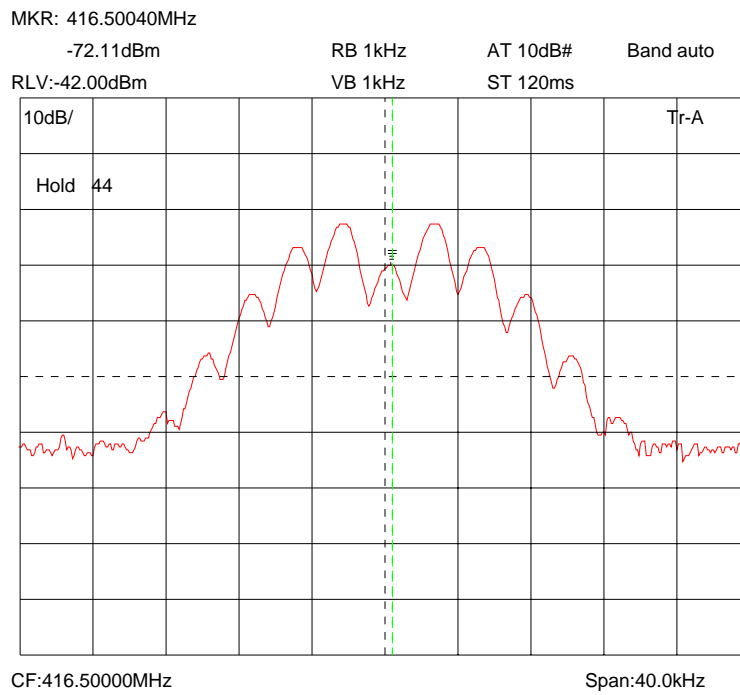


416.5MHz Signal Generator and EUT, deviation set to 5kHz

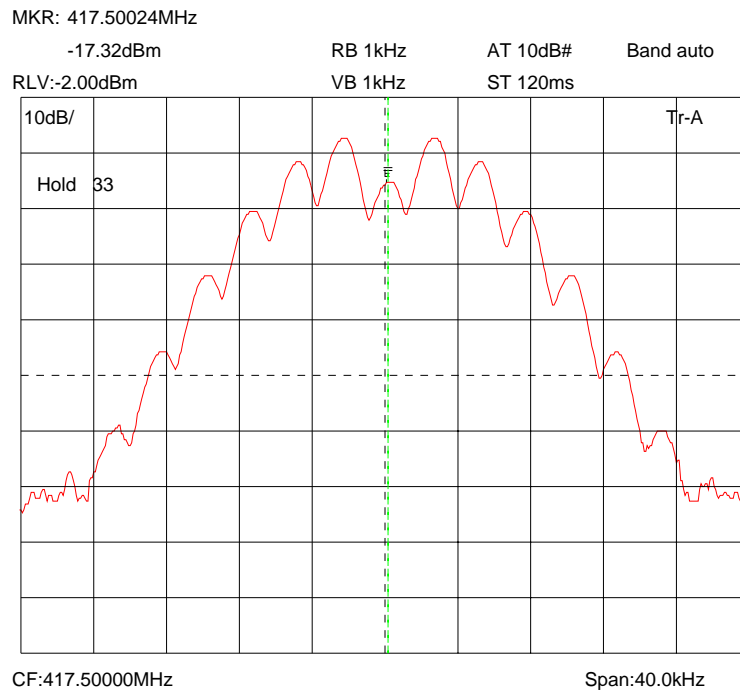


The above plots depicting the output wavseshape show no measurable distortion visible when compared to the input signal.

418.0MHz Signal Generator, deviation set to 5kHz

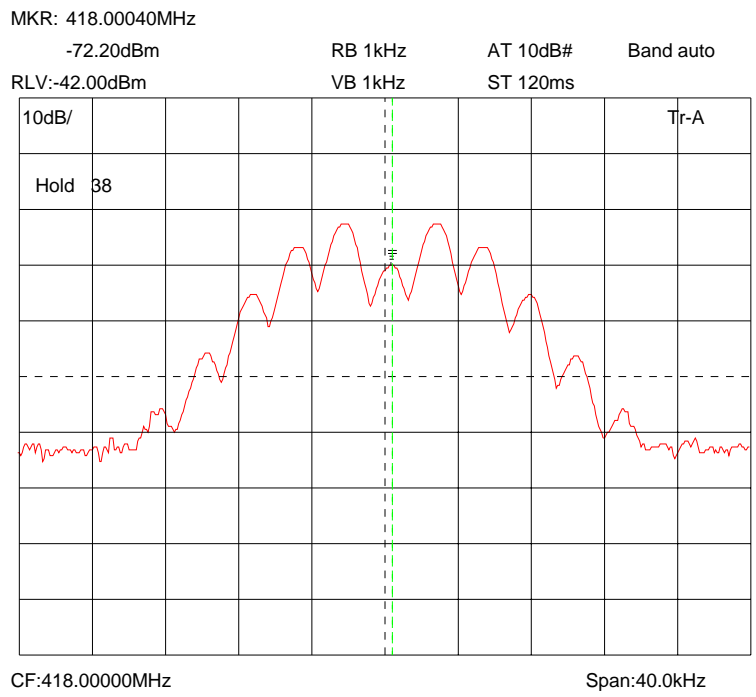

418.0MHz Signal Generator and EUT, deviation set to 5kHz

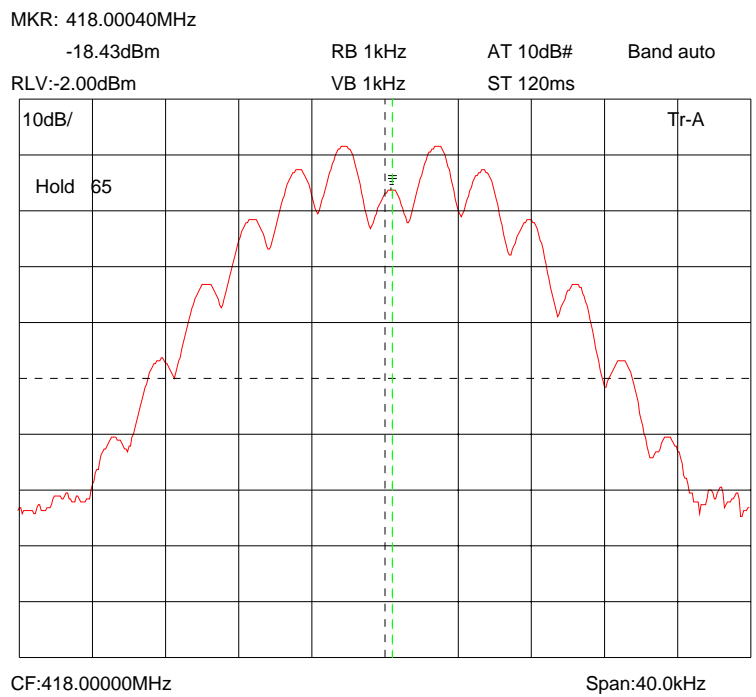


The above plots depicting the output wavseshape show no measurable distortion visible when compared to the input signal.

TRANSMITTER TESTS

AMPLIFIER SPURIOUS EMISSIONS – CONDUCTED – Part 2.1053 – UPLINK

Ambient temperature = 22°C
 Relative humidity = 63%
 Supply voltage = +110Vac

Radio Laboratory Test Signal = F3E

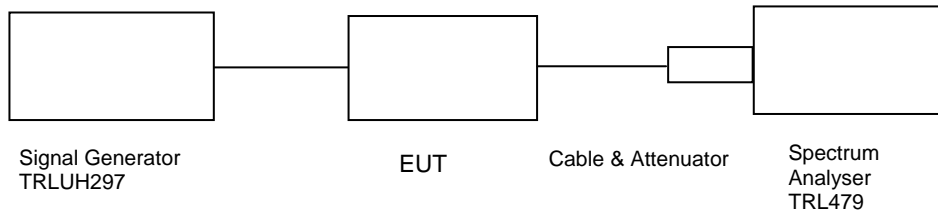

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating at maximum power and on three test frequencies.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more than 250% of the authorised bandwidth

At least $43 + 10 \log P_{dB}$

$$(10 \log P_{\text{watts}}) - (43 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$


RESULTS

FREQUENCY RANGE	FREQ. (MHz)	MEASURED LEVEL (dBm)	ATTENUATOR & CABLE LOSSES (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
0Hz – 5GHz	No Significant Emissions Within 20 dB of the Limit				-13


The test equipment used for the Transmitter Conducted Emissions:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
ATTENUATOR	BIRD	8304-300-N	N/A	220	X
ATTENUATOR	BIRD	8308-100	N/A	112	X
SIGNAL GENERATOR	RHODE & SCHWARZ	SML 03	102268	UH297	X


Conducted emissions 415.0MHz 0 – 2.5GHz

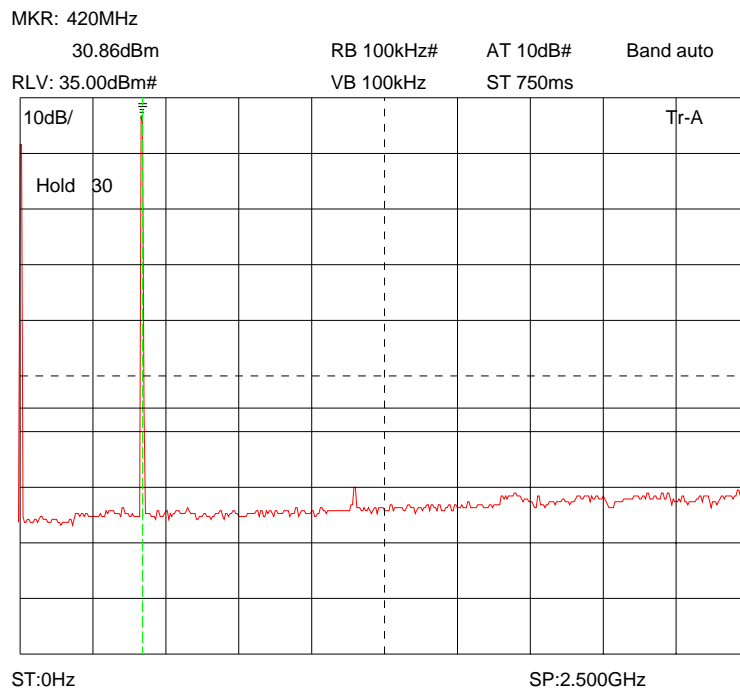


Conducted emissions 415.0MHz 2.5 – 5GHz

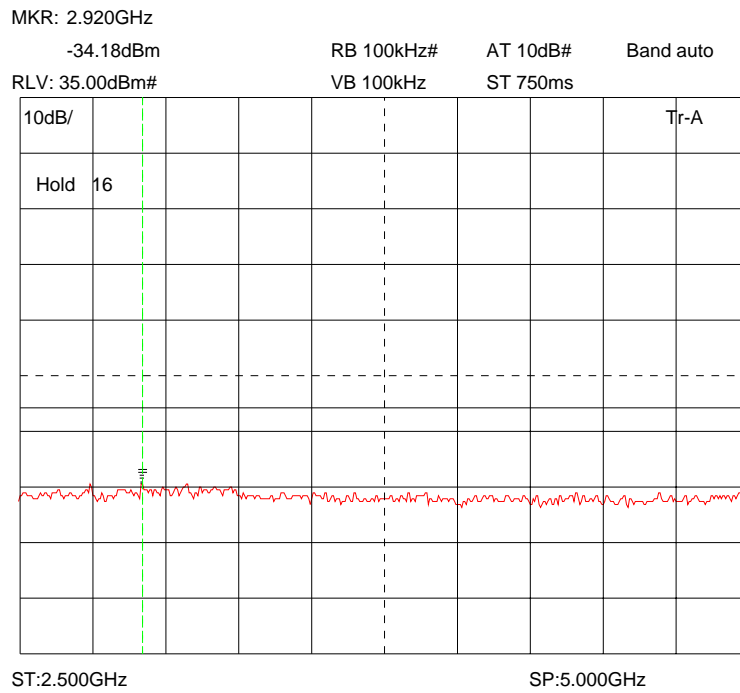


Conducted emissions 416.5MHz 0 – 2.5GHz

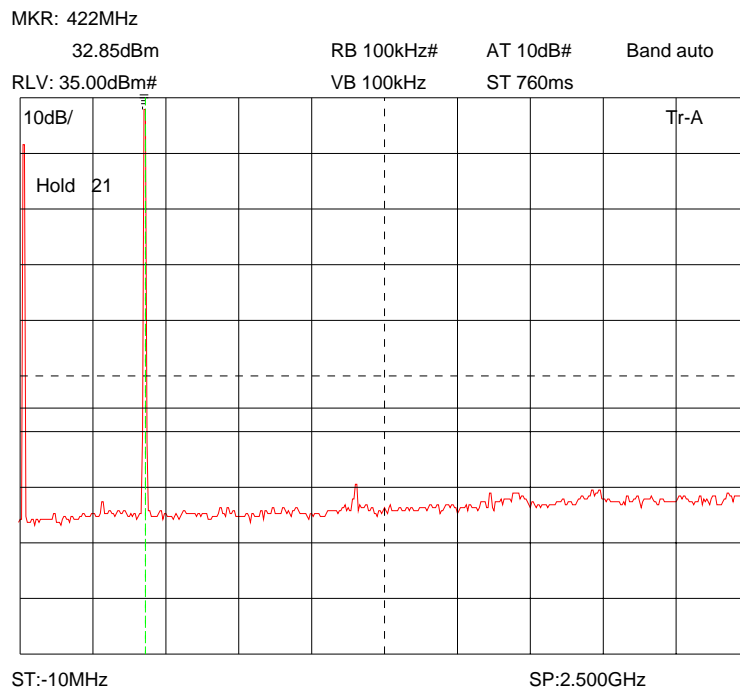


Conducted emissions 416.5MHz 2.5 – 5GHz

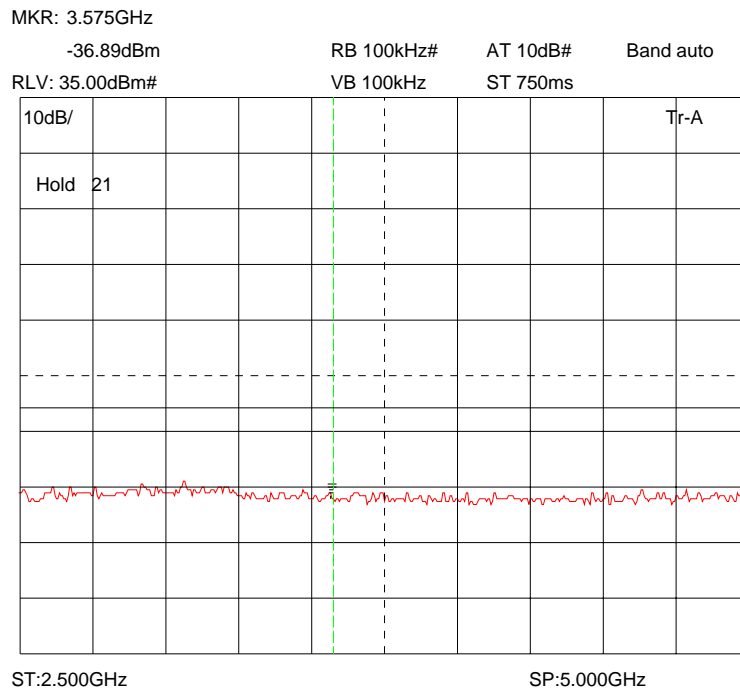

Conducted emissions 418.0MHz 0 – 2.5GHz

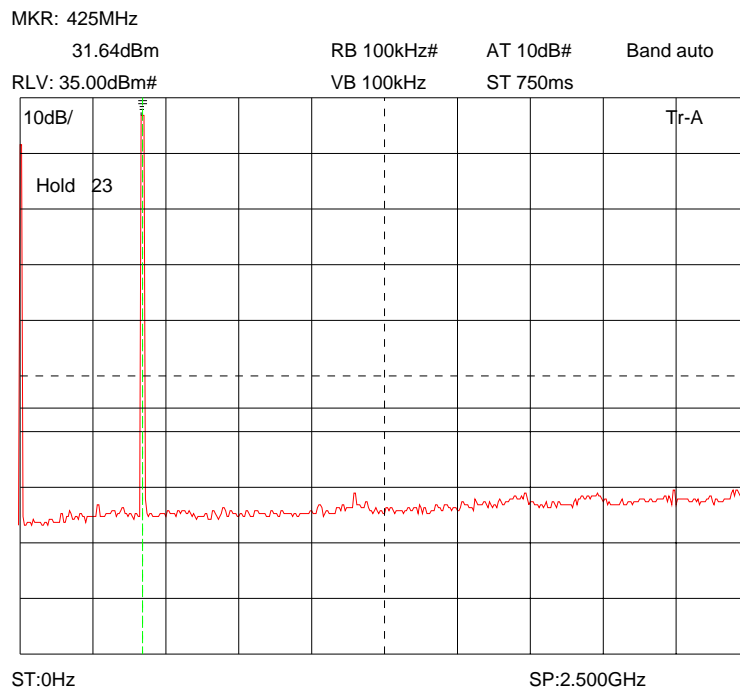

Conducted emissions 418.0MHz 2.5 – 6GHz

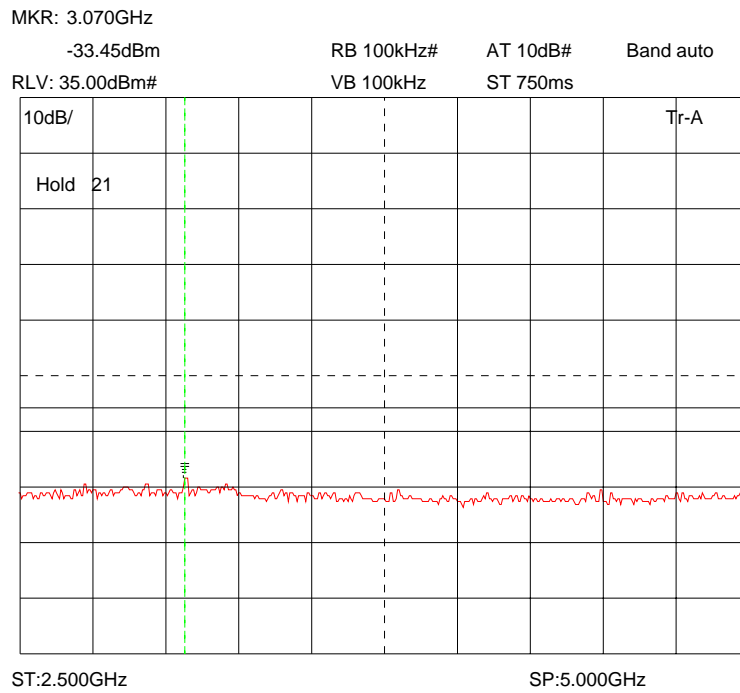


TRANSMITTER TESTS

AMPLIFIER SPURIOUS EMISSIONS – RADIATED – Part 2.1053– UPLINK

Ambient temperature = 11°C
 Relative humidity = 67%
 Conditions = OATS
 Supply voltage = +110Vac
 Supply Frequency = N/A

Test Signal = F3E

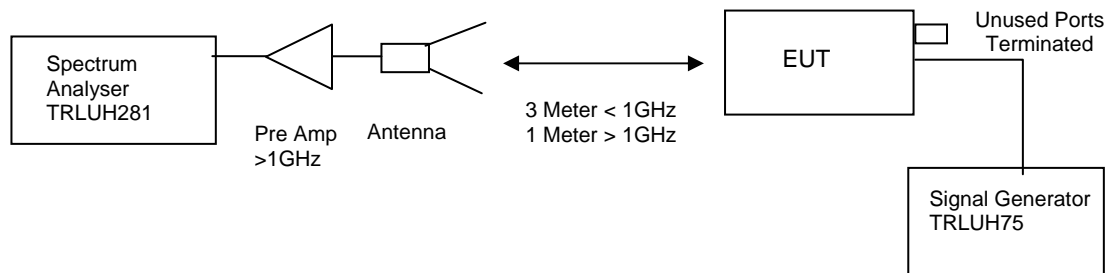

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output. The unit was also tested with the signal generator replaced by another 50ohm load.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least $43 + 10 \log P_{dB}$

$(10 \log P_{watts}) - (43 + 10 \log (P_{watts} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$


RESULTS

FREQUENCY RANGE	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dBµV/m)	CALCULATED EIRP (dBm)	LIMIT (dBm)
30MHz – 5GHz	No Significant Emissions Within 20 dB of the Limit						-13dBm

The test equipment used for the Transmitter Spurious Emissions:


TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	
HORN	EMCO	3115	9010-3580	138	X
SPECTRUM ANALYSER	R&S	FSU46	200034	UH281	X
PRE AMPLIFIER	HP	8449B	3008A016	572	X
SIGNAL GENERATOR	MARCONI	2022D	119224/035	UH89	X
ANTENNA	CHASE	CBL6612B	2803	UH93	X

Radiated emissions 415.0MHz 30MHz – 1GHz

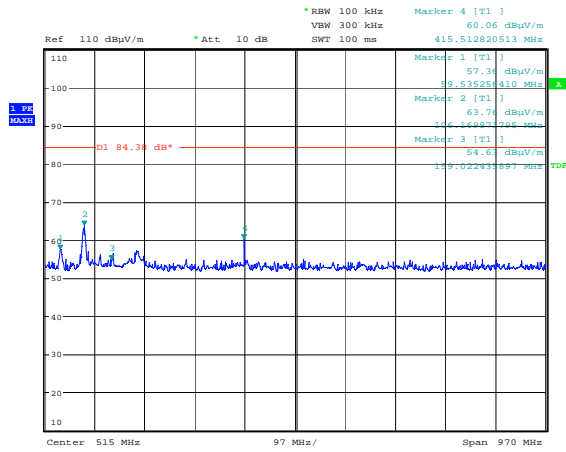


Date: 21.SEP.2007 16:16:15

Radiated emissions 415.0MHz 1GHz – 3GHz

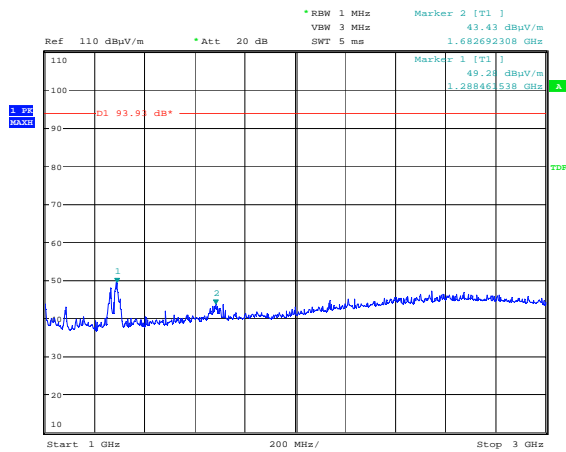

Date: 21.SEP.2007 15:54:28


Radiated emissions 415.0MHz 3GHz – 5GHz

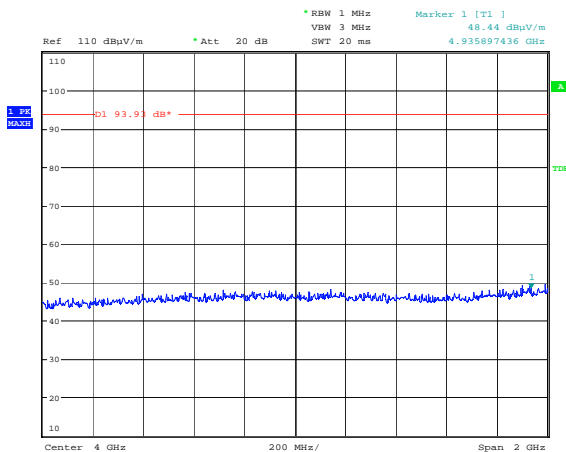

Date: 21.SEP.2007 15:54:49


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

Radiated emissions 416.5MHz 30MHz – 1GHz

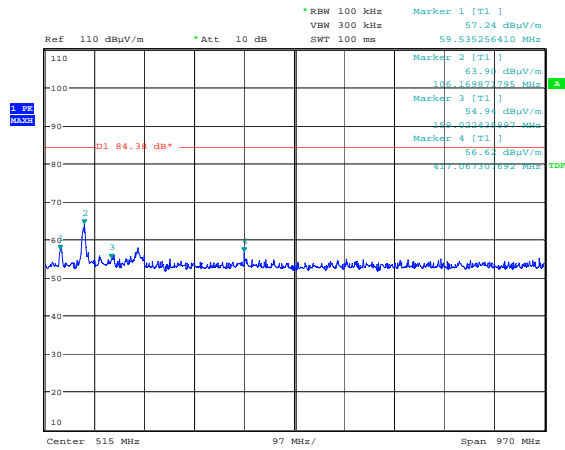


Date: 21.SEP.2007 16:16:45

Radiated emissions 416.5MHz 1GHz – 3GHz

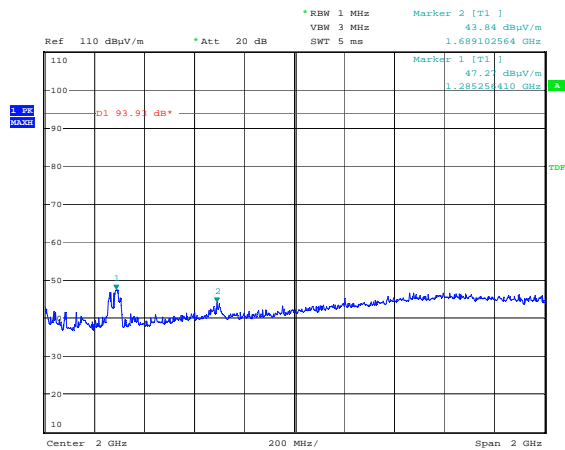

Date: 21.SEP.2007 15:58:40


Radiated emissions 416.5MHz 3GHz – 5GHz

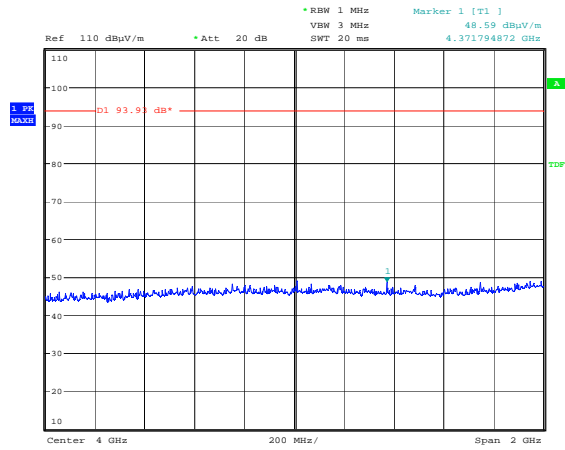

Date: 21.SEP.2007 15:57:49


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

Radiated emissions 418.0MHz 30MHz – 1GHz

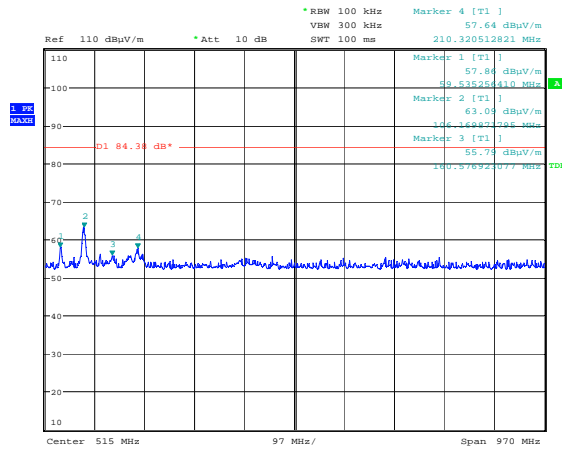


Date: 21.SEP.2007 16:17:17

Radiated emissions 418.0MHz 1GHz – 3GHz

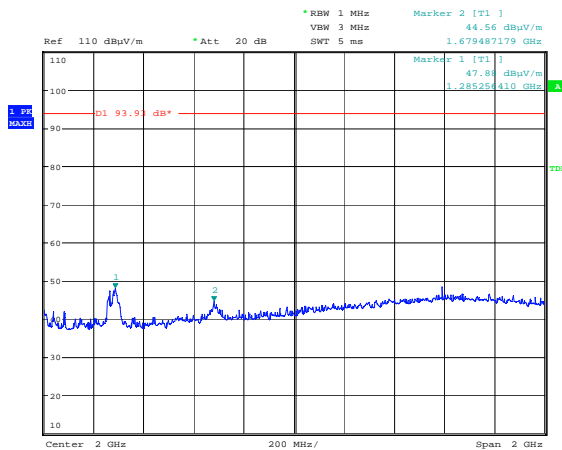

Date: 21.SEP.2007 15:59:31


Radiated emissions 418.0MHz 3GHz – 5GHz

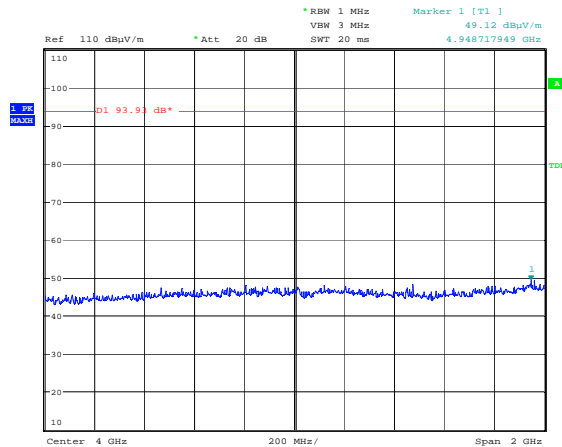

Date: 21.SEP.2007 15:59:45


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

Radiated emissions no input signal 30MHz – 1GHz

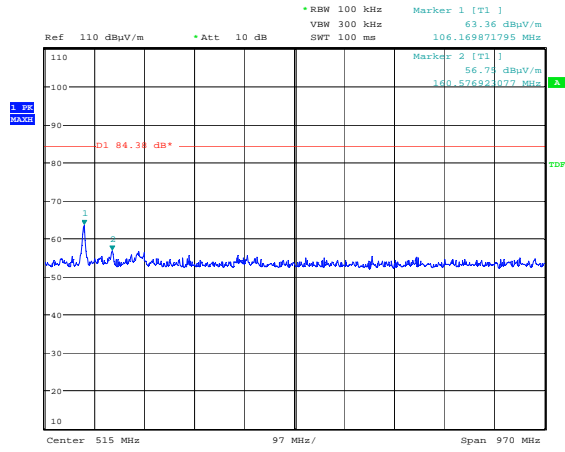


Date: 21.SEP.2007 16:12:47

Radiated emissions no input signal 1GHz – 3GHz

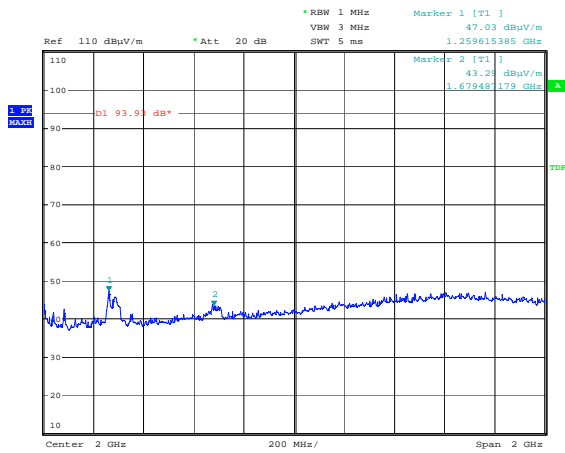

Date: 21.SEP.2007 16:02:56

Radiated emissions no input signal 3GHz – 5GHz

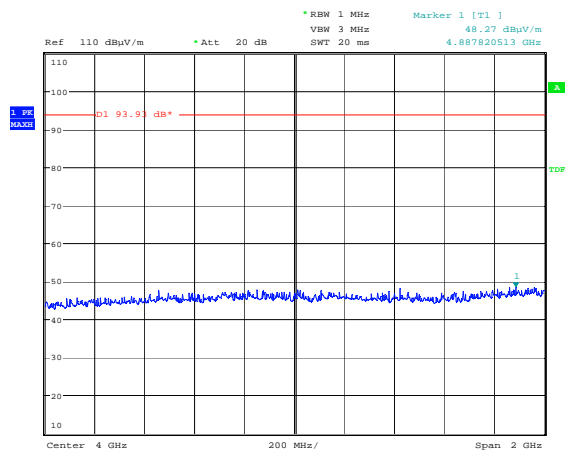


Date: 21.SEP.2007 16:01:54

The above test results show that there were no emissions within 20dBs of the -13dBm limit.

AMPLIFIER GAIN – CONDUCTED – PART 2.1046 – DOWNLINK

Ambient temperature = 23°C
 Relative humidity = 61%
 Supply voltage = +110Vac
 Channel number = See test results

Radio Laboratory

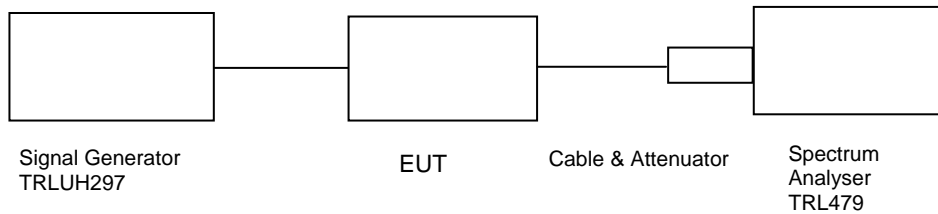

Frequency MHz	Signal Generator input level dBm	Input Cable Loss dB	Output Cable & Attenuator loss dB	Level at Spectrum Analyser dBm	Gain dB	Conducted Output Power dBm	Gain after 10dB input level increase dB
406.0MHz	-57.5	0.17	46.14	-7.27	96.54	38.87	87.48
407.5MHZ	-57.5	0.17	46.14	-6.47	97.34	39.67	88.24
409.0MHz	-57.5	0.17	46.14	-6.43	96.38	39.71	87.45


Notes: 1. The signal generator input was increased by 10dBs and the level of the output signal remeasured.

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
ATTENUATOR	BIRD	8304-200	N/A	103	X
ATTENUATOR	BIRD	8304-300-N	N/A	220	X
SIGNAL GENERATOR	RHODE & SCHWARZ	SML 03	102268	UH297	X

AMPLIFIER INTERMODULATION SPURIOUS EMISSIONS – CONDUCTED – PART 2.1053– DOWNLINK

Ambient temperature = 20°C
 Relative humidity = 65%
 Supply voltage = +110Vac

Radio Laboratory

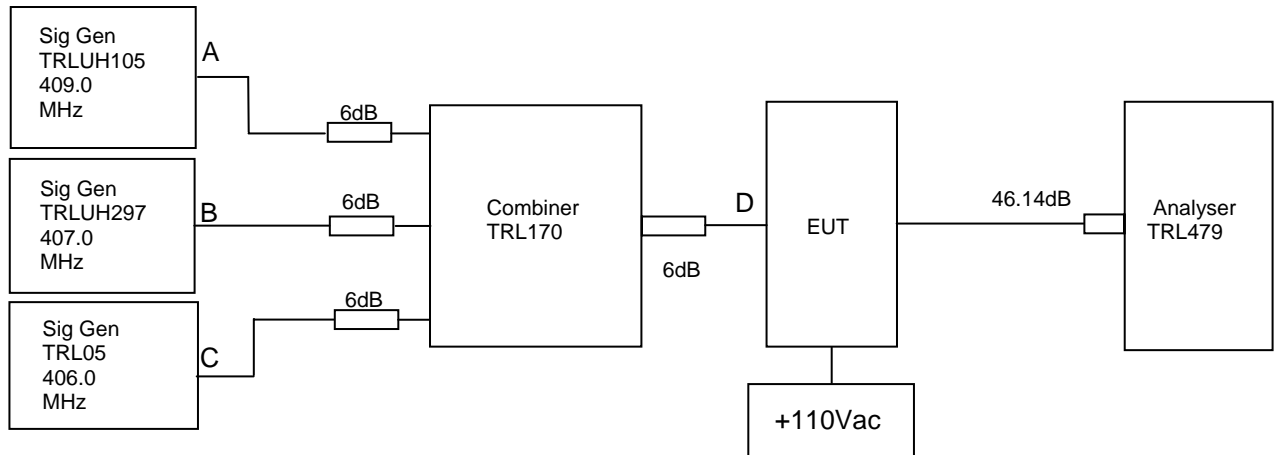

The intermodulation and spurious products were measured with the amplifier operating at maximum gain. A three tone test was conducted using the equipment as above. The input power level was adjusted so the level at point D was 10dB above the maximum input of -57.5dBm. The cable and attenuator loss between the EUT and the spectrum analyser was 46.14dB.

RF Input Frequency (MHz)			Highest Intermodulation Product Level (dBm)	Limit (dBm)
409.0	407.0	406.0	-13.40 dBm @ 408.0MHz	-13

Sweep data is shown on the next page:

Test equipment used for intermodulation test

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
SPECTRUM ANALYSER	R&S	FSU46	200034	UH281	
SIGNAL GENERATOR	MARCONI	2042	119388/080	176	
SIGNAL GENERATOR	R&S	SML 03	102268	UH297	X
SIGNAL GENERATOR	MARCONI	2022D	119215/058	UH75	
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	X
CMTA	ROHDE & SCHWARZ	CMTA52	894715/033	05	X
COMBINER	ELCOM	RC-4-50	N/A	170	X

Intermodulation Inband

DLT: 1.00MHz

-48.50dB

RB 10kHz#


AT 10dB#

Band auto

RLV: 44.00dBm#



VB 10kHz

ST 300ms

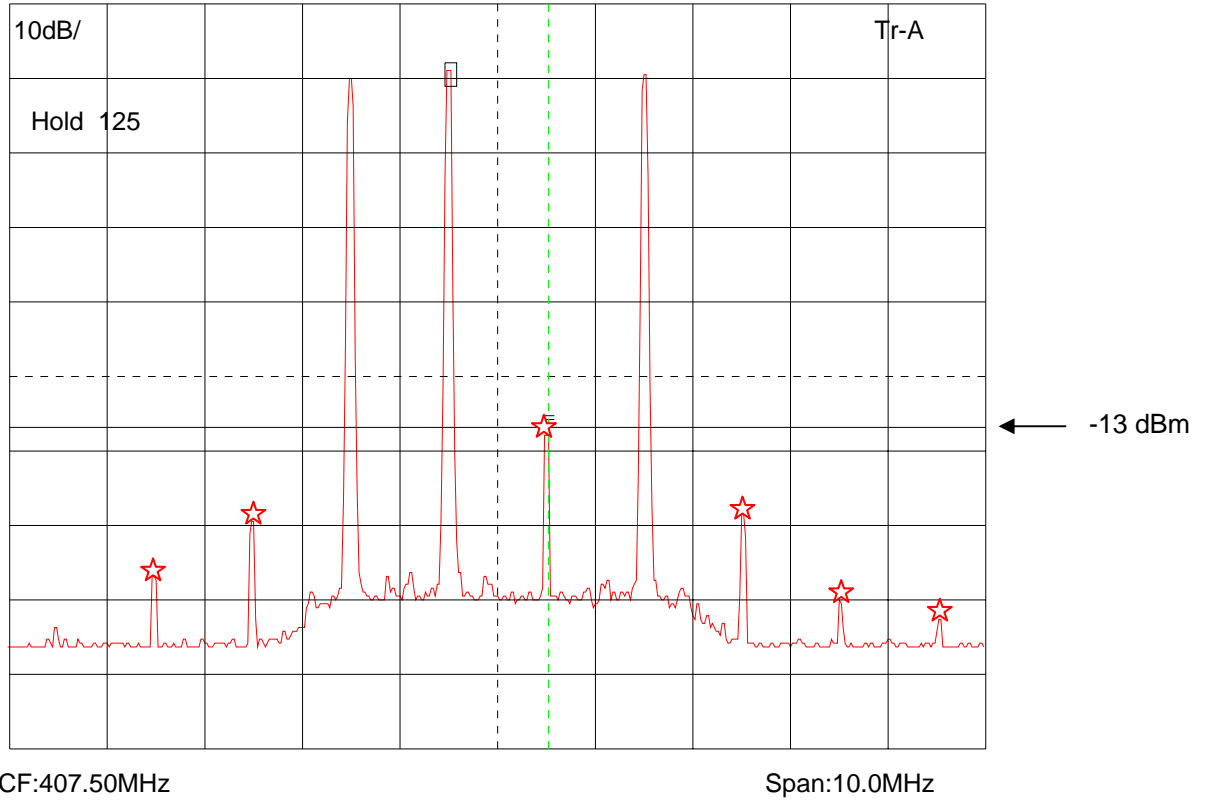

The above plot shows that all products (designated by ☆) are below the spurious limit.

Intermodulation Wideband

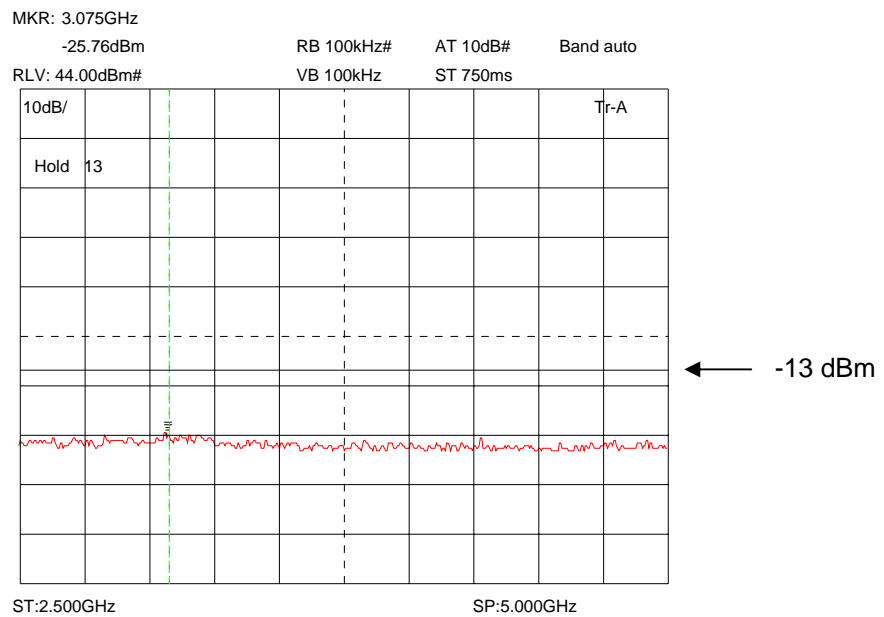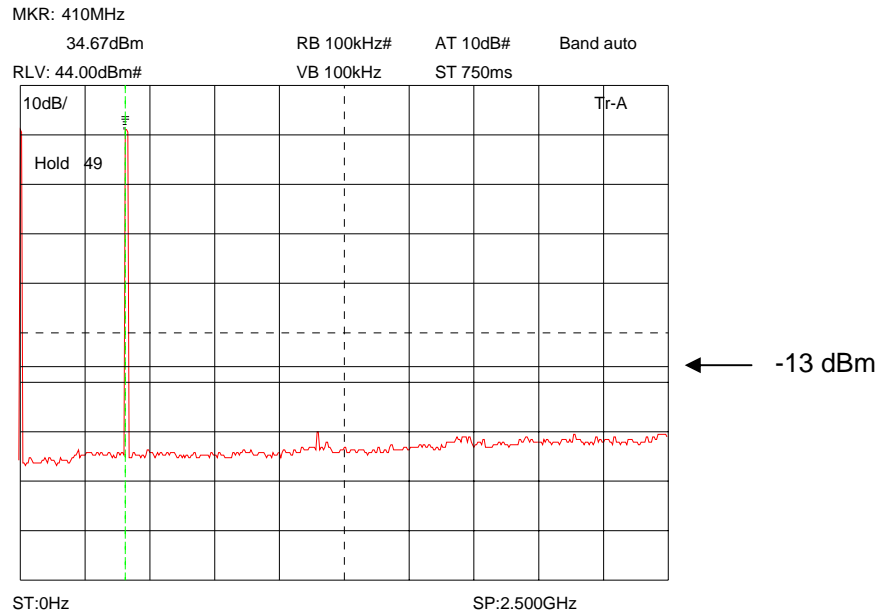


The above plot shows that there are no products outside the bands.

TRANSMITTER TESTS

AMPLIFIER MODULATED CHANNEL TEST – CONDUCTED – Part 2.1049– DOWNLINK

Ambient temperature = 23°C Radio Laboratory
 Relative humidity = 60%
 Supply voltage = +110Vac
 Channel number = See test results

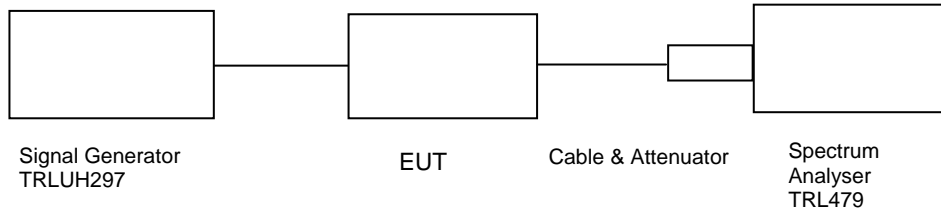


This test was performed to show that the amplifier does not alter the input signal in any way. The input signal was set to the maximum input level (-57.5dBm) and modulated with a 2500Hz tone. The plots show the signal measured at the signal generator and the signal measured at the output of the EUT.

Note: The cables and attenuators had the following losses.


1. Cable and attenuator between EUT and spectrum analyser 0.17dB
2. Cable between signal generator and EUT 46.14dB

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
ATTENUATOR	BIRD	8304-200	N/A	103	X
ATTENUATOR	BIRD	8304-300-N	N/A	220	X
SIGNAL GENERATOR	RHODE & SCHWARZ	SML 03	102268	UH297	X

406.0MHz Signal Generator, deviation set to 5kHz

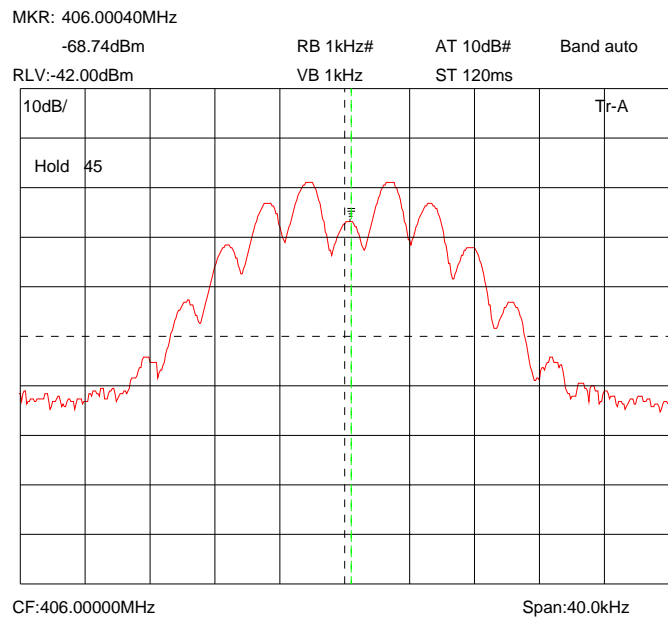


406.0MHz Signal Generator and EUT, deviation set to 5kHz

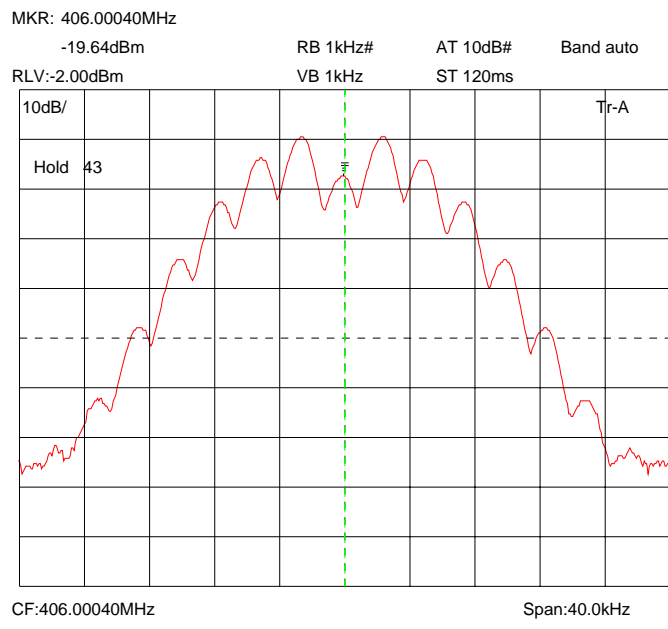


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

407.5MHz Signal Generator, deviation set to 5kHz

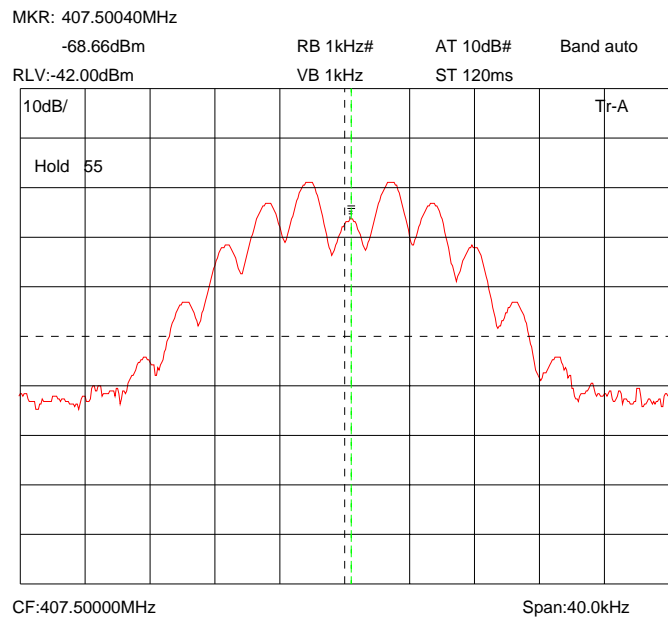


407.5MHz Signal Generator and EUT, deviation set to 5kHz

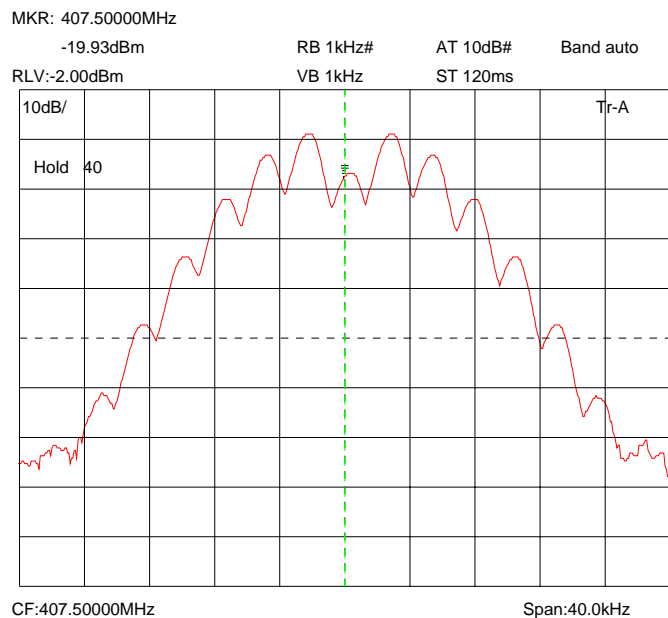


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

409.0MHz Signal Generator, deviation set to 5kHz

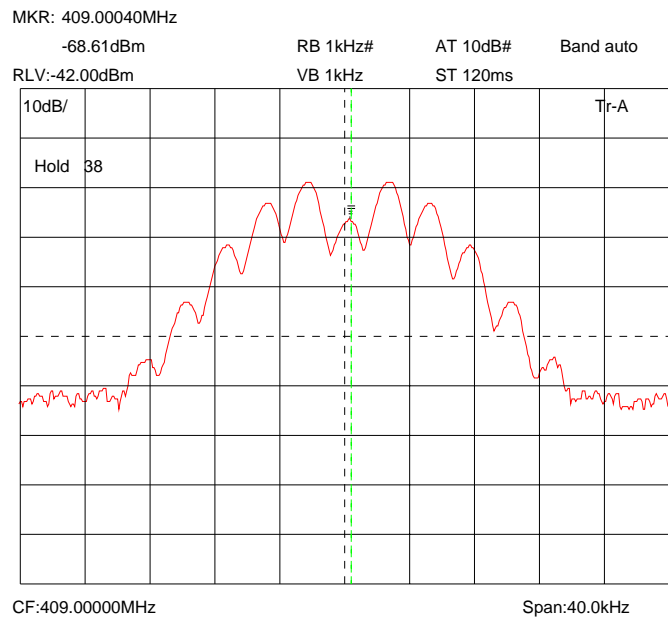

409.0MHz Signal Generator and EUT, deviation set to 5kHz

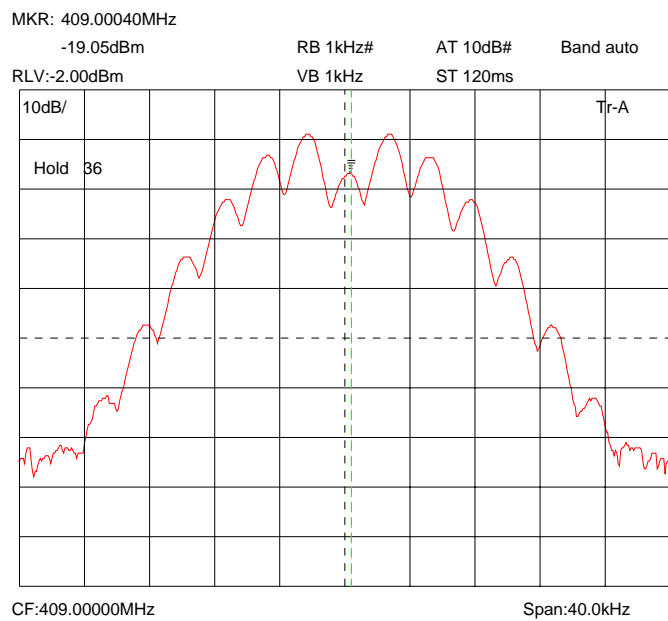


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

TRANSMITTER TESTS

AMPLIFIER SPURIOUS EMISSIONS – CONDUCTED – Part 2.1053 – DOWNLINK

Ambient temperature = 22°C
 Relative humidity = 63%
 Supply voltage = +110Vac

Radio Laboratory Test Signal = F3E

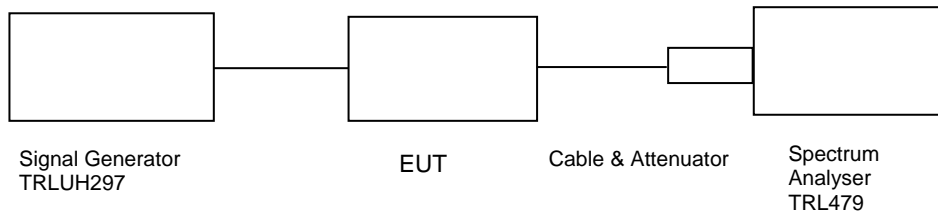

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating at maximum power and on three test frequencies.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more than 250% of the authorised bandwidth

At least $43 + 10 \log P_{dB}$

$$(10 \log P_{\text{watts}}) - (43 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$


RESULTS

FREQUENCY RANGE	FREQ. (MHz)	MEASURED LEVEL (dBm)	ATTENUATOR & CABLE LOSSES (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
0Hz – 5GHz	No Significant Emissions Within 20 dB of the limit				-13


The test equipment used for the Transmitter Conducted Emissions:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X
ATTENUATOR	BIRD	8304-200	N/A	103	X
ATTENUATOR	BIRD	8304-300-N	N/A	220	X
SIGNAL GENERATOR	RHODE & SCHWARZ	SML 03	102268	UH297	X


Conducted emissions 406.0MHz 0Hz – 2.5GHz

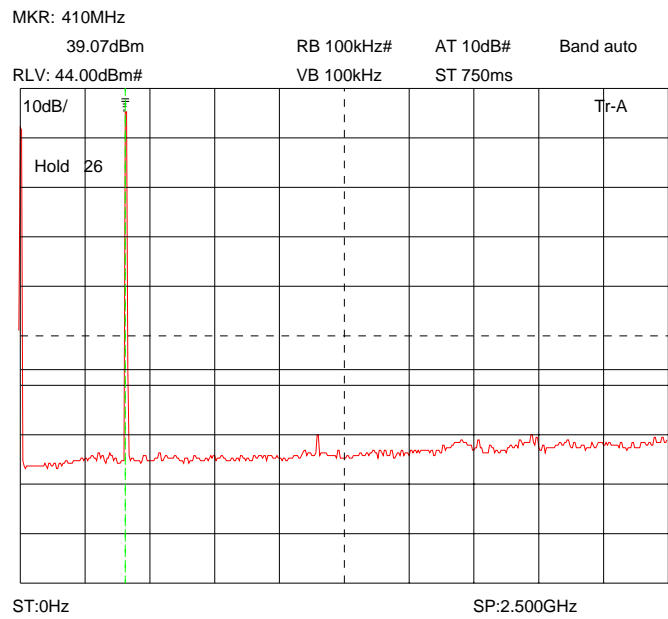


Conducted emissions 406.0MHz 2.5GHz – 5GHz

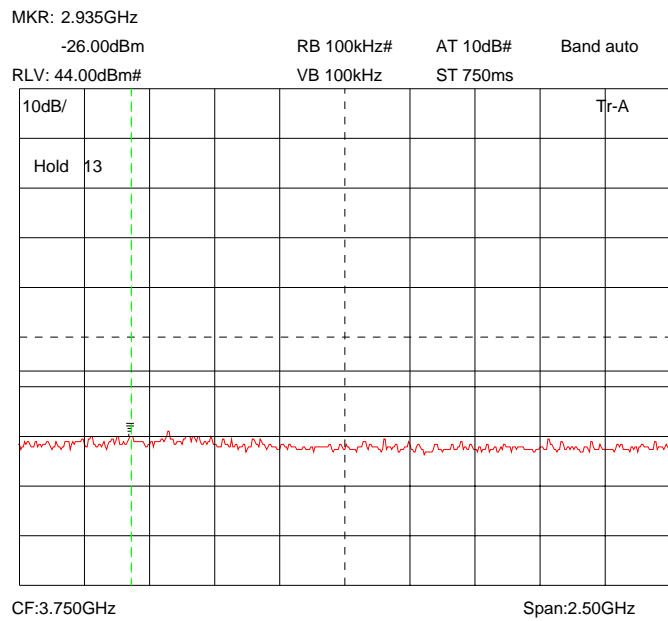


Conducted emissions 407.5MHz 0Hz – 2.5GHz

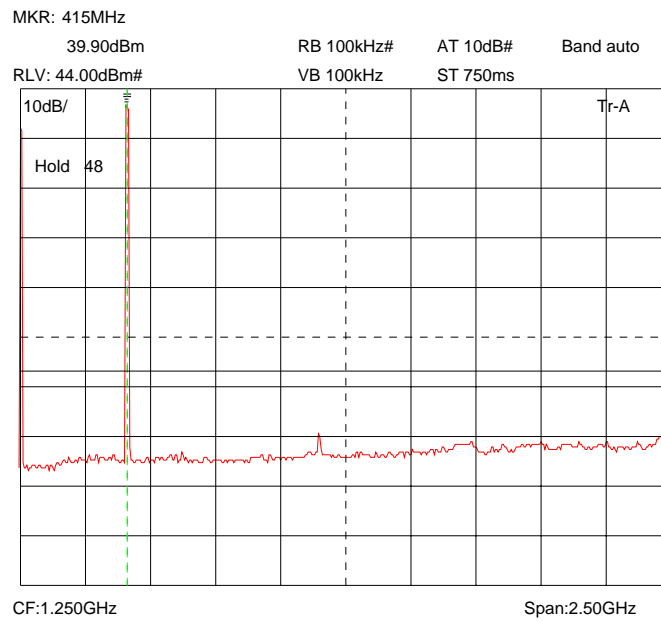


Conducted emissions 407.5MHz 2.5GHz – 5GHz

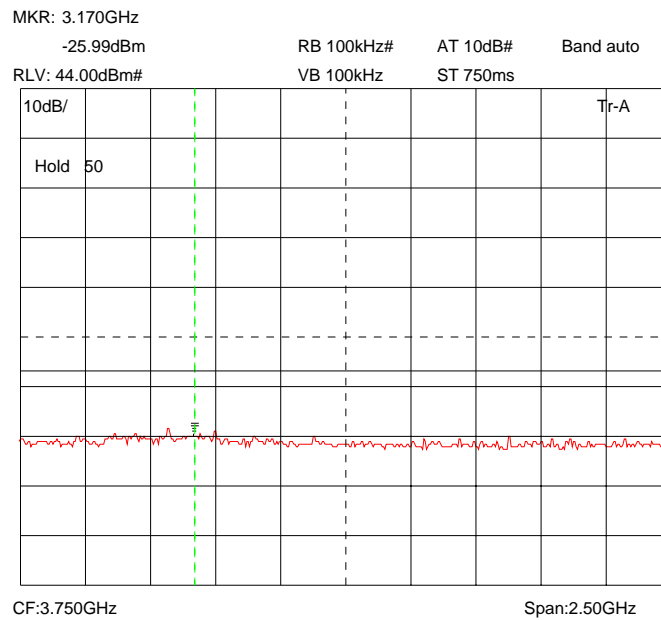

Conducted emissions 409.0MHz 0Hz – 2.5GHz

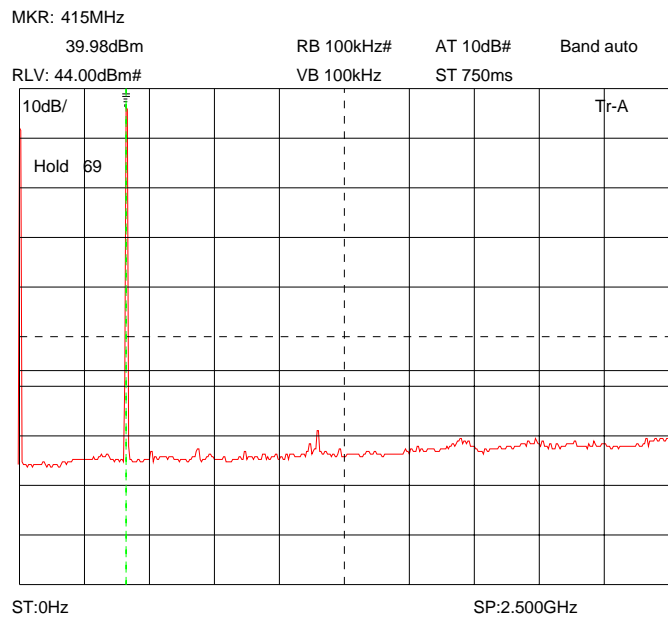

Conducted emissions 409.0MHz 2.5GHz – 5GHz

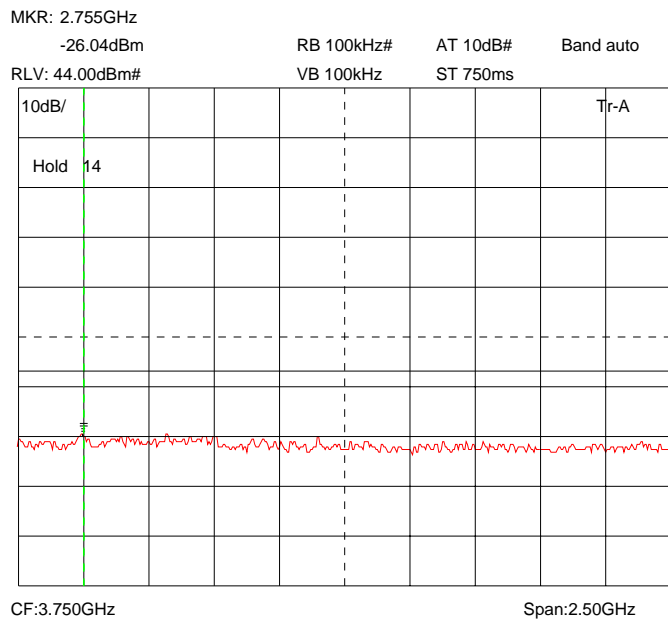


TRANSMITTER TESTS

AMPLIFIER SPURIOUS EMISSIONS – RADIATED – Part 2.1053– DOWNLINK

Ambient temperature = 11°C
 Relative humidity = 67%
 Conditions = OATS
 Supply voltage = +110Vac
 Supply Frequency = N/A

Test Signal = F3E

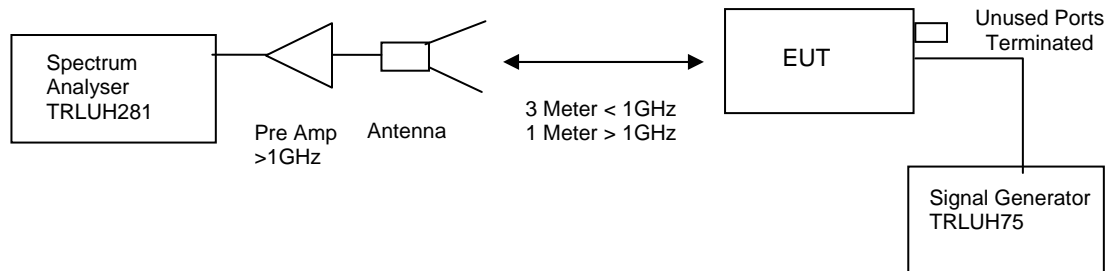

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output. The unit was also tested with the signal generator replaced by another 50ohm load.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least $43 + 10 \log P_{dB}$

$(10 \log P_{watts}) - (43 + 10 \log (P_{watts} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$


RESULTS

FREQUENCY RANGE	FREQ. (MHz)	MEAS. Rx. (dBµV)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dBµV/m)	CALCULATED EIRP (dBm)	LIMIT (dBm)
30MHz – 5GHz	No Significant Emissions Within 20dBs of the Limit						-13dBm

The test equipment used for the Transmitter Spurious Emissions:


TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	
HORN	EMCO	3115	9010-3580	138	X
SPECTRUM ANALYSER	R&S	FSU46	200034	UH281	X
PRE AMPLIFIER	HP	8449B	3008A016	572	X
SIGNAL GENERATOR	MARCONI	2022D	119224/035	UH89	X
ANTENNA	CHASE	CBL6612B	2803	UH93	X

Radiated emissions 406.0MHz 30MHz– 1GHz

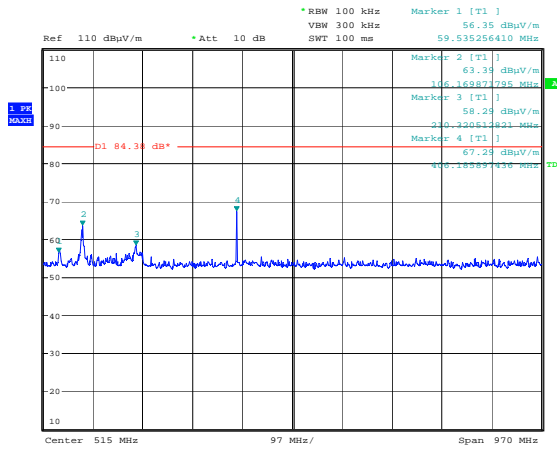


Date: 21.SEP.2007 16:20:00

Radiated emissions 406.0MHz 1GHz – 3GHz

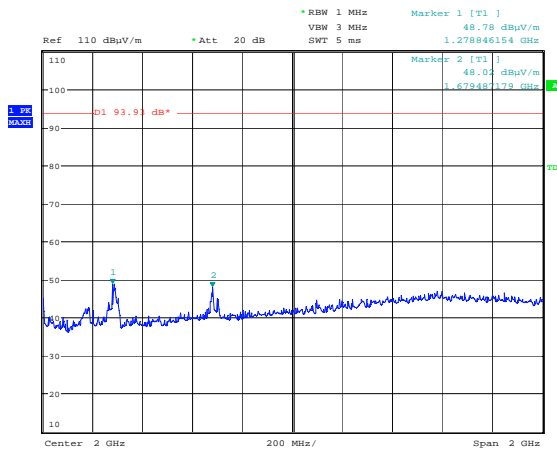

Date: 21.SEP.2007 15:44:20


Radiated emissions 406.0MHz 3GHz – 5GHz

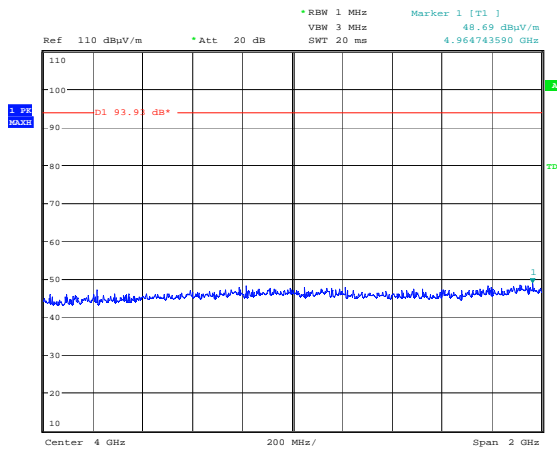

Date: 21.SEP.2007 15:43:56


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

Radiated emissions 406.0MHz 30MHz– 1GHz

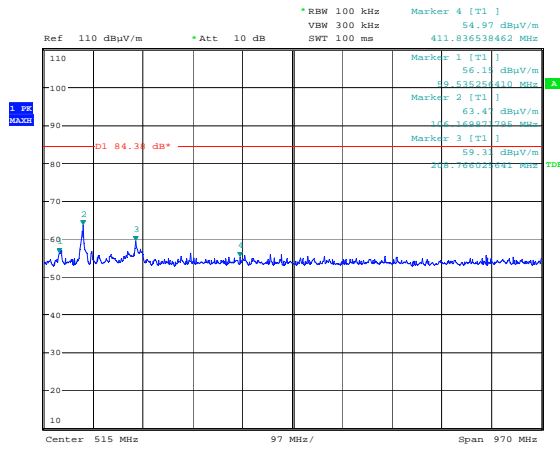


Date: 21.SEP.2007 16:21:25

Radiated emissions 407.5MHz 1GHz – 3GHz

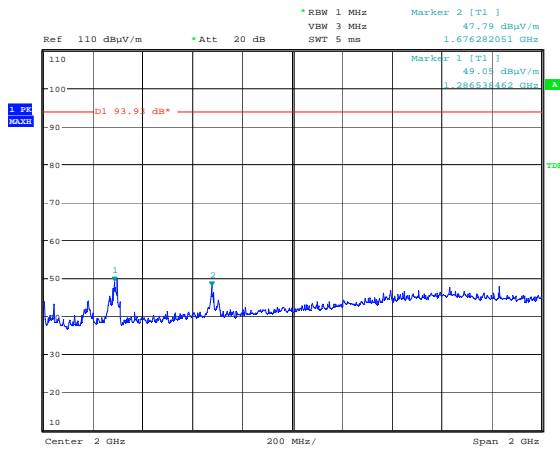

Date: 21.SEP.2007 15:45:07


Radiated emissions 407.5MHz 3GHz – 5GHz

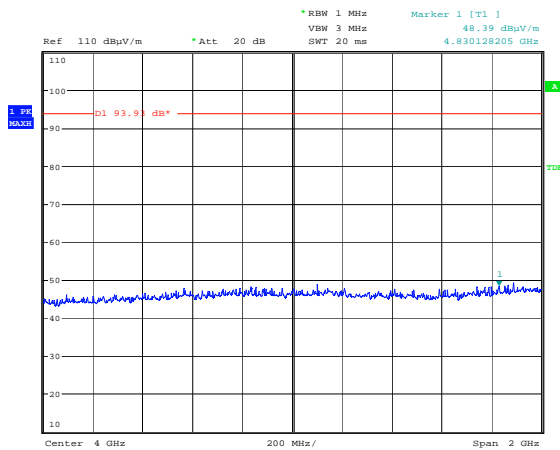

Date: 21.SEP.2007 15:46:04


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

Radiated emissions 409.0MHz 30MHz– 1GHz

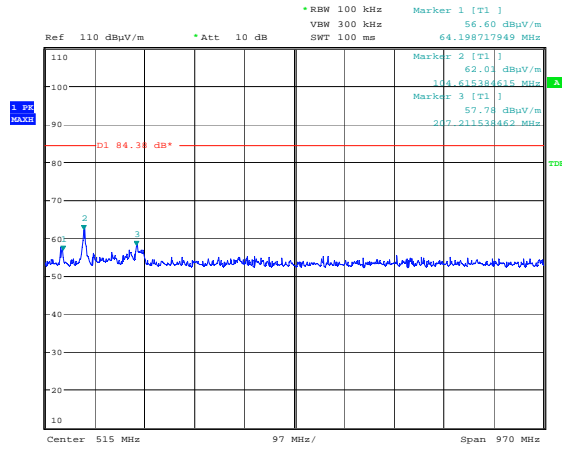


Date: 21.SEP.2007 16:23:05

Radiated emissions 409.0MHz 1GHz – 3GHz

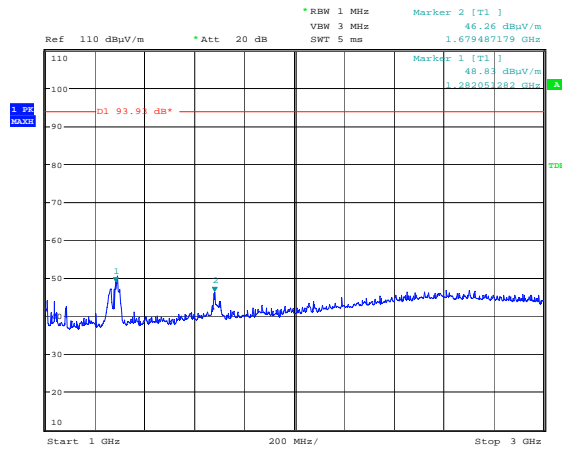

Date: 21.SEP.2007 15:49:04


Radiated emissions 409.0MHz 3GHz – 5GHz

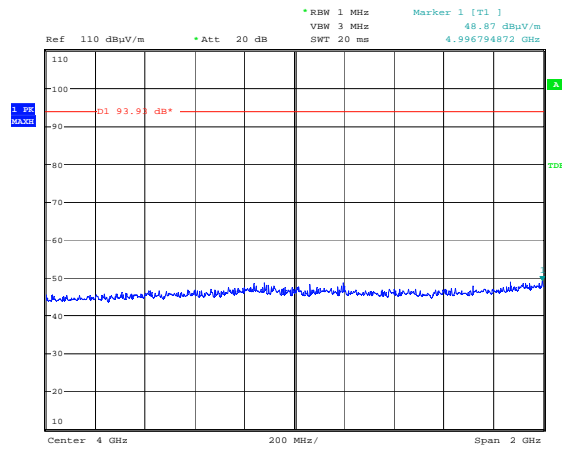

Date: 21.SEP.2007 15:48:01


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

Radiated emissions no input signal 30MHz – 1GHz

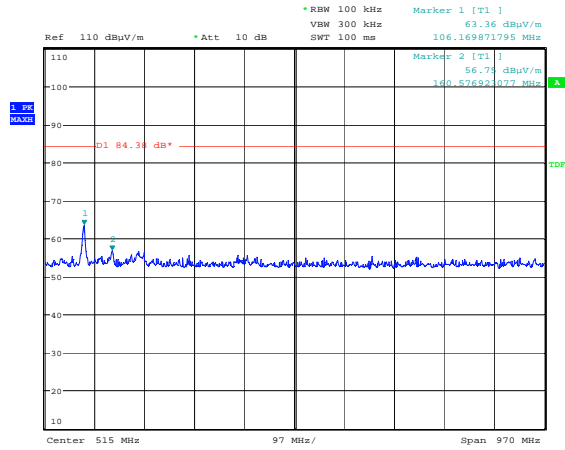


Date: 21.SEP.2007 16:12:47

Radiated emissions no input signal 1GHz – 3GHz

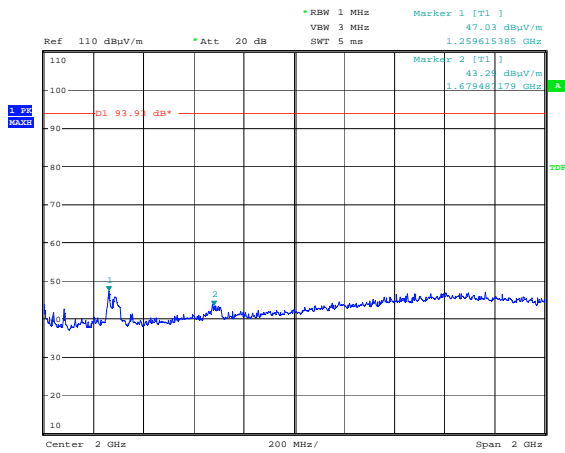

Date: 21.SEP.2007 16:02:56

Radiated emissions no input signal 3GHz – 5GHz

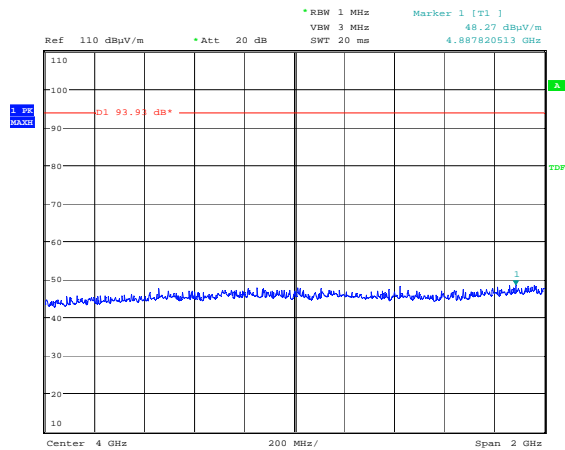

Date: 21.SEP.2007 16:01:54

The above test results show that there were no emissions within 20dBs of the -13dBm limit.

ANNEX A
PHOTOGRAPHS





ANNEX B
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[]
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		[]
e.	LABELLING	-	PHOTOGRAPHS	[]
		-	DECLARATION	[]
		-	DRAWINGS	[]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
h.	CIRCUIT DIAGRAMS	-	Tx	[]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
i.	COMPONENT LOCATION	-	Tx	[]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
j.	PCB TRACK LAYOUT	-	Tx	[]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
k.	BILL OF MATERIALS	-	Tx	[]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

ANNEX C
EQUIPMENT CALIBRATION

TRL Number	Equipment Type	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
UH06/07	IC OATS Submission	TRL	01/06/2007	24	01/06/2009
UH006	3m Range ERP CAL	TRL	08/12/2006	12	08/12/2007
UH028	Log Periodic Ant	Schwarbeck	30/05/2007	24	30/05/2009
UH029	Bicone Antenna	Schwarbeck	22/05/2007	24	22/05/2009
UH041	Multimeter	AVOmeter	04/01/2007	12	04/01/2008
UH089	Signal Generator	Marconi	09/01/2007	12	09/01/2008
UH093	Bilog Antenna	Chase	21/05/2007	24	21/05/2009
UH105	Signal Generator	Marconi	31/05/2007	12	31/05/2008
UH132	Power meter	Marconi	10/01/2007	12	10/01/2008
UH162	ERP Cable Cal	TRL	02/01/2007	12	02/01/2008
UH228	Power Sensor	Marconi	15/01/2007	12	15/01/2008
UH253	1m Cable N type	TRL	07/12/2006	12	07/12/2007
UH254	1m Cable N type	TRL	07/12/2006	12	07/12/2007
UH265	Notch filer	Telonic	11/01/2006	24	11/01/2008
UH269	1m Cable N type	TRL	07/12/2006	12	07/12/2007
UH270	1m Cable N type	TRL	07/12/2006	12	07/12/2007
UH271	1.5m Cable N type	TRL	07/12/2006	12	07/12/2007
UH272	1.5m Cable N type	TRL	07/12/2006	12	07/12/2007
UH273	2m Cable N type	TRL	07/12/2006	12	07/12/2007
UH274	2m Cable N type	TRL	07/12/2006	12	07/12/2007
UH281	Spectrum Analyser	R&S	24/07/2006	12	24/07/2007
UH297	Signal Generator	R&S	30/05/2007	12	30/05/2008
UH340	Signal Generator	HP	29/06/2006	12	29/06/2007
L005	CMTA	R&S	10/01/2007	12	10/01/2008
L007	Loop Antenna	R&S	22/05/2007	24	22/05/2009
L103	Attenuator	Bird		Calibrate in Use	
L112	Attenuator	Bird		Calibrate in Use	
L138	1-18GHz Horn	EMCO	23/05/2007	24	23/05/2009
L139	1-18GHz Horn	EMCO	23/05/2007	24	23/05/2009
L170	Combiner	Elcom		Calibrate in Use	
L176	Signal Generator	Marconi	01/03/2007	12	01/03/2008
L220	Attenuator	Bird		Calibrate in Use	
L426	Temperature Indicator	Fluke	09/01/2007	12	09/01/2008
L479	Analyser	Anritsu	09/01/2007	12	09/01/2008
L572	Pre Amplifier	HP		Calibrate in Use	

ANNEX D
MEASUREMENT UNCERTAINTY

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Equipment - TRLUH120) = **2.18dB**

Uncertainty in test result (Equipment – TRL05) = **1.08dB**

Uncertainty in test result (Equipment – TRL479) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Equipment - TRLUH120) = **119ppm**

Uncertainty in test result (Equipment – TRL05) = **0.113ppm**

Uncertainty in test result (Equipment – TRL479) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**, Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz-18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = **3.31dB**

Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**, Uncertainty in time measurement = **0.59%**, Uncertainty in Amplitude measurement = **0.82%**

[11] Power Line Conduction

Uncertainty in test result = **3.4dB**

[12] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[13] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[14] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[15] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[16] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[17] Receiver Threshold

Uncertainty in test result = **3.23dB**

[18] Transmission Time Measurement

Uncertainty in test result = **7.98%**