

Global Product Compliance Laboratory  
600-700 Mountain Avenue  
Room 5B-108  
Murray Hill, New Jersey 07974-0636 USA



**TESTING**

**NVLAP LAB CODE: 100275-0**

**RF Transmitter Certification Test Report  
(FCC ID: 2AD8UAZRBRH1)**

Regulation

**FCC CFR 47 Part 15 Subpart E, Section 15.407**

Client

**Nokia Solutions and Networks Oy**

Product Evaluated

**AZRB AirScale Micro RRH Band 46 LAA UNII-2 (DFS)**

**GPCL Report Number**

TR2018-0233 FCC DFS

**GPCL Project Number**

2018-0233

**Date Issued**

February 13, 2019

## TABLE OF CONTENTS

<b>1.</b>	<b>ATTESTATION OF TEST RESULTS</b>	<b>4</b>
<b>2.</b>	<b>SUMMARY OF THE TEST RESULTS</b>	<b>5</b>
<b>3.</b>	<b>GENERAL INFORMATION</b>	<b>6</b>
3.1	<i>Product Descriptions</i>	
3.2	<i>Accessories</i>	
3.3	<i>Antenna(s)</i>	
3.3.1	<i>Description of Antenna(s)</i>	
3.3.2	<i>Antenna Configuration and Gain Verification</i>	
<b>4.</b>	<b>DFS MEASUREMENTS</b>	<b>9</b>
4.1	<i>Regulatory Requirements</i>	
4.2	<i>DFS Band Carrier Frequencies</i>	
4.3	<i>DFS Technical Requirements</i>	
4.4	<i>DFS Detection Thresholds</i>	
4.5	<i>Radar Test Waveforms</i>	
4.5.1	<i>Short Pulse Radar Test Waveforms</i>	
4.5.2	<i>Long Pulse Radar Test Waveforms</i>	
4.5.3	<i>Frequency Hopping Radar Test Waveforms</i>	
<b>5.</b>	<b>REQUIRED MEASUREMENTS AND RESULTS</b>	<b>17</b>
5.1	<i>Test Configurations and Setup</i>	
5.2	<i>Test Channels and Method</i>	
5.3	<i>Radar Waveform Verification</i>	
5.4	<i>DFS Conformance Evaluation</i>	
5.4.1	<i>U-NII Detection Bandwidth</i>	
5.4.2	<i>Channel Availability Check Time</i>	
5.4.3	<i>In Service Monitoring</i>	
5.4.4	<i>Statistical Performance Check</i>	
<b>5.</b>	<b>PHOTOGRAPHS OF EUT SETUP</b>	<b>66</b>
<b>6.</b>	<b>LIST OF TEST EQUIPMENT</b>	<b>67</b>
<b>7.</b>	<b>TEST FACILITIES</b>	<b>68</b>
<b>8.</b>	<b>REFERENCES</b>	<b>69</b>

Date	Revision	Section	Change

*Nokia Global Product Compliance Laboratory represents to the client that testing was done in accordance with standard procedures as applicable, and that reported test results are accurate within generally accepted commercial ranges of accuracy in accordance with the scope of our NVLAP Accreditation. Nokia Global Product Compliance reports only apply to the specific samples tested. This report is the property of the client. This report shall not be reproduced except in full without the written approval of the Nokia Global Product Compliance Laboratory.*

*Nokia Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA). The laboratory is ISO 9001:2008 Certified.*

*Nokia Global Product Compliance Laboratory represents to the client that the laboratory's accreditation or any of its calibration or test reports in no way constitutes or implies product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.*

*The test results documented in this report refer exclusively to the test model/sample specified, under the conditions and modes of operation as described herein.*

Prepared By:

Reviewed By:

Signed: Steve Gordon 2/13/2019  
S. Gordon Date  
GPCL Compliance Engineer  
NVLAP Approved Signatory

Signed: Raymond L. Johnson 2/13/2019  
R.J. Johnson Date  
GPCL Technical Manager  
NVLAP Approved Signatory

# 1 ATTESTATION OF TEST RESULTS

<b>Company Name (Manufacturer)</b>	Nokia Solutions and Networks Oy 2000 W. Lucent Lane Naperville, IL 60563
<b>FCC ID</b>	2AD8UAZRBRH1
<b>Product Name</b>	AZRB AirScale Micro RRH Band 46 LAA
<b>Model Name</b>	AZRB
<b>Serial Number(s)</b>	1M181319958
<b>Test Requirement(s)</b>	47 CFR FCC Part 15 Subpart E, Section 15.407 (DFS)
<b>Test Procedures/Methods</b>	FCC KDB 905462 D02 v02, April 8, 2016
<b>Frequency Band</b>	E-UTRAN Band 46: 5250-5350 MHz (UNII-2a); 5470-5725 MHz (UNII-2c)
<b>Operation Mode</b>	Master Device
<b>Date Tested</b>	November 26 – December 20, 2018
<b>Type of Application</b>	C2PC
<b>Test Laboratory</b>	Nokia Global Product Compliance Laboratory 600-700 Mountain Avenue Murray Hill, New Jersey 07974-0636 USA FCC Registration No/Designation No: 896745/US5302
<b>Test Engineers</b>	S. Gordon and J. Yadav

The above product has been evaluated and found to be in compliance with the Commission's Rules and Regulations set forth in the above standards.

## FCC Section 2.911(e) Certification of Technical Test Data

The technical test data presented in this report are accurate.

## 2 SUMMARY OF THE TEST RESULTS

<b>Applied Standards: 47 CFR FCC Part Subpart E Section 15.407 UNII-2 (DFS) KDB 905462 D02</b>				
<b>Section</b>	<b>FCC Rules</b>	<b>Description of Tests</b>	<b>Test Condition</b>	<b>Results In Compliance</b>
5.3	15.407 (h)(2)	DFS Detection Threshold	Radiated	Yes
5.4.1	15.407 (h)(2)	U-NII Detection Bandwidth		Yes
5.4.2	15.407 (h)(2)(ii)	Channel Availability Check Time		Yes
5.4.3	15.407 (h)(2)(iii)	In Service Monitoring		Yes
		Channel Move Time		
		Channel Closing Time		
		Non-Occupancy Period		
5.4.4		Statistical Performance Check	Yes	

### 3 GENERAL INFORMATION

#### 3.1 Product Descriptions

**Table 3.1.1 Product Specifications**

Specification Items	Description
Product Type	LAA LTE RRH
Radio Type	Intentional Transceiver
Power Type	DC: -38V to -57V AC: 80V to 276V (via external AC/DC Converter)
FCC Rules	15.407
Operation Mode	Master Device, Point to Multipoint
Communication Mode	Framed Based System
Modulation	OFDM (QPSK, 16QAM, 64QAM, 256QAM)
Technology	LAA LTE-TDD
Frequency Range	5250-5350 MHz (UNII-2a); 5470-5725 MHz (UNII-2c) E-UTRAN Band 46
Carrier Operating Frequency (Aggregated) Bandwidth(s)	5260-5320 MHz (UNII-2a); 5500-5720 MHz (UNII-2c) 20/40/60MHz
MIMO	2Tx, 2Rx
Max Rated Conducted RF Power	Antennas with Max Gain $\leq 6$ dBi: 1x20MHz: 19.5dBm per port and 22.5dBm total 2x20MHz: 21dBm per port and 24dBm total 3x20MHz: 21dBm per port and 24dBm total Antennas with Max Gain =7.5 dBi: 1x20MHz: 18dBm per port and 21dBm total 2x20MHz: 19.5dBm per port and 23.5dBm total 3x20MHz: 19.5dBm per port and 23.5dBm total Antennas with Max Gain =9.5 dBi: 1x20MHz: 16dBm per port and 19dBm total 2x20MHz: 17.5dBm per port and 20.5dBm total 3x20MHz: 17.5dBm per port and 20.5dBm total
Max Rated EIRP Power	1x20MHz: 28.5dBm 2x20MHz: 30dBm 3x20MHz: 30dBm
Min Conducted RF Power	17dBm (50mW) per port and 20dBm (100mW) per unit
Min EIRP Power	24.43dBm
Time required for Power-on cycle	The time required for the power-on cycle is 145.2 seconds.
TPC Function	Yes (Test Report: TR2018-0233 FCC RF Non-DFS)
Software Version (Master)	FL18A
Hardware Version (Master)	474510A.101
Antennas	Refer to Section 3.5.
Secuirty of Parameters of Radar Waveforms	The information regarding the parameters of the detected Radar Waveforms is not available to the end user per KDB 905462 D02 Section 8.

## 3.2 Accessories

A Nokia BBU, ASMi, was used for all testing. ASMi consists of an ASIA system module circuit pack and an ABIA baseband sub-module circuit pack. The ASMi was connected to the AZRB through fiber connection. The above accessory device is unmodified and is commercially available per FCC requirement given in 2.1033(b)(8).

## 3.3 Antenna(s)

### 3.3.1 Description of Antennas

Currently, there are seven available antennas of two types to be equipped for this low power Band 46 LAA RRH AZRB. The demonstration of meeting the FCC Section 15.203 and KDB 353028 D01 requirements on these antennas has been presented in previous filings, where it stated that unique (non-standard) antenna connectors were designed with the product and professional installation was used. There are provisions for special connectors to be used for any external antennas.

**Table 3.3.1 UNII-2 Antenna Data from Manufacturers**

Ant No	Model Name	Antenna Type/ Size (mm)	Frequency (MHz)	Tx/Rx Port	Max Gain (dBi)	
					Port 1	Port 2
1	AARC	Directional 295(L) × 270(W) × 30(D)	5150 ~ 5850	Tx/Rx 1/2	4.91	4.91
2	FA2RC	Directional 160(L) × 110(W) × 44(D)	5150 ~ 5850	Tx/Rx 1/2	6.0	6.0
3	VVSSP-360S-F	Omni-Directional 600(L) × 100(R)	5150 ~ 5925	Tx/Rx 1/2	5.1	5.1
4	GQ2410-06645	Omni-Directional 634(L) × 127.5(R)	5150 ~ 5925	Tx/Rx 1/2	5.9	5.9
5	2205	Directional 198(W) × 24.5(D) × 198(H)	5150 ~ 5925	Tx/Rx 1/2	9.5	9.5
6	GO4806-06664	Omni-Directional, 1219(L) × 52(D)	5150 ~ 5925	Tx/Rx 1/2	6.0	6.0
7	FA2RA	Omni-Directional, 235(L) × 51(D)	5150 ~ 5850	Tx/Rx 1/2	7.5	7.5

**Table 3.3.2 UNII-2 Antenna Tested for DFS**

Antenna No	Model Name	Antenna Type	Frequency (MHz)	Gain (dBi)
1	AARC	Directional	5150 ~ 5925	4.43 ~ 4.91

The compliance of the EUT with the directional antennas #1 AARC, which have the lowest antenna gain, was evaluated.

### 3.3.2 Antenna Configuration and Gain Verification

The mechanical design of the antenna is a panel style antenna enclosed in a plastic radome with NEX10 straight male connectors on attached cables. The design of this assembly will allow the antenna to be mounted directly into the AZRB shroud.

The antenna gain of the AARC is specified to be between 4 and 6 dBi. Its radiation performance, including antenna pattern, horizontal and vertical beam width, across the entire UNII-1/2/3 frequency bands was measured by the antenna supplier with standard SATIMO SG-24 3D antenna test system.





## 4 DFS REQUIREMENTS

### 4.1 Regulatory Requirements

The tests in this report were performed in accordance with FCC CFR 47 Part 15 Subpart E and FCC KDB 905462 D02 *Compliance Measurement Procedures for Unlicensed-National Information Infrastructure Devices Operating in the 5250-5350 MHz and 5470-5725 MHz Bands Incorporating Dynamic Frequency Selection*.

KDB 905462 D02 Section 7.8 stated that the EUT must pass all tests successfully. If the EUT fails any one of the tests it will count as a failure of compliance. To show compliance, all tests must be performed with waveforms randomly generated as specified with test results meeting the required percentage of successful detection criteria.

FCC Section 15.407(h)(2) specified the requirements for Dynamic Frequency Selection (DFS):

UNII devices operating in the 5.25–5.35 GHz and 5.47–5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems. Operators shall only use equipment with a DFS mechanism that is turned on when operating in these bands. The device must sense for radar signals at 100 percent of its emission bandwidth. The minimum DFS detection threshold for devices with a maximum EIRP of 200 mW (23dBm) to 1 W (30dBm) is -64 dBm. For devices that operate with less than 200 mW (23dBm) EIRP the minimum detection threshold is -62 dBm. The detection threshold is the received power averaged over 1  $\mu$ s referenced to a 0 dBi antenna. For the initial channel setting, the manufacturers shall be permitted to provide for either random channel selection or manual channel selection.

- (i) Operational Modes. The DFS requirement applies to the following operational modes:
  - a. The requirement for channel availability check time applies in the master operational mode.
  - b. The requirement for channel move time applies in both the master and slave operational modes.
- (ii) Channel Availability Check Time.

A U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the interference threshold values is detected within 60 seconds.

- (iii) Channel Move Time.

After a radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds. Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.

- (iv) Non-Occupancy Period.

A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

## 4.2 DFS Band Carrier Frequencies

**Table 4.2.1 5GHz UNII-2 (5250-5350MHz, 5470-5725MHz) Frequency Channel Plan**

<b>Bands</b>	<b>Channel No</b>	<b>Freq (MHz)</b>	<b>Channel Bandwidth</b>	<b>Freq Bands</b>
UNII-2a (B46b)	52	5260	20MHz	5250-5350
	56	5280		
	60	5300		
	64	5320		
UNII-2c (B46c)	100	5500	20MHz	5470-5725
	104	5520		
	108	5540		
	112	5560		
	116	5580		
	120	5600		
	124	5620		
	128	5640		
	132	5660		
	136	5680		
	140	5700		
144	5720			
UNII-2a (B46b)	52, 56	5260, 5280	40MHz	5250-5350
	60, 64	5300, 5320		
UNII-2c (B46c)	100, 104	5500, 5520	40MHz	5470-5725
	108, 112	5540, 5560		
	116, 120	5580, 5600		
	124, 128	5620, 5640		
	132, 136	5660, 5680		
	140, 144	5700, 5720		
UNII-2a	52, 56, 60	5260, 5280, 5300	60MHz	5250-5350
UNII-2c (B46c)	100, 104, 108	5500, 5520, 5540	60MHz	5470-5725
	112, 116, 120	5560, 5580, 5600		
	124, 128, 132	5620, 5640, 5660		
	136, 140, 144	5680, 5700, 5720		

## 4.3 DFS Technical Requirements

**Table 4.3.1 Applicability DFS Requirements Prior to Use of a Channel  
(KDB 905462 D02 Table 1)**

<b>Requirement</b>	<b>Operational Mode</b>		
	<b>Master</b>	<b>Client (w/o Radar Detection)</b>	<b>Client (w Radar Detection)</b>
Non-Occupancy Period	Yes	Not Required	Yes
DFS Detection Threshold	Yes	Not Required	Yes
Channel Availability Check Time	Yes	Not Required	Not Required
U-NII Detection Bandwidth	Yes	Not Required	Yes

**Table 4.3.2 Applicability DFS Requirements during Normal Operation  
(KDB 905462 D02 Table 2)**

Requirement	Operational Mode	
	Master or Client (w Radar Detection)	Client (w/o Radar Detection)
DFS Detection Threshold	Yes	Not Required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not

Additional requirements for devices with multiple bandwidth modes	Master or Client (w Radar Detection)	Client (w/o Radar Detection)
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not Required
Channel Move Time and Channel Closing Transmission Time	Test using the widest BW mode	Test using the widest BW mode available for the link
All other tests	Any single mode	Not Required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices, it is suggested to select frequencies in each of the bonded 20MHz channels and the channel center frequency.

Operational Behavior	
<b>Master Devices</b>	<ul style="list-style-type: none"> <li>a) The <i>Master Device</i> will use DFS in order to detect <i>Radar Waveforms</i> with received signal strength above the <i>DFS Detection Threshold</i> in the 5250 - 5350 MHz and 5470 - 5725 MHz bands. DFS is not required in the 5150 - 5250 MHz or 5725 - 5825 MHz bands.</li> <li>b) Before initiating a network on a <i>Channel</i>, the <i>Master Device</i> will perform a <i>Channel Availability Check</i> for a specified time duration (<i>Channel Availability Check Time</i>) to ensure that there is no radar system operating on the <i>Channel</i>, using DFS described under subsection a) above.</li> <li>c) The <i>Master Device</i> initiates a U-NII network by transmitting control signals that will enable other U-NII devices to <i>Associate</i> with the <i>Master Device</i>.</li> <li>d) During normal operation, the <i>Master Device</i> will monitor the <i>Channel (In-Service Monitoring)</i> to ensure that there is no radar system operating on the <i>Channel</i>, using DFS described under a).</li> <li>e) If the <i>Master Device</i> has detected a <i>Radar Waveform</i> during <i>In-Service Monitoring</i> as described under d), the <i>Operating Channel</i> of the U-NII network is no longer an <i>Available Channel</i>. The <i>Master Device</i> will instruct all associated <i>Client Device(s)</i> to stop transmitting on this <i>Channel</i> within the <i>Channel Move Time</i>. The transmissions during the <i>Channel Move Time</i> will be limited to the <i>Channel Closing Transmission Time</i>.</li> <li>f) Once the <i>Master Device</i> has detected a <i>Radar Waveform</i> it will not utilize the <i>Channel</i> for the duration of the <i>Non-Occupancy Period</i>. If the <i>Master Device</i> delegates the <i>In-Service Monitoring</i> to a <i>Client Device</i>, then the combination will be tested to the requirements described under d) through f) above.</li> </ul>

**Table 4.3.3 DFS Response Requirements for Master & Client Devices with DFS  
(KDB 905462 D02 Table 4)**

Parameter	Value
Non-Occupancy Period	Min 30 Minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (Note 1)
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10s period (Notes 1&2)
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth (Note 3)
<p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, Radar Type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

## 4.4 DFS Detection Thresholds

**Table 4.4.1 DFS Detection Threshold for Master & Client Devices with Radar Detection  
(KDB 905462 D02 Table 3)**

Maximum Transmit Power	Value (See Notes 1 and 2)
EIRP $\geq$ 200 mW (23dBm)	-64 dBm
EIRP < 200 mW (23dBm) & PSD < 10dBm/MHz	-62 dBm
<p>Note 1: This is the power level at the input of the receiver averaged over 1 <math>\mu</math>s referenced to 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, Radar Type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

Interference Detection Threshold to be used is:

$$\text{Interference Detection Threshold Used} = -64 \text{ dBm} + 1 \text{ dB} = -63 \text{ dBm},$$

where the gain of receive antenna needs to be taken into account if not 0 dBi.

## 4.5 Radar Test Waveforms

KDB 905462 D02 Section 6 provides the parameters for 7 required test waveforms (see Tables below), minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

### 4.5.1 Short Pulse Radar Test Waveforms

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example, if in Short Pulse Radar Type 1 Test B a PRI of 3066  $\mu\text{sec}$  is selected, the number of pulses would be

$$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Roundup}\{17.2\} = 18.$$

**Table 4.5.1 Short Pulse Radar Waveforms (KDB 905462 D02 Table 5)**

Radar Type	Pulse Width ( $\mu\text{sec}$ )	PRI ( $\mu\text{sec}$ )	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 $\mu\text{sec}$ , with a minimum increment of 1 $\mu\text{sec}$ , excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

**Table 4.5.1a - Pulse Repetition Intervals Values for Test A (KDB 905462 D02 Table 5a)**

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

#### 4.5.2 Long Pulse Radar Test Waveform

**Table 4.5.2. Long Pulse Radar Test Waveform (KDB 905462 D02 Table 6)**


Radar Type	Pulse Width (μs)	Chirp Width (MHz)	PRI (ms)	No. of Pulses per Burst	No. of Bursts	Minimum % of Successful Detections	Min No. of Trials
5	50-100	5-20	1-2	1-3	8-20	80%	30

\*The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *transmission period* will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst Count*. Each interval is of length  $(12,000,000 / \textit{Burst Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \textit{Burst Count}) - (\textit{Total Burst Length}) + (\textit{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen randomly.

The Figure below provides a graphical representation of the Long Pulse Radar Test Waveform.

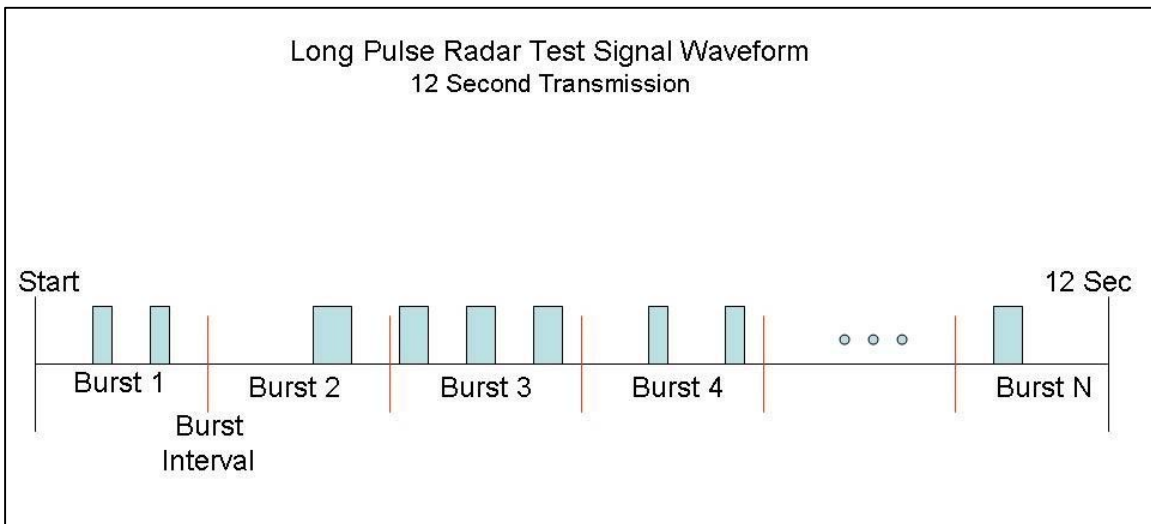

**Figure 4.5.1: Graphical Representation of a Long Pulse Radar Type Waveform (KDB 905462 D02 Figure 1)**

A representative example of a Long Pulse Radar Type waveform:

- 1) The total test waveform length is 12s.
- 2) Eight (8) *Bursts* are randomly generated for the *Burst Count*.

- 3) *Burst* 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 ms.
- 5) The PRI is randomly selected to be at 1213 ms.
- 6) *Bursts* 2 through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 ms. The starting location for Pulse 1, *Burst* 1 is randomly generated (1 to 1,500,000 minus the total *Burst* 1 length + 1 random PRI interval) at the 325,001 ms step. *Bursts* 2 through 8 randomly fall in successive 1,500,000 ms intervals (i.e. *Burst* 2 falls in the 1,500,001 – 3,000,000 ms range).

### 4.5.3 Frequency Hopping Radar Test Waveform

**Table 4.5.3. Frequency Hopping Radar Test Waveform (KDB 905462 D02 Table 7)**

<b>Radar Type</b>	<b>Pulse Width (µs)</b>	<b>PRI (µs)</b>	<b>Pulses per Hop</b>	<b>Hopping Rate (kHz)</b>	<b>Hopping Sequence Length</b>	<b>Minimum % of Successful Detections</b>	<b>Min No. of Trials</b>
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.




## 5 REQUIRED MEASUREMENTS AND RESULTS

### 5.1 Test Configurations and Setup

The radiated measurement method was used. The setup diagram(s) of the test and measurement system are given below.

**Master with injection at the Master**

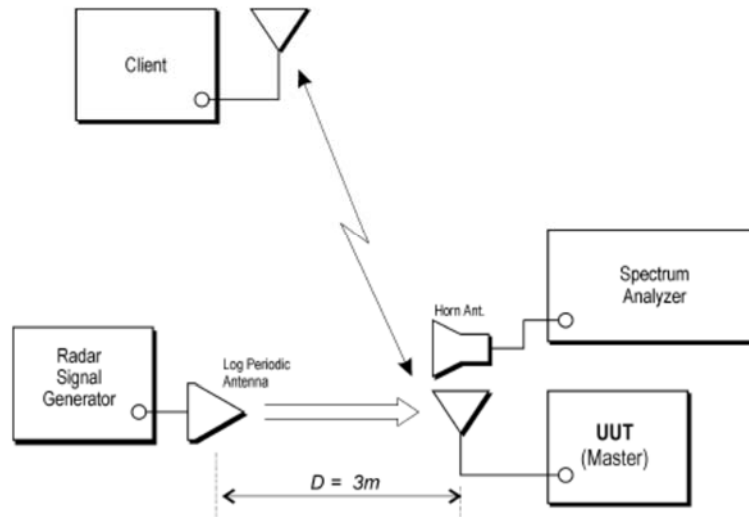

**Figure 5.1.1 Setup Diagram of DFS Test with Radiated Method**

### 5.2 Test Channels and Method

Per KDB 905462 D02 Section 7.8, one frequency needs to be chosen from the operating *Channels* of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands. The radiated method was used.

**Table 5.2.1 Frequency Channels and Radars Used for DFS Testing**

Tests	Master (w Radar Detection)		Radar Type
	Channel/Freq (MHz)	Bandwidth (MHz)	
Radar Waveform Calibration	100/5500	NA	Types 0- 6
U-NII Detection Bandwidth	100/5500	20	Type 0
	100, 104/5500, 5520	40	
	100, 104, 108 /5500, 5520, 5540	60	
CAC Time	132/5660	20	Type 0
Channel Move Time and Channel Closing Transmission Time	100, 104, 108 /5500, 5520, 5540	60	Type 0
Non-Occupancy Period	120, 124, 128 (5600, 5620, 5640)	60	Type 0
Statistical Performance Check (For Radar Type 5, low and high channels were evaluated as well)	100/5500	20	Types 1- 6
	100, 104/5500, 5520	40	
	100, 104, 108 /5500, 5520, 5540	60	


### **5.3 Radar Waveform Verification**

The parameters for the required test waveforms are given in Section 4.5.

The radar waveforms Type 0-6 were verified by the radiated method with a spectrum analyzer with the 0 Hz span setting at the 5500MHz channel center frequency and were plotted below. The DFS Detection Threshold level -63dBm specified in Section 4.4 was verified as well and are shown in the plots where the receive antenna gain has been taken into consideration.

The block diagram of equipment setup is shown in Section 5.1, where the step intervals of 0.1  $\mu$ s for pulse width, 1  $\mu$ s for PRI (pulse repetition interval), 1MHz for chirp width and 1 for the number of pulses was utilized for the random determination for specific test waveform.

### Short Pulse Radar Test Waveform Type 0

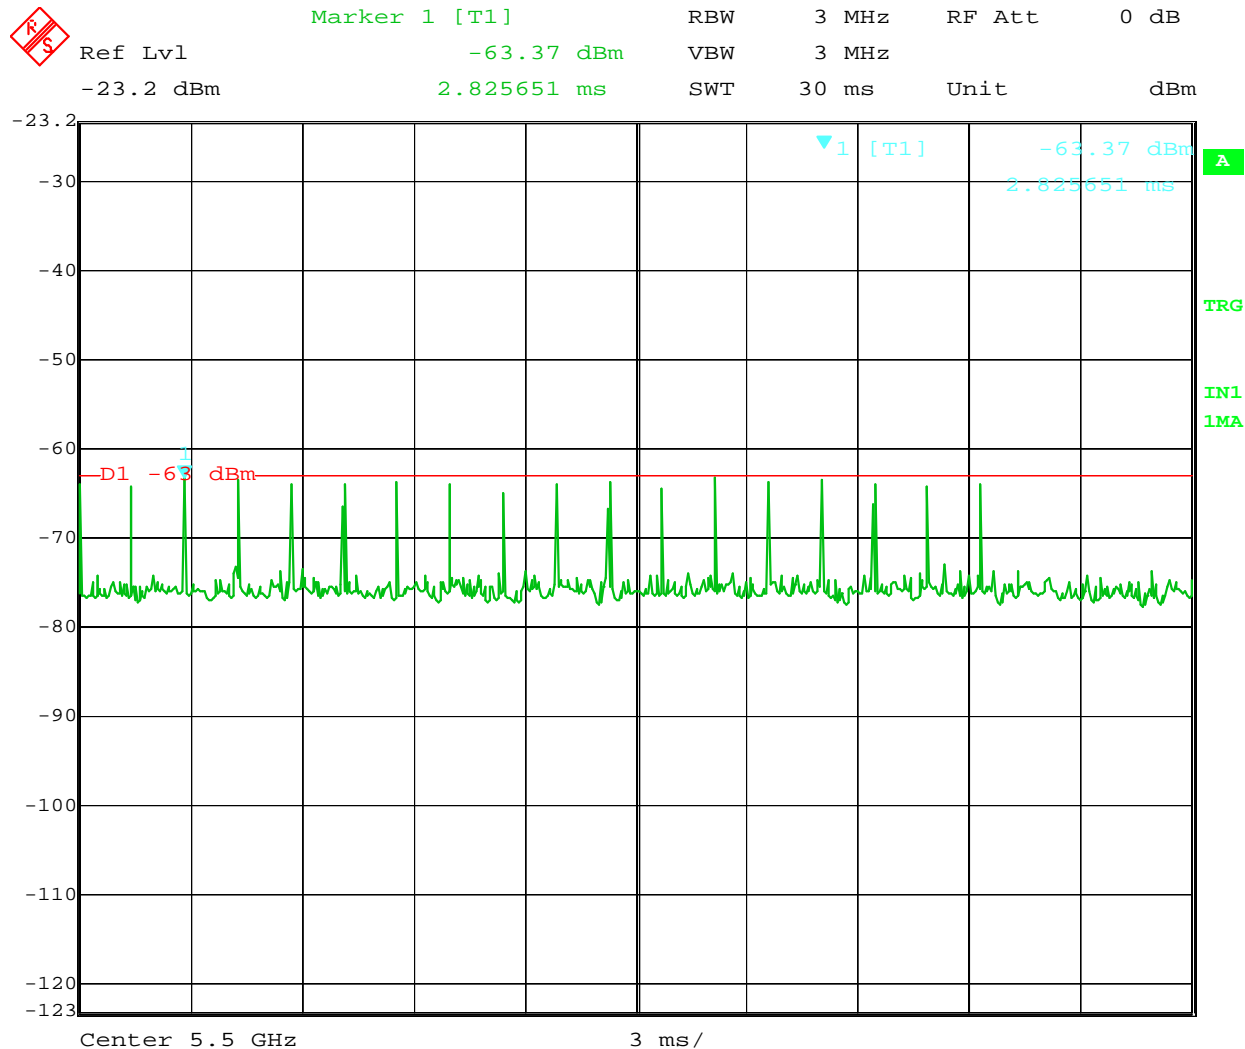


Title:      RADAR WAVEFORM CALIBRATION:TEST ENGINEER: SEG  
 Comment A: SHORT PULSE RADAR TEST WAVEFORM: TYPE #0  
 Date:      4.DEC.2018 08:05:31



# Short Pulse Radar Test Waveform Type 1B




Marker 1 [T1]	RBW	3 MHz	RF Att	0 dB
Ref Lvl	-63.52 dBm	VBW	3 MHz	
-23.2 dBm	8.537074 ms	SWT	30 ms	Unit dBm

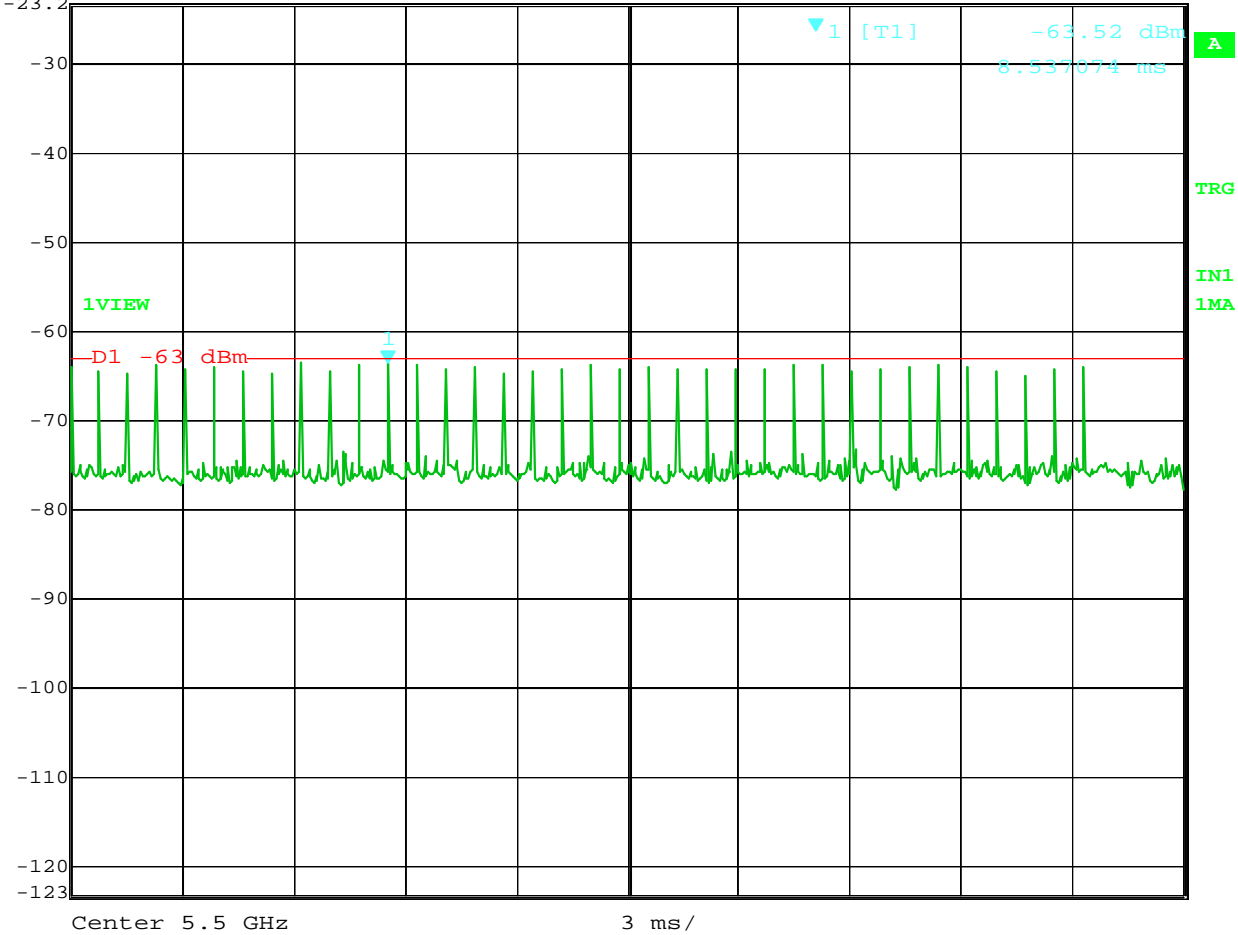


Title: RADAR WAVEFORM CALIBRATION:TEST ENGINEER: SEG  
 Comment A: SHORT PULSE RADAR TEST WAVEFORM: TYPE #1B  
 Date: 4.DEC.2018 08:47:36

## Short Pulse Radar Test Waveform Type 2

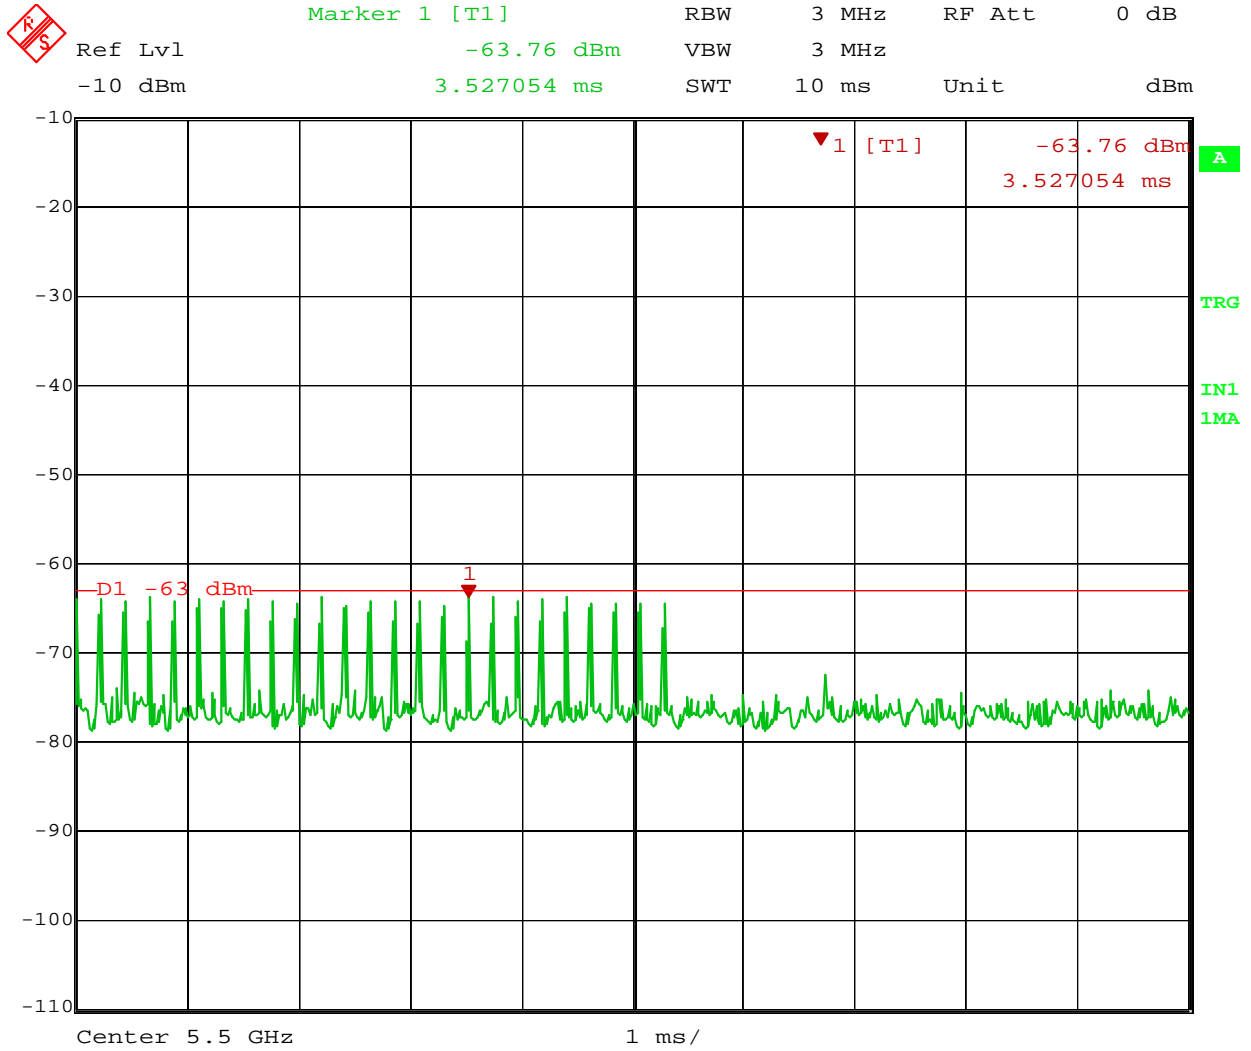


Title:            RADAR WAVEFORM CALIBRATION; TEST ENGINEER: SEG  
 Comment A:    SHORT PULSE RADAR TEST WAVEFORM: RADAR TYPE #2  
 Date:            6.DEC.2018 11:02:24

### Short Pulse Radar Test Waveform Type 3

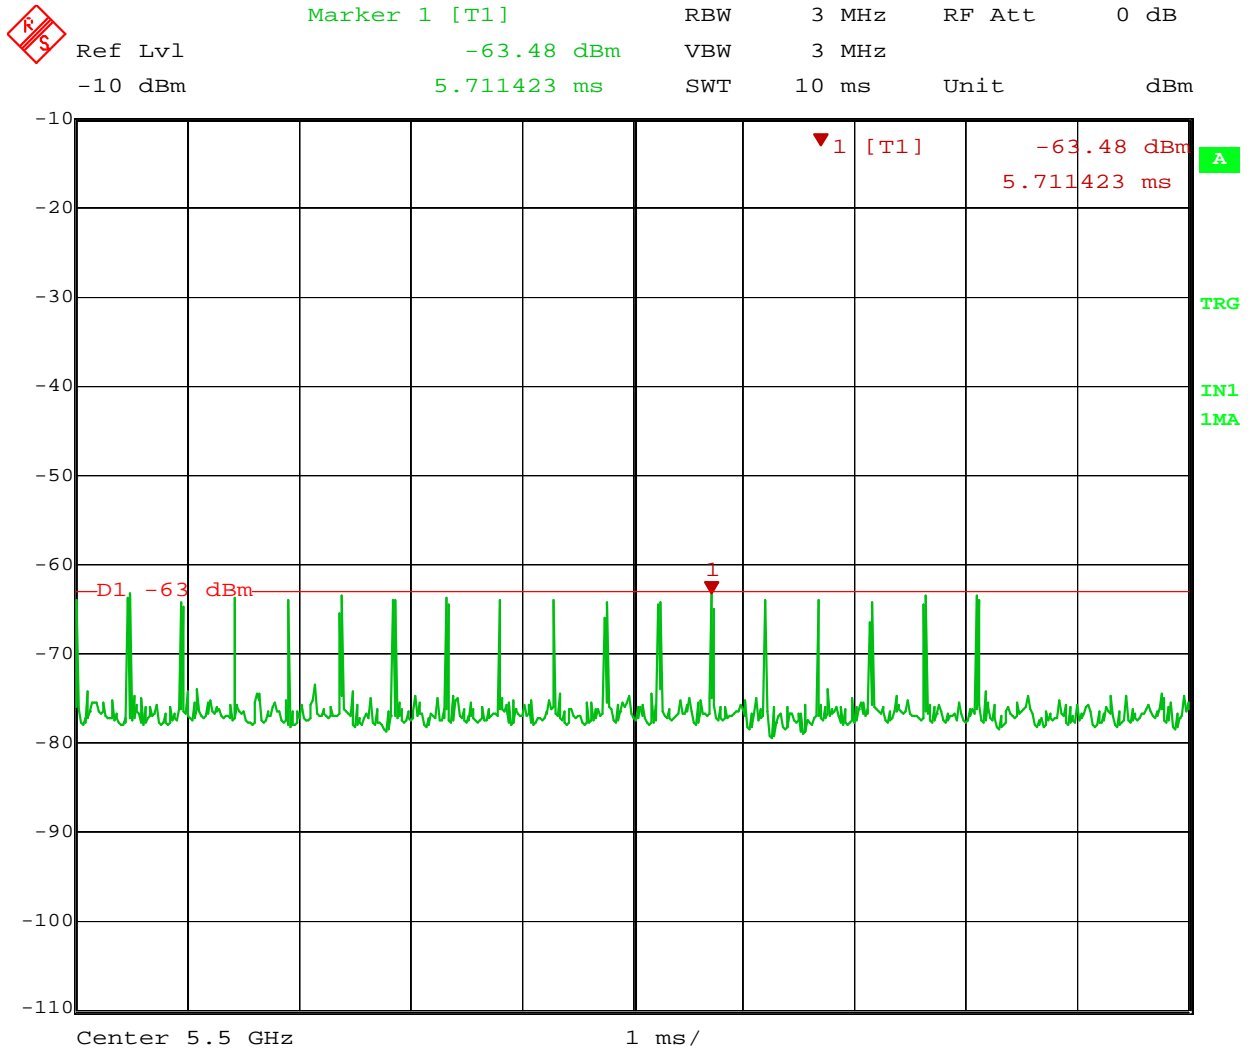

Title: RADAR WAVEFORM CALIBRATION; TEST ENGINEER: SEG  
 Comment A: SHORT PULSE RADAR TEST WAVEFORM: RADAR TYPE #3  
 Date: 6.DEC.2018 10:56:29


### Short Pulse Radar Test Waveform Type 4

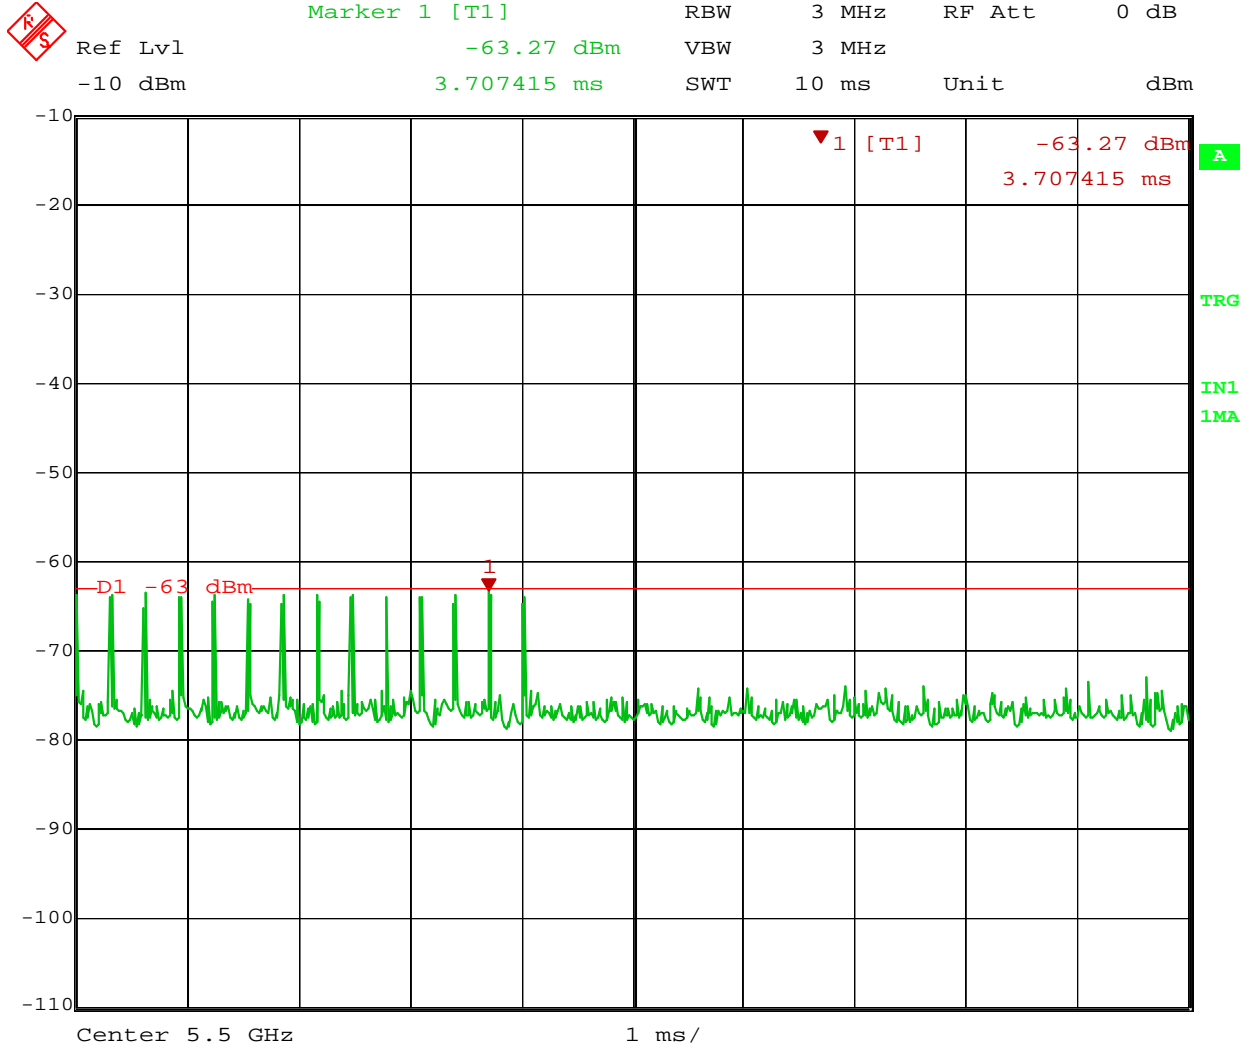

Title:            RADAR WAVEFORM CALIBRATION; TEST ENGINEER: SEG  
 Comment A:    SHORT PULSE RADAR TEST WAVEFORM: RADAR TYPE #4  
 Date:            6.DEC.2018 10:53:29



## Long Pulse Radar Test Waveform Type 5

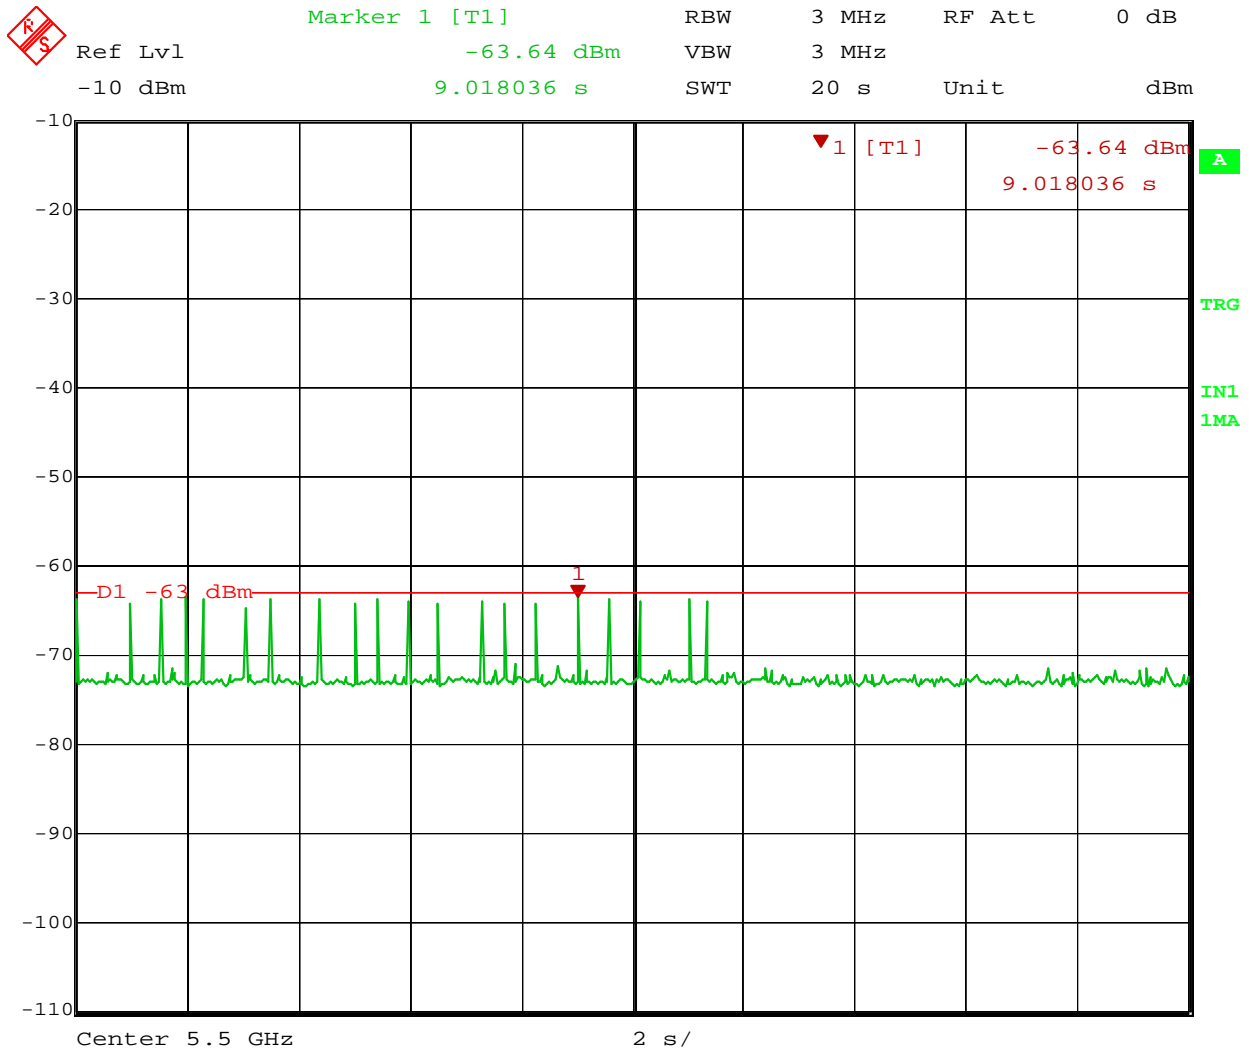

Title: RADAR WAVEFORM CALIBRATION; TEST ENGINEER: SEG  
 Comment A: SHORT PULSE RADAR TEST WAVEFORM: RADAR TYPE #5  
 Date: 6.DEC.2018 10:46:04




### Plot of AZRB Master with Traffic



Ref Lvl  
-10 dBm

RBW	3 MHz	RF Att	0 dB
VBW	3 MHz		
SWT	12 s	Unit	dBm

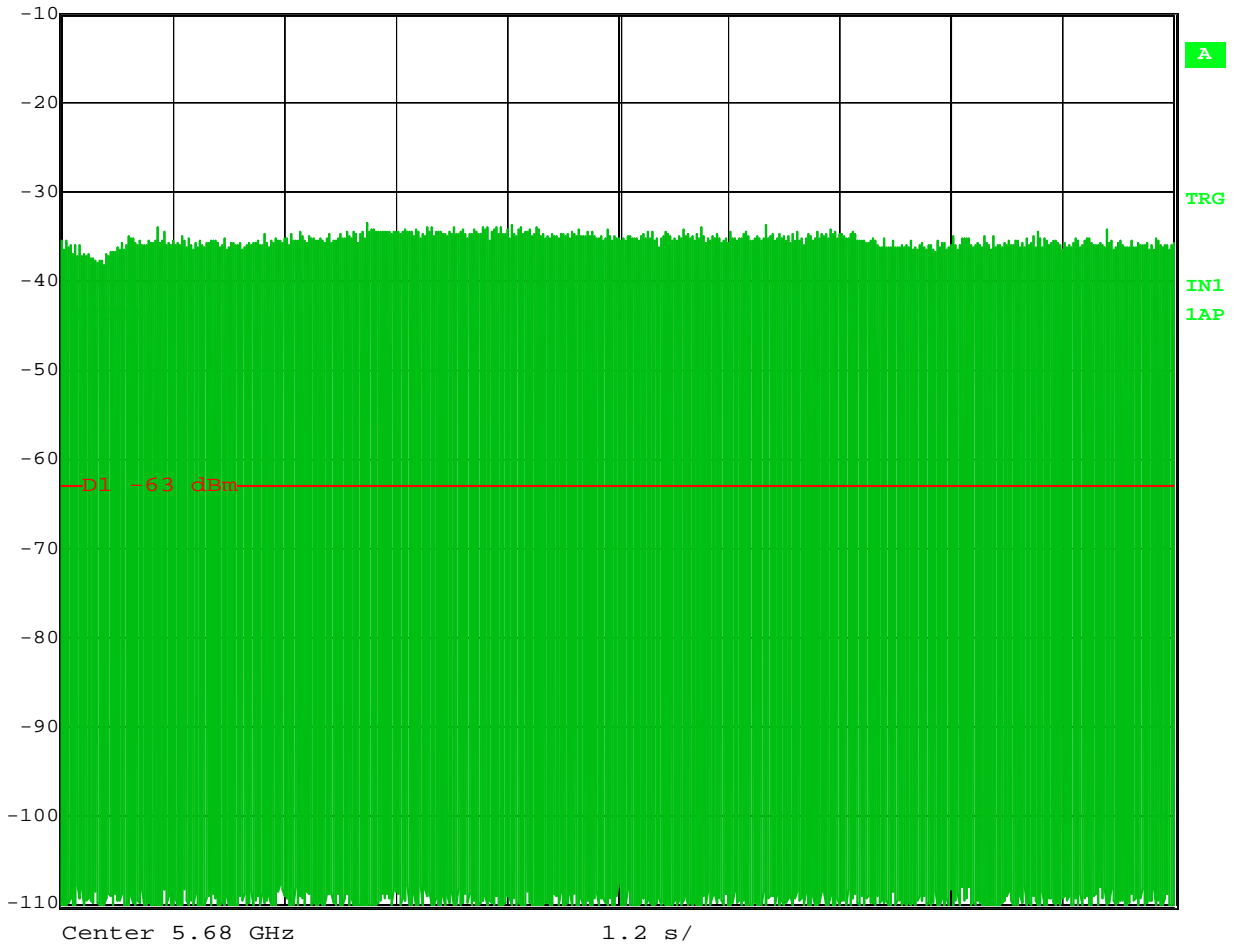


Title:            PLOT OF EUT WITH TRAFFIC STREAMING; TEST ENGINEER: SEG  
Comment A:      CHANNEL: 136; 20 MHz BW; CENTER FREQUENCY: 5680 MHz  
                    RADAR TYPE #0  
Date:            7.DEC.2018  14:17:46

### Plot of AZRB Master without Traffic



	Marker 1 [T1]	RBW	3 MHz	RF Att	0 dB
Ref Lvl	-73.52 dBm	VBW	3 MHz		
-10 dBm	3.294589 s	SWT	12 s	Unit	dBm

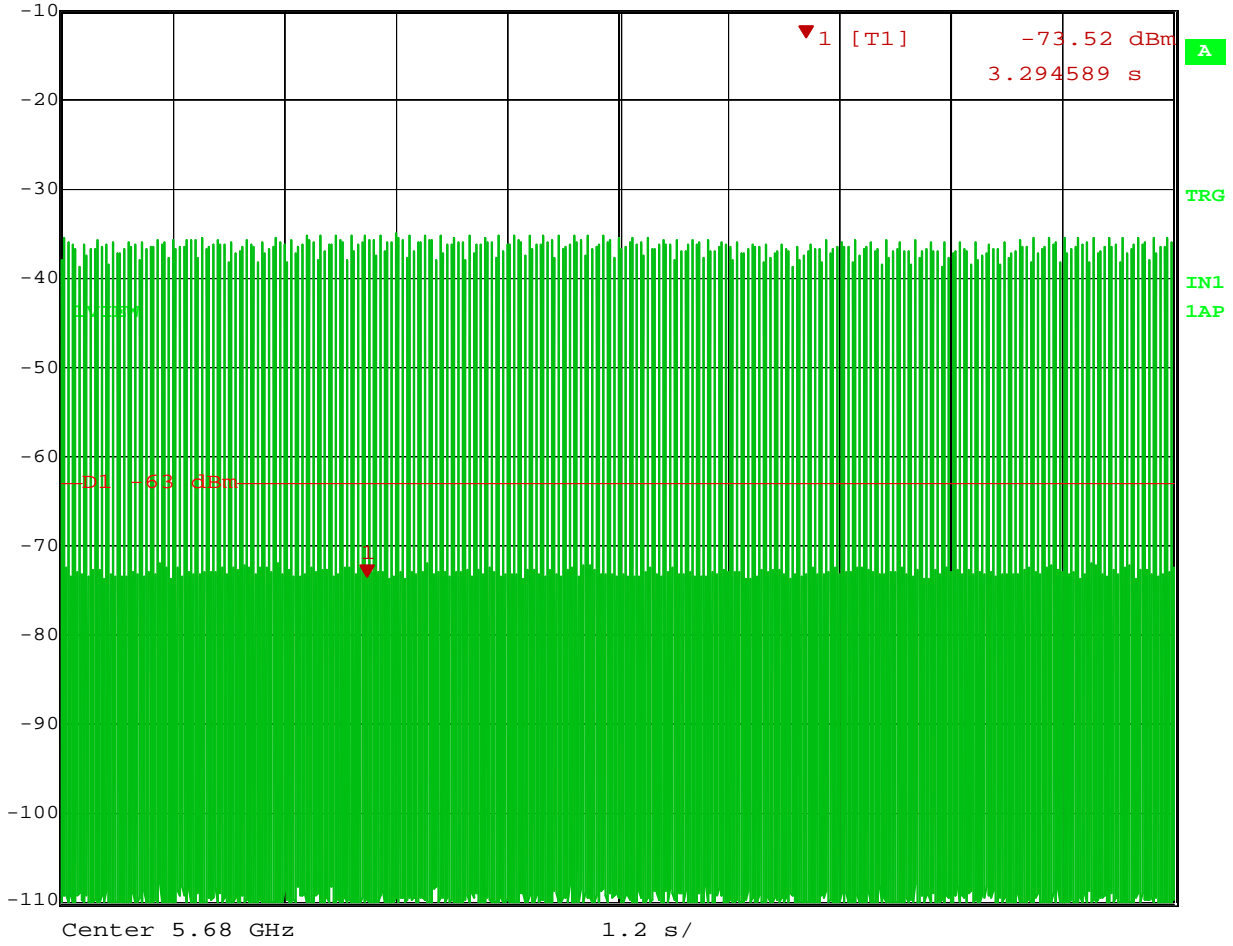

Title:            PLOT OF EUT WITHOUT TRAFFIC STREAMING; TEST ENGINEER: SEG  
 Comment A:    CHANNEL: 136; 20 MHz BW; CENTER FREQUENCY: 5680 MHz  
                   RADAR TYPE #0  
 Date:           7.DEC.2018  14:24:39

## 5.4 DFS Conformance Evaluation

The EUT has four statuses: Power-up Mode, Normal Mode, Channel Availability Check status and Radar detection events. Their performance requirements are provided in Table 4.3.3.

### 5.4.1 U-NII Detection Bandwidth

The purpose of this test is to subject the EUT to a Type 0 FCC radar pulse while moving the frequency of the radar signal through the channel to characterize the range of frequencies over which the EUT can detect the radar pulse. This is essential to ensure that the EUT is capable of detecting *Radar Waveforms* across the same frequency spectrum that contains the significant energy from the system. This test is performed on a single channel. All channel bandwidths have been evaluated by using Short Pulse Radar Type 0 per KDB 905462 D02 Section 5.1 and 7.1.

The testing procedures and setup used per KDB 905462, Section 7.8.1 are given below:

- Measure the 99% BW of the operating channel.
- Adjust the equipment to produce a single *Burst* at the center frequency of the EUT *Operating Channel* at the specified *DFS Detection Threshold* level.
- Generate a single radar *Burst* and repeat for a minimum of 10 trials. The EUT must detect the *Radar Waveform* within the DFS band using the specified *U-NII Detection Bandwidth* criterion shown in Table 4.3.3 (90%). In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems), select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
- Starting at the center frequency of the EUT operating *Channel*, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in Table 4.3.3. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as  $F_H$ ) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies above  $F_H$  is not required to demonstrate compliance.
- Starting at the center frequency of the EUT operating *Channel*, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in Table 4.3.3 (90%). Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as  $F_L$ ) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies below  $F_L$  is not required to demonstrate compliance.
- $U-NII\ Detection\ Bandwidth = F_H - F_L$ .
- In the case that the *U-NII Detection Bandwidth* is greater than or equal to the 99% power bandwidth for the measured  $F_H$  and  $F_L$ , the test can be truncated and the *U-NII Detection Bandwidth* can be reported as the measured  $F_H$  and  $F_L$ .

**Table 5.4.1.1 Measurement Set Up for U-NII Detection Bandwidth**

<b>Burst</b>	Short Pulse Radar Waveform Type 0 and Repeat a min of 10 Trials
<b>EUT</b>	As a standalone Master or Client device with no associated Client or Master. No Traffic. Frame based systems will be set to a talk/listen ratio
<b>Requirement</b>	Minimum 100% of the UNII 99% transmission power bandwidth.
<b>Criteria</b>	For each frequency step the minimum percentage of detection is 90 percent.

During the test, more than one detection could occur for each trial due to the fact that two sequential radar detection windows could pick up the same burst: one could detect the beginning of the burst and the other could detect the end of the same pulse. Therefore, multiple detections occurring during each trial are considered as one detection one only.

The test results were summarized below.

**Table 5.4.1.2 U-NII Detection Bandwidth Test Data (20MHz)**

<b>Radar Freq (MHz)</b>	<b>Number of Trials</b>	<b>Number of Detected</b>	<b>Detection (%)</b>	<b>Mark</b>
5490	10	10	100	F <sub>L</sub>
5491	10	10	100	
5492	10	10	100	
5493	10	10	100	
5494	10	10	100	
5495	10	10	100	
5496	10	10	100	
5497	10	10	100	
5498	10	10	100	
5499	10	10	100	
<b>5500</b>	10	10	100	
5501	10	10	100	
5502	10	10	100	
5503	10	10	100	
5504	10	10	100	
5505	10	10	100	
5506	10	10	100	
5507	10	10	100	
5508	10	10	100	
5509	10	10	100	
5510	10	10	100	F <sub>H</sub>

**Table 5.4.1.3 U-NII Detection Bandwidth Test Data (40MHz)**

<b>Radar Freq (MHz)</b>	<b>Number of Trials</b>	<b>Number of Detected</b>	<b>Detection (%)</b>	<b>Mark</b>
5490	10	10	100	F <sub>L</sub>
5491	10	10	100	
5495	10	10	100	
5500	10	10	100	
5505	10	10	100	
<b>5510</b>	10	10	100	
5515	10	10	100	
5520	10	10	100	
5525	10	10	100	
5529	10	10	100	
5530	10	10	100	F <sub>H</sub>

**Table 5.4.1.4 U-NII Detection Bandwidth Test Data (60MHz)**

<b>Radar Freq (MHz)</b>	<b>Number of Trials</b>	<b>Number of Detected</b>	<b>Detection (%)</b>	<b>Mark</b>
5490	10	10	100	F <sub>L</sub>
5491	10	10	100	
5495	10	10	100	
5500	10	10	100	
5505	10	10	100	
5510	10	10	100	
5515	10	10	100	
<b>5520</b>	10	10	100	
5525	10	10	100	
5530	10	10	100	
5535	10	10	100	
5540	10	10	100	
5545	10	10	100	
5549	10	10	100	
5550	10	10	100	F <sub>H</sub>

**Table 5.4.1.5 Measurement Result for U-NII Detection Bandwidth**

<b>Channel Bandwidth</b>	<b>Waveform Name</b>	<b>Detection Bandwidth F<sub>H</sub> – F<sub>L</sub></b>	<b>% of BW Detected</b>	<b>Min % of BW Required</b>	<b>Results</b>
20MHz	Short Pulse Radar Type 0	20 MHz	100 %	100%	PASSED
40MHz	Short Pulse Radar Type 0	40 MHz	100 %	100%	PASSED
60MHz	Short Pulse Radar Type 0	60 MHz	100 %	100%	PASSED

The *U-NII Detection Bandwidth* met the *U-NII Detection Bandwidth* requirement.

## 5.4.2 Channel Availability Check Time

The EUT shall perform a Channel Availability Check (CAC) to ensure that there is no radar operating on the channel:

- A U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel.
- The U-NII device may start using the channel if no radar signal with a power level greater than the minimum detection threshold is detected within 60 seconds.

This evaluation includes Initial Channel Availability Check and Radar Burst at both the Beginning and Ending of the Channel Availability Check Time. The requirements are given in Table below.

**Table 5.4.2.1 Measurement Requirements for CAC**

Timing of Radar Burst	Display on Control Computer	SA Display
No Radar Triggered	EUT marks Channel as active	Transmission begins on channel at least 1 min after completion of the initial power-up cycle
Within 0-6 Seconds Window (Beginning of CAC)	EUT indicates radar detected; EUT does not display any radar parameter values	No transmission on channel.
Within 54 to 60 Seconds Window (End of CAC)	EUT indicates radar detected; EUT does not display any radar parameter values	No transmission on channel.

The CAC test only needs to be performed for one channel bandwidth.

### 5.4.2.1 Power-On Time


The procedures used for measuring power-on time are as follows:

- Set the EUT at a non-DFS channel: Ch 36 at 5180 MHz,
- The spectrum analyzer is set to zero span mode with a 3 MHz RBW and 3 MHz VBW.
- Let the spectrum analyzer's sweep start at the same time when the EUT is rebooted. If not, record the time the SA is powered-on  $T_0$ .
- Mark the time  $T_1$  on the plot as the time when the power-on cycle is completed.
- Record  $T_1$  as the power-on cycle time of the EUT.

The measurement plot is shown below. The power-on time of the EUT measured  $T_1 - T_0$  is 145.2 seconds.



## Power-On Cycle Length Measurement

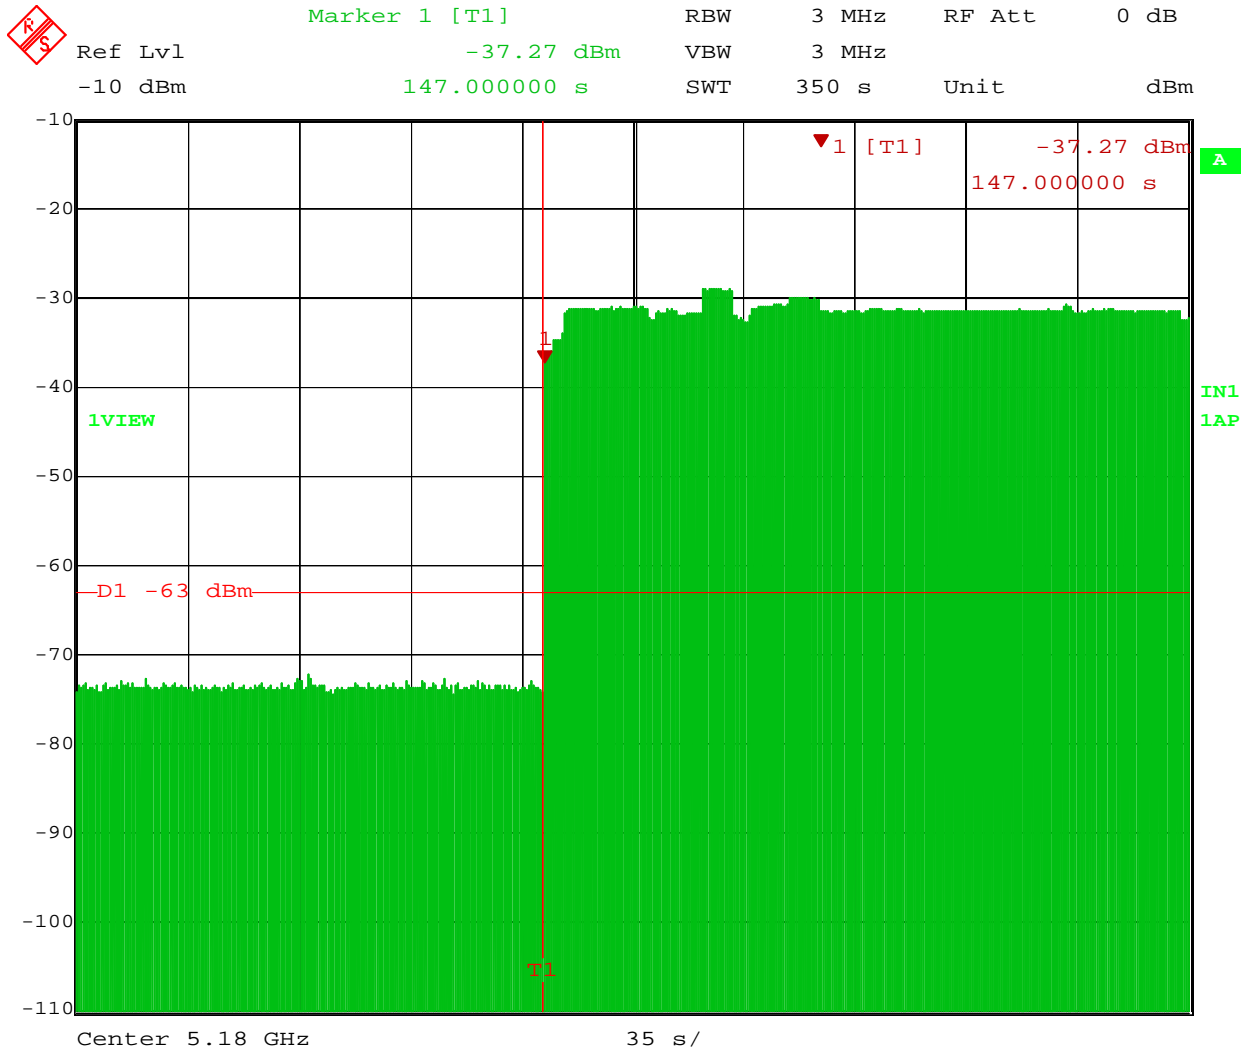

Title: INITIAL CHANNEL AVAILABILITY CHECK TIME; TEST ENGINEER: SEG  
 Comment A: CHANNEL: 36; 20 MHz BW; CENTER FREQUENCY: 5180 MHz  
 Date: 7.DEC.2018 19:18:52

### 5.4.2.2 Initial Channel Availability Check Time

This test ensures that the EUT does not emit beacon, control, or data signals on the test channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test channel. This test does not use any Radar Waveforms and only needs to be performed one time.

The test procedures used are given below:

- The U-NII devices is powered on and be instructed to operate on an appropriate U-NII channel.
- The spectrum analyzer is set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the channel occupied by the radar (Ch<sub>r</sub>).

- The spectrum analyzer's sweep is started at the same time power is applied to the U-NII device.
- Mark the time  $T_1$  on the plot as the time when the power-on cycle is completed.
- Mark the time  $T_2$  on the plot as the time when EUT starts to transmit.
- The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle, i.e.,  $T_2 - T_1 \geq 60$  seconds.

Plot for Initial Channel Availability Check (20MHz)

Channel: Ch 132 @ 5660MHz:


$T_1 = 145.2$  seconds

$T_2 = 207.6$  seconds

$T_2 - T_1 = 62.4$  seconds  $\geq 60$  seconds

The CAC time is 62.4 seconds

The EUT started to transmit the data more than 1 minute after the completion of the power-on cycle.

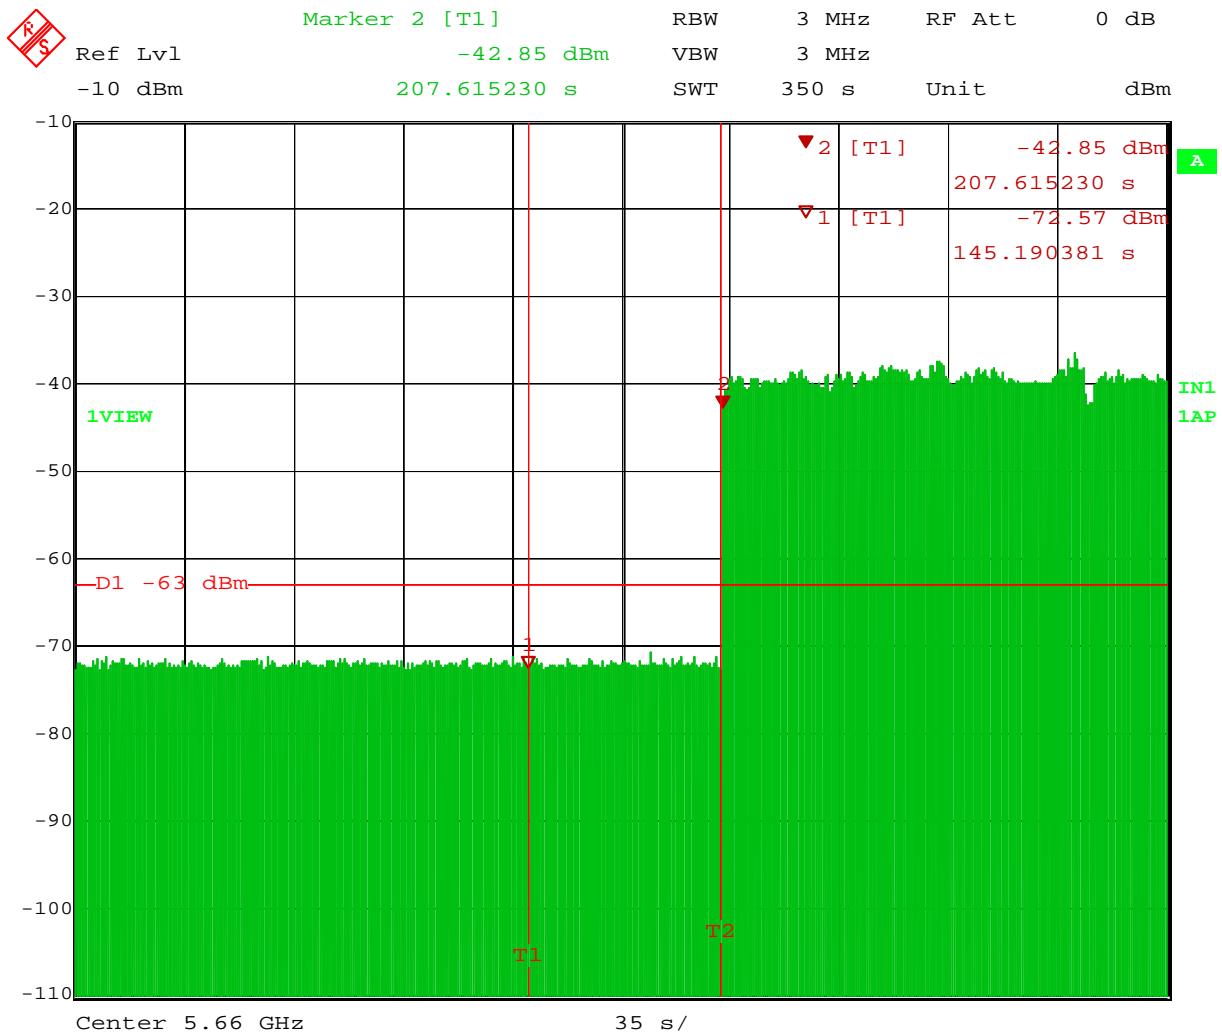

Title: INITIAL CHANNEL AVAILABILITY CHECK TIME; TEST ENGINEER: SEG  
 Comment A: CHANNEL: 132; 20 MHz BW; CENTER FREQUENCY: 5660 MHz  
 Date: 5.DEC.2018 09:39:43


### 5.4.2.3 Radar Burst at the Beginning of the Channel Availability Check Time

The steps below give the procedure to verify successful radar detection on the test channel during a period equal to the Channel Availability Check Time and avoidance of operation on that channel when a radar burst at the beginning of the Channel Availability Check Time:

- Connect the Radar Waveform generator and the EUT together with the EUT power off.
- Set the power level of the radar test signal.
- The EUT is powered on at  $T_0$  and completes its power-up sequence ( $T_{\text{power\_up}}$ ) at  $T_1$ .
- The Channel Availability Check Time commences on  $Ch_r$  at instant  $T_1$  and will end no sooner than  $T_1 + T_{\text{ch\_avail\_check}}$ .  $T_{\text{ch\_avail\_check}} \geq 60$  seconds.
- A single Burst of the Short Pulse Radar Type 0 will commence within a 6 second window starting at  $T_1$ .
- Visual indication or measured results on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of  $Ch_r$  for EUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- Verify that during the 2.5minute (150 seconds) measurement window no EUT transmissions occurred on  $Ch_r$ . The CAC results will be recorded.

Plot of Radar Burst at the Beginning of the Channel Availability Check Time

The plot below shows that the radar burst was commenced at 147.99 seconds which is 2.8 seconds after the power-on cycle or CAC starting time. Observation of Ch<sub>r</sub> for EUT emissions continued for 202 seconds after the radar Burst has been generated. It has been verified that during the 2.5 minutes (150 seconds) measurement window no EUT transmissions occurred on Ch<sub>r</sub>.

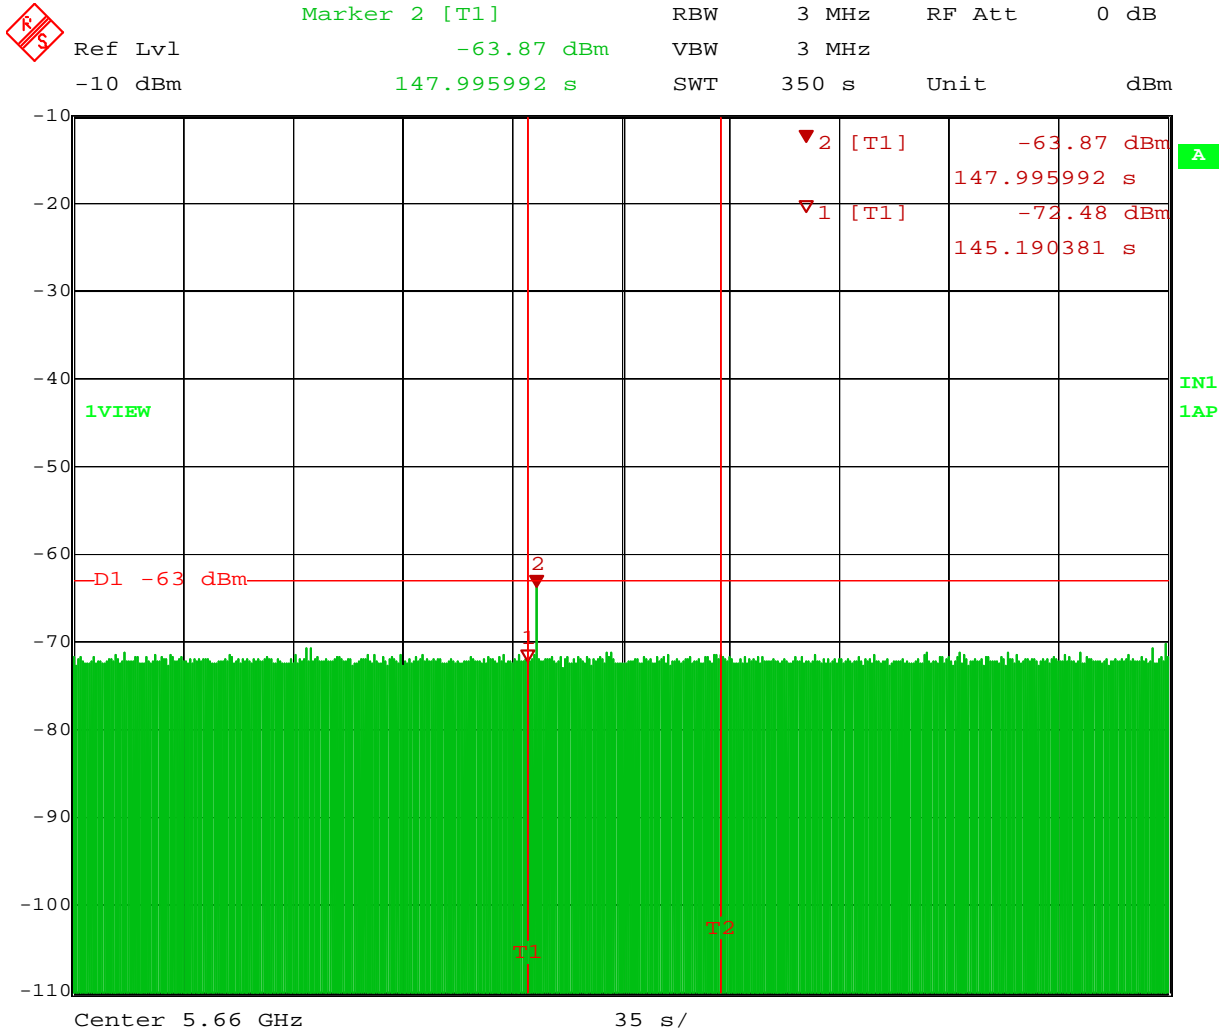

Title: RADAR BURST AT THE BEGINNING OF CAC TIME; TEST ENGINEER: SEG  
 Comment A: CHANNEL: 132; 20 MHz BW; CENTER FREQUENCY: 5660 MHz  
 RADAR TYPE #0  
 Date: 5.DEC.2018 10:11:29

#### **5.4.2.4 Radar Burst at the End of the Channel Availability Check Time**


The steps below define the procedure to verify successful radar detection on the test channel during a period equal to the Channel Availability Check Time and avoidance of operation on that channel when a radar burst at the end of the Channel Availability Check Time:

- Connect the Radar Waveform generator and EUT together with the EUT power off.
- Set the power level of radar test signal.
- The EUT is powered on at  $T_0$  and completes its power-up sequence ( $T_{\text{power\_up}}$ ) at  $T_1$ .
- The Channel Availability Check Time commences on  $\text{Ch}_r$  at instant  $T_1$  and will end no sooner than  $T_1 + T_{\text{ch\_avail\_check}}$ .  $T_{\text{ch\_avail\_check}} \geq 60$  seconds.
- A single Burst of the Short Pulse Radar Type 1 will commence within a 6 second window starting at  $T_1 + 54$  seconds.
- Visual indication or measured results on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of  $\text{Ch}_r$  for EUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- Verify that during the 2.5 minutes measurement window no EUT transmissions occurred on  $\text{Ch}_r$ .
- The Channel Availability Check results will be recorded.

Plot of Radar Burst at the End of the Channel Availability Check Time

The plot below shows that the CAC started at  $T_1 = 145.2$  seconds. The earliest time that CAC should end is  $T_1 + 60$  seconds = 205.2 seconds and the radar signal should be injected after 199.2 seconds. Since  $T_{ch\_avail\_check} = 62.4$  seconds which is larger than 60 seconds, the CAC ends at 207.6 seconds. The 6 seconds window is from 207.2 seconds ( $T_1 + T_{ch\_avail\_check} - 6 = 201.6$  seconds) to 207.6 seconds. In other words, the radar signal should not be injected sooner than at 201.6 seconds. From the plot below, the radar signal was injected at  $T_2 = 203.98$  seconds which is within 6 seconds window before the CAC ends at 207.6 seconds. Observation of  $Ch_r$  for EUT emissions continued for 186.02 seconds after the radar burst has been generated.

It was verified that during the 2.5 minutes (150 seconds) measurement window no EUT transmissions occurred on  $Ch_r$ .

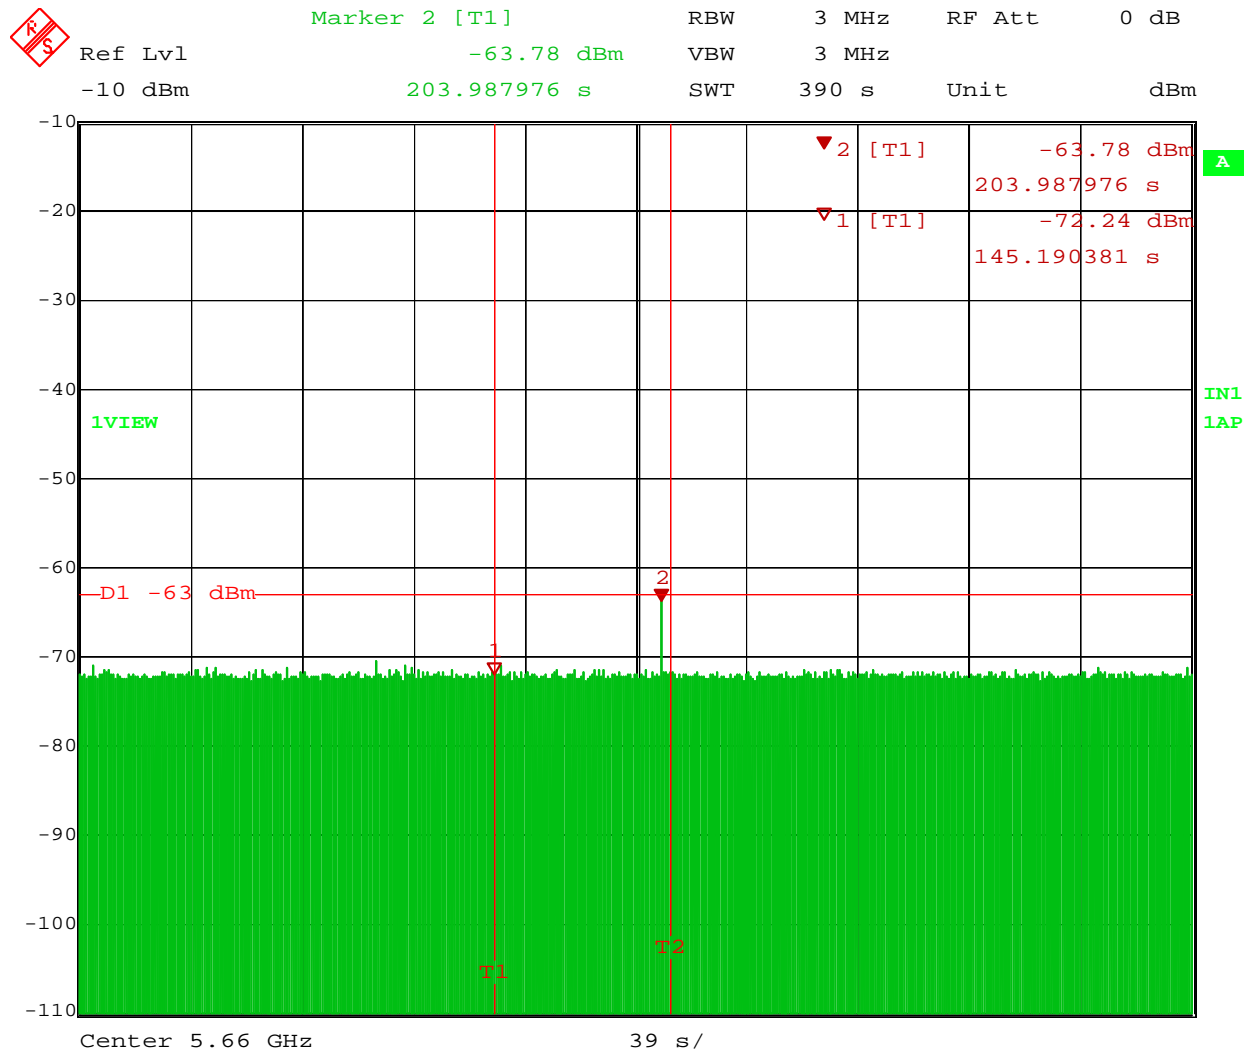

Title:            RADAR BURST AT THE END OF CAC TIME; TEST ENGINEER: SEG  
 Comment A:    CHANNEL: 132; 20 MHz BW; CENTER FREQUENCY: 5660 MHz  
                   RADAR TYPE #0  
 Date:            5.DEC.2018 10:57:13

The results are summarized below:

**Table 5.4.2.1 Measurement Results for Channel Availability Check Time Tests**

<b>Radar Burst Applied After Reboot</b>	<b>EUT</b>	<b>Results</b>
No Radar Triggered	EUT marks the Channel as active	The initial power-up cycle requires 145.2 seconds; Transmission began on the channel after completion of the initial power-up cycle and the 62.4 seconds CAC.
At 147.9 seconds	EUT indicates the radar detected.	No transmission on channel observed for 2.5 minutes after the radar was detected.
At 203.98 seconds	EUT indicates the radar detected.	No transmission on channel observed for 2.5 minutes after the radar was detected.

### 5.4.3 In Service Monitoring

In Service Monitoring will verify Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period. After a radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds (see Table 4.3.3):

- Transmission during this period shall consist of normal traffic for a maximum of 200ms after detection of the radar signal.
- In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.

These tests define how the following DFS parameters are verified during In-Service Monitoring:

- Channel Closing Transmission Time: 200 ms + an aggregate of 60 ms over remaining 10s period.
- Channel Move Time: 10 seconds
- Non-Occupancy Period: No EUT transmissions were observed on the test channel during the 30 min observation period. The non-occupancy period starts at the time when the radar system is detected.

The steps were used to determine the above mentioned parameters.

- Set the Operating Channel.
- Associate a U-NII client device with the EUT (Master).
- Start the Radar Waveform generator. For radiated tests, the emissions of the *Radar Waveform* generator will be directed towards the *Master Device*. If the *Master Device* has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- Stream the MPEG test file from the Master Device to the Client Device on the test channel for the entire period of the test.
- Set a marker at time  $M_0$  when the Radar Waveform generator sends a burst of pulses for Short Pulse Radar Type 0 on the Operating Channel.
- Observe the transmissions of the EUT at the end of the radar burst on the Operating Channel for duration greater than 10 seconds.  $M_1$  is the instant when the burst ends and  $M_2$  is the instant when EUT transmission ends where  $M_2 - M_1 < 10$  seconds. The measurement timing for channel move time and channel closing time begins at the end of the Radar Type 0 burst.
- Measure and record the Channel Move Time  $M_2 - M_1$  and Channel Closing Transmission Time if radar detection occurs.
- Monitor the EUT for more than 30 minutes (Non-Occupancy Period) following instant  $M_2$  to verify that the EUT does not resume any transmissions on this channel. Perform this test once and record the measurement result.
- The Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 ms) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

The measurements for Channel Move Time and Channel Closing Transmission Time were performed for a 3x20MHz carrier at Channels 100, 104, 108 (5500, 5520 and 5540 MHz) with Radar Type 0. Non-Occupancy Period has been performed for a 3x20MHz carrier at Channels 120, 124, 128 (5600, 5620, 5640 MHz) with Radar Type 0.




### 5.4.3.1 Channel Move Time

#### Plot of Channel Move Time with Radar Type 0 (Short Pulse Type)

The time when radar burst ended  $M_1 = 0.262$  seconds  
 The time when Transmission ended  $M_2 = 0.368$  seconds  
 Channel move time  $M_2 - M_1 = 0.106$  seconds < 10 seconds


The transmission was observed for over 10 seconds.

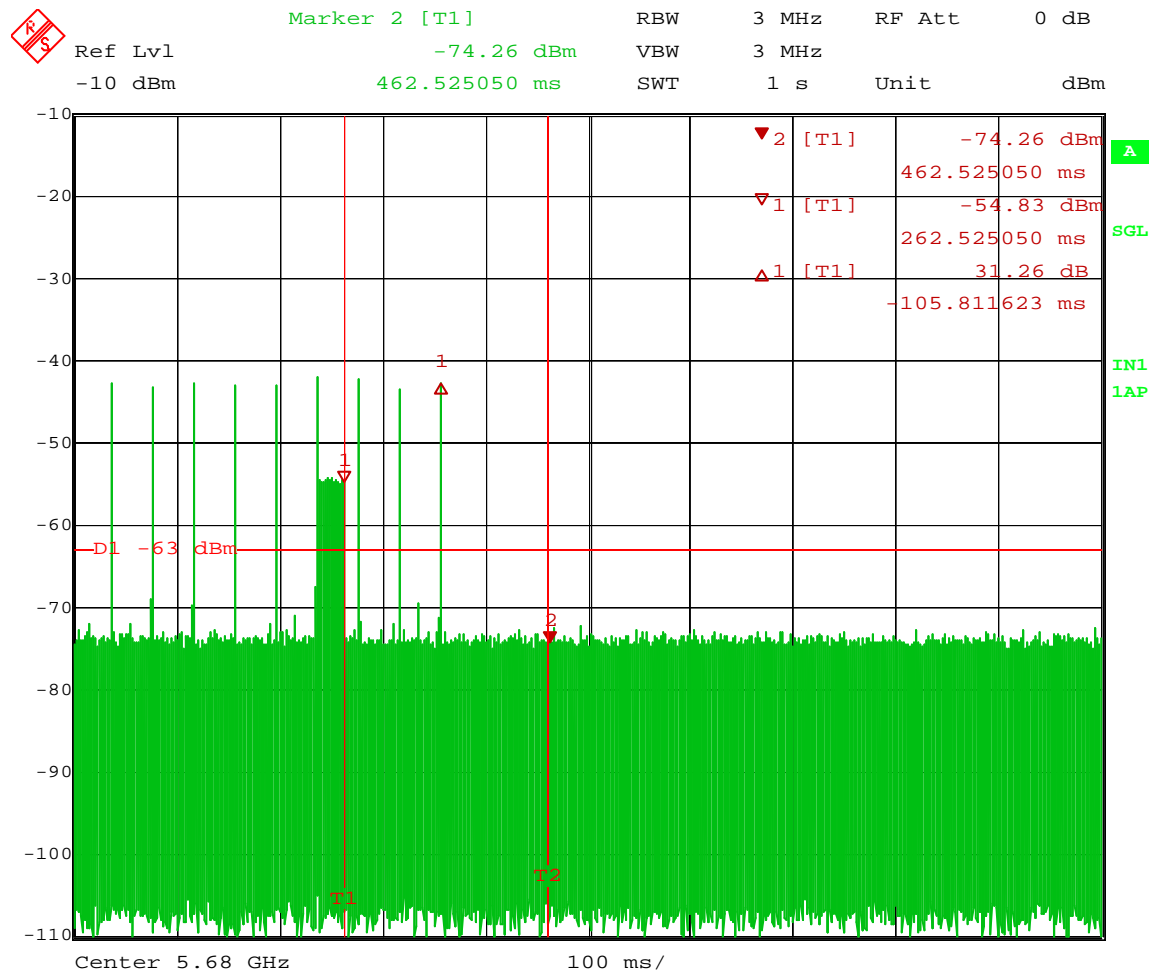

Title: CHANNEL CLOSING TRANSMISSION TIME; TEST ENGINEER: JY  
 Comment A: CHANNEL: 132, 136 AND 140; CENTER FREQUENCY:  
 5680 MHz; RADAR TYPE-0  
 Date: 20.DEC.2018 10:59:53



Marker 1 [T1]      RBW    3 MHz    RF Att    0 dB  
 Ref Lvl            -42.91 dBm    VBW    3 MHz  
 -10 dBm            937.875752 ms    SWT    12 s    Unit        dBm

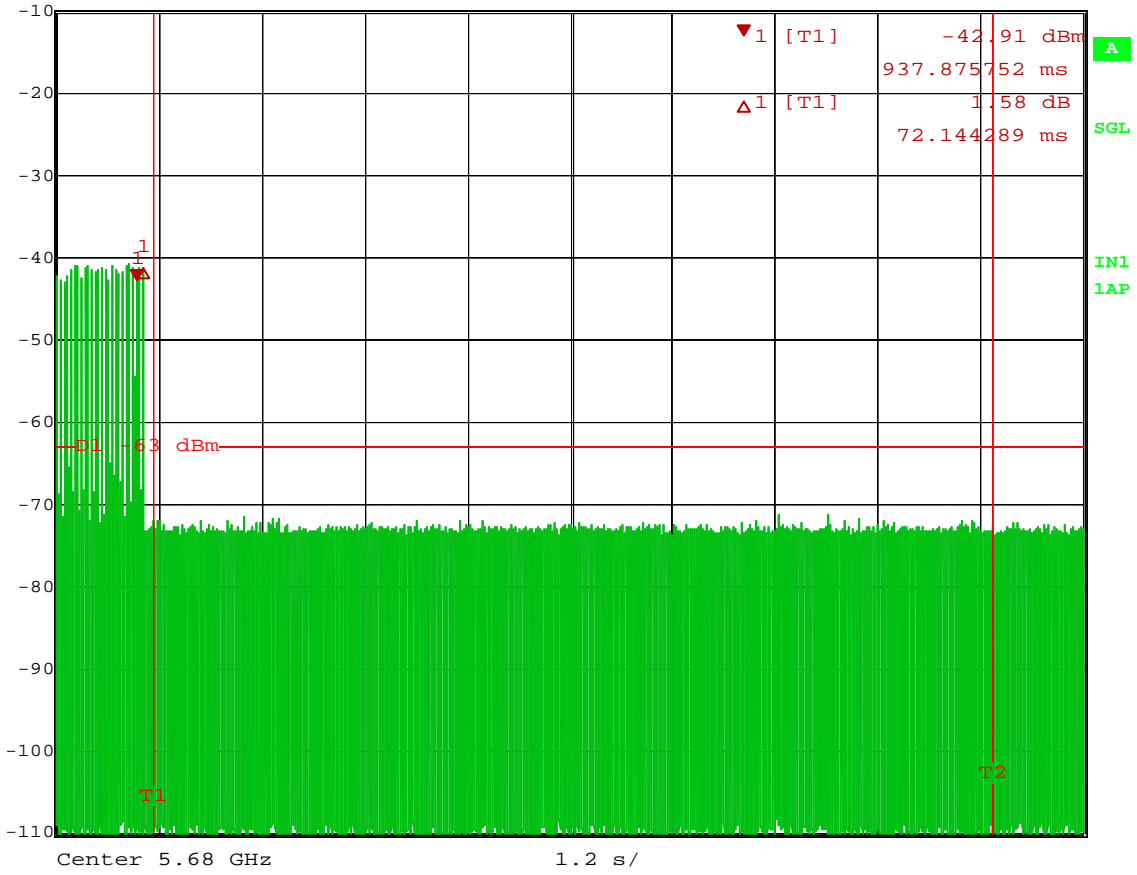

Title:            MOVE TIME; TEST ENGINEER: JY  
 Comment A:      CHANNEL: 132, 136 AND 140; 60MHz BW; CENTER FREQUENCY:  
                   5680MHz; RADAR TYPE-0  
 Date:            20.DEC.2018 09:48:19

### 5.4.3.2 Channel Closing Transmission Time

#### Plot of Channel Closing Time with Radar Type #0

Marker #1: End of Radar #0 Burst

Marker #2: 200 ms after radar ends

The Upper Bound of the Aggregate Duration of the Channel Closing Transmission Time is estimated below:

$D = S / B = 1 \text{ seconds} / 8001 \text{ bins} = 0.125 \text{ ms/bin}$ , and

$C = N * D = N \text{ bins} * 0.125 \text{ ms/bin} < 60 \text{ ms}$ .

S is the Sweep Time,

B is the Number of Spectrum Analyzer Sampling Bins,

N is the Number of Spectrum Analyzer Sampling Bins showing a U-NII Transmission (Intermittent Control Signals between the 0.2 seconds after the radar and 10 seconds after the radar),


D is the Dwell Time per Spectrum Analyzer Sampling Bin, and

C is the Aggregated Time of Intermittent Control Signals.

For  $C \geq 60 \text{ ms}$ ,  $N \geq 480$ . Since  $N < 480$ ,  $C < 60 \text{ ms}$ .



Marker 2 [T1] RBW 3 MHz RF Att 0 dB  
 Ref Lvl -10 dBm -74.26 dBm VBW 3 MHz  
 462.525050 ms SWT 1 s Unit dBm

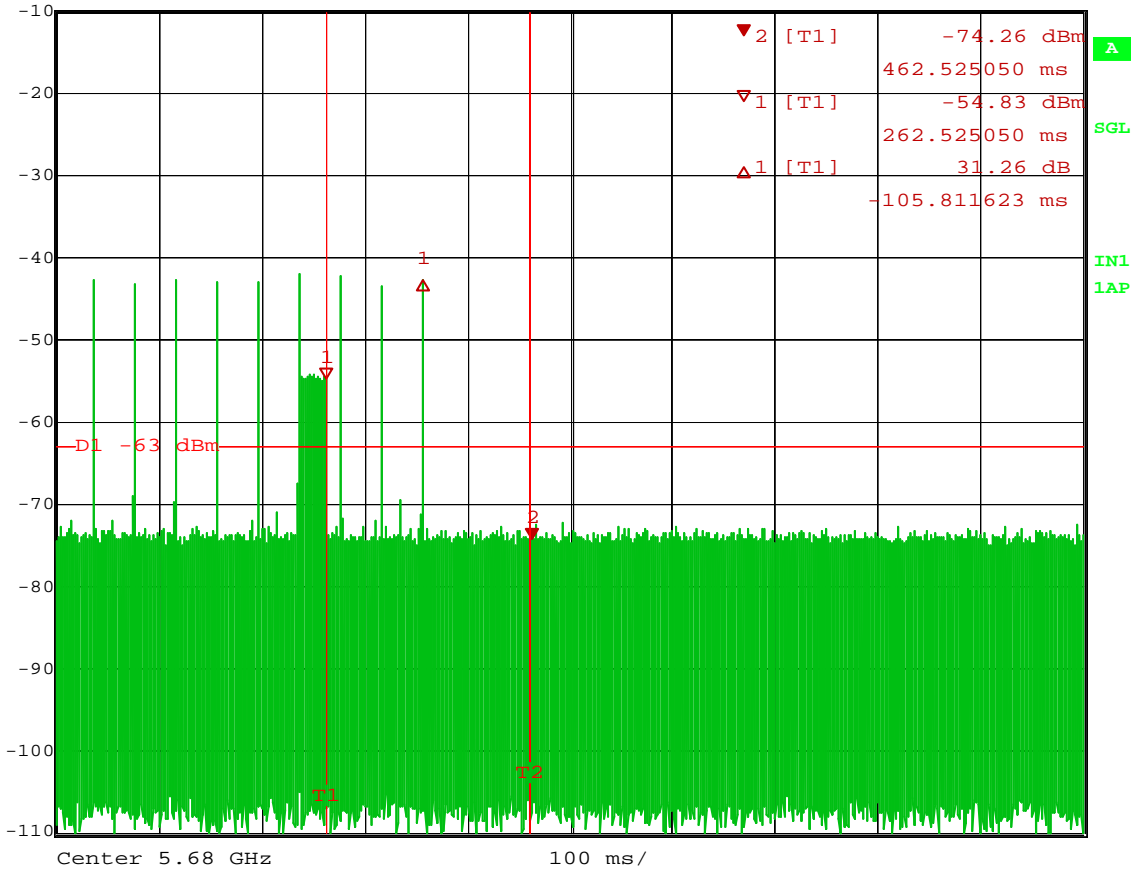

Title: CHANNEL CLOSING TRANSMISSION TIME; TEST ENGINEER: JY  
 Comment A: CHANNEL: 132, 136 AND 140; CENTER FREQUENCY:  
 5680 MHz; RADAR TYPE-0  
 Date: 20.DEC.2018 10:59:53

### 5.4.3.3 Non-Occupancy Period

#### Plot of Non-Occupancy Period


$T_1 = 52.1$  seconds

$T_2 = 1852.1$  seconds

$T_2 - T_1 = 1800$  seconds (30 minutes)

Non-Occupancy Period extended well beyond  $T_2$  to 2000 seconds, therefore  $> 30$  minutes.

The non-occupancy period starts at the time when the radar system is detected. The radar signal was detected before  $T_1$ . Therefore, during the 30 minutes observation time after a radar signal was detected on the test channel, the EUT did not make any transmissions on that channel.

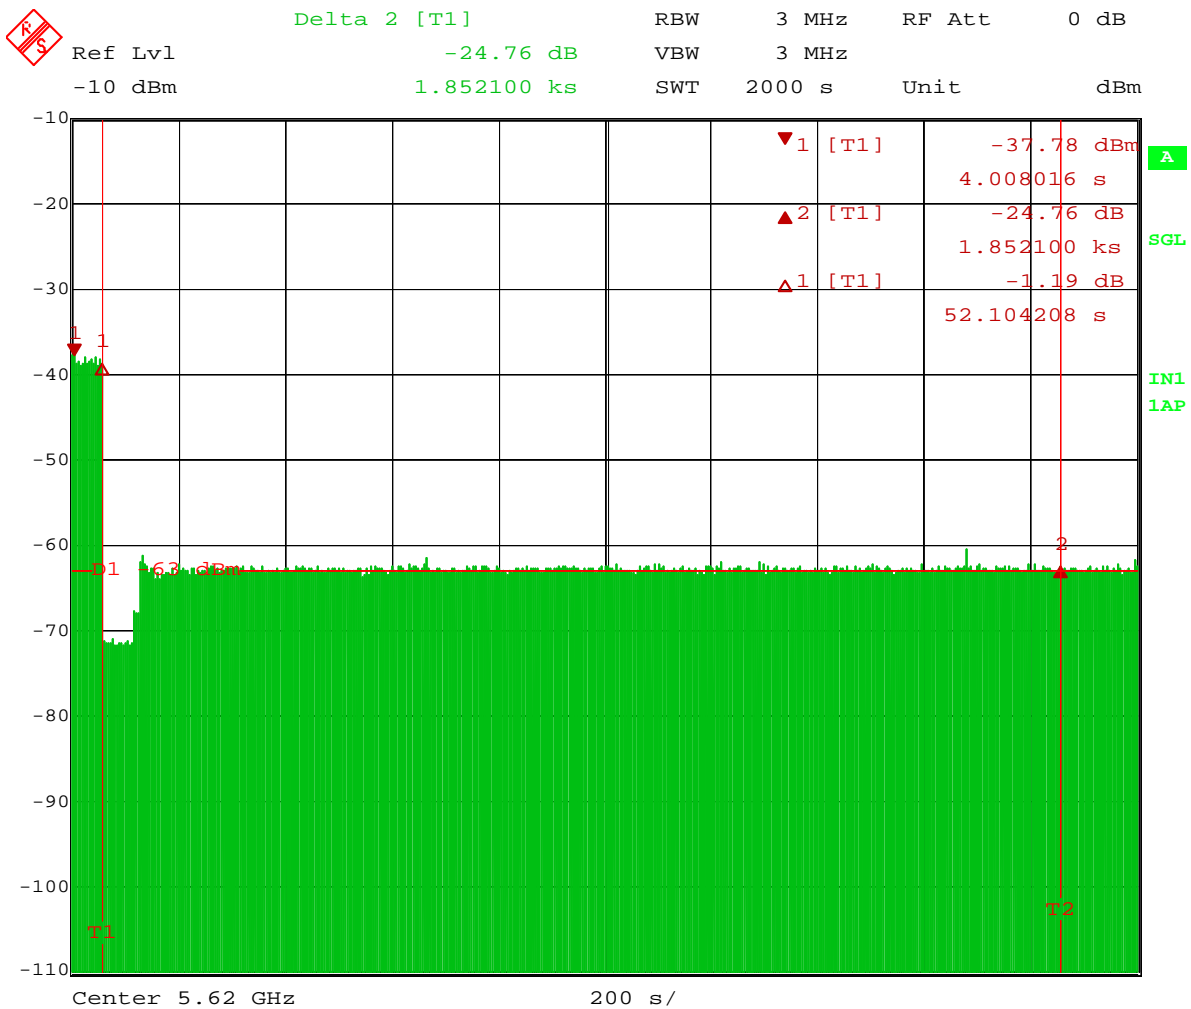

Title: NON-OCCUPANCY PERIOD; TEST ENGINEER: JY  
 Comment A: CHANNEL: 120, 124 AND 128; CENTER FREQUENCY:  
 5620 MHz; RADAR TYPE-0  
 Date: 20.DEC.2018 12:07:05

#### 5.4.4 Statistical Performance Check

The purpose of this test is to present a given radar pulse type to the EUT repeatedly to measure the probability of detection in the presence of *traffic*. The requirements are given in Tables 4.5.1, 4.5.2 and 4.5.3.

$$\text{Successful Detection Radar Waveform N (\%)} = P_{dN} = \frac{\text{Total Waveform Detections}}{\text{Total Waveform Trials}} \times 100.$$

The procedures below provided in KDB 905462 D02 are followed:

- Set the Operating Channel.
- The emissions of the Radar Waveform generator will be directed towards the Master Device. The main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
- At time  $T_0$  the Radar Waveform generator sends the individual waveform for each of the Radar Types 1-6 on the Operating Channel.
- Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types to ensure detection occurs.
- Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
- For Radar Type 5, three subsets of trials need to be performed at low, middle and high channels.
- For Radar Types 2-4, a minimum of 30 unique waveforms are required for each.

The results are summarized below:

**Table 5.4.4.1 Statistical Performance Check Summary  
for Test Waveforms Radar Types 1-6 (20MHz)**

Radar Type N	No. of Trials	No. of Successful Detections	Ave Detection Time (ms)	PaN (%)	Min % of Successful Detections	Minimum Number of Trials
1A	30	21	98.12	70	60	30
1B	30	20	98.12	67	60	30
2	30	30	103.17	100	60	30
3	30	30	117.66	100	60	30
4	30	30	100.41	100	60	30
Aggregate (Pd1A + Pd1B+ Pd2 +Pd3+ Pd4)/5 = 87.4					80	180
5	30	30	4.64	100	80	30
6	30	30	1.84	100	70	30

**Table 5.4.4.2 Statistical Performance Check Summary  
for Test Waveforms Radar Types 1-6 (2x20MHz)**

Radar Type N	No. of Trials	No. of Successful Detections	PaN (%)	Min % of Successful Detections	Minimum No of Trials
1AA	30	30	100	60	30
1B	30	30	100	60	30
2	30	30	100	60	30
3	30	30	100	60	30
4	30	30	100	60	30
Aggregate (Pd1A + Pd1B+ Pd2 +Pd3+ Pd4+)/5 = 100				80	180
5	30	28	93	80	30
6	30	30	100	70	30

**Table 5.4.4.3 Statistical Performance Check Summary  
for Test Waveforms Radar Types 1-6 (3x20MHz)**

Radar Type N	No. of Trials	No. of Successful Detections	PaN (%)	Min % of Successful Detections	Minimum No of Trials
1AA	30	25	83	60	30
1B	30	30	100	60	30
2	30	21	70	60	30
3	30	23	70	60	30
4	30	20	77	60	30
Aggregate (Pd1A + Pd1B+ Pd2 +Pd3+ Pd4)/5 = 80				80	180
5	30	28	93	80	30
6	30	30	100	70	30

**Table 5.4.4.4(a) Statistical Performance Check Summary  
for Test Waveforms Radar Type 5 (20MHz)**

Channels	No. of Trials	No. of Successful Detections	PaN (%)
Low 52, 56, 60	10	10	90
Middle 100, 104, 108	10	10	90
High 132, 136, 140	10	10	100
<b>Total</b>	<b>30</b>	<b>30</b>	<b>100</b>

**Table 5.4.4.4(b) Statistical Performance Check Summary  
for Test Waveforms Radar Type 5 (2x20MHz)**

Channels	No. of Trials	No. of Successful Detections	PaN (%)
Low 52, 56	10	9	90
Middle 100, 104	10	9	90
High 136, 140	10	10	100
<b>Total</b>	<b>30</b>	<b>28</b>	<b>93</b>

**Table 5.4.4.4(c) Statistical Performance Check Summary  
for Test Waveforms Radar Type 5 (3x20MHz)**

<b>Channels</b>	<b>No. of Trials</b>	<b>No. of Successful Detections</b>	<b>PaN (%)</b>
Low 52, 56, 60	10	9	90
Middle 100, 104, 108	10	9	90
High 132, 136, 140	10	10	100
<b>Total</b>	<b>30</b>	<b>28</b>	<b>93</b>

In the above Statistical Performance Check test, the Radar Waveforms Type 1-6 specified in KDB 905462 D02, presented in Section 4.5 Tables 4.5.1, 4.5.2 and 4.5.3, were used. The pulse generator WaveTest 20 from IXIA technologies, which has the required radar waveforms built in, was used in the tests to generate the required pulses through command scripts. The command script allows to select Channel Frequency, Radar Type, Power and Number of Trials for each radar type. All the waveforms had been verified and calibrated in Section 5.3 by a spectrum analyzer.

The characteristics of Radar Waveform Types 1-6 generated by IXIA pulse generator for a 20MHz carrier at 5500MHz for Statistic Performance Check tests, such as pulse width, pulse repetition interval, number of pulses per burst, etc., are provided in the following Tables 5.4.4.5-10.

**Table 5.4.4.5(a) Statistical Performance Check  
Test Waveforms Radar Type 1a Characteristics**

<b>Trial No</b>	<b>Pulse Width (µs)</b>	<b>PRI (µs)</b>	<b>No of Pulses</b>
1	1	518	102
2	1	558	95
3	1	598	89
4	1	638	83
5	1	658	81
6	1	678	78
7	1	698	76
8	1	718	74
9	1	758	70
10	1	778	68
11	1	838	63
12	1	878	61
13	1	898	59
14	1	918	58
15	1	938	57

**Table 5.4.4.5(b) Statistical Performance Check  
Test Waveforms Radar Type 1b Characteristics**

<b>Trial No</b>	<b>Pulse Width (µs)</b>	<b>PRI (µs)</b>	<b>No of Pulses</b>
1	1	538	99
2	1	578	92
3	1	618	86
4	1	640	83
5	1	660	80
6	1	680	78



7	1	700	76
8	1	720	74
9	1	738	72
10	1	760	70
11	1	779	68
12	1	801	66
13	1	818	65
14	1	840	63
15	1	861	62

**Table 5.4.4.6 Statistical Performance Check  
Test Waveforms Radar Type 2 Characteristics**

<b>Trial No</b>	<b>Pulse Width (μs)</b>	<b>PRI (μs)</b>	<b>No of Pulses</b>
1	3.3	181	28
2	2.9	159	24
3	4.2	225	25
4	4.2	164	27
5	3.2	165	28
6	3.5	186	28
7	3.0	191	26
8	4.2	188	27
9	3.3	153	27
10	1.0	162	29
11	1.4	194	26
12	3.0	221	28
13	5.0	184	29
14	2.4	195	27
15	2.9	220	27
16	2.5	190	23
17	1.1	198	24
18	4.2	150	26
19	2.7	200	26
20	2.3	167	29
21	4.1	219	25
22	3.5	212	23
23	3.9	150	27
24	4.5	168	23
25	4.7	194	26
26	3.2	214	28
27	3.8	153	29
28	4.9	216	24
29	4.4	186	23
30	4.7	193	23

**Table 5.4.4.7 Statistical Performance Check  
Test Waveforms Radar Type 3 Characteristics**

<b>Trial No</b>	<b>Pulse Width (μs)</b>	<b>PRI (μs)</b>	<b>No of Pulses</b>
1	6.2	437	17
2	6.1	446	16

3	7.3	433	18
4	9.7	290	16
5	9.5	477	16
6	7.4	343	16
7	7.3	370	18
8	9.9	402	17
9	6.8	395	18
10	6.6	449	18
11	6.1	216	18
12	8.6	404	17
13	9.0	390	17
14	6.3	206	16
15	8.7	286	17
16	6.7	240	17
17	8.0	258	16
18	6.8	489	18
19	8.6	466	18
20	6.7	200	18
21	6.4	380	17
22	6.4	204	17
23	9.1	490	16
24	6.3	327	16
25	7.1	480	18
26	6.3	409	17
27	6.1	332	16
28	8.8	377	16
29	7.1	245	18
30	7.8	414	16

**Table 5.4.4.8 Statistical Performance Check  
Test Waveforms Radar Type 4 Characteristics**

<b>Trial No</b>	<b>Pulse Width (µs)</b>	<b>PRI (µs)</b>	<b>No of Pulses</b>
1	12.8	417	13
2	13.7	310	16
3	17.5	390	14
4	13.3	367	12
5	19.9	260	12
6	19.2	410	12
7	15.1	327	15
8	18.3	202	12
9	19.0	300	12
10	11.0	377	14
11	16.4	404	12
12	13.5	362	14
13	12.0	295	16
14	19.1	343	15
15	18.5	264	15
16	13.7	274	13
17	16.7	346	16

18	16.1	480	12
19	13.4	279	16
20	11.6	439	16
21	13.9	487	12
22	11.7	383	15
23	16.7	499	13
24	17.3	255	15
25	15.1	349	12
26	14.5	225	13
27	17.4	425	14
28	14.4	472	12
29	18.5	378	13
30	17.1	475	12

**Table 5.4.4.9 Statistical Performance Check  
Test Waveforms Radar Type 5 Characteristics**

<b>Trial No</b>	<b>Burst No</b>	<b>Pulse Width (μs)</b>	<b>PRI (μs)</b>	<b>Chirp Width (MHz)</b>	<b>No of Pulses per Burst</b>
1	1	54.6	1883, 1500, 1213	5	3
1	2	58.6	1499, 1128, 1633	20	3
1	3	68.2	1045	14	1
1	4	78.6	1184, 1165	15	2
1	5	55.5	1293, 1294	6	2
1	6	82	1191, 1094	13	2
1	7	66.6	1201	15	1
1	8	53.3	1376, 1883, 1894	6	3
1	9	72.9	1667, 1127	11	2
1	10	55	1081, 1268, 1597	17	3
1	11	50.5	1060	19	1
1	12	91.4	1355	19	1
1	13	76.1	1389, 1481	12	2
1	14	98.8	1999, 1120, 1001	5	3
1	15	75.9	1075, 1918	7	2
1	16	63	1556	5	1
1	17	98.4	1129, 1582	9	2
1	18	53.6	1790, 1216	9	2
1	19	98.9	1441, 1798	8	2
2	1	67.2	1423, 1930, 1507	7	3
2	2	85.2	1639, 1948, 1128	8	3
2	3	63	1544, 1346	7	2
2	4	86.8	1372, 1678	8	2
2	5	78	1072	12	1
2	6	77	1610, 1764	20	2
2	7	97.6	1440, 1277	19	2
2	8	58.9	1625, 1947	10	2

2	9	91.8	1875, 1194, 1181	18	3
2	10	79.5	1666, 1108	11	2
3	1	98	1375, 1100, 1140	5	3
3	2	78.8	1810, 1854	5	2
3	3	65.6	1711, 1496	17	2
3	4	62.3	1393, 1542	5	2
3	5	71.8	1101, 1030	20	2
3	6	82.4	1133	6	1
3	7	78.6	1688, 1908, 1539	5	3
3	8	71.3	1862, 1587	9	2
3	9	86.3	1859, 1536, 1394	8	3
4	1	92.7	1419, 1790, 1305	20	3
4	2	83.6	1202, 1505	19	2
4	3	86.1	1528, 1313	8	2
4	4	90.4	1509, 1809, 1425	15	3
4	5	75.7	1652, 1817, 1515	16	3
4	6	75.6	1165, 1785, 1181	12	3
4	7	92.3	1282, 1602	5	2
4	8	81.8	1934, 1962	7	2
4	9	52	1973, 1429, 1439	8	3
4	10	96.8	1657, 1802	19	2
4	11	77.9	1207	18	1
4	12	80.6	1253, 1839	7	2
5	1	97.5	1774, 1221, 1677	6	3
5	2	50.6	1190	7	1
5	3	99.9	1492, 1627	12	2
5	4	78.1	1413, 1076	8	2
5	5	78.4	1077, 1360, 1415	6	3
5	6	94.1	1567, 1828	15	2
5	7	64.6	1454, 1896, 1480	14	3
5	8	74.9	1469, 1227	17	2
5	9	62.1	1454	8	1
5	10	71	1670, 1400, 1732	19	3
5	11	100	1977, 1385, 1552	16	3
5	12	84.1	1922	9	1
5	13	58	1008	16	1
5	14	67.6	1039	6	1
5	15	78.5	1792	17	1
5	16	88.5	1568, 1127	19	2
5	17	81.4	1683, 1352, 1503	7	3
5	18	81	1130	10	1

6	1	96.4	1999	19	1
6	2	97.5	1928, 1251, 1102	17	3
6	3	94.3	1187	18	1
6	4	66.4	1246	19	1
6	5	96.8	1490, 1808, 1677	16	3
6	6	85.4	1975, 1118, 1017	10	3
6	7	50.1	1924, 1215, 1334	9	3
6	8	84.3	1192	8	1
6	9	90.8	1529, 1401, 1761	15	3
6	10	63.3	1610, 1114, 1467	17	3
6	11	80.5	1218, 1051	11	2
6	12	67.2	1566, 1896, 1536	17	3
6	13	67.3	1500, 1717, 1471	19	3
6	14	67.5	1632	9	1
6	15	94.4	1341, 1719	13	2
6	16	63	1137, 1708, 1213	17	3
6	17	86.5	1550	16	1
6	18	71.8	1003	18	1
6	19	63.3	1459, 1607, 1990	18	3
7	1	57.6	1797	17	1
7	2	67	1380	18	1
7	3	90.7	1168, 1243	13	2
7	4	50.4	1795, 1090, 1067	5	3
7	5	69.9	1523	5	1
7	6	93.9	1582	19	1
7	7	59	1624, 1654, 1624	19	3
7	8	92.3	1554, 1494	20	2
7	9	68.1	1346, 1163, 1444	16	3
7	10	88.7	1112, 1845, 1790	13	3
7	11	91.1	1422, 1656	17	2
7	12	67.6	1311, 1278	13	2
7	13	64.2	1816, 1128	19	2
7	14	67.3	1684	15	1
7	15	64.2	1889, 1088, 1030	14	3
8	1	74.3	1687, 1784, 1307	16	3
8	2	56.6	1813, 1951	8	2
8	3	98.6	1345, 1602	8	2
8	4	56	1513, 1179, 1010	17	3
8	5	85	1327, 1289, 1891	7	3
8	6	74.9	1298, 1137	10	2
8	7	79.1	1882	11	1

8	8	77.9	1573	17	1
8	9	79.4	1537	10	1
8	10	74	1141	7	1
8	11	89.5	1756	15	1
8	12	53.3	1443, 1863, 1597	15	3
8	13	77.8	1123	17	1
8	14	66.4	1719, 1116	9	2
8	15	98.7	1705	8	1
8	16	60.3	1499	17	1
8	17	59.1	1418, 1152	16	2
8	18	61	1513, 1036	16	2
8	19	96.2	1177, 1147, 1977	9	3
8	20	92.6	1598, 1298	9	2
9	1	65.5	1441	15	1
9	2	89.3	1934, 1883, 1510	6	3
9	3	62.3	1392, 1360, 1384	16	3
9	4	84.4	1486, 1592, 1696	17	3
9	5	75.8	1658	13	1
9	6	90.3	1731	8	1
9	7	81.3	1812, 1791	6	2
9	8	93.6	1213	10	1
9	9	74.3	1331	18	1
9	10	55.9	1242, 1177	18	2
10	1	62.6	1729, 1656	13	2
10	2	57.6	1068, 1259	8	2
10	3	87.4	1556, 1243, 1711	19	3
10	4	98.6	1838	5	1
10	5	87	1102	10	1
10	6	63.4	1913, 1861	7	2
10	7	67.1	1807	16	1
10	8	69.7	1237, 1669	8	2
10	9	78.1	1357, 1702, 1330	20	3
11	1	72.7	1306, 1195	6	2
11	2	99.2	1450, 1804	5	2
11	3	91.6	1475, 1047	11	2
11	4	54.3	1661	9	1
11	5	86	1899, 1712	13	2
11	6	57.7	1941, 1874, 1449	6	3
11	7	71.2	1368, 1073	20	2
11	8	76.5	1738, 1439, 1524	20	3
11	9	67	1239	20	1

11	10	84.9	1217, 1059	7	2
11	11	67.5	1861, 1356	17	2
11	12	56.1	1178, 1273	5	2
11	13	94.2	1598, 1237	19	2
11	14	96.9	1369	19	1
11	15	54.8	1836	14	1
11	16	78	1960, 1885	7	2
11	17	57	1119	20	1
11	18	73.7	1019, 1733	10	2
12	1	90.2	1877	9	1
12	2	99	1052	8	1
12	3	86.4	1726	5	1
12	4	61.8	1230, 1417	19	2
12	5	59.1	1131, 1152	16	2
12	6	94.1	1500, 1745	5	2
12	7	79.3	1028	11	1
12	8	96.3	1461, 1731	10	2
12	9	78	1287	7	1
12	10	84.6	1712, 1432	11	2
12	11	69.6	1685	15	1
13	1	60.8	1720	6	1
13	2	84.9	1910, 1193	20	2
13	3	62.2	1051, 1707	13	2
13	4	82.8	1970, 1806	17	2
13	5	65.2	1758, 1888	14	2
13	6	67.2	1433, 1860	19	2
13	7	88.1	1388	14	1
13	8	81.4	1304, 1109, 1468	18	3
13	9	84.6	1236	7	1
13	10	71.5	1395, 1064	19	2
13	11	80.7	1228	19	1
13	12	66.2	1140, 1452, 1033	14	3
13	13	71.4	1478, 1623, 1331	15	3
13	14	77.8	1360	15	1
13	15	63.7	1545	20	1
13	16	80.8	1704, 1759	6	2
13	17	99.1	1591	7	1
14	1	59	1673	10	1
14	2	67.6	1586	11	1
14	3	50.3	1999, 1078, 1032	12	3
14	4	65.5	1639	11	1

14	5	60.1	1291	20	1
14	6	98.4	1047	18	1
14	7	91.4	1561, 1059, 1374	7	3
14	8	90.2	1931, 1153	16	2
14	9	81.7	1139, 1638	17	2
14	10	82.6	1100	14	1
14	11	87.6	1095	14	1
14	12	90.5	1636, 1415	7	2
14	13	89	1948, 1999, 1504	17	3
14	14	61.6	1991, 1542	18	2
14	15	92.1	1960, 1531	5	2
14	16	52.6	1838, 1574, 1528	18	3
14	17	81	1462	10	1
14	18	93.4	1101	11	1
14	19	51.5	1922, 1426	12	2
15	1	67.8	1989, 1911	11	2
15	2	80	1410	11	1
15	3	56.8	1099, 1258	7	2
15	4	86	1543, 1371	16	2
15	5	69.3	1952	10	1
15	6	89.2	1934, 1205	6	2
15	7	63.6	1560, 1954, 1109	18	3
15	8	60.3	1464, 1100	7	2
16	1	64.5	1397, 1899	19	2
16	2	67.8	1356, 1083, 1073	16	3
16	3	91.8	1338, 1470, 1903	17	3
16	4	64.7	1885	7	1
16	5	55.2	1567	5	1
16	6	69.6	1393	17	1
16	7	94.5	1082, 1625	14	2
16	8	94.7	1735	17	1
16	9	82.1	1969	19	1
16	10	70.9	1647, 1661	10	2
16	11	96.1	1643, 1489, 1723	9	3
16	12	61.9	1055	11	1
17	1	51.1	1116	18	1
17	2	85.5	1250, 1860, 1388	10	3
17	3	62.4	1008	8	1
17	4	53.7	1390	15	1
17	5	92.6	1849, 1599, 1355	8	3
17	6	59.8	1526, 1397	6	2



17	7	65.6	1416	13	1
17	8	70	1518	14	1
17	9	81.6	1663, 1931	11	2
17	10	92.1	1060, 1859, 1598	6	3
17	11	88.9	1388	14	1
17	12	80.1	1698, 1769	15	2
17	13	93.4	1787, 1038, 1673	7	3
17	14	65.9	1507, 1378	20	2
17	15	82.1	1505	14	1
17	16	61.8	1159, 1774, 1403	14	3
18	1	97.1	1982, 1489	16	2
18	2	94.4	1086, 1174, 1472	8	3
18	3	61.4	1991, 1824, 1667	10	3
18	4	54.9	1038	5	1
18	5	90.4	1691, 1081, 1066	13	3
18	6	68.5	1233, 1051, 1018	16	3
18	7	97.7	1429, 1774	18	2
18	8	93.9	1142, 1759, 1546	12	3
18	9	72.4	1266	8	1
18	10	62.4	1793	11	1
18	11	72.4	1585, 1633, 1493	7	3
18	12	78.6	1694, 1078, 1121	5	3
18	13	89.1	1925, 1954	10	2
18	14	67.9	1005, 1601, 1883	5	3
18	15	56.9	1535, 1553	11	2
18	16	78.7	1722, 1753, 1242	13	3
18	17	71.2	1560, 1614, 1327	12	3
18	18	59.9	1040	15	1
19	1	72.2	1881, 1000	9	2
19	2	75	1149, 1671, 1350	12	3
19	3	93.2	1719, 1129, 1394	7	3
19	4	72.6	1570	12	1
19	5	58	1374, 1351	8	2
19	6	65.7	1772, 1371, 1514	7	3
19	7	88.5	1201	13	1
19	8	51.9	1521, 1229	20	2
19	9	51.2	1053, 1638	6	2
19	10	72.2	1354, 1631, 1337	14	3
19	11	99.4	1393, 1793	10	2
19	12	82.9	1674, 1029, 1001	9	3
20	1	57	1250	14	1

20	2	54.5	1811, 1950, 1872	12	3
20	3	57.8	1670	10	1
20	4	70.3	1308, 1450, 1576	9	3
20	5	98.6	1190, 1641	19	2
20	6	51.9	1927, 1528, 1423	7	3
20	7	94.9	1218, 1796, 1982	12	3
20	8	57.7	1823, 1861, 1010	6	3
20	9	60	1882, 1594, 1000	12	3
20	10	90.8	1982, 1295, 1773	12	3
20	11	51.5	1320	11	1
20	12	85.1	1375	13	1
20	13	93.5	1298	18	1
20	14	76	1144, 1057	17	2
21	1	98.5	1983, 1536	11	2
21	2	54	1443	19	1
21	3	75.3	1467	6	1
21	4	54.9	1663, 1891	20	2
21	5	90.8	1740	15	1
21	6	71	1649, 1956, 1231	18	3
21	7	83.4	1051, 1761, 1303	5	3
21	8	76.6	1196, 1462, 1679	9	3
21	9	87.5	1561	9	1
21	10	54.1	1684, 1394, 1519	9	3
21	11	77.4	1262, 1068	13	2
21	12	83.6	1671, 1463	5	2
21	13	92.5	1834, 1883, 1944	9	3
21	14	59.1	1560, 1219	16	2
21	15	74.5	1627	10	1
21	16	55.5	1126, 1520	18	2
21	17	57.3	1164, 1751	17	2
21	18	88.2	1049, 1888	16	2
21	19	55.4	1631	13	1
22	1	54.7	1224, 1226, 1131	17	3
22	2	59.6	1165, 1482	11	2
22	3	57.9	1524	7	1
22	4	89.3	1525, 1420	16	2
22	5	96.9	1453	5	1
22	6	86.7	1056	15	1
22	7	76.1	1361, 1563	17	2
22	8	81.3	1495	10	1
22	9	97.9	1279, 1230	10	2
22	10	74.3	1457	11	1

22	11	74.2	1112	18	1
22	12	84	1335, 1296	8	2
22	13	50.5	1724	15	1
22	14	59.6	1831	17	1
22	15	54.5	1853, 1124, 1600	15	3
23	1	96.5	1859, 1668, 1967	6	3
23	2	52.6	1242, 1530, 1890	16	3
23	3	64.4	1920, 1055	8	2
23	4	90.9	1766	9	1
23	5	80	1540	18	1
23	6	91	1254	17	1
23	7	84.7	1678	9	1
23	8	57	1572	7	1
23	9	68.5	1947, 1255, 1463	16	3
23	10	58.9	1990, 1020, 1208	5	3
23	11	59.4	1417	13	1
23	12	88.7	1339, 1923, 1506	6	3
23	13	67.7	1689, 1138	20	2
23	14	74.1	1955, 1960	18	2
23	15	95.8	1461, 1930, 1855	8	3
23	16	91.1	1069, 1440	19	2
23	17	84.2	1900, 1984	19	2
23	18	68.4	1625, 1349	13	2
23	19	64.7	1770	6	1
24	1	55.7	1060	13	1
24	2	83.8	1107	20	1
24	3	86	1805	13	1
24	4	95.2	1947	16	1
24	5	67.5	1025, 1470	7	2
24	6	99.1	1015, 1741, 1782	11	3
24	7	59.3	1476, 1883	14	2
24	8	56.1	1857	15	1
24	9	57.6	1167, 1253, 1402	20	3
24	10	87.9	1258, 1579	14	2
24	11	66.3	1285	16	1
24	12	92.9	1153, 1553	8	2
24	13	69.9	1926	9	1
24	14	61	1635, 1883, 1453	19	3
24	15	62.9	1445, 1857	17	2
24	16	68	1599, 1238, 1610	20	3
24	17	52.1	1063, 1054, 1552	14	3
24	18	97.2	1398, 1876	16	2

24	19	80.8	1204, 1189, 1451	5	3
25	1	85.1	1739, 1899, 1223	8	3
25	2	63.2	1398	10	1
25	3	54.6	1906, 1842, 1639	19	3
25	4	72.8	1355	11	1
25	5	68.5	1415, 1393, 1848	18	3
25	6	81.6	1092	9	1
25	7	53.8	1622	12	1
25	8	98	1284	16	1
25	9	50.5	1781	16	1
26	1	81.7	1987, 1651	17	2
26	2	97.9	1270, 1476, 1303	13	3
26	3	78.2	1935, 1528, 1879	20	3
26	4	61.4	1440, 1429	6	2
26	5	89	1572, 1711	11	2
26	6	89.6	1447, 1276, 1094	7	3
26	7	77.3	1000	15	1
26	8	73	1829, 1548, 1779	17	3
26	9	76.5	1221	20	1
26	10	82.6	1374, 1881	14	2
26	11	52.7	1199, 1829, 1231	15	3
26	12	85.3	1840, 1314	8	2
26	13	69.9	1852, 1251	13	2
27	1	64.7	1155, 1316	13	2
27	2	63.6	1586, 1695, 1801	19	3
27	3	68.6	1036, 1921, 1344	19	3
27	4	93.6	1230, 1858, 1048	7	3
27	5	56.7	1128, 1981	17	2
27	6	71.5	1761	5	1
27	7	95.7	1642, 1633, 1848	6	3
27	8	83.2	1198, 1401	8	2
27	9	90.7	1001, 1490, 1948	19	3
28	1	80.8	1166, 1872, 1759	18	3
28	2	55.6	1445, 1747, 1721	16	3
28	3	54	1838, 1328, 1979	19	3
28	4	50.6	1385	10	1
28	5	53.2	1776	14	1
28	6	57.9	1697, 1354	6	2
28	7	95	1514, 1794	5	2
28	8	69.2	1767	13	1

28	9	93.9	1541, 1591, 1762	13	3
28	10	91.5	1714, 1909	11	2
29	1	54.6	1878	16	1
29	2	92.4	1822	11	1
29	3	57.1	1233, 1758, 1423	13	3
29	4	59.7	1885, 1846, 1415	11	3
29	5	52.3	1211	13	1
29	6	83.3	1991, 1584	16	2
29	7	90.5	1505	10	1
29	8	90.9	1648, 1158	19	2
29	9	66.6	1287	14	1
29	10	51.2	1370, 1257	14	2
29	11	51.4	1526, 1189	18	2
29	12	64	1784	20	1
29	13	88.2	1463, 1550, 1182	5	3
29	14	91.9	1713, 1954, 1841	15	3
29	15	87.6	1804, 1324, 1587	13	3
29	16	80.6	1049, 1340	19	2
29	17	52.1	1781, 1091, 1727	7	3
29	18	79.3	1796, 1229, 1454	6	3
29	19	50	1791, 1687, 1666	20	3
29	20	54.1	1084, 1712	13	2
30	1	55.2	1914	18	1
30	2	68.7	1878, 1443	12	2
30	3	72.8	1331, 1360, 1526	16	3
30	4	52.5	1720, 1565, 1687	20	3
30	5	52.6	1956	16	1
30	6	55.1	1299, 1216	6	2
30	7	72.9	1361, 1297	6	2
30	8	79	1009, 1082, 1665	8	3
30	9	74.9	1568, 1623, 1286	13	3
30	10	57.7	1849, 1033	10	2
30	11	71	1235	10	1
30	12	72.5	1077	16	1
30	13	85.1	2000, 1977	6	2

**Table 5.4.4.10 Statistical Performance Check  
Test Waveforms Radar Type 6 Characteristics**

<b>Trial No</b>	<b>Hopping Frequencies (MHz)</b>
1	5633, 5303, 5354, 5618, 5432, 5499, 5370, 5507, 5257, 5523, 5304, 5631, 5487, 5466, 5695, 5332, 5347, 5363, 5430, 5544, 5670, 5359, 5698, 5276, 5374, 5636, 5676, 5586, 5379, 5547, 5644, 5557, 5412, 5468, 5709, 5628, 5338, 5530, 5270, 5425, 5575, 5543, 5564, 5716, 5604, 5706, 5548, 5588, 5273, 5357, 5264, 5699, 5486, 5283, 5551, 5634, 5314, 5513, 5503, 5515, 5344, 5540, 5528, 5555, 5478, 5444, 5591, 5703, 5362, 5356, 5320, 5429, 5396, 5464, 5488, 5650, 5403, 5679, 5574, 5260, 5475, 5717, 5446, 5473, 5351, 5669, 5339, 5296, 5538, 5561, 5297, 5664, 5529, 5341, 5516, 5619, 5438, 5311, 5651, 5570
2	5571, 5474, 5701, 5365, 5427, 5422, 5514, 5393, 5635, 5459, 5349, 5591, 5318, 5577, 5677, 5483, 5282, 5540, 5391, 5325, 5662, 5507, 5310, 5284, 5547, 5252, 5337, 5694, 5528, 5529, 5421, 5300, 5621, 5288, 5347, 5543, 5504, 5275, 5711, 5636, 5544, 5656, 5531, 5709, 5434, 5559, 5675, 5255, 5490, 5476, 5703, 5279, 5407, 5653, 5401, 5466, 5705, 5452, 5308, 5254, 5303, 5472, 5369, 5335, 5707, 5417, 5264, 5400, 5670, 5461, 5420, 5333, 5674, 5257, 5258, 5432, 5600, 5706, 5378, 5648, 5469, 5316, 5433, 5304, 5276, 5363, 5462, 5607, 5289, 5361, 5708, 5352, 5624, 5642, 5372, 5286, 5331, 5389, 5446, 5587
3	5421, 5566, 5507, 5571, 5578, 5320, 5516, 5497, 5300, 5550, 5478, 5698, 5282, 5362, 5475, 5514, 5603, 5312, 5689, 5271, 5428, 5399, 5447, 5311, 5700, 5598, 5453, 5606, 5593, 5451, 5535, 5545, 5548, 5622, 5633, 5542, 5287, 5563, 5324, 5489, 5546, 5532, 5697, 5712, 5387, 5556, 5640, 5409, 5317, 5717, 5544, 5528, 5301, 5272, 5430, 5582, 5472, 5579, 5555, 5701, 5474, 5584, 5679, 5258, 5668, 5618, 5464, 5699, 5513, 5645, 5636, 5502, 5294, 5330, 5318, 5685, 5501, 5380, 5665, 5723, 5669, 5400, 5666, 5325, 5686, 5341, 5643, 5350, 5629, 5641, 5440, 5309, 5707, 5322, 5661, 5651, 5509, 5452, 5503, 5655
4	5553, 5694, 5349, 5685, 5612, 5506, 5584, 5600, 5652, 5483, 5673, 5323, 5460, 5530, 5399, 5713, 5414, 5603, 5389, 5703, 5408, 5543, 5591, 5337, 5357, 5361, 5250, 5332, 5712, 5639, 5472, 5308, 5702, 5448, 5548, 5526, 5256, 5573, 5271, 5488, 5508, 5345, 5539, 5570, 5355, 5433, 5324, 5513, 5714, 5319, 5524, 5252, 5582, 5284, 5272, 5395, 5708, 5701, 5544, 5547, 5394, 5618, 5320, 5499, 5347, 5625, 5410, 5590, 5280, 5288, 5309, 5622, 5636, 5566, 5478, 5430, 5706, 5442, 5587, 5691, 5365, 5601, 5550, 5720, 5403, 5441, 5602, 5297, 5536, 5473, 5585, 5697, 5649, 5514, 5400, 5462, 5546, 5525, 5657, 5386
5	5432, 5270, 5451, 5262, 5495, 5546, 5567, 5350, 5633, 5260, 5511, 5341, 5365, 5289, 5557, 5326, 5386, 5700, 5620, 5714, 5653, 5461, 5344, 5587, 5286, 5492, 5673, 5254, 5496, 5301, 5283, 5409, 5329, 5586, 5307, 5588, 5600, 5281, 5689, 5353, 5331, 5345, 5333, 5564, 5675, 5654, 5556, 5405, 5704, 5682, 5287, 5328, 5560, 5419, 5690, 5364, 5504, 5445, 5449, 5332, 5699, 5265, 5453, 5473, 5542, 5670, 5601, 5698, 5313, 5394, 5340, 5464, 5581, 5454, 5514, 5318, 5610, 5503, 5624, 5299, 5664, 5491, 5671, 5558, 5460, 5497, 5531, 5384, 5308, 5490, 5563, 5467, 5494, 5566, 5617, 5392, 5252, 5706, 5526, 5667
6	5450, 5638, 5498, 5396, 5701, 5457, 5700, 5302, 5328, 5708, 5415, 5439, 5402, 5542, 5499, 5658, 5554, 5434, 5536, 5634, 5295, 5631, 5574, 5275, 5495, 5406, 5276, 5589, 5692, 5622, 5438, 5608, 5358, 5476, 5377, 5400, 5449, 5600, 5294, 5703, 5696, 5661, 5653, 5352, 5677, 5620, 5531, 5586, 5699, 5373, 5363, 5563, 5436, 5379, 5413, 5364, 5599, 5325, 5679, 5315, 5462, 5582, 5256, 5456, 5420, 5655, 5572, 5720, 5674, 5395, 5473, 5356, 5604, 5685, 5431, 5336, 5535, 5351, 5448, 5490, 5583, 5518, 5368, 5393, 5567, 5529, 5652, 5423, 5277, 5289, 5616, 5251, 5521, 5384, 5493, 5519, 5412, 5466, 5681, 5306
7	5630, 5564, 5447, 5601, 5385, 5616, 5468, 5553, 5618, 5639, 5486, 5538, 5391, 5256, 5642, 5277, 5683, 5612, 5623, 5541, 5552, 5716, 5371, 5672, 5620, 5625, 5549, 5510, 5406, 5596, 5445, 5711, 5343, 5606, 5434, 5669, 5695, 5699, 5547, 5402, 5432, 5361, 5316, 5674, 5292, 5518, 5594, 5278, 5490, 5412, 5647, 5344, 5374, 5523, 5354, 5597, 5389, 5598, 5610, 5633, 5415, 5509, 5705, 5317, 5631, 5331, 5678, 5637, 5269, 5440, 5428, 5395, 5362, 5555, 5369, 5714, 5635, 5701, 5503, 5662, 5536, 5659, 5572, 5355, 5334, 5563, 5483, 5663, 5522, 5313, 5545, 5261, 5328, 5504, 5708, 5604, 5314, 5308, 5266, 5499

8	5614, 5360, 5272, 5303, 5719, 5482, 5321, 5335, 5426, 5443, 5273, 5519, 5265, 5383, 5380, 5525, 5587, 5546, 5432, 5584, 5373, 5441, 5310, 5544, 5509, 5579, 5444, 5493, 5398, 5391, 5615, 5502, 5477, 5466, 5606, 5459, 5547, 5357, 5413, 5635, 5485, 5384, 5510, 5322, 5629, 5507, 5533, 5554, 5348, 5324, 5264, 5610, 5599, 5659, 5334, 5279, 5392, 5491, 5612, 5578, 5687, 5259, 5553, 5540, 5586, 5664, 5386, 5362, 5627, 5407, 5291, 5341, 5564, 5406, 5296, 5312, 5583, 5660, 5260, 5623, 5465, 5545, 5351, 5501, 5639, 5595, 5401, 5468, 5720, 5495, 5512, 5252, 5504, 5331, 5661, 5388, 5340, 5644, 5439, 5442
9	5355, 5626, 5487, 5614, 5546, 5494, 5574, 5404, 5477, 5659, 5310, 5502, 5504, 5607, 5342, 5284, 5605, 5396, 5370, 5613, 5511, 5366, 5516, 5630, 5411, 5656, 5533, 5385, 5381, 5428, 5677, 5341, 5625, 5645, 5690, 5634, 5325, 5640, 5442, 5648, 5658, 5443, 5383, 5311, 5313, 5517, 5695, 5488, 5676, 5459, 5646, 5274, 5415, 5326, 5288, 5266, 5654, 5582, 5277, 5346, 5680, 5716, 5483, 5270, 5600, 5501, 5569, 5520, 5347, 5675, 5416, 5632, 5693, 5271, 5698, 5594, 5591, 5549, 5364, 5713, 5530, 5377, 5388, 5369, 5702, 5264, 5588, 5250, 5495, 5523, 5251, 5407, 5438, 5633, 5400, 5621, 5449, 5319, 5452, 5352
10	5368, 5251, 5675, 5606, 5659, 5480, 5323, 5415, 5459, 5298, 5587, 5703, 5620, 5574, 5497, 5467, 5676, 5389, 5544, 5406, 5372, 5431, 5685, 5684, 5506, 5350, 5682, 5305, 5633, 5379, 5668, 5286, 5654, 5702, 5575, 5278, 5601, 5487, 5399, 5565, 5512, 5594, 5696, 5576, 5490, 5265, 5579, 5534, 5664, 5270, 5373, 5465, 5526, 5382, 5464, 5398, 5665, 5284, 5328, 5636, 5454, 5549, 5622, 5474, 5525, 5585, 5656, 5640, 5514, 5339, 5543, 5488, 5670, 5519, 5451, 5274, 5586, 5523, 5609, 5463, 5455, 5592, 5364, 5649, 5491, 5529, 5417, 5707, 5533, 5355, 5446, 5598, 5442, 5386, 5524, 5494, 5333, 5420, 5261, 5723
11	5501, 5362, 5328, 5257, 5714, 5636, 5307, 5251, 5494, 5547, 5647, 5285, 5658, 5717, 5709, 5574, 5712, 5318, 5329, 5575, 5486, 5588, 5365, 5359, 5527, 5538, 5403, 5722, 5404, 5534, 5679, 5688, 5402, 5310, 5380, 5579, 5364, 5635, 5690, 5278, 5336, 5504, 5644, 5279, 5320, 5617, 5387, 5697, 5331, 5265, 5523, 5308, 5315, 5343, 5598, 5694, 5288, 5397, 5637, 5543, 5342, 5312, 5419, 5545, 5651, 5458, 5424, 5649, 5400, 5489, 5282, 5601, 5659, 5383, 5692, 5416, 5451, 5573, 5599, 5309, 5293, 5606, 5605, 5671, 5502, 5262, 5667, 5464, 5487, 5496, 5629, 5593, 5715, 5386, 5607, 5526, 5490, 5581, 5546, 5436
12	5300, 5665, 5369, 5605, 5722, 5625, 5610, 5478, 5391, 5667, 5518, 5566, 5341, 5442, 5289, 5440, 5593, 5537, 5520, 5596, 5579, 5332, 5619, 5268, 5523, 5319, 5672, 5587, 5344, 5343, 5658, 5638, 5387, 5620, 5349, 5548, 5514, 5639, 5721, 5553, 5295, 5525, 5472, 5401, 5436, 5443, 5724, 5255, 5413, 5551, 5533, 5526, 5535, 5550, 5302, 5371, 5307, 5673, 5547, 5701, 5699, 5516, 5636, 5274, 5616, 5583, 5642, 5678, 5273, 5709, 5691, 5424, 5463, 5350, 5621, 5647, 5405, 5685, 5279, 5591, 5417, 5666, 5643, 5534, 5288, 5459, 5627, 5512, 5394, 5278, 5542, 5435, 5715, 5276, 5342, 5467, 5328, 5254, 5365, 5601
13	5342, 5672, 5335, 5469, 5433, 5486, 5382, 5689, 5426, 5260, 5503, 5444, 5383, 5262, 5648, 5584, 5548, 5441, 5552, 5668, 5497, 5555, 5366, 5544, 5329, 5412, 5556, 5598, 5605, 5338, 5478, 5434, 5718, 5502, 5376, 5554, 5258, 5301, 5345, 5632, 5636, 5255, 5395, 5322, 5712, 5492, 5306, 5493, 5315, 5508, 5466, 5511, 5340, 5647, 5525, 5346, 5574, 5372, 5662, 5354, 5400, 5275, 5357, 5385, 5519, 5317, 5484, 5518, 5375, 5510, 5339, 5601, 5259, 5386, 5540, 5374, 5499, 5355, 5261, 5720, 5627, 5320, 5628, 5256, 5711, 5365, 5448, 5467, 5487, 5653, 5367, 5666, 5686, 5381, 5288, 5634, 5397, 5611, 5609, 5284
14	5667, 5352, 5369, 5422, 5690, 5377, 5570, 5337, 5718, 5321, 5636, 5679, 5658, 5472, 5283, 5427, 5575, 5698, 5308, 5424, 5649, 5319, 5290, 5661, 5645, 5495, 5571, 5723, 5312, 5687, 5361, 5437, 5303, 5490, 5428, 5551, 5485, 5260, 5534, 5289, 5715, 5286, 5565, 5595, 5702, 5315, 5703, 5464, 5475, 5295, 5338, 5253, 5277, 5537, 5441, 5493, 5474, 5683, 5515, 5559, 5323, 5324, 5366, 5686, 5299, 5339, 5413, 5611, 5520, 5592, 5486, 5560, 5620, 5257, 5465, 5262, 5582, 5669, 5568, 5491, 5336, 5713, 5628, 5607, 5447, 5451, 5697, 5471, 5574, 5483, 5462, 5373, 5446, 5556, 5302, 5317, 5380, 5689, 5281, 5310
15	5404, 5412, 5618, 5468, 5320, 5693, 5590, 5597, 5662, 5586, 5652, 5580, 5427, 5637, 5342, 5710, 5620, 5560, 5312, 5448, 5678, 5346, 5313, 5617, 5481, 5378, 5647, 5463, 5386, 5612, 5476, 5370, 5605, 5422, 5308, 5701, 5539, 5713, 5675, 5575, 5567, 5383, 5262, 5299, 5402, 5640, 5400, 5653, 5611, 5596, 5403, 5679, 5255, 5565, 5428, 5684, 5535, 5522, 5450, 5374, 5626, 5351, 5465, 5415, 5587, 5496, 5641, 5549, 5434, 5458, 5533, 5438, 5518, 5423, 5355, 5545, 5363, 5592, 5322, 5515, 5712, 5704, 5455, 5714, 5608, 5284, 5449, 5281, 5490, 5673, 5266, 5307, 5722, 5388, 5670, 5721, 5338, 5516, 5621, 5511

16	5350, 5497, 5575, 5655, 5646, 5423, 5459, 5528, 5466, 5644, 5371, 5669, 5519, 5388, 5659, 5352, 5384, 5675, 5351, 5422, 5253, 5696, 5689, 5385, 5463, 5719, 5445, 5294, 5396, 5338, 5553, 5405, 5629, 5495, 5389, 5585, 5274, 5451, 5572, 5589, 5417, 5701, 5542, 5526, 5487, 5400, 5272, 5283, 5416, 5379, 5694, 5250, 5331, 5614, 5583, 5265, 5427, 5301, 5544, 5635, 5486, 5560, 5507, 5514, 5525, 5498, 5446, 5447, 5296, 5435, 5604, 5257, 5640, 5568, 5461, 5356, 5335, 5429, 5634, 5598, 5464, 5567, 5554, 5690, 5703, 5620, 5723, 5442, 5452, 5683, 5286, 5474, 5593, 5674, 5511, 5681, 5394, 5687, 5420, 5718
17	5278, 5467, 5661, 5367, 5658, 5506, 5344, 5586, 5699, 5377, 5284, 5622, 5402, 5559, 5448, 5483, 5612, 5537, 5382, 5453, 5701, 5355, 5679, 5424, 5285, 5584, 5489, 5400, 5578, 5275, 5645, 5316, 5417, 5673, 5392, 5676, 5610, 5710, 5475, 5611, 5350, 5463, 5498, 5567, 5296, 5404, 5638, 5684, 5623, 5474, 5410, 5660, 5339, 5713, 5441, 5585, 5341, 5552, 5496, 5544, 5650, 5412, 5262, 5311, 5641, 5508, 5690, 5655, 5702, 5523, 5577, 5705, 5381, 5501, 5495, 5692, 5416, 5359, 5648, 5494, 5295, 5279, 5640, 5721, 5551, 5298, 5569, 5420, 5260, 5364, 5507, 5289, 5681, 5594, 5327, 5709, 5303, 5592, 5477, 5321
18	5293, 5290, 5375, 5344, 5294, 5676, 5469, 5308, 5630, 5666, 5418, 5299, 5252, 5440, 5342, 5404, 5349, 5464, 5335, 5322, 5458, 5616, 5329, 5478, 5571, 5551, 5508, 5303, 5649, 5618, 5405, 5384, 5435, 5337, 5365, 5386, 5659, 5686, 5703, 5536, 5364, 5507, 5425, 5320, 5689, 5286, 5413, 5607, 5692, 5546, 5378, 5419, 5617, 5701, 5394, 5430, 5563, 5599, 5434, 5488, 5341, 5376, 5385, 5646, 5498, 5634, 5422, 5629, 5288, 5523, 5574, 5314, 5295, 5650, 5509, 5473, 5567, 5282, 5255, 5626, 5261, 5470, 5589, 5271, 5518, 5276, 5548, 5667, 5614, 5538, 5305, 5298, 5704, 5373, 5400, 5438, 5696, 5409, 5493, 5602
19	5685, 5374, 5508, 5576, 5459, 5537, 5381, 5488, 5260, 5712, 5673, 5292, 5724, 5585, 5507, 5317, 5723, 5653, 5369, 5536, 5354, 5252, 5705, 5261, 5333, 5689, 5540, 5492, 5345, 5701, 5606, 5348, 5434, 5373, 5623, 5401, 5549, 5575, 5379, 5343, 5528, 5490, 5452, 5275, 5398, 5443, 5514, 5268, 5665, 5668, 5711, 5416, 5566, 5335, 5693, 5274, 5420, 5346, 5251, 5365, 5383, 5377, 5254, 5451, 5676, 5257, 5650, 5311, 5562, 5276, 5304, 5400, 5652, 5397, 5450, 5479, 5691, 5649, 5325, 5504, 5631, 5295, 5485, 5366, 5303, 5635, 5548, 5481, 5467, 5698, 5418, 5584, 5532, 5708, 5629, 5632, 5619, 5511, 5638, 5253
20	5568, 5644, 5432, 5518, 5281, 5388, 5341, 5648, 5690, 5572, 5477, 5512, 5524, 5688, 5712, 5298, 5372, 5630, 5282, 5503, 5479, 5560, 5610, 5324, 5604, 5264, 5683, 5347, 5277, 5254, 5494, 5369, 5596, 5385, 5284, 5533, 5657, 5521, 5595, 5722, 5615, 5682, 5714, 5522, 5260, 5327, 5576, 5339, 5410, 5571, 5505, 5420, 5445, 5433, 5449, 5472, 5452, 5263, 5674, 5527, 5459, 5300, 5673, 5638, 5403, 5461, 5419, 5377, 5337, 5679, 5631, 5520, 5265, 5590, 5312, 5315, 5321, 5455, 5642, 5262, 5368, 5584, 5358, 5335, 5574, 5601, 5390, 5428, 5603, 5660, 5523, 5698, 5672, 5484, 5413, 5708, 5267, 5430, 5295, 5551
21	5346, 5574, 5423, 5304, 5459, 5619, 5392, 5297, 5673, 5418, 5444, 5629, 5645, 5433, 5410, 5417, 5445, 5639, 5502, 5454, 5437, 5325, 5533, 5656, 5397, 5510, 5551, 5718, 5550, 5514, 5280, 5658, 5601, 5453, 5416, 5378, 5624, 5678, 5328, 5377, 5563, 5618, 5666, 5324, 5451, 5698, 5517, 5704, 5402, 5501, 5264, 5273, 5327, 5497, 5523, 5282, 5672, 5387, 5642, 5557, 5549, 5695, 5671, 5296, 5376, 5380, 5662, 5278, 5498, 5395, 5483, 5476, 5256, 5675, 5524, 5708, 5370, 5556, 5625, 5429, 5637, 5400, 5462, 5617, 5512, 5528, 5529, 5644, 5359, 5536, 5354, 5661, 5309, 5271, 5318, 5558, 5616, 5724, 5481, 5312
22	5309, 5352, 5427, 5438, 5368, 5567, 5354, 5639, 5703, 5266, 5658, 5599, 5322, 5608, 5251, 5607, 5670, 5691, 5704, 5506, 5620, 5296, 5590, 5558, 5250, 5541, 5338, 5375, 5457, 5343, 5515, 5405, 5359, 5285, 5686, 5563, 5619, 5363, 5581, 5415, 5449, 5539, 5265, 5697, 5520, 5623, 5547, 5374, 5269, 5568, 5410, 5720, 5253, 5668, 5677, 5433, 5435, 5270, 5611, 5494, 5482, 5421, 5356, 5389, 5626, 5604, 5571, 5495, 5662, 5256, 5481, 5460, 5492, 5462, 5371, 5654, 5550, 5264, 5698, 5308, 5577, 5519, 5673, 5409, 5357, 5420, 5385, 5653, 5687, 5647, 5383, 5302, 5546, 5570, 5523, 5575, 5337, 5649, 5369, 5569
23	5464, 5335, 5440, 5466, 5581, 5306, 5327, 5566, 5593, 5724, 5250, 5546, 5705, 5532, 5528, 5425, 5403, 5398, 5485, 5680, 5642, 5604, 5583, 5426, 5574, 5484, 5578, 5432, 5632, 5271, 5673, 5393, 5491, 5421, 5516, 5513, 5580, 5618, 5256, 5702, 5349, 5276, 5405, 5422, 5591, 5287, 5364, 5670, 5392, 5458, 5523, 5343, 5284, 5441, 5662, 5534, 5564, 5382, 5286, 5683, 5567, 5418, 5272, 5340, 5395, 5330, 5573, 5294, 5530, 5459, 5664, 5479, 5258, 5435, 5318, 5377, 5326, 5535, 5635, 5478, 5561, 5370, 5475, 5625, 5562, 5558, 5257, 5694, 5387, 5685, 5507, 5609, 5531, 5520, 5649, 5617, 5309, 5316, 5390, 5630




24	5493, 5479, 5702, 5698, 5656, 5591, 5467, 5334, 5716, 5374, 5529, 5626, 5456, 5553, 5371, 5589, 5445, 5297, 5287, 5489, 5427, 5258, 5382, 5333, 5503, 5430, 5618, 5572, 5351, 5289, 5599, 5446, 5671, 5555, 5471, 5318, 5697, 5418, 5612, 5268, 5694, 5614, 5366, 5496, 5353, 5519, 5431, 5510, 5688, 5537, 5264, 5358, 5461, 5661, 5397, 5412, 5647, 5616, 5359, 5623, 5283, 5619, 5628, 5512, 5432, 5511, 5668, 5378, 5406, 5276, 5482, 5706, 5414, 5298, 5263, 5355, 5630, 5434, 5583, 5481, 5421, 5721, 5303, 5652, 5488, 5326, 5606, 5569, 5376, 5320, 5329, 5567, 5596, 5294, 5391, 5712, 5660, 5448, 5608, 5513
25	5263, 5659, 5647, 5576, 5652, 5605, 5673, 5669, 5577, 5445, 5629, 5319, 5497, 5691, 5418, 5456, 5361, 5642, 5427, 5528, 5366, 5666, 5630, 5346, 5272, 5264, 5280, 5472, 5643, 5452, 5345, 5634, 5392, 5696, 5584, 5344, 5351, 5293, 5580, 5334, 5443, 5323, 5367, 5413, 5347, 5296, 5449, 5514, 5474, 5622, 5256, 5268, 5619, 5688, 5718, 5519, 5485, 5259, 5339, 5671, 5716, 5389, 5653, 5670, 5353, 5488, 5638, 5297, 5661, 5616, 5623, 5578, 5511, 5385, 5436, 5267, 5515, 5552, 5295, 5350, 5283, 5660, 5589, 5554, 5408, 5476, 5700, 5556, 5273, 5390, 5720, 5380, 5531, 5422, 5250, 5714, 5322, 5404, 5330, 5448
26	5258, 5332, 5606, 5274, 5557, 5337, 5545, 5705, 5574, 5578, 5406, 5464, 5724, 5383, 5264, 5381, 5266, 5451, 5509, 5675, 5530, 5460, 5287, 5486, 5341, 5418, 5590, 5498, 5669, 5339, 5638, 5630, 5369, 5423, 5637, 5278, 5289, 5504, 5461, 5593, 5628, 5315, 5719, 5462, 5521, 5667, 5485, 5641, 5263, 5353, 5393, 5673, 5562, 5276, 5283, 5309, 5570, 5497, 5588, 5527, 5659, 5721, 5290, 5553, 5358, 5697, 5484, 5399, 5538, 5299, 5563, 5572, 5262, 5713, 5438, 5412, 5305, 5683, 5514, 5605, 5453, 5450, 5702, 5622, 5434, 5653, 5513, 5694, 5292, 5382, 5396, 5524, 5539, 5304, 5567, 5409, 5541, 5627, 5355, 5374
27	5371, 5481, 5543, 5641, 5686, 5372, 5462, 5253, 5528, 5392, 5503, 5507, 5723, 5312, 5468, 5291, 5398, 5562, 5714, 5399, 5637, 5374, 5439, 5627, 5254, 5349, 5375, 5688, 5531, 5589, 5684, 5676, 5296, 5519, 5276, 5473, 5309, 5555, 5506, 5621, 5263, 5351, 5592, 5657, 5444, 5443, 5598, 5583, 5260, 5677, 5287, 5675, 5295, 5373, 5546, 5388, 5445, 5573, 5563, 5547, 5478, 5643, 5571, 5696, 5662, 5526, 5533, 5328, 5624, 5572, 5634, 5541, 5362, 5412, 5498, 5701, 5275, 5694, 5630, 5475, 5669, 5277, 5397, 5532, 5454, 5369, 5580, 5610, 5642, 5251, 5575, 5619, 5267, 5654, 5489, 5407, 5608, 5596, 5659, 5285
28	5592, 5268, 5455, 5571, 5304, 5643, 5589, 5533, 5676, 5580, 5279, 5296, 5560, 5551, 5670, 5295, 5443, 5334, 5535, 5712, 5320, 5572, 5601, 5668, 5680, 5457, 5630, 5267, 5347, 5399, 5276, 5655, 5301, 5510, 5525, 5610, 5598, 5499, 5416, 5657, 5612, 5460, 5570, 5722, 5717, 5672, 5390, 5388, 5709, 5574, 5278, 5599, 5567, 5654, 5469, 5342, 5596, 5346, 5459, 5329, 5319, 5640, 5545, 5591, 5447, 5566, 5583, 5288, 5333, 5286, 5393, 5258, 5344, 5465, 5395, 5270, 5624, 5302, 5356, 5303, 5310, 5280, 5584, 5521, 5608, 5463, 5254, 5605, 5577, 5497, 5496, 5349, 5462, 5635, 5644, 5690, 5614, 5394, 5588, 5431
29	5544, 5499, 5367, 5648, 5692, 5707, 5550, 5487, 5417, 5387, 5554, 5652, 5634, 5385, 5383, 5322, 5412, 5350, 5480, 5622, 5393, 5497, 5505, 5396, 5621, 5282, 5341, 5482, 5632, 5620, 5432, 5439, 5490, 5679, 5551, 5409, 5294, 5697, 5436, 5337, 5645, 5302, 5440, 5398, 5494, 5706, 5565, 5596, 5356, 5660, 5605, 5478, 5563, 5266, 5535, 5571, 5583, 5658, 5685, 5521, 5381, 5555, 5329, 5688, 5708, 5268, 5619, 5263, 5585, 5678, 5473, 5318, 5250, 5538, 5276, 5533, 5258, 5578, 5672, 5467, 5423, 5278, 5496, 5549, 5344, 5358, 5567, 5426, 5653, 5363, 5283, 5681, 5339, 5719, 5714, 5503, 5517, 5332, 5317, 5287
30	5322, 5656, 5400, 5503, 5418, 5585, 5407, 5635, 5567, 5671, 5607, 5587, 5702, 5566, 5619, 5371, 5492, 5515, 5519, 5369, 5440, 5695, 5329, 5448, 5491, 5617, 5280, 5521, 5304, 5601, 5287, 5365, 5290, 5379, 5578, 5544, 5522, 5276, 5558, 5514, 5590, 5424, 5335, 5510, 5458, 5546, 5714, 5655, 5572, 5439, 5610, 5317, 5632, 5489, 5473, 5338, 5404, 5378, 5477, 5501, 5339, 5294, 5331, 5363, 5664, 5712, 5396, 5393, 5410, 5465, 5672, 5604, 5296, 5667, 5556, 5390, 5302, 5487, 5380, 5686, 5345, 5273, 5547, 5663, 5599, 5374, 5288, 5415, 5382, 5685, 5591, 5684, 5668, 5395, 5528, 5713, 5419, 5639, 5483, 5349

\*Pulse Width ( $\mu$ s) = 1; PRI ( $\mu$ s) = 333; No of Pulses per Burst =9 and No of Bursts = 100.

## 6 PHOTOGRAPHS OF EUT SETUP

The setup photos of the DFS test were provided below.

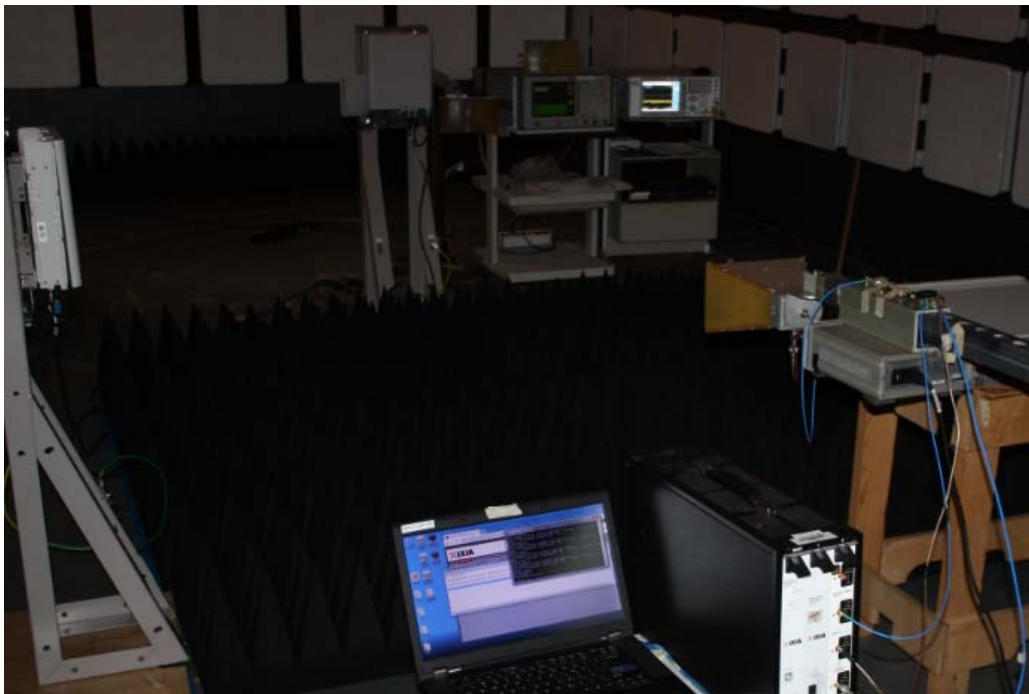

## 7 LIST OF TEST EQUIPMENT

**Table 7.1 List of Test Equipment Used**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial #</b>	<b>Last Cal Date</b>	<b>Cal Due Date</b>
MXA Signal Analyzer (20Hz-26.5GHz)	Agilent	N9020A	MY53420147	2017-03-13	2019-03-13
Electronic Stopwatch	Control Company	1051	181179959	2018-05-12	2020-05-12
Double Ridged Horn 1-18 GHz	EMCO	3115	0001-6008	2016-10-26	2018-12-26
Double Ridged Horn 1-18 GHz	EMCO	3115	9909-5914	2016-11-07	2019-01-07
Preamplifier 1-26.5 GHz	Hewlett Packard	8449B	3008A00608	2018-01-30	2020-01-30
EMI Test Receiver 20Hz-26.5GHz	Rohde & Schwarz	ESI	832692/005	2018-03-19	2020-03-19
MXG Vector Sig Gen 250 kHz – 6 GHz	Agilent	N5182A	MY46240177	2018-10-05	2021-10-05
Traffic Generator	Ixia Technologies	WaveTest 20	WT20-X1120005	N/A	N/A
10 dB Attenuator (DC – 18 GHz)	N/A-CCM	6193-10	2082	N/A	N/A
Power Divider/Combiner	MECA	802-2-2- 6.00		N/A	N/A
20 dB Attenuator 10 Watts	Weinschel	41-20-12	10192	N/A	N/A

## 8 TEST FACILITIES

All measurement facilities used to collect the measurement data under normal condition are located at 600-700 Mountain Avenue, Murray Hill, New Jersey 07974-0636 USA. The field strength measurements of radiated spurious emissions are made in a FCC and IC registered semi-anechoic chamber AR5 (FCC Site Registration Number: 515091, IC Filing Number: 6933F-5). The sites were constructed and are continuously in conformance with the requirements of ANSI C63.4 and CISPR Publication 32.

Nokia Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA). The laboratory is ISO 9001:2008 Certified.

<b>United States Department of Commerce National Institute of Standards and Technology</b>	
	
<hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2005</b> <hr/>	
NVLAP LAB CODE: 100275-0	
<b>Nokia, Global Product Compliance Lab</b> Murray Hill, NJ	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>Electromagnetic Compatibility &amp; Telecommunications</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i>	
2018-09-05 through 2019-09-30 <i>Effective Dates</i>	 For the National Voluntary Laboratory Accreditation Program
	

## 9 REFERENCES

- [1]. Title 47 Code of Federal Regulations (CFR) Parts 2 and 15.
- [2]. FCC KDB 905462 D02, Compliance Measurement Procedures for Unlicensed-National Information Infrastructure Devices Operating in the 5250-5350 Mhz and 5470-5725 MHz Bands Incorporating Dynamic Frequency Selection, April 8, 2016, v02.