

2ADCB-REG127 Radio User Manual

Version 1.0 • March 12, 2020

Acuity Brands Lighting, Inc.

One Lithonia Way

Conyers, GA 30012

Last edited: 12 March 2020

Copyright © 2019 Acuity Brands Lighting. All rights reserved.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from Acuity Brands Lighting.

All copyright, confidential information, patents, design rights and all other intellectual property rights of whatsoever nature contained herein are and shall remain the sole and exclusive property of Acuity Brands Lighting. The information furnished herein is believed to be accurate and reliable.

However, no responsibility is assumed by Acuity Brands Lighting for its use, or for any infringements of patents or other rights of third parties resulting from its use.

The Acuity Brands Lighting name and Acuity Brands Lighting logo are trademarks or registered trademarks of Acuity Brands Lighting.

All other trademarks are the property of their respective owners

2ADCB-REG127 Radio User Manual

ROAM/Acuity Brands

Version: [1.0]

Revision Date [4/30/2019]

Executive Sponsor Acuity Brands Lighting		
Signature		Date

Executive Sponsor		
[Name]	[Email]	[Telephone]
Signature		Date

[Name]	[Email]	[Telephone]
Signature		Date

[Name]	[Email]	[Telephone]
Signature		Date

Table of Contents

1	EXECUTIVE SUMMARY	ERROR! BOOKMARK NOT DEFINED.
2	GENERAL INFORMATION	ERROR! BOOKMARK NOT DEFINED.
2.1	COMPANY DETAILS	ERROR! BOOKMARK NOT DEFINED.
2.2	COMPANY(S) PROFILE.....	ERROR! BOOKMARK NOT DEFINED.
3	UNDERSTANDING OF REQUIREMENTS.....	ERROR! BOOKMARK NOT DEFINED.
3.1	BENEFITS	ERROR! BOOKMARK NOT DEFINED.
3.2	MAIN ARGUMENTS	ERROR! BOOKMARK NOT DEFINED.
3.3	AGENCY EFFORT REQUIRED.....	ERROR! BOOKMARK NOT DEFINED.
4	SOLUTION OVERVIEW	ERROR! BOOKMARK NOT DEFINED.
4.1	RESPONSE TO REQUIREMENTS.....	ERROR! BOOKMARK NOT DEFINED.
5	PROJECT MANAGEMENT	ERROR! BOOKMARK NOT DEFINED.
5.1	PROJECT PLAN	ERROR! BOOKMARK NOT DEFINED.
5.2	PROJECT ESTIMATING	ERROR! BOOKMARK NOT DEFINED.
5.2.1	Work Days by Phase	Error! Bookmark not defined.
5.2.2	Work Days by Role	Error! Bookmark not defined.
5.2.3	Experience	Error! Bookmark not defined.
5.3	RISKS.....	ERROR! BOOKMARK NOT DEFINED.
5.4	ISSUES	ERROR! BOOKMARK NOT DEFINED.
5.5	ASSUMPTIONS	ERROR! BOOKMARK NOT DEFINED.
6	QUALIFICATIONS.....	ERROR! BOOKMARK NOT DEFINED.
6.1	SAMPLE PEN PORTRAIT.....	ERROR! BOOKMARK NOT DEFINED.
6.2	REFERENCES.....	ERROR! BOOKMARK NOT DEFINED.
6.2.1	Reference # 1.....	Error! Bookmark not defined.
6.2.2	Reference # 2.....	Error! Bookmark not defined.
6.2.3	Reference # 3.....	Error! Bookmark not defined.
7	COSTS.....	ERROR! BOOKMARK NOT DEFINED.
7.1	FIXED PRICE COSTS.....	ERROR! BOOKMARK NOT DEFINED.
7.2	ITEMIZED COST BREAKDOWN.....	ERROR! BOOKMARK NOT DEFINED.
7.3	TECHNICAL SUPPORT.....	ERROR! BOOKMARK NOT DEFINED.
8	CONCLUSIONS.....	ERROR! BOOKMARK NOT DEFINED.
9	APPENDIX.....	ERROR! BOOKMARK NOT DEFINED.

9.1 GLOSSARY OF TERMS**ERROR! BOOKMARK NOT DEFINED.**

Document History

Paper copies are valid only on the day they are printed. Contact the author if you are in any doubt about the accuracy of this document.

Revision History

Revision Number	Revision Date	Summary of Changes	Author
Version 1.0	1/7/2020	Initial Draft	Szabolcs Zigo vszki

Reference Documents

Please see the following documents for more information:

Document Name	Version	Author

Distribution List

This document has been distributed to:

Name	Position	Company	Action




1 Background

The 2ADC-REG127 radio module is intended for installation in wireless streetlight controls applications. The module is supplied regulated 5.0 Vdc by a mainboard with +/-1% regulated supply in all applications. The module contains voltage regulators and filtering capacitors onboard to smooth variations in supply voltage. It features a standard mini PCI-e edge connector and form-factor so it can be plugged in to any mini PCI-e USB only connector.

2 Modem User's Manual (not accessible to end-users).

2.1 Overview of the Radio Modem Hardware

The 2ADCB-REG127 modem is an 802.15.4 wireless module that allows wireless communication using a standard asynchronous serial data stream. The main features of the 2ADCB-REG127 radio modem are presented in the figures below. FCC ID label will be applied to the shield later.

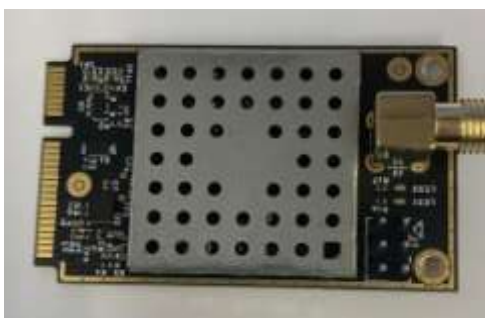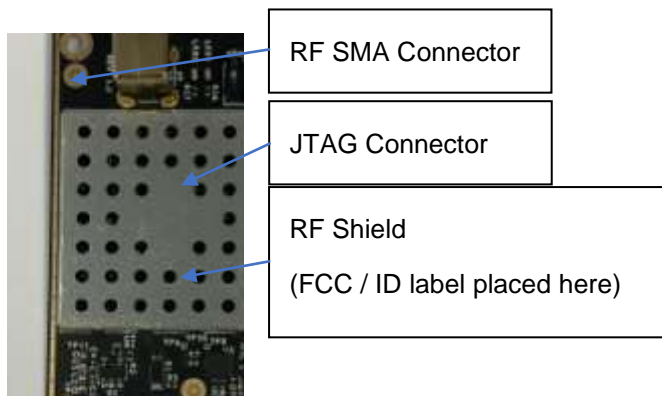

2.2 Functional Block Diagram of the module

NOTE: CONFIDENTIAL BLOCK DIAGRAM IS REMOVED

The 2ADCB-REG127 radio module consists of four functional entities:

- 1.) Transceiver section – processor, RF Transceiver
- 2.) RF Section – BALUNs, RF Front-End, RF filters
- 3.) Non-volatile storage – EEPROM
- 4.) Voltage regulators – LDO

2.3 Pinout

The module follows the mini PCI-e, USB only standard pinout.

Standard Mini PCI Express

This pinout is the standard pinout used by manufacturers for WLAN and high speed applications. It is likely that at least the primary Mini PCI Express slot will feature this level of connectivity.

Pin #	Function	Pin #	Function
51	Reserved	52	3.3Vaux
49	Reserved	50	GND
47	Reserved	48	1.5V
45	Reserved	46	LED_WPAN#
43	GND	44	LED_WLAN#
41	3.3Vaux	42	LED_WWAN#
39	3.3Vaux	40	GND
37	GND	38	USB_D+
35	GND	36	USB_D-
33	PETp0	34	GND
31	PETn0	32	SMB_DATA
29	GND	30	SMB_CLK
27	GND	28	1.5V
25	PERp0	26	GND
23	PERn0	24	3.3Vaux
21	GND	22	PERST#
19	Reserved* (UIM_C4)	20	W_DISABLE#
17	Reserved* (UIM_C8)	18	GND
Mechanical Key			
15	GND	16	UIM_VPP
13	REFCLK+	14	UIM_RESET
11	REFCLK-	12	UIM_CLOCK
9	GND	10	UIM_DATA
7	CLKREQ#	8	UIM_PWR
5	COEX2	6	1.5V
3	COEX1	4	GND
1	WAKE#	2	3.3Vaux

USB only Mini PCIe

This is the USB only version of the slot. It is based on the standard pinout, minus the PCI Express lanes and whilst not officially endorsed by PCI SIG, is widely used for USB only applications such as WWAN or GPS cards.

Pin #	Function	Pin #	Function
51	Reserved	52	3.3Vaux
49	Reserved	50	GND
47	Reserved	48	1.5V
45	Reserved	46	LED_WPAN#
43	GND	44	LED_WLAN#
41	3.3Vaux	42	LED_WWAN#
39	3.3Vaux	40	GND
37	GND	38	USB_D+
35	GND	36	USB_D-
33		34	GND
31		32	SMB_DATA
29	GND	30	SMB_CLK
27	GND	28	1.5V
25		26	GND
23		24	3.3Vaux
21	GND	22	PERST#
19	Reserved* (UIM_C4)	20	W_DISABLE#
17	Reserved* (UIM_C8)	18	GND
Mechanical Key			
15	GND	16	UIM_VPP
13		14	UIM_RESET
11		12	UIM_CLOCK
9	GND	10	UIM_DATA
7		8	UIM_PWR
5	COEX2	6	1.5V
3	COEX1	4	GND
1	WAKE#	2	3.3Vaux

2.4 Operation of the 2ADCB-REG127 Radio Modem

Communication with the ROAMMOD0001 radio modem happens through USB port. The baud rate is set to be 19200, 8N1.

2.5 Command Set

Open an instance of terminal software on a serial port with the above settings and connect to the RF modem. Any command is single line followed by entercommand. Format of command is: command param1 param2 ... <enter>

Atstartup pushing the enter key a few times is necessary until the reception of theprompt string.

PTS Commands description:

1. Clear screen

- a. **Description:** clear screen
- b. **Command name:** "cls"
- c. **Parameters:** None
- d. **Ex:** cls<enter>

2. Help

- a. **Description:** display commands list and a short description of eachcommand
- b. **Command name:** "help"
- c. **Parameters:** None
- d. **Ex:** help<enter>

3. Read ADC (ATD) channels

- a. **Description:** read and display ADC channels values
- b. **Command name:** "getadc"
- c. **Parameters:** None
- d. **Ex:** getadc<enter>

4. Get Modem SPI Register

- a. **Description:** get value for a modem register (from page0)
- b. **Command name:** "getreg"
- c. **Parameters:** 1
- register ID: hex format

d. **Ex:** getreg 00<enter>

5. Set Modem SPI Register

a. **Description:** set value for a modem register (from page0)

b. **Command name:** "setreg"

c. **Parameters: 2**

- register ID: hex format

- register vlaue: hex format

d. **Ex:** setreg 20 80FF<enter>

6. Set Power Amplification value

a. **Description:** set value for a modem PA power (not persistent value)

b. **Command name:** "setpa"

c. **Parameters: 1**

- PA value: hex format

d. **Ex:** setpa FC<enter>

7. Set Modem Channel

a. **Description:** set value for a modem channel (not persistent value)

b. **Command name:** "setch"

c. **Parameters: 1**

- channel number: **decimal format**

d. **Ex:** setch 0<enter>

8. Set red LED value

a. **Description:** set red LED on or off

b. **Command name:** "setredled"

c. **Parameters: 1**

- Red led: 0 or 1

d. **Ex:** setredled 0<enter>

9. Set green LED value

a. **Description:** set green LED on or off

b. **Command name:** "setgreenled"

c. **Parameters:** 1

- Green led: 0 or 1

d. **Ex:** setgreenled 0<enter>

10. Put modem in IDLE state

a. **Description:** put modem in IDLE state

b. **Command name:** "idle"

c. **Parameters:** None

d. **Ex:** idle<enter>

11. Put modem in PULSE state

a. **Description:** put modem in pulse PRBS9 state

b. **Command name:** "pulse"

c. **Parameters:** None

d. **Ex:** pulse<enter>

12. Put modem in RX state

a. **Description:** put modem in RX state

b. **Command name:** "rx"

c. **Parameters:** None

d. **Ex:** rx<enter>

13. Put modem in RX echo state

a. **Description:** put modem in RX echo state (used for message success rate)

b. **Command name:** "rxecho"

c. **Parameters:** 1 (but can missing)

- Msg signature: hex format, default value 0xFF

d. **Ex:** rxecho<enter>

14. Calculate the TX message success rate

a. **Description:** Calculate message success rate

b. **Command name:** "txmsg"

c. **Parameters: 4 (but can missing)**

- Packet no: **decimal format**, default 100

- Delay (in ms): **decimal format**, default 100

- Packet len: **decimal format**, default 125

- Msg signature: hex format, default value 0xFF

d. **Ex:** txmsg 10<enter>

15. Put modem in TX not modulated state

a. **Description:** put modem in continuous TX not modulated state

b. **Command name:** "txnomod"

c. **Parameters: None**

d. **Ex:** txnomod<enter>

16. Put modem in TX modulated state

a. **Description:** put modem in continuous TX modulated state

b. **Command name:** "txmod"

c. **Parameters: None**

d. **Ex:** txmod<enter>

17. Read main info stored on EEPROM

a. **Description:** displays SN, max PA power, and VRef stored on EEPROM

b. **Command name:** "iic_read"

c. **Parameters: None**

d. **Ex:** iic_read<enter>

18. Clear EEPROM (except main info)

- a. **Description:** Clear EEPROM except main info
- b. **Command name:** "iic_erase"
- c. **Parameters:** None
- d. **Ex:** iic_erase<enter>

19. Write device SN on EEPROM

- a. **Description:** Set device SN on EEPROM and clear rest of EEPROM
- b. **Command name:** "iic_setsn"
- c. **Parameters:** 1
 - Device SN: hex format, up to 16 digits (8 bytes)
- d. **Ex:** iic_setsn 4FC0<enter>

20. Write VRef on EEPROM

- a. **Description:** Set VRef on EEPROM
- b. **Command name:** "iic_setvref"
- c. **Parameters:** 1
 - Value VRef: **decimal format** (between 2450 and 2550)
- d. **Ex:** iic_sevref 2500<enter>

21. Write max PA on EEPROM

- a. **Description:** Set max PA on EEPROM
- b. **Command name:** "iic_setpa"
- c. **Parameters:** 1
 - Max power hex format
- d. **Ex:** iic_setpa FF<enter>

22. Set output pin in lo

- a. **Description:** Set a pin as output and in lo state
- b. **Command name:** "outlo"
- c. **Parameters:** 1
 - Pin definition: string: port and bit

d. **Ex:** outlo A5<enter>

23. Set output pin in hi

a. **Description:** Set a pin as output and in hi state

b. **Command name:** "outhi"

c. **Parameters: 1**

- Pin definition: string: port and bit

d. **Ex:** outhi A5<enter>

2.6 Frequency selection

The 2ADC-B-REG127 module is not frequency agile during run-time, but it can select an unoccupied portion of the spectrum at startup. The series uses a set of 16 channels as defined by the IEEE 802.15.4 standards which span a range from 2405 to 2480 MHz with 5 MHz spacing between channels:

Center Frequency (MHz)	Channel Designator	Nominal Occupied BW
2405	11	2402.5-2407.5
2410	12	2407.5-2412.5
2415	13	2412.5-2417.5
2420	14	2417.5-2422.5
2425	15	2422.5-2427.5
2430	16	2427.5-2432.5
2435	17	2432.5-2437.5
2440	18	2437.5-2442.5
2445	19	2442.5-2447.5
2450	20	2447.5-2452.5
2455	21	2452.5-2457.5
2460	22	2457.5-2462.5
2465	23	2462.5-2467.5
2470	24	2467.5-2472.5
2475	25	2472.5-2477.5
2480	26	2477.5-2482.5



The channel mask is the name used to describe the list of frequency channels that a radio can use. The default channel mask for client radios allows them to operate on any frequency highlighted blue in the table above.

2.7 RF Exposure Limit Warning

To comply with FCC's RF exposure limits for general population / uncontrolled exposure, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

The above statement must be placed in the end-user's operating manual of finished products.

2.8 FCC Certification Requirements

This Device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

The above statement must be placed in the end-user's operating manual of finished products.

2.9 Warning (Part 15.21)

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The above statement must be placed in the end-user's operating manual of finished products.

2.10 Compliance Statement (Industry Canada)

IC – Canada. This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit
- (2) accepter tout brouillage radio électrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The above statement must be placed in the end-user's operating manual of finished products.

3 Installation

- **This module is limited to OEM installation only**
 - **OEM Integrators may not provide instructions for end user to remove/install module.**
 - **This module is to be installed only in mobile or fixed applications -- reference part 2.1091(b) for a definition of mobile and fixed devices.**
 - **Separate approval is required for all other operating configurations, including portable configurations with respect to 2.1093 and different antenna configurations.**

4 RF Exposure Limit Warning

To comply with FCC's RF exposure limits for general population / uncontrolled exposure, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter (must not transmit simultaneously with any other antenna or transmitter, except in accordance with FCC multi transmitter product procedures).

The above statement must be placed in the end-user's operating manual of finished products.

5 Host Manufacturer Statements

To ensure compliance with all non-transmitter functions the host manufacturer (ROAM/Acuity Brands Technical Services) is responsible for ensuring compliance with the module(s) installed and fully operational. For example, if a host was previously authorized as an unintentional radiator under the Declaration of Conformity procedure without a transmitter certified module and a module is added, the host manufacturer is responsible for ensuring that after the module is installed and operational the host continues to be compliant with the Part 15B unintentional radiator requirements. Since this may depend on the details of how the module is integrated with the host, the grantee (the party responsible for the module grant) shall provide guidance to the host manufacturer for compliance with the Part 15B requirements.

6 Import Statement

The FCC regulates marketing, sale and importation of radio frequency devices. When importing a radio frequency (RF) device the importer or ultimate consignee, or their designated broker, may be required to declare that the radiofrequency device meets the FCC importation conditions under Title 47 of the Code of Federal Regulation (CFR) Section 2.1204. ROAM/Acuity Brands Technical Services marks the master carton of all devices containing 2ADC-B-REG127 radios with the FCC ID and IC ID.

7 Module Labeling

A certified module has the option to use a permanently affixed label, or an electronic label (see 9. Electronic Labelling below). For a permanently affixed label, the module must be labelled with an FCC ID - Section 2.926. See section 1 above for figures instructing installation of permanently affixed label.



Label Size is 25 mm X 25 mm

8 Host Device Labeling

For a host using a certified module with a standard fixed label, if (1) the module's FCC ID is not visible when installed in the host, or (2) if the host is marketed so that end users do not have straightforward commonly used methods for access to remove the module so that the FCC ID and IC IDs of the module are visible; then an additional permanent label referring to the enclosed module: "Contains Transmitter Module FCC ID: 2ADCB-REG127 and IC: 6715C-REG127" or "Contains FCC ID: 2ADCB-REG127 and IC: 6715C-REG127" must be used. The host OEM user manual must also contain clear instructions on how end users can find and/or access the module and the FCC ID. See section 1 above for figures depicting the FCC ID and IC ID that must be affixed to the exterior of the host device into which the 2ADCB-REG127 module will be installed.
