

TEST REPORT NO: RU1189/6473

COPY NO: <u>1</u>

ISSUE NO: 1

FCC ID:

REPORT ON THE CERTIFICATION TESTING OF AERIAL FACILITIES LIMITED 60-056101 and 60-056102 WITH RESPECT TO THE FCC RULES CFR 47, PART 90 SUBPART I

NEOCE-470BDA

TEST DATE: 12th – 16th July 2005

TESTED B	Y:		J CHARTERS
APPROVE	D BY:		P GREEN PRODUCT MANAGER EMC
DATE:		1 st December 2005	
Distribution:			
Copy Nos:	1.	Aerial Facilities Limited	
	2.	TCB: TRL Compliance Services Limited.	
	3.	TRL EMC	

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

 TRL COMPLIANCE SERVICES LTD EMC DIVISION

 LONG GREEN
 FORTHAMPTON
 GLOUCESTER
 GL19 4QH
 UNITED KINGDOM

 TELEPHONE
 +44
 (0)1684
 833818
 FAX
 +44
 (0)1684
 833858

 E-MAIL
 test@trlcompliance.com
 www.trlcompliance.com



FS 21805

CONTENTS

	PAGE
CERTIFICATE OF CONFORMITY & COMPLIANCE	3
APPLICANT'S SUMMARY	4
EQUIPMENT TEST CONDITIONS	5
TESTS REQUIRED	5
TEST RESULTS	6-60

	ANNEX	
PHOTOGRAPHS	А	
PHOTOGRAPH No. 1: Test setup		
PHOTOGRAPH No. 2: Test setup		
TEST EQUIPMENT CALIBRATION DETAILS	В	
SYSTEM DIAGRAM	С	
Notes: 1. Component failure during test	YES NO	[] [X]

2. If Yes, details of failure:

3. The facilities used for the testing of the product contain in this report are FCC Listed.



CERTIFICATE OF CONFORMITY & COMPLIANCE NEOCE-470BDA

Compliant to Specification

60-056101 and 60-056102

FCC RULES CFR 47, PART 90 SUBPART I

Downlink: 470MHz: 38.4dBm 483MHz :44.3dBm

Up Link: 473MHz: 59.01dBm 486MHz : 49.3dBm

Certification

Booster

FCC IDENTITY:

PURPOSE OF TEST:

TEST SPECIFICATION:

TEST RESULT:

EQUIPMENT UNDER TEST:

EQUIPMENT TYPE:

MAXIMUM GAIN

MAXIMUM INPUT

MAXIMUM OUTPUT

CHANNEL SPACING:

NUMBER OF CHANNELS:

FREQUENCY GENERATION:

MODULATION TYPE:

POWER SOURCE(s):

TEST DATE(s):

ORDER No(s):

APPLICANT:

ADDRESS:

Downlink: 470MHz: -6dBm 483MHz:-7dBm Uplink: 473MHz: -74dBm 486MHz:-64dBm Downlink: 470MHz: 32.4dBm 483MHz:37.3dBm Uplink: 473MHz: -14.99dBm 486MHz:-14.7dBm 25kHz Downlink 470MHz band Down Link 483MHz Band 470.2625MHz 483.3125MHz 470.2125MHz 483.2875MHz 483.0625MHz 483.5625MHz 482.2375MHz Uplink 473MHz Band Uplink 486MHz Band 473.2625MHz 486.3125MHz 473.2125MHz 486.2875MHz 486.0625MHz 486.5625MHz 485.2375MHz N/A F3F 110Vac $12^{th} - 16^{th}$ July 2005 31474 Aerial Facilities Limited Aerial House Asheridge Road Chesham Buckinghamshire HP5 1TU United Kingdom

TESTED BY:

APPROVED BY:

J CHARTERS

P GREEN PRODUCT MANAGER EMC Page 3 of 67

RU1189/6473

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT):	60-056101 and 60-056102(Downlink only)
EQUIPMENT TYPE:	Booster
PURPOSE OF TEST:	Certification
TEST SPECIFICATION(s):	FCC RULES CFR 47, PART 90 SUBPART I
TEST RESULT:	COMPLIANT Yes [X] No []
APPLICANT'S CATEGORY:	MANUFACTURER[X]IMPORTER[DISTRIBUTOR[TEST HOUSE[AGENT[
APPLICANT'S ORDER No(s):	31474
APPLICANT'S CONTACT PERSON(s):	Mr Peter Bradfield
E-mail address:	Peterb@aerial.co.uk
APPLICANT:	Aerial Facilities Limited
ADDRESS:	Aerial House Asheridge Road Chesham Buckinghamshire HP5 1TU United Kingdom
TEL:	+44 (0)1494 777000
FAX:	+44 (0)1494 778456
MANUFACTURER:	Aerial Facilities Limited
EUT(s) COUNTRY OF ORIGIN:	United Kingdom
TEST LABORATORY:	TRL EMC
UKAS ACCREDITATION No:	0728
TEST DATE(s)	12 th – 16 th July 2005
TEST REPORT No:	RU1189/6473

EQUIPMENT TEST / EXAMINATIONS REQUIRED

1	
	٠

TEST/EXAMINATION	RULE PART	APPLICABILITY	RESULT
RF Gain	90.205 2.1046	Yes	Complies
Audio Frequency Response	TIA EIA-603.3.2.6	N/A	N/A
Audio Low-Pass Filter Response	TIA EIA-603.3.2.6	N/A	N/A
Modulation Limiting	TIA EIA-603.3.2.6	N/A	N/A
Occupied Bandwidth	90.210 2.1049	Yes	Complies
Spurious Emissions at Antenna Terminals	90.210	Yes	Complies
Field Strength of Spurious Emissions	90.210 2.1053	Yes	Complies
Frequency Stability	90.213	N/A	N/A (Note 1)
Transient behaviour	90.214	N/A	N/A (Note 1)

Notes:

1 The EUT does not contain modulation circuitry, therefore the test was not performed.

2 The EUT does not contain any switching circuitry, therefore the test was not performed.

2.	Product Use:	Cell enhancer	
3.	Emission Designator:	F3E	
4.	Temperatures:	Ambient (Tnom)	26°C
5.	Supply Voltages:	Vnom	110Vac

Note: Vnom voltages are as stated above unless otherwise shown on the test report page

6.	Equipment Category:	Single channel Two channel Multi-channel	[] [] [X]
7.	Channel spacing:	Narrowband Wideband	[X] []
8.	Test Location	TRL Compliance Services Up Holland Long Green	[X] []

- 9. Modifications made during test program
- 10. System description

No modifications were performed.

The 60-056101 and 60-56102 are intended to be used as part of a larger system. They are broadband boosters with the channel filtering occurring at the above ground air interface. See Annex C for a system diagram.

COMPLIANCE TESTS


TRANSMITTER TEST - GAIN - CONDUCTED - PART 2.1046 - DOWNLINK

Ambient temperature Relative humidity Supply voltage Channel number = 18°C

= 41%

= 110Vac

= See test results




Radio Laboratory

Frequency MHz	Signal Generator Input Level dBm	Cable & attenuator Loss dB	Level at Spectrum Analyser dBm	Gain dB	Gain after 10dB increase input signal level dBm	Measured Output power dBm
469.5	-6.0	46.6	-15.76	36.84	29.5	30.84
469.95	-6.0	46.6	-15.71	36.89	28.5	30.89
470.4	-6.0	46.6	-14.2	38.4	29.0	32.4
482.2	-7.0	46.6	-9.46	44.14	37.4	37.14
482.9	-7.0	46.6	-9.27	44.33	37.8	37.33
483.6	-7.0	46.6	-10.8	42.8	36.95	35.8

The test was setup as above. The signal generator was to simulate an input signal to the system from a transmitter and the analyzer used to obtain the output level from the system.

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS266C	MT26089	479	х
ATTENUATOR	BIRD	8302	N/A	105	х
ATTENUATOR	BIRD	8304-300-N	N/A	220	x
CABLE	ROSENBERGER	MICRO COAX	N/A	280	x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	x

TRANSMITTER TEST - INTERMODULATION SPURIOUS EMISSIONS – CONDUCTED – PART 2.1053– DOWNLINK

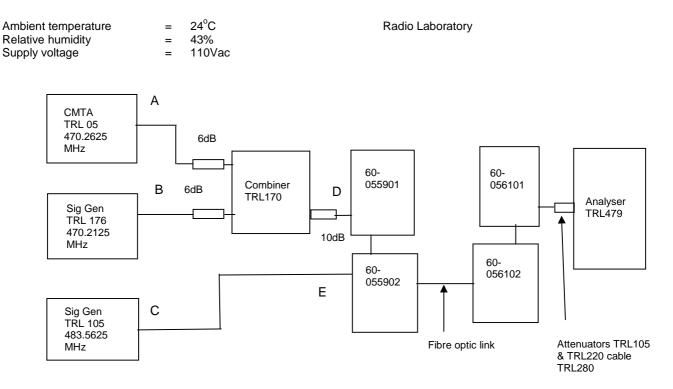


Due to the fact that the units under test will only ever be operated as a system with the channel filters contained with in units 60-055901 and 60-55902. The intermodulation products test was performed as a system. The diagram above show the setup that produced the worst case products. The intermodulation and spurious products were measured with the fibre optic system operating at maximum input level. A three tone test was conducted using the equipment as above. The input power level was adjusted so the level at point D was the maximum input -52dBm and at point E was the maximum input of -62.0dBm.

Sweep data is shown on the next page: See Annex C for system diagram.

Test equipment used for intermodulation test

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	x
SIGNAL GENERATOR	MARCONI	2042	119562/02	254	x
СМТА	ROHDE & SCHWARZ	CMTA52	894715/033	05	x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	x
COMBINER	ELCOM	RC-4-50	N/A	170	x

Intermodulation Inband

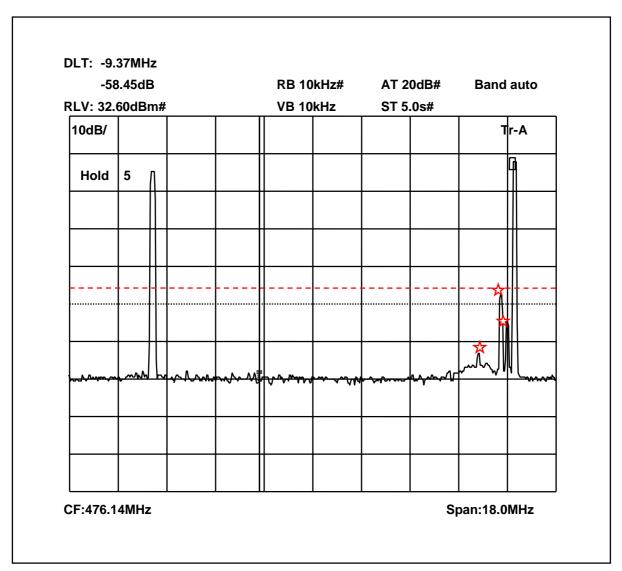

The above plot shows that all products (designated by \uparrow) are at least 5dB below the spurious limit. Based the 10dB above the on the -62dBm and -72dBminput to the system.

Intermodulation Wideband

22	.00dBm			F	B 10	kHz#		AT 20)dB#	Band	auto
LV: 32.0	60dBm#			VB 10kHz			ST 5.0s#				
10dB/										Т	r-A
Hold	66										
~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~~~~~	~~~~~~	Mm.	~~			Ĺ	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	w.m.M	hmm	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~

CF:476.1MHz

Span:100MHz

The above plot shows that all products (designated by  $\uparrow$ ) are at least 10dB below the spurious limit. Based the 10dB above the on the -62dBm and -72dBminput to the system.

### **TRANSMITTER TESTS**

Radio Laboratory


### MODULATED BANDWIDTH TEST - CONDUCTED - Part 2.1049- DOWNLINK

Ambient temperature	
Relative humidity	
Supply voltage	
Channel number	

18°C = 40% =

110Vac =

See test results =




This test was performed to show that the fibre optic system does not alter the input signal in any way. The input signal was set to the maximum input level (-6dBm) and modulated with a 2500Hz tone. The plots show the signal measured at the signal generator and the signal measured at the output of the EUT.

Note: The cables and attenuators had the following losses.


- Cable TRL280 and Attenuators TRL220, TRL 105 between EUT and spectrum analyser= 46.6dB 1.
- Cable between signal generator and EUT = 0.22dB 2.

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	x
ATTENUATOR	BIRD	8304-200	N/A	105	х
ATTENUATOR	BIRD	8304-300-N	N/A	220	х
CABLE	ROSENBERGER	MICRO COAX	N/A	280	x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	х

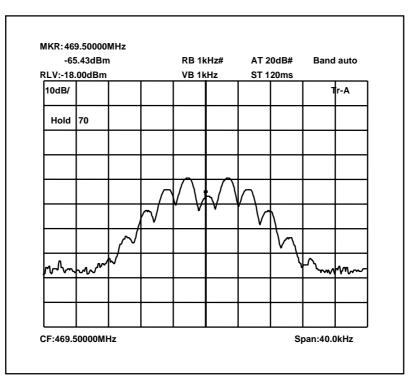


469.50MHz Signal Generator deviation set to 5kHz


469.50MHz Signal Generator and amplifier deviation set to 5kHz

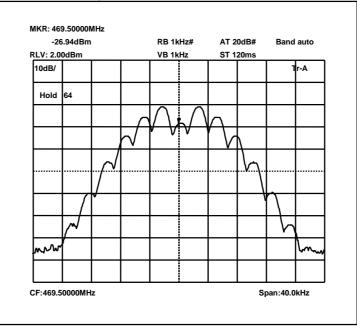


469.95MHz Signal Generator deviation set to 5kHz

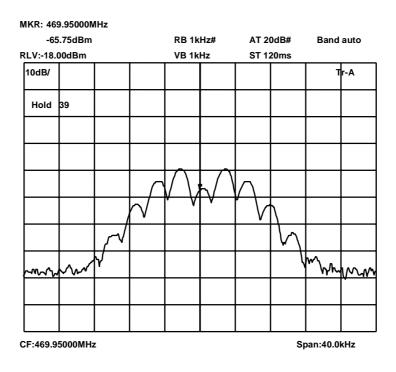


469.95MHz Signal Generator and amplifier deviation set to 5kHz

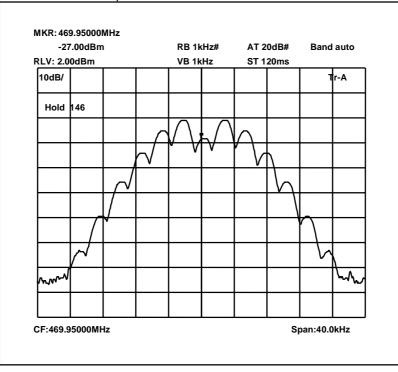


470.4MHz Signal Generator deviation set to 5kHz

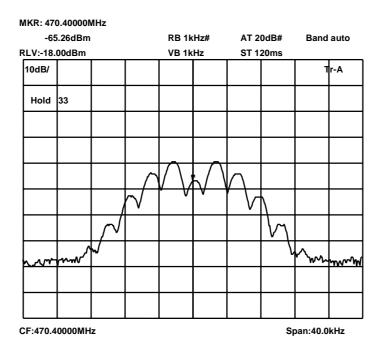


470.4MHz Signal Generator and amplifier system deviation set to 5kHz

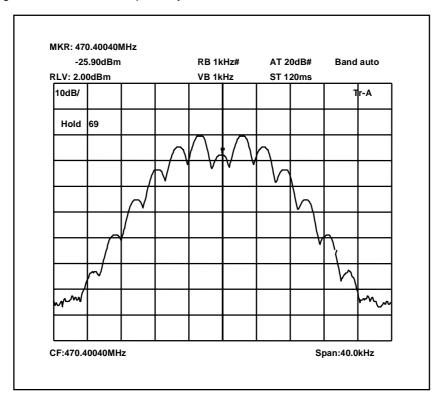


## 482.2375MHz Signal Generator deviation set to 5kHz

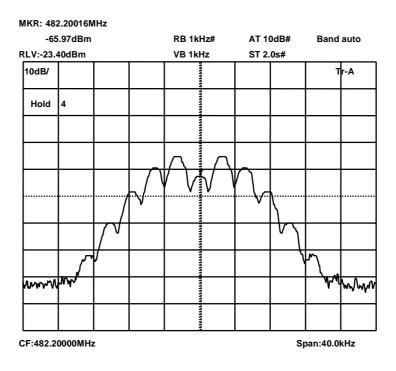


482.2375MHz Signal Generator and amplifier system deviation set to 5kHz

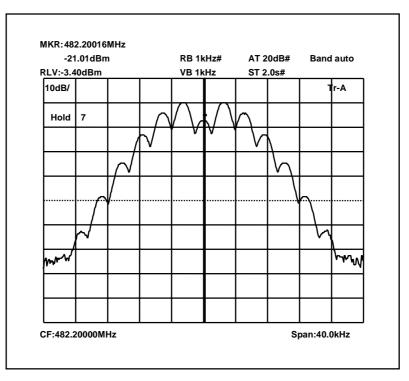


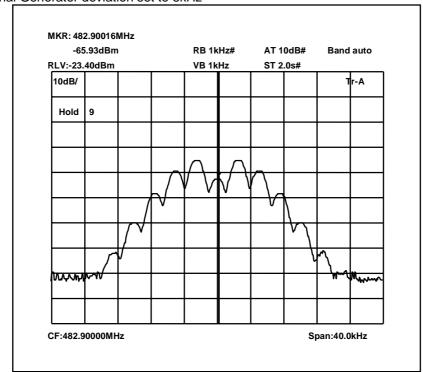

### 482.9MHz Signal Generator deviation set to 5kHz


482.9MHz Signal Generator and amplifier system deviation set to 5kHz

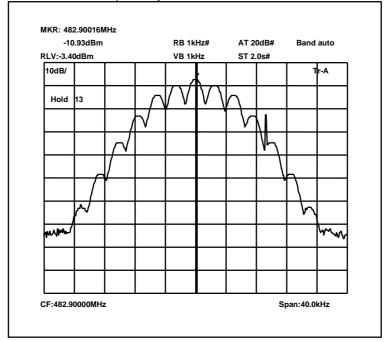

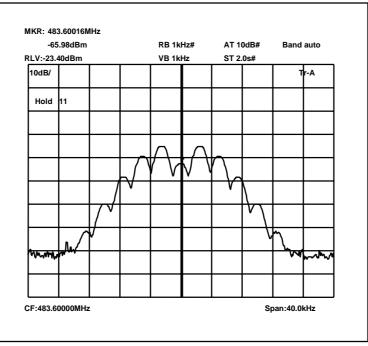

## 483.6MHz Signal Generator deviation set to 5kHz

483.6MHz Signal Generator and amplifier system deviation set to 5kHz

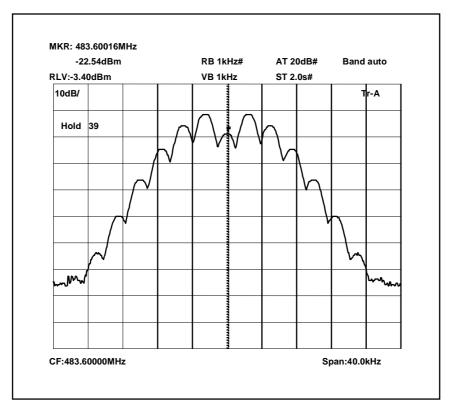


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

RU1189/6473

#### TRANSMITTER TESTS

### TRANSMITTER SPURIOUS EMISSIONS - CONDUCTED - Part 2.1053 - DOWNLINK

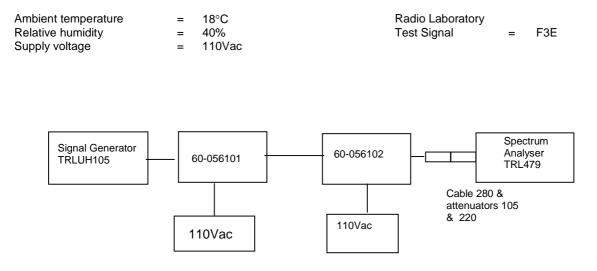

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating at maximum power and on three test frequencies.

The spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least 43 + 10 log PdB

(10logP_{watts}) - (43+10log (P_{watts} * 1000)) = LIMIT =-13 dBm

Results

No significant emissions we detected within 20dBm of limit.


The test equipment used for the Transmitter Conducted Emissions:


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	x
ATTENUATOR	BIRD	8304-200	N/A	105	x
ATTENUATOR	BIRD	8304-300-N	N/A	220	x
CABLE	ROSENBERGER	MICRO COAX	N/A	280	x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	x

### Conducted emissions 469.5 MHz 0-2 GHz

-68.06d	Bm		RB 10	0kHz#	AT 2	0dB#	Band	auto
LV: 2.00dBn	n		VB 10	0kHz	ST 6	00ms		
10dB/							т	r-A
Hold 47								
							~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	
		 040 ml m	~~~~~					
T:0Hz						SP:2.000		


Conducted emissions 469.5MHz 2-5 GHz

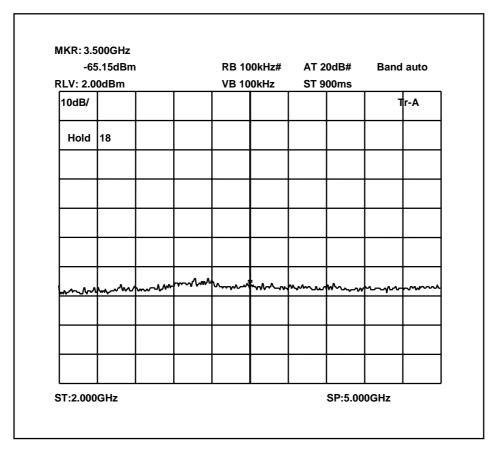


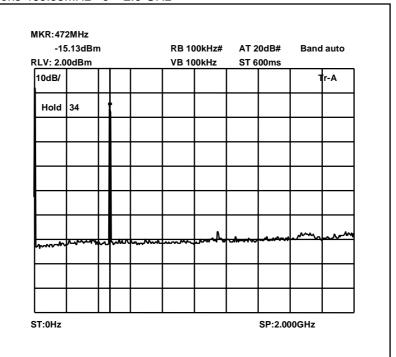

Conducted emissions 469.95MHz 0 - 2.0 GHz


Conducted emissions 469.95MHz 2.0 - 5.0 GHz

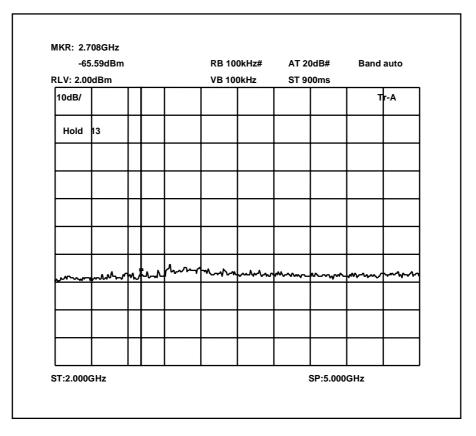

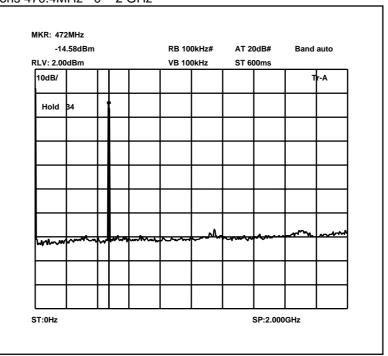


Conducted emissions 470.4MHz 0-2 GHz


Conducted emissions 470.4MHz 2-5 GHz

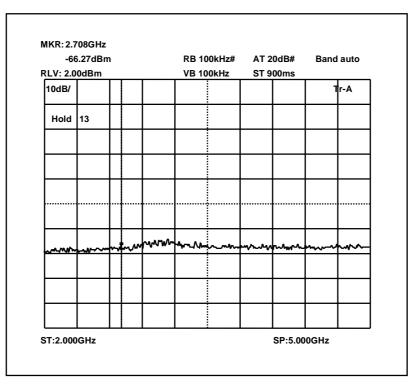


Conducted emissions 482.2MHz 0 - 2 GHz

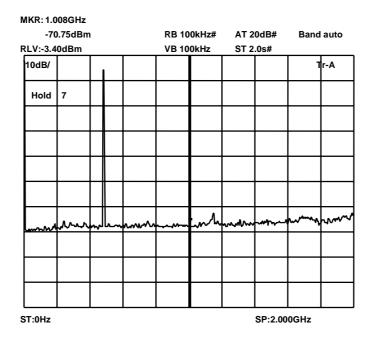


Conducted emissions 482.2MHz 2-5 GHz

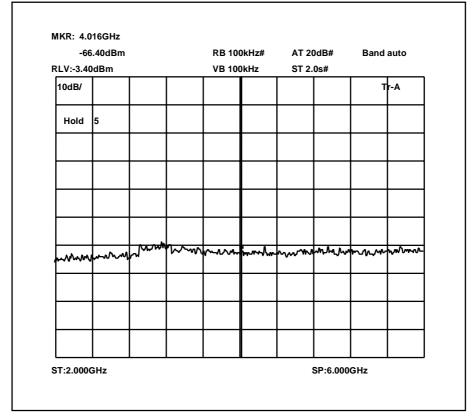

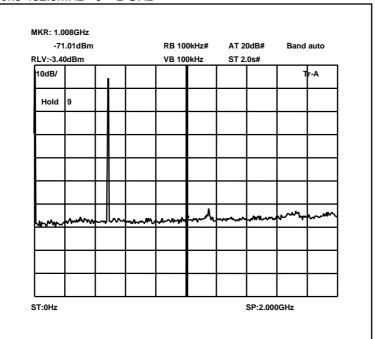


Conducted emissions 482.9MHz 0 - 2 GHz


Conducted emissions 482.9MHz 2-5 GHz

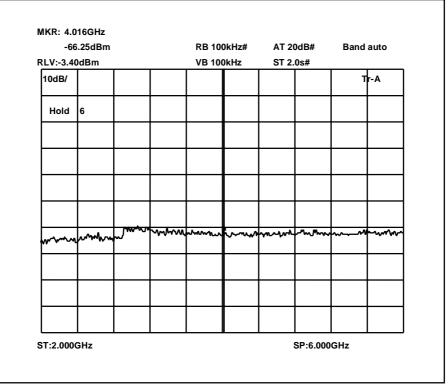

Conducted emissions 483.6MHz 0 - 2 GHz

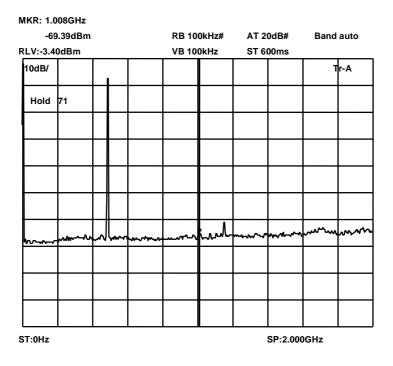


Conducted emissions 483.6MHz 2-5 GHz

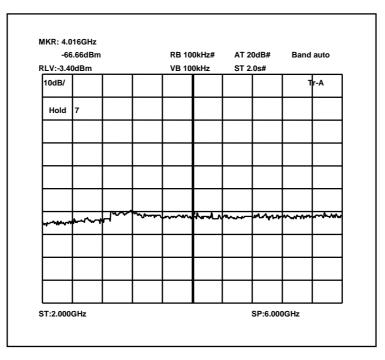

RU1189/6473

TRANSMITTER TESTS

TRANSMITTER SPURIOUS EMISSIONS - RADIATED - Part 2.1053- DOWNLINK

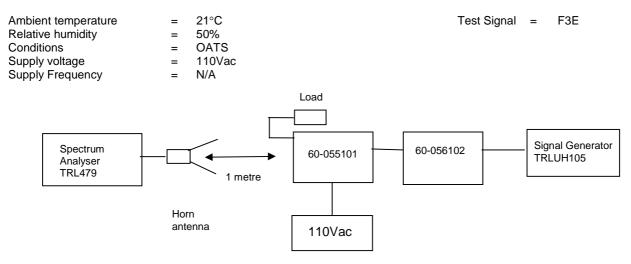

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output. The unit was also tested with the signal generator replaced by another 50 ohm load.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least 43 + 10 log PdB

 $(10logP_{watts}) - (43+10log (P_{watts} * 1000)) = LIMIT = -13 dBm$


Test result

No significant emissions with 20dBm of limit.


The test equipment used for the Transmitter Spurious Emissions:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	x
HORN	EMCO	3115	9010-3581	139	x
ATTENUATOR	BIRD	8304-300-N	N/A	220	x
ATTENUATOR	BIRD	8308-100	N/A	112	x
CABLE	ROSENBERGER	MICRO COAX	N/A	280	x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	х

Radiated emissions 469.50MHz 0 - 2GHz

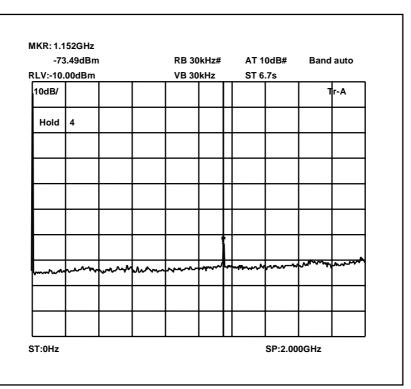


Radiated emissions 469.5 MHz 2-5GHz

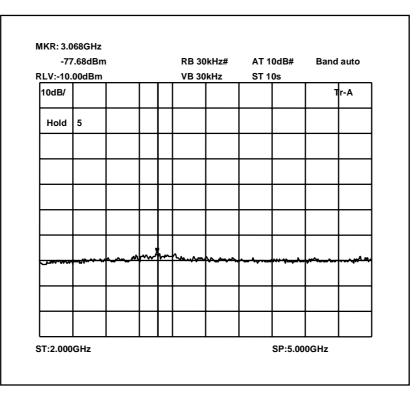


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

RU1189/6473


Radiated emissions 469.95MHz 0 -2GHz

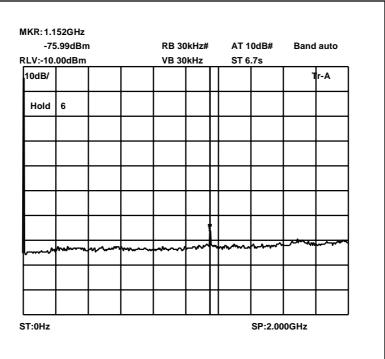


Radiated emissions 469.95MHz 2-5 GHz

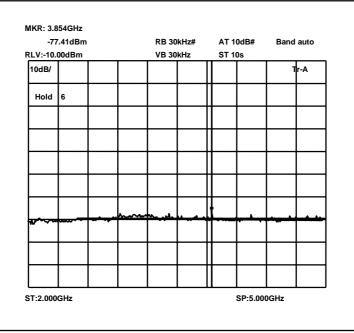



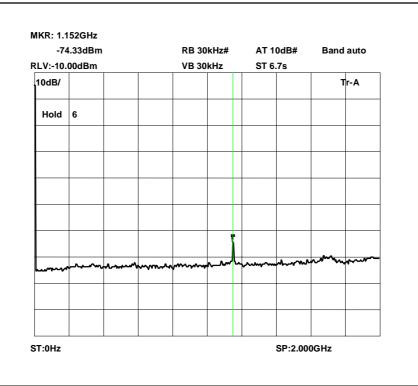


Radiated emissions 470.4MHz 2 - 5GHz

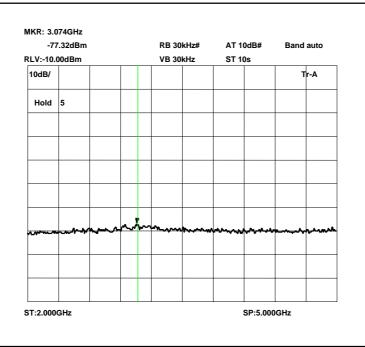


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

RU1189/6473


Radiated emissions 482.2MHz 0 -2 GHz

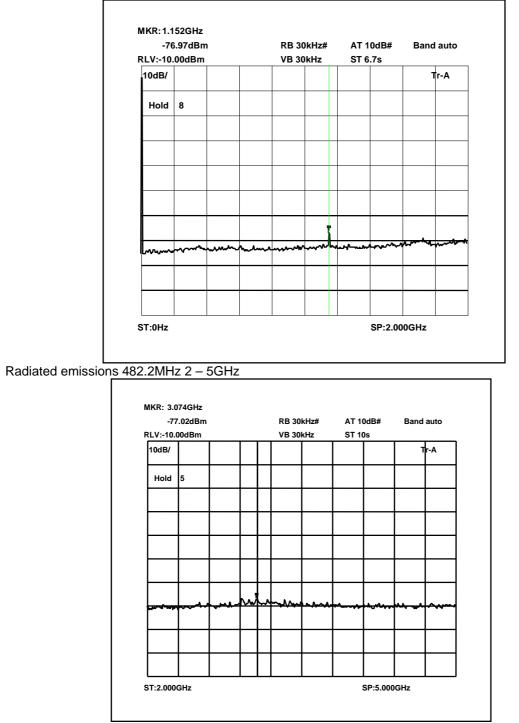




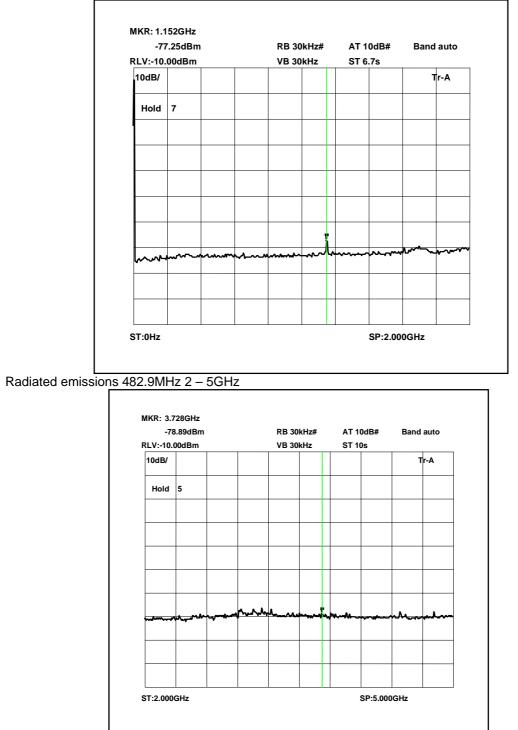




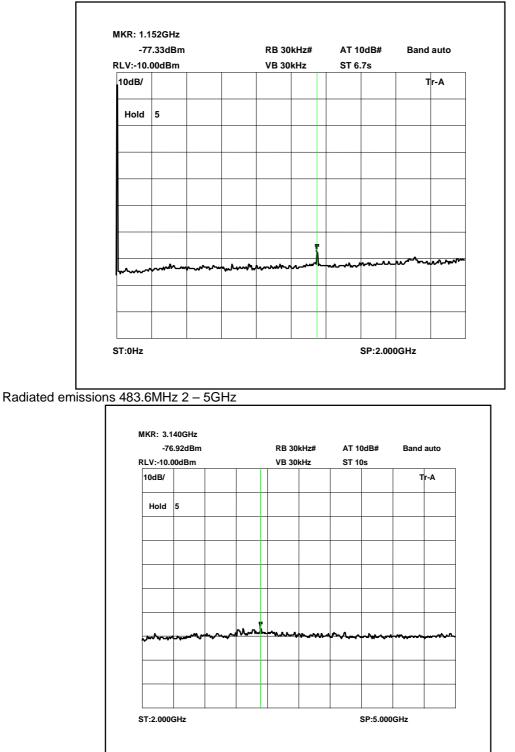

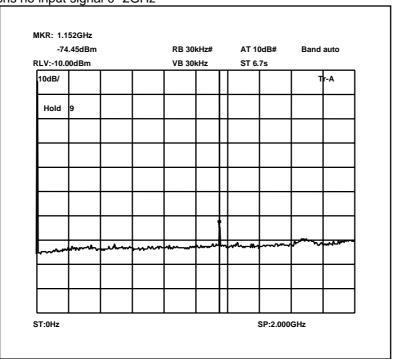

Radiated emissions no input signal 0 -2GHz

Radiated emissions no signal 2-5 GHz

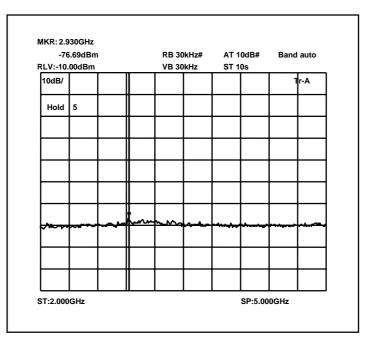

TRANSMITTER TEST - GAIN - CONDUCTED - PART 2.1046 - UPLINK

Ambient temperature Relative humidity

24°C =


Radio Laboratory

53% =

Supply voltage Channel number

110Vac =

= See test results




Frequency MHz	Signal Generator Input Level dBm	Cable Loss dB	Level at Spectrum Analyser dBm	Gain dB	Gain after 10dB increase input signal level dBm	Measured Output power dBm
473.2125	-74.0	0.3	-15.35	58.95	48.95	-15.05
473.2375	-74.0	0.3	-15.36	58.94	48.97	-15.06
473.2625	-74.0	0.3	-15.29	59.01	49.05	-14.99
485.2375	-63.0	0.3	-14.26	49.04	39.14	-13.96
485.9000	-64.0	0.3	-14.95	49.35	39.88	-14.65
486.5625	-62.0	0.3	-13.08	49.22	39.69	-12.78

The test was setup as above. The signal generator was to simulate an input signal to the system from a transmitter and the analyzer used to obtain the output level from the system.

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS266C	MT26089	479	х
ATTENUATOR	BIRD	8302	N/A	105	
ATTENUATOR	BIRD	8304-300-N	N/A	220	
CABLE	ROSENBERGER	MICRO COAX	N/A	280	х
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	х

TRANSMITTER TEST - INTERMODULATION SPURIOUS EMISSIONS - CONDUCTED - PART 2.1053- UPLINK

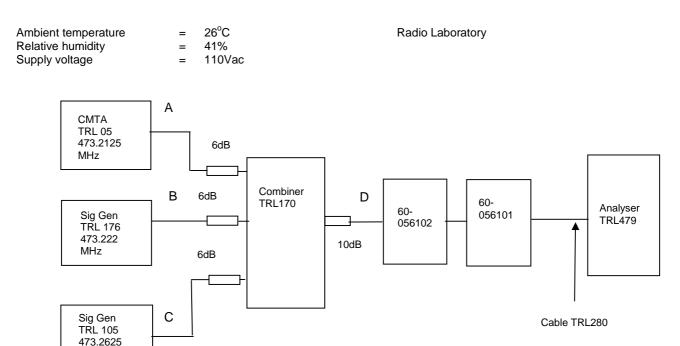


The intermodulation products test was performed as a system. The intermodulation and spurious products were measured with the fibre optic system operating at maximum input level. A three tone test was conducted using the equipment as above. The input power level was adjusted so the level at point D was the maximum input -62dBm.

Test result: Measured as compliant Sweep data is shown on the next page


MHz

Test equipment used for intermodulation test

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	x
SIGNAL GENERATOR	MARCONI	2042	119562/02	254	x
СМТА	ROHDE & SCHWARZ	CMTA52	894715/033	05	x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	x
COMBINER	ELCOM	RC-4-50	N/A	170	x

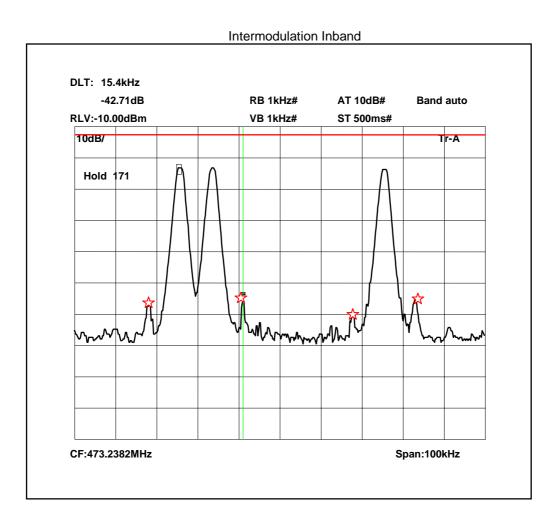


The above plot shows that all products (designated by☆) are at least 40dB below the spurious limit. Based on -62dBm input to the system.

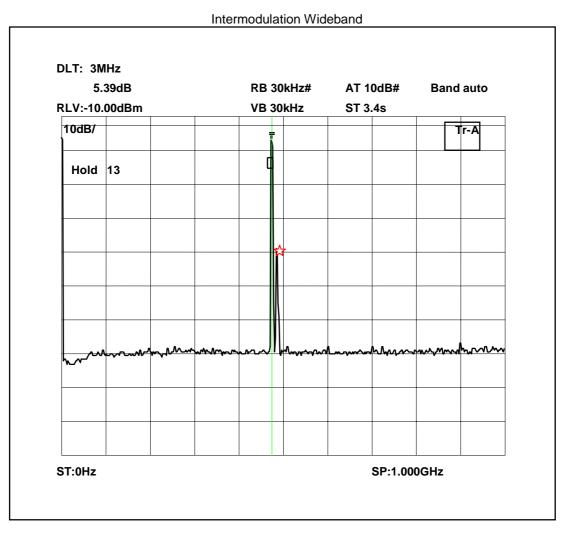

The above plot shows that all products (designated by x) are at least 30dB below the spurious limit.

Based on -62dBm input to the system

TRANSMITTER TEST - INTERMODULATION SPURIOUS EMISSIONS - CONDUCTED - PART 2.1053- UPLINK

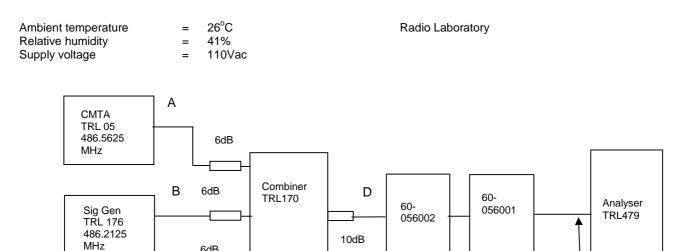

The intermodulation products test was performed as a system. The intermodulation and spurious products were measured with the fibre optic system operating at maximum input level. A three tone test was conducted using the equipment as above. The input power level was adjusted so the level at point D was the maximum input -51dBm.

Test result: Measured as compliant Sweep data is shown on the next page

Sig Gen

TRL 105 485.2375 MHz

6dB

С


Test equipment used for intermodulation test

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	x
SIGNAL GENERATOR	MARCONI	2042	119562/02	254	x
СМТА	ROHDE & SCHWARZ	CMTA52	894715/033	05	x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	x
COMBINER	ELCOM	RC-4-50	N/A	170	x


RU1189/6473

Cable TRL280

Intermodulation Inband

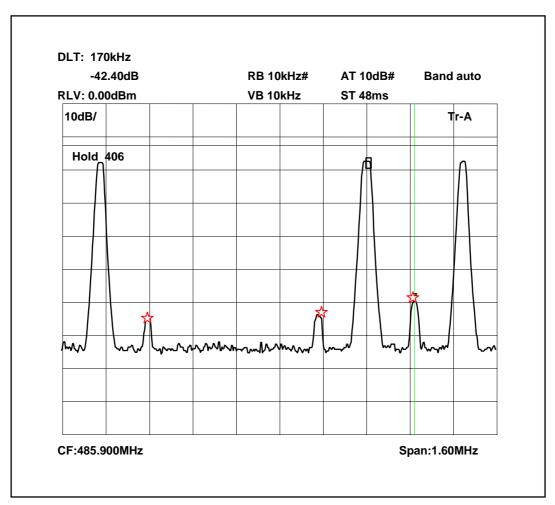

The above plot shows that all products (designated by☆) are at least 40dB below the spurious limit. Based on -51dBm input to the system.

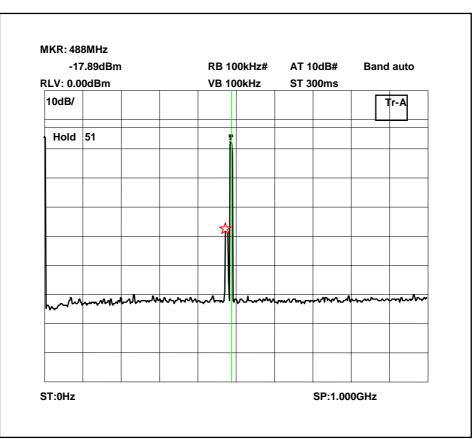

Intermodulation Wideband

The above plot shows that all products (designated by Ar) are at least 30dB below the spurious limit.

Based on -51dBm the input to the system.

TRANSMITTER TESTS


MODULATED BANDWIDTH TEST – CONDUCTED – Part 2.1049– UPLINK

Ambient temperature
Relative humidity
Supply voltage
Channel number

= 18°C = 40%

= 110Vac

= See test results




Radio Laboratory

This test was performed to show that the fibre optic system does not alter the input signal in any way. The input signal was set to the maximum input level and modulated with a 2500Hz tone. The plots show the signal measured at the signal generator and the signal measured at the output of the EUT. Input level 470MHz -74dBm Input level 480Mhz -62dBm

Note: The cables and attenuators had the following losses.


- 1. Cable TRL280 between EUT and spectrum analyser= 0.3dB
- 2. Cable between signal generator and EUT = 0.22dB


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C MT26089		479	х
ATTENUATOR	BIRD	8304-200	N/A	105	x
ATTENUATOR	BIRD	8304-300-N	N/A	220	х
CABLE	ROSENBERGER	MICRO COAX	N/A 280		x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	x

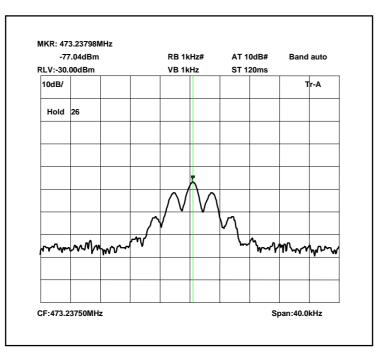

473.2125MHz Signal Generator deviation set to 5kHz


473.2125MHz Signal Generator and amplifier deviation set to 5kHz

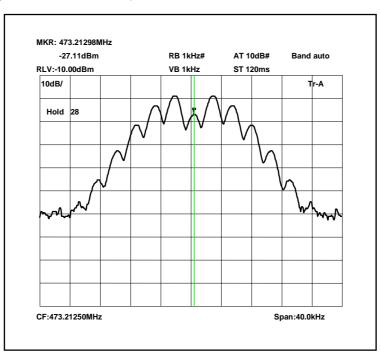


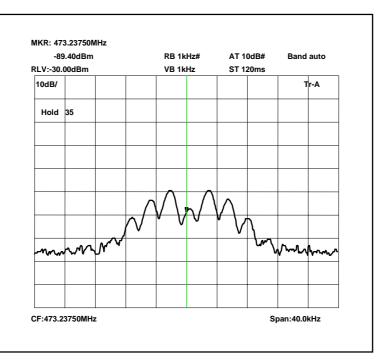


473.2375MHz Signal Generator deviation set to 5kHz


473.2375MHz Signal Generator and amplifier deviation set to 5kHz

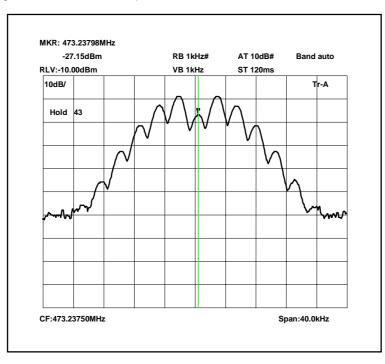




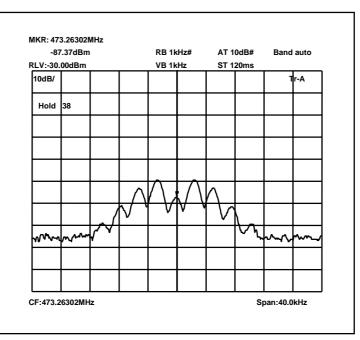


473.2625MHz Signal Generator and amplifier system deviation set to 5kHz

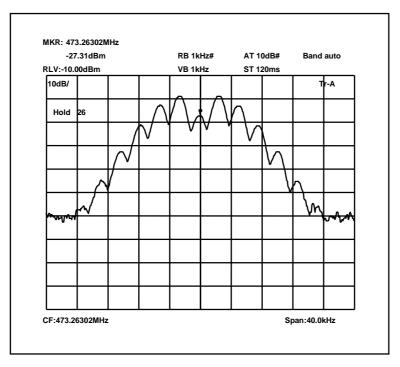


485.2375MHz Signal Generator deviation set to 5kHz

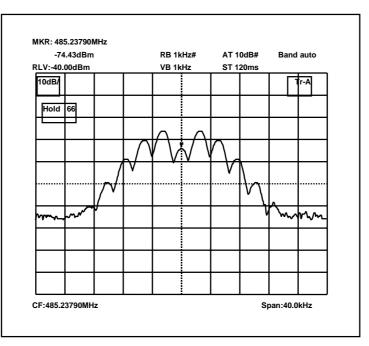


485.2375MHz Signal Generator and amplifier system deviation set to 5kHz

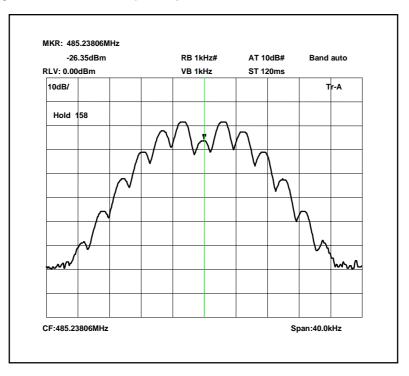


485.900MHz Signal Generator deviation set to 5kHz




485.900MHz Signal Generator and amplifier system deviation set to 5kHz

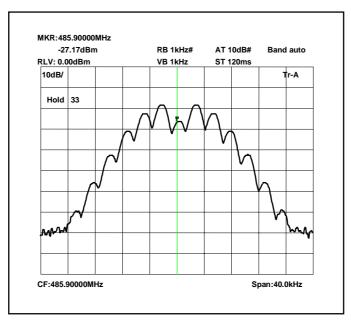

486.5625MHz Signal Generator deviation set to 5kHz




4865625MHz Signal Generator and amplifier system deviation set to 5kHz



TRANSMITTER TESTS

TRANSMITTER SPURIOUS EMISSIONS - CONDUCTED - Part 2.1053 - UPLINK

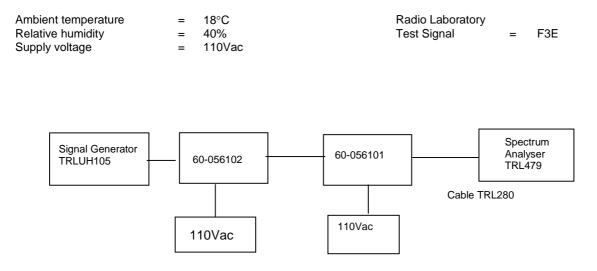

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating at maximum power and on three test frequencies.

The spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least 43 + 10 log PdB

(10logP_{watts}) - (43+10log (P_{watts} * 1000)) = LIMIT =-13 dBm


Results

No significant emissions we detected within 20dBm of limit.


The test equipment used for the Transmitter Conducted Emissions:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C	IS2665C MT26089		x
ATTENUATOR	BIRD	8304-200	N/A	105	
ATTENUATOR	BIRD	8304-300-N	300-N N/A		
CABLE	ROSENBERGER	MICRO COAX	N/A 280		x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	х


Conducted emissions 473.2115MHz 0 - 2 GHz

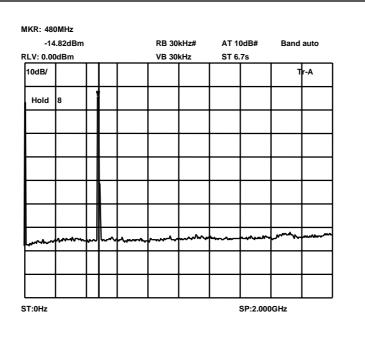

Conducted emissions 473.2115MHz 2-5 GHz

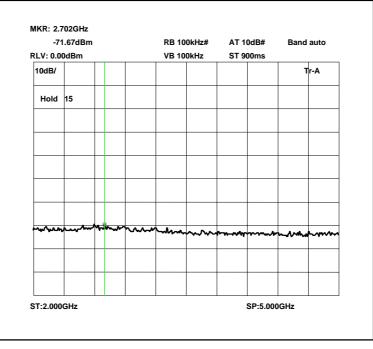



RU1189/6473

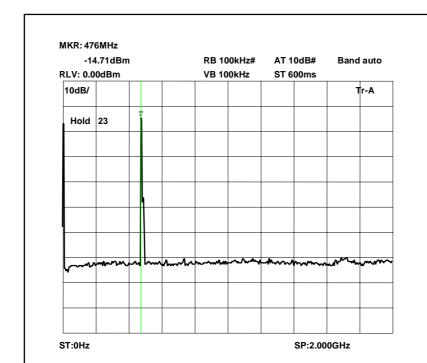

Conducted emissions 473.2375MHz 0 - 2.0 GHz


Conducted emissions 473.2375MHz 2.0 - 5.0 GHz

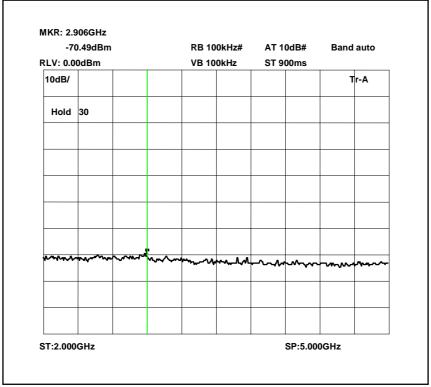


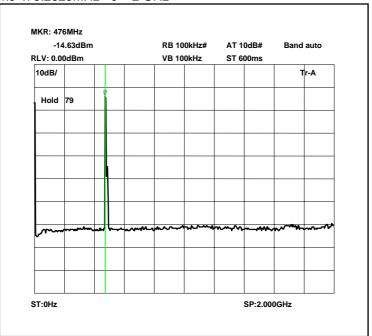

Conducted emissions 473.2625MHz 0 - 2 GHz


Conducted emissions 473.2625MHz 2-5 GHz

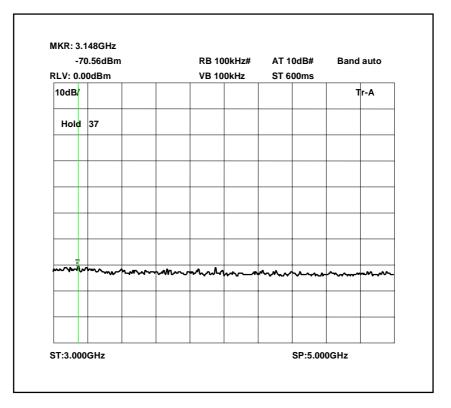

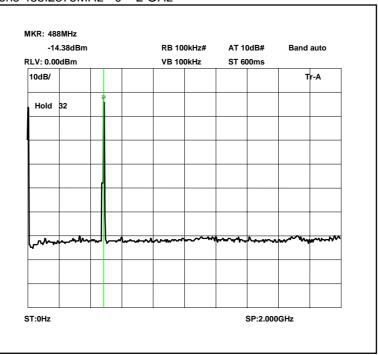


Conducted emissions 485.2375MHz 0 - 2 GHz


Conducted emissions 485.2375MHz 2-5 GHz

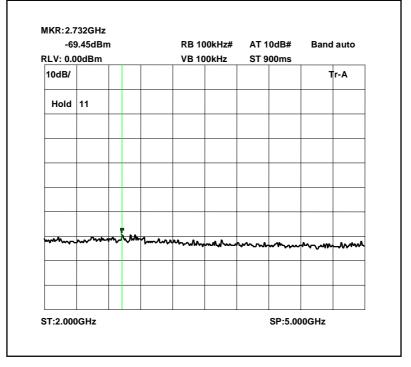




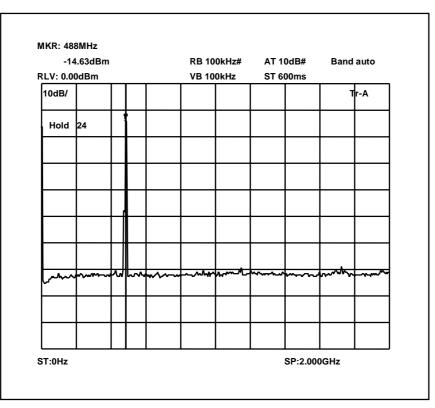


Conducted emissions 485.900MHz 2-5 GHz

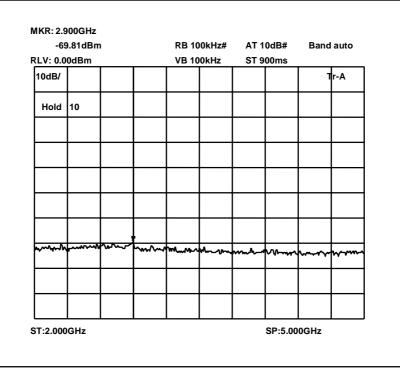

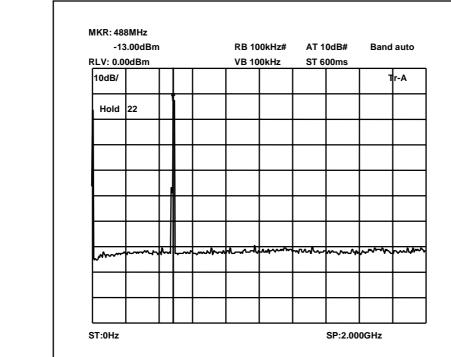


Conducted emissions 486.5625MHz 0 - 2 GHz

Conducted emissions 486.5625MHz 2 - 5 GHz

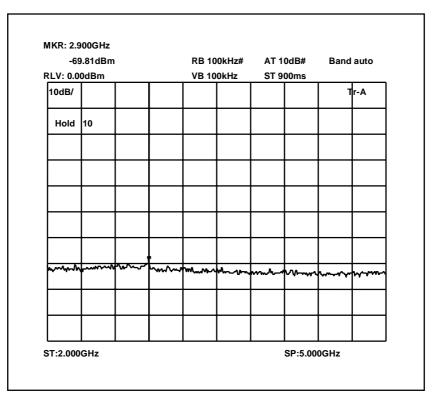

TRANSMITTER TESTS

TRANSMITTER SPURIOUS EMISSIONS - RADIATED - Part 2.1053- UPLINK

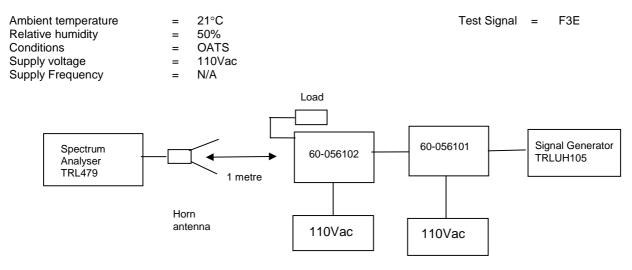

The test was set up as per the diagram. The level at the input was adjusted to compensate for the loss of the interconnecting cable. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output. The unit was also tested with the signal generator replaced by another 50 ohm load.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least 43 + 10 log PdB

 $(10logP_{watts}) - (43+10log (P_{watts} * 1000)) = LIMIT = -13 dBm$


Test result

No significant emissions with 20dBm of limit.


The test equipment used for the Transmitter Spurious Emissions:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	MODEL No SERIAL No TR		ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	ANRITSU	MS2665C MT26089		479	x
HORN	EMCO	3115	9010-3581	139	x
ATTENUATOR	BIRD	8304-300-N	N/A	220	x
ATTENUATOR	BIRD	8308-100	N/A	112	x
CABLE	ROSENBERGER	MICRO COAX	N/A 280		x
SIGNAL GENERATOR	MARCONI	2023	112224/040	UH105	х


Radiated emissions 473.2125MHz 0 - 2GHz

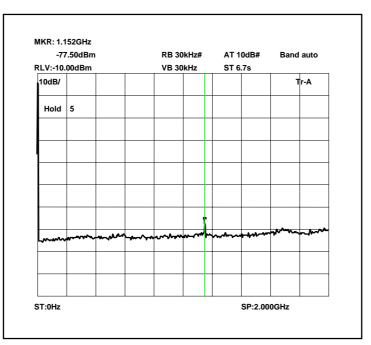


Radiated emissions 473.2125MHz 2-5GHz

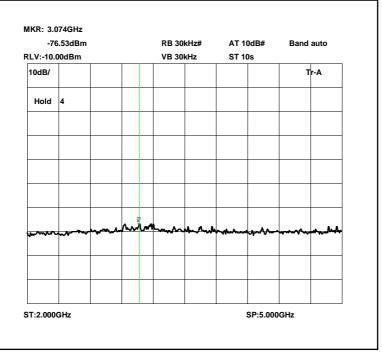

Radiated emissions 473.2MHz 0 -2GHz

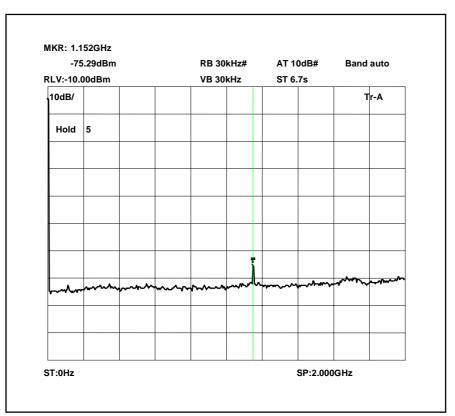


Radiated emissions 473.2MHz 2-5 GHz

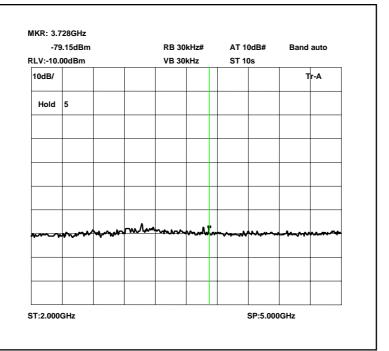


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

RU1189/6473


Radiated emissions 473.2525MHz 0 -2 GHz




Radiated emissions 473.2525MHz 2 - 5GHz

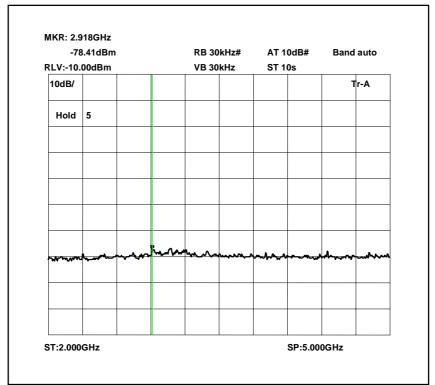


Radiated emissions 485.2375MHz 0 -2 GHz

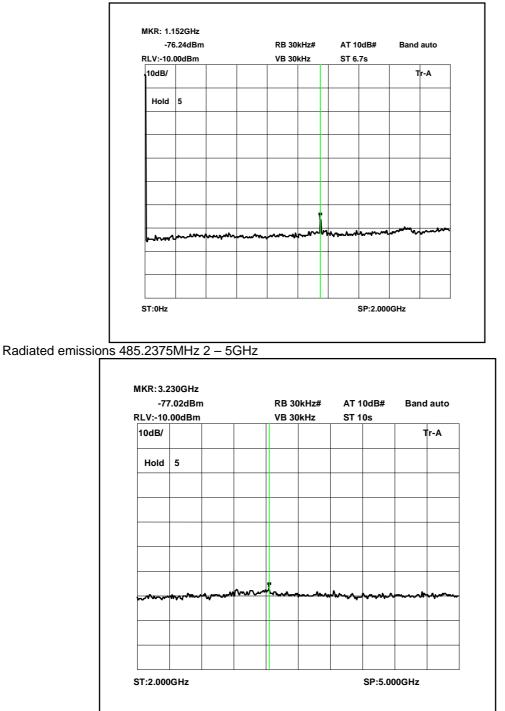



Radiated emissions 485.9MHz 0 -2 GHz

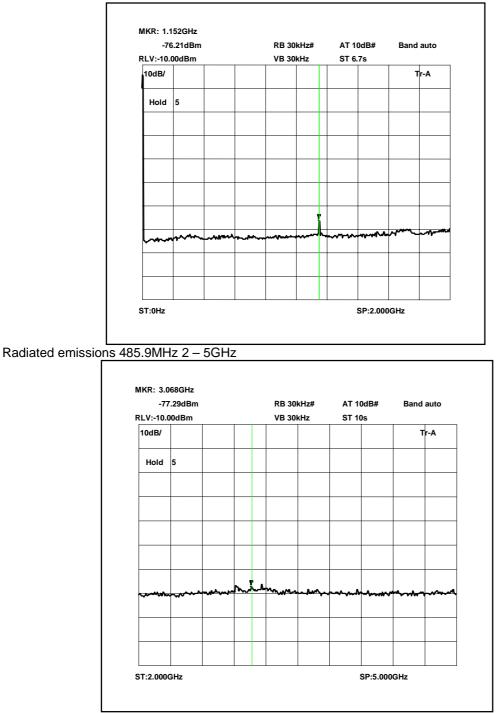

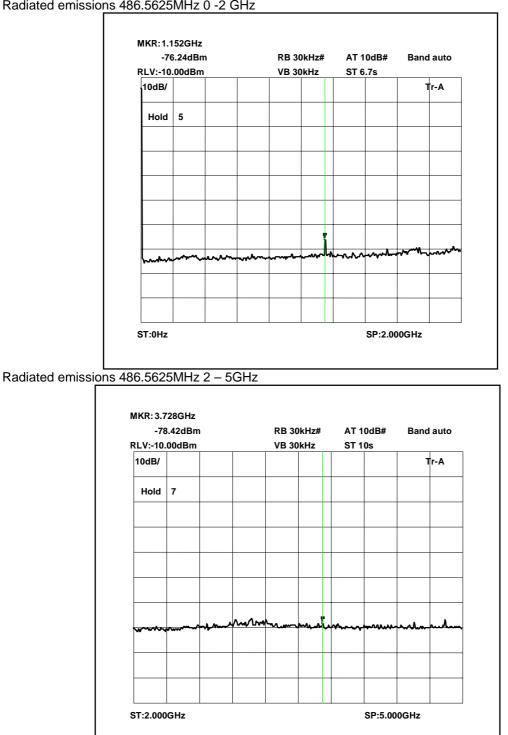


Radiated emissions 486.5625MHz 0 -2 GHz



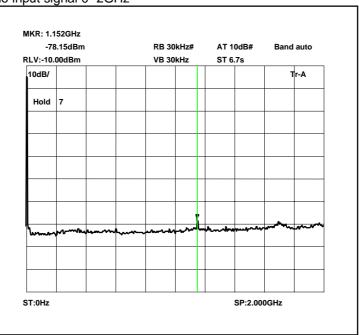

Radiated emissions no signal 2-5 GHz

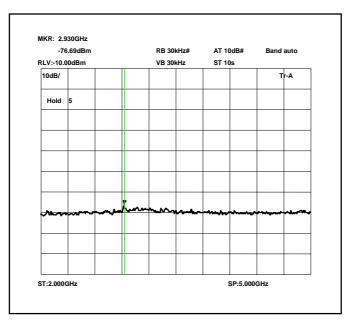

ANNEX A

PHOTOGRAPHS

RU1189/6473


PHOTOGRAPH No. 1

TEST SETUP



PHOTOGRAPH No. 2

TEST SETUP

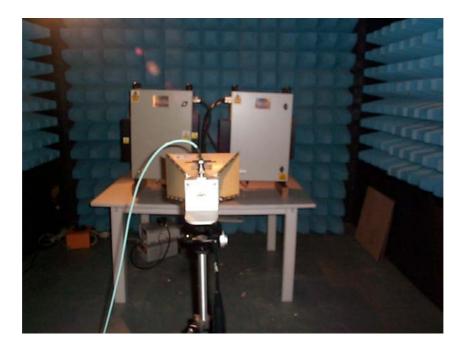

ANNEX B TEST EQUIPMENT CALIBRATION DETAILS

RU1189/6473

TEST EQUIPMENT CALIBRATION DETAILS

TRL Number	Equipment Type	Manufacturer	Last Cal Calibration	Calibration Period
	2m Pongo EPD			
UH006	3m Range ERP CAL	TRL	01/03/05	12
UH028	Log Periodic Ant	Schwarbeck	28/04/05	24
UH029	Bicone Antenna	Schwarbeck	27/04/05	24
UH041	Multimeter	AVOmeter	14/12/04	12
UH120	Spectrum Analyser	Marconi	15/03/05	12
UH122	Oscilloscope	Tektronix	07/06/05	24
UH162	ERP Cable Cal	TRL	23/05/05	12
UH179	Power Sensor	Marconi	14/12/04	12
UH228	Power Sensor	Marconi	17/01/05	12
UH253	1m Cable N type	TRL	10/01/05	12
UH254	1m Cable N type	TRL	10/01/05	12
L005	CMTA	R&S	22/10/04	12
L007	Loop Antenna	R&S	29/03/05	24
L138	1-18GHz Horn	EMCO	15/04/05	24
L139	1-18GHz Horn	EMCO	03/05/05	24
L176	Signal Generator	Marconi	31/01/05	12
L193	Bicone Antenna	Chase	12/10/03	24
L203	Log Periodic Ant	Chase	21/10/03	24
L254	Signal Generator	Marconi	13/12/04	12
L280	18GHz Cable	Rosenberger	10/01/05	12
L343	CCIR Noise Filter	TRL	07/06/05	12
	Temperature			
L426	Indicator	Fluke	14/12/04	12
L478	Signal Generator	R&S	19/05/04	12
L479	Analyser	Anritsu	05/10/04	12
L552	Signal Generator	Agilent	25/04/05	12

ANNEX C SYSTEM DIAGRAM

