

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)



## Test Report

Product Name: 27 MHz REMOTE CONTROL TRANSMITTER

FCC ID: NLB27054TX

Applicant:

**DICKIE-SPIELZEUG GmbH & CO KG  
WERKSTRABE 1  
D-90765 FUERTH D-90765  
GERMANY**

**Date Receipt: SEPTEMBER 17, 2003**

**Date Tested: SEPTEMBER 22, 2003**

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB27054TX  
REPORT #: D\DICKIE\875ZGT3\875ZGT3TestReport.doc

COVER SHEET

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TABLE OF CONTENTS LIST

**APPLICANT:** DICKIE-SPIELZEUG GmbH & CO KG

**FCC ID:** NLB27054TX

### TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST  
PAGE 2.....TEST PROCEDURE  
PAGE 3.....RADIATION INTERFERENCE TEST DATA  
PAGE 4.....OCCUPIED BANDWIDTH  
PAGE 5.....OCCUPIED BANDWIDTH PLOT

### EXHIBITS CONTAINING:

EXHIBIT 1.....BLOCK DIAGRAM  
EXHIBIT 2.....SCHEMATIC  
EXHIBIT 3.....INSTRUCTION MANUAL  
EXHIBIT 4.....LABEL SAMPLE  
EXHIBIT 5.....LABEL LOCATION  
EXHIBIT 6.....EXTERNAL PHOTOGRAPHS  
EXHIBIT 7.....INTERNAL PHOTOGRAPHS  
EXHIBIT 8.....CIRCUIT DESCRIPTION  
EXHIBIT 9.....TEST SET UP PHOTOGRAPH

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB27054TX  
REPORT #: D\DICKIE\875ZGT3\875ZGT3TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
 Newberry, Florida 32669  
<http://www.timcoengr.com>  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/13/06
Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
Biconnical Antenna	Electro- Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 4/15/03	4/15/05
Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
LISN	Electro- Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
LISN	Electro- Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05
Log-Periodic Antenna	Electro- Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
Log-Periodic Antenna	Electro- Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
Log-Periodic Antenna	Electro- Metrics	LPA-30	409	CAL 3/4/03	3/4/05
Silver Tower Preamplifier	HP	8449B	3008A01075	CHAR 1/28/02	1/28/04
Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/14/02	10/14/04
Silver Tower RF Preselector	HP	85685A	2620A00294	CAL 10/14/02	10/14/04
Silver Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 10/14/02	10/14/04
Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
 FCC ID: NLB27054TX  
 REPORT #: D\DICKIE\875ZGT3\875ZGT3TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TEST PROCEDURE

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a pre-selector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 80°C with a humidity of 76%.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

**Example:**

Freq (MHz) METER READING + ACF = FS  
33            20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

**ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES:** The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**APPLICANT:** DICKIE-SPIELZEUG GmbH & CO KG  
**FCC ID:** NLB27054TX  
**NAME OF TEST:** RADIATION INTERFERENCE  
**RULES PART NO.:** 15.227  
**REQUIREMENTS:** CARRIER FREQUENCY WILL NOT EXCEEDS 80 dBuV/m AT 3M.  
OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

30 - 88 MHz	40.0 dBuV/M MEASURED AT 3 METERS
88 - 216 MHz	43.5 dBuV/M
216 - 960 MHz	46.0 dBuV/m
ABOVE 960 MHz	54.0 dBuV/m

## TEST DATA:

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
27.15	38.6	H	0.31	13.96	52.87	27.13
27.15	56.7	V	0.31	12.42	69.43	10.57
54.30	15.7	V	0.84	9.92	26.46	13.54
54.30	20.4	H	0.84	10.34	31.58	8.42
81.41	20.3	H	1.06	8.97	30.33	9.67
81.41	23.4	V	1.06	8.47	32.93	7.07
108.56	12.1	V	1.23	11.36	24.69	18.81
108.56	14.0	H	1.23	11.12	26.35	17.15
135.71	17.0	V	1.34	15.04	33.38	10.12
135.71	17.1	H	1.34	14.44	32.88	10.62
162.78	7.7	V	1.50	17.78	26.98	16.52
162.78	8.9	H	1.50	16.68	27.08	16.42
190.00	7.8	H	1.72	14.20	23.72	19.78
190.00	11.9	V	1.72	14.90	28.52	14.98
217.14	7.8	H	1.87	12.19	21.86	24.14
217.14	15.3	V	1.87	11.36	28.53	17.47
244.29	8.0	H	1.98	12.51	22.49	23.51
244.29	15.0	V	1.98	12.16	29.14	16.86
271.45	4.3	H	2.09	13.72	20.11	25.89
271.45	9.0	V	2.09	12.82	23.91	22.09

SAMPLE CALCULATION: FSdBuV/m = MR (dBuV) + ACFdB.

**TEST PROCEDURE:** The procedure used was ANSI STANDARD C63.4-1992. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The UUT was tested in 3 orthogonal planes.

**TEST RESULTS:** THE UNIT DOES MEET THE FCC REQUIREMENTS.

**PERFORMED BY:** NAM NGUYEN **DATE:** SEPTEMBER 22, 2003

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB27054TX  
REPORT #: D\DICKIE\875ZGT3\875ZGT3TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**APPLICANT:** DICKIE-SPIELZEUG GmbH & CO KG

**FCC ID:** NLB27054TX

**NAME OF TEST:** Occupied Bandwidth

**RULES PART NO.:** 15.227

**REQUIREMENTS:** The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated to the general limits of 15.209.

**TEST DATA:**

**THE GRAPH ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.**

**METHOD OF MEASUREMENT:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was taken. The vertical scale is set to 10 dB per division. The horizontal scale is set to 10 kHz per division.

**TEST RESULTS:** The unit DOES meet the FCC requirements.

**PERFORMED BY:** NAM NGUYEN

**DATE:** SEPTEMBER 22, 2003

APPLICANT: DICKIE-SPIELZEUG GmbH & CO KG  
FCC ID: NLB27054TX  
REPORT #: D\DICKIE\875ZGT3\875ZGT3TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
 Newberry, Florida 32669  
<http://www.timcoengr.com>  
 888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)


## OCCUPIED BANDWIDTH PLOT

### NOTES:

DICKIE-SPIELZEUG GmbH & CO  
 27MHz R/C TRANSMITTER-

FCC ID: NLB27054TX

### FCC 15.227 Mask

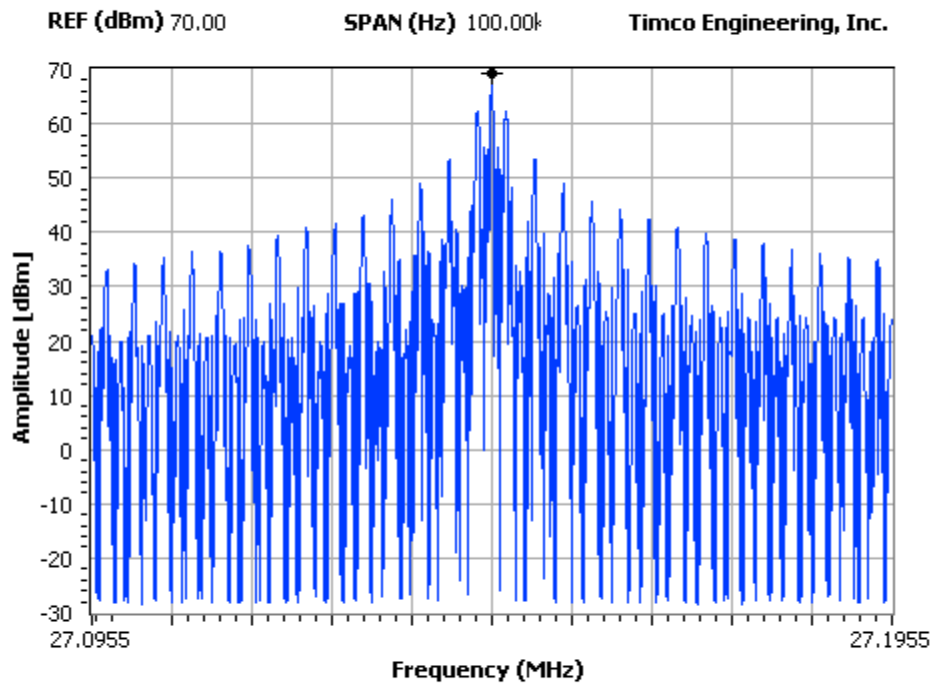

**RBW**      **VBW**      **ST (sec)**  
 300 Hz      100 kHz      8

**Center Frequency (Hz)** 27.146M

**Marker Delta (Hz)** 10.10k

Peak	27.145	69.20	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MKR2	27.136	18.40	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
MKR3	27.146	28.20	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
HWMK	27.145	69.20	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>