



REV.	DESCRIPTION	DATE	BY
01	Preliminary	11/19/06	HH

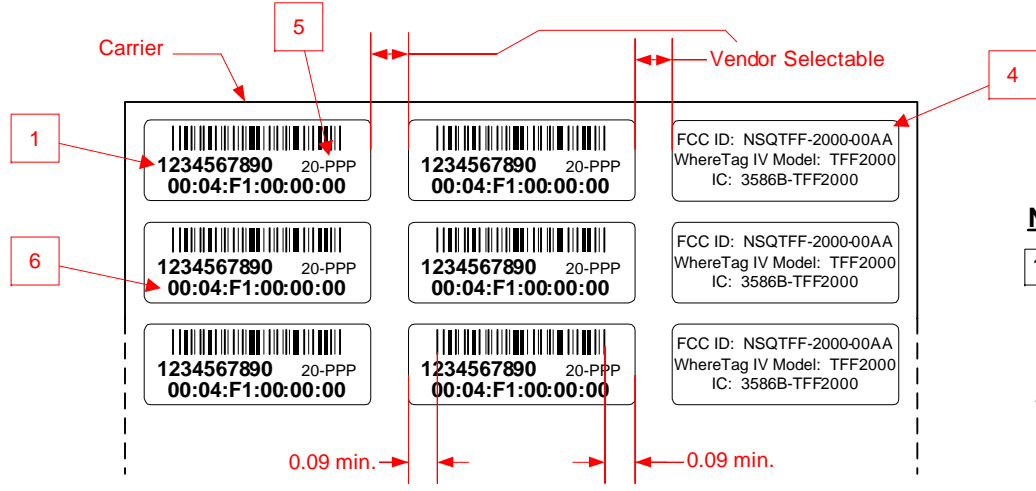

NOTES (UNLESS OTHERWISE SPECIED):

- Tag SN:** Center ten digit serial number on label using 0.13" high, code 128 barcode with 8 points bold human readable text. Use all 10 digits on very label, padding zeroes on the left as necessary.
- MATERIAL:**
Label Stock: Zebra Image Lock 5000 White 65513RM (custom cut by Redline Solutions, see WhereNet P/N 22448)

Ribbon: Zebra Image Lock 5000 Thermal Transfer 74778 (see WhereNet P/N 22449)
- Printed labels must be non-smeared and capable of withstanding 5 years of exterior exposure in harsh industrial environments
- FCC/IC Label:** Center text on label. Text size is 5 points.
- Product Code:** Text size is 7 points. Substitute PPP with current family product code. (See WhereNet Doc # 10764)
- MAC Address:** Text size is 8 points bold human readable. Substitute the first 3 bytes "00:00:00" with numbers derived from tag SN using formula specified in WhereNet Doc # tbd

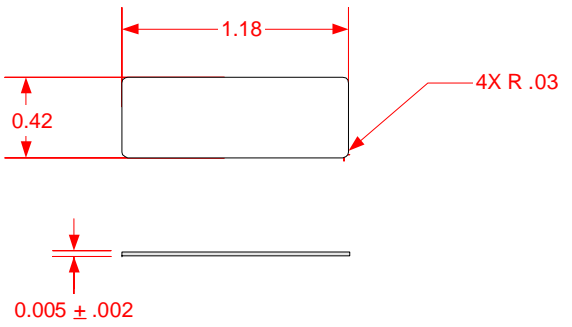

UNLESS OTHERWISE SPECIFIED:
 * DIMENSIONS & TOLERANCES ARE IN INCHES & APPLY TO FINISHED PART
 * BREAK ALL SHARP CORNERS AND EDGES 0.01 (EXCEPT PCBs AND LABELS)
TOLERANCES
 0.X = ± 0.02 ALL ANGLES
 0.XX = ± 0.01 ARE ± 05
 0.X XX = ± 0.005

WhereNet 2858 De La Cruz Blvd, Santa Clara, CA 95050

**Label SET, WhereTag IV TFF2000
 BAR CODE and FCC ID**

PROPRIETARY INFORMATION
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF WHRENET CORPORATION AND MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED OR DISCLOSED OR USED FOR MANUFACTURE OF ANY PART DISCLOSED HEREIN WITHOUT THE PRIOR WRITTEN PERMISSION OF WHRENET
 ALL RIGHTS RESERVED

Resp. Engr: HHang
 Phone: 408-845-8512
 Drawn by: HHang
 Date: 11/19/06

SIZE A	FSCM NO 1PQP8	DWG NO 24319	REV 01
SCALE 1 : 1	FILENAME 24319R01 FCC_IC LABEL.VSD	SHEET 1 OF 1	

4 3 2 1

D

D

C

C

B

B

A

A

4 3 2 1