

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: CP/TX DUAL FREQUENCY REMOTE CONTROL TRANSMITTER

FCC ID: OHRCP-TXHH

Applicant:

**SEDCO INC.
8701 CASTLE PARK DRIVE
INDIANAPOLIS, IN. 46256**

Date Receipt: NOVEMBER 19, 2003

Date Tested: NOVEMBER 25, 2003

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
TITLE PAGE

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TABLE OF CONTENTS

APPLICANT: SEDCO INC.

FCC ID: OHRCP-TXHH

TEST REPORT CONTAINING:

PAGE 1.....	TEST EQUIPMENT LIST
PAGE 2.....	TEST PROCEDURE
PAGE 3-5.....	RADIATION INTERFERENCE TEST DATA (300 MHz)
PAGE 6-8.....	RADIATION INTERFERENCE TEST DATA (387 MHz)
PAGE 9.....	CALCULATION OF DUTY CYCLE
PAGE 10.....	DUTY CYCLE PLOT - SMALL PULSES
PAGE 11.....	DUTY CYCLE PLOT - LARGE PULSES
PAGE 12.....	DUTY CYCLE PLOT
PAGE 13.....	OCCUPIED BANDWIDTH
PAGE 14.....	OCCUPIED BANDWIDTH PLOT

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....	BLOCK DIAGRAM
EXHIBIT 2.....	SCHEMATIC
EXHIBIT 3.....	USERS MANUAL
EXHIBIT 4.....	LABEL SAMPLE
EXHIBIT 5.....	LABEL LOCATION
EXHIBIT 6.....	EXTERNAL PHOTOGRAPHS
EXHIBIT 7.....	INTERNAL PHOTOGRAPHS
EXHIBIT 8.....	CIRCUIT DESCRIPTION
EXHIBIT 9.....	TEST SET UP PHOTOGRAPH

APPLICANT: SEDCO INC.

FCC ID: OHRCP-TXHH

REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/13/06
Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Blue Tower RF	HP	85685A	2926A00983	CAL 4/15/03	4/15/05
Preselector Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
Double - Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 2/17/03	2/17/05
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
LISN	Electro-Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a pre-selector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz. The ambient temperature of the UUT was 68.3°F with a humidity of 40%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings were converted to average readings based on the duration of "ON" time.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

Measurements were made by TIMCO ENGINEERING INC. at the registered open field test site located at 849 N.W. State Road 45, Newberry, Fl 32669.

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 2 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
NAME OF TEST: RADIATION INTERFERENCE (300 MHZ)
RULES PART NO.: 15.231

REQUIREMENTS:

Fundamental Frequency MHz	Field Strength of Fundamental dBuV	Field Strength of Harmonics and Spurious Emissions (dBuV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

THE LIMIT FOR AVERAGE FIELD STRENGTH dBuV/m FOR THE FUNDAMENTAL FREQUENCY = 74.67 dBuV/m. NO FUNDAMENTAL IS ALLOWED IN THE RESTRICTED BANDS.

THE LIMIT FOR AVERAGE FIELD STRENGTH dBuV/m FOR THE HARMONICS AND SPURIOUS FREQUENCIES = 54.67 dBuV/m. SPURIOUS IN THE RESTRICTED BANDS MUST BE LESS THAN 54dBuV/m OR 15.209.

TEST DATA (X-AXIS):

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
299.96	47.4	H	2.20	14.20	14.88	48.92	25.75
299.96	52.0	V	2.20	13.60	14.88	52.92	21.75
599.91	33.8	H	3.40	19.70	14.88	42.02	12.65
599.91	36.8	V	3.40	19.00	14.88	44.32	10.35
899.87	26.8	H	4.20	23.50	14.88	39.62	15.05
899.87	30.5	V	4.20	22.90	14.88	42.72	11.95
1,200.00	** 20.8	H	1.30	25.88	14.88	33.10	20.90
1,200.00	** 29.5	V	1.30	25.88	14.88	41.80	12.20
1,500.00	** 29.7	V	1.45	26.90	14.88	43.17	10.83
1,500.00	** 33.5	H	1.45	26.90	14.88	46.97	7.03
1,800.00	27.4	H	1.60	27.92	14.88	42.04	12.63
1,800.00	33.2	V	1.60	27.98	14.88	47.90	6.77
2,100.00	21.2	H	1.74	28.76	14.88	36.82	17.85
2,100.00	28.4	V	1.74	28.84	14.88	44.10	10.57
2,400.00	25.3	H	1.86	29.24	14.88	41.52	13.15
2,400.00	27.0	V	1.86	29.26	14.88	43.24	11.43
2,700.00	** 18.3	H	1.98	29.84	14.88	35.24	18.76
2,700.00	** 20.8	V	1.98	29.84	14.88	37.74	16.26
3,000.00	14.7	V	2.10	30.50	14.88	32.42	22.25
3,000.00	15.5	H	2.10	30.50	14.88	33.22	21.45

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 3 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
NAME OF TEST: RADIATION INTERFERENCE (300 MHz)
RULES PART NO.: 15.231

REQUIREMENTS:

Fundamental Frequency MHz	Field Strength of Fundamental dBuV	Field Strength of Harmonics and Spurious Emissions (dBuV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

TEST DATA (Y-AXIS):

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
299.96	44.8	V	2.20	13.60	14.88	45.72	28.95
299.96	53.8	H	2.20	14.20	14.88	55.32	19.35
599.91	31.4	V	3.40	19.00	14.88	38.92	15.75
599.91	41.6	H	3.40	19.70	14.88	49.82	4.85
899.87	26.9	V	4.20	22.90	14.88	39.12	15.55
899.87	33.7	H	4.20	23.50	14.88	46.52	8.15
1,200.00	** 20.3	V	1.30	25.88	14.88	32.60	21.40
1,200.00	** 23.2	H	1.30	25.88	14.88	35.50	18.50
1,500.00	** 30.0	V	1.45	26.90	14.88	43.47	10.53
1,500.00	** 30.7	H	1.45	26.90	14.88	44.17	9.83
1,800.00	27.5	V	1.60	27.98	14.88	42.20	12.47
1,800.00	32.1	H	1.60	27.92	14.88	46.74	7.93
2,100.00	23.3	V	1.74	28.84	14.88	39.00	15.67
2,100.00	28.0	H	1.74	28.76	14.88	43.62	11.05
2,400.00	22.3	V	1.86	29.26	14.88	38.54	16.13
2,400.00	29.6	H	1.86	29.24	14.88	45.82	8.85
2,700.00	** 18.4	V	1.98	29.84	14.88	35.34	18.66
2,700.00	** 20.0	H	1.98	29.84	14.88	36.94	17.06
3,000.00	13.9	V	2.10	30.50	14.88	31.62	23.05
3,000.00	17.3	H	2.10	30.50	14.88	35.02	19.65

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 4 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
NAME OF TEST: RADIATION INTERFERENCE (300 MHz)
RULES PART NO.: 15.231

REQUIREMENTS:

Fundamental Frequency MHz	Field Strength of Fundamental dBuV	Field Strength of Harmonics and Spurious Emissions (dBuV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

TEST DATA (Z-AXIS):

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
299.96	51.1	H	2.20	14.20	14.88	52.62	22.05
299.96	51.8	V	2.20	13.60	14.88	52.72	21.95
599.91	37.0	V	3.40	19.00	14.88	44.52	10.15
599.91	40.3	H	3.40	19.70	14.88	48.52	6.15
899.87	26.8	V	4.20	22.90	14.88	39.02	15.65
899.87	32.5	H	4.20	23.50	14.88	45.32	9.35
1,200.00	** 23.7	V	1.30	25.88	14.88	36.00	18.00
1,200.00	** 25.5	H	1.30	25.88	14.88	37.80	16.20
1,500.00	** 25.4	H	1.45	26.90	14.88	38.87	15.13
1,500.00	** 30.2	V	1.45	26.90	14.88	43.67	10.33
1,800.00	30.4	V	1.60	27.98	14.88	45.10	9.57
1,800.00	31.7	H	1.60	27.92	14.88	46.34	8.33
2,100.00	27.1	V	1.74	28.84	14.88	42.80	11.87
2,100.00	28.3	H	1.74	28.76	14.88	43.92	10.75
2,400.00	22.1	H	1.86	29.24	14.88	38.32	16.35
2,400.00	25.9	V	1.86	29.26	14.88	42.14	12.53
2,700.00	** 18.3	H	1.98	29.84	14.88	35.24	18.76
2,700.00	** 25.4	V	1.98	29.84	14.88	42.34	11.66
3,000.00	14.5	V	2.10	30.50	14.88	32.22	22.45
3,000.00	18.3	H	2.10	30.50	14.88	36.02	18.65

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 5 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
NAME OF TEST: RADIATION INTERFERENCE (387 MHz)
RULES PART NO.: 15.231

REQUIREMENTS:

Fundamental Frequency MHz	Field Strength of Fundamental dBuV	Field Strength of Harmonics and Spurious Emissions (dBuV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

THE LIMIT FOR AVERAGE FIELD STRENGTH dBuV/m FOR THE FUNDAMENTAL FREQUENCY = 74.67 dBuV/m. NO FUNDAMENTAL IS ALLOWED IN THE RESTRICTED BANDS.

THE LIMIT FOR AVERAGE FIELD STRENGTH dBuV/m FOR THE HARMONICS AND SPURIOUS FREQUENCIES = 54.67 dBuV/m. SPURIOUS IN THE RESTRICTED BANDS MUST BE LESS THAN 54dBuV/m OR 15.209.

TEST DATA (X-AXIS):

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
386.92	52.3	V	2.72	15.31	14.88	55.45	23.67
386.92	54.5	H	2.72	15.48	14.88	57.82	21.30
773.83	21.8	H	3.92	21.69	14.88	32.53	26.59
773.83	30.6	V	3.92	20.48	14.88	40.12	19.00
1,160.70	**	H	1.28	25.75	14.88	33.95	20.05
1,160.70	**	V	1.28	25.75	14.88	45.15	8.85
1,547.66	**	V	1.47	27.07	14.88	36.16	17.84
1,547.66	**	H	1.47	27.06	14.88	42.75	11.25
1,934.63	25.7	H	1.67	28.38	14.88	40.87	18.25
1,934.63	31.3	V	1.67	28.46	14.88	46.55	12.57
2,321.60	**	H	1.83	29.11	14.88	41.26	12.74
2,321.60	**	V	1.83	29.15	14.88	41.50	12.50
2,708.27	**	H	1.98	29.86	14.88	38.06	15.94
2,708.27	**	H	1.98	29.86	14.88	42.36	11.64
3,095.29	14.8	H	2.13	30.71	14.88	32.76	26.36
3,095.29	15.3	V	2.13	30.69	14.88	33.24	25.88
3,482.31	12.5	H	2.24	31.56	14.88	31.42	27.70
3,482.31	16.7	V	2.24	31.46	14.88	35.52	23.60
3,869.18	**	H	2.36	32.71	14.88	31.09	22.91
3,869.18	**	V	2.36	32.53	14.88	35.91	18.09

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 6 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
NAME OF TEST: RADIATION INTERFERENCE (387 MHz)
RULES PART NO.: 15.231

REQUIREMENTS:

Fundamental Frequency MHz	Field Strength of Fundamental dBuV	Field Strength of Harmonics and Spurious Emissions (dBuV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

TEST DATA (Y-AXIS):

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
386.92	50.4	V	2.72	15.31	14.88	53.55	25.57
386.92	60.6	H	2.72	15.48	14.88	63.92	15.20
773.83	23.0	V	3.92	20.48	14.88	32.52	26.60
773.83	28.1	H	3.92	21.69	14.88	38.83	20.29
1,160.70	** 24.7	V	1.28	25.75	14.88	36.85	17.15
1,160.70	** 30.5	H	1.28	25.75	14.88	42.65	11.35
1,547.66	** 25.2	V	1.47	27.07	14.88	38.86	15.14
1,547.66	** 25.3	H	1.47	27.06	14.88	38.95	15.05
1,934.63	27.0	H	1.67	28.38	14.88	42.17	16.95
1,934.63	29.0	V	1.67	28.46	14.88	44.25	14.87
2,321.60	** 22.2	V	1.83	29.15	14.88	38.30	15.70
2,321.60	** 30.9	H	1.83	29.11	14.88	46.96	7.04
2,708.27	** 19.0	H	1.98	29.86	14.88	35.96	18.04
2,708.27	** 19.9	V	1.98	29.86	14.88	36.86	17.14
3,095.29	9.7	V	2.13	30.69	14.88	27.64	31.48
3,095.29	14.4	H	2.13	30.71	14.88	32.36	26.76
3,482.31	11.4	V	2.24	31.46	14.88	30.22	28.90
3,482.31	13.4	V	2.24	31.46	14.88	32.22	26.90
3,869.18	** 7.1	H	2.36	32.71	14.88	27.29	26.71

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 7 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SEDCO INC.

FCC ID: OHRCP-TXHH

NAME OF TEST: RADIATION INTERFERENCE (387 MHz)

RULES PART NO.: 15.231

REQUIREMENTS:

Fundamental Frequency MHz	Field Strength of Fundamental dBuV	Field Strength of Harmonics and Spurious Emissions (dBuV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

TEST DATA (Z-AXIS):

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
386.92	50.1	H	2.72	15.48	14.88	53.42	25.70
386.92	52.4	V	2.72	15.31	14.88	55.55	23.57
773.83	25.1	V	3.92	20.48	14.88	34.62	24.50
773.83	26.7	H	3.92	21.69	14.88	37.43	21.69
1,160.70	** 28.0	V	1.28	25.75	14.88	40.15	13.85
1,160.70	** 32.8	H	1.28	25.75	14.88	44.95	9.05
1,547.66	** 24.3	V	1.47	27.07	14.88	37.96	16.04
1,547.66	** 24.4	H	1.47	27.06	14.88	38.05	15.95
1,934.63	30.1	V	1.67	28.46	14.88	45.35	13.77
1,934.63	31.8	H	1.67	28.38	14.88	46.97	12.15
2,321.60	** 21.9	V	1.83	29.15	14.88	38.00	16.00
2,321.60	** 30.1	H	1.83	29.11	14.88	46.16	7.84
2,708.27	** 20.3	H	1.98	29.86	14.88	37.26	16.74
2,708.27	** 23.0	V	1.98	29.86	14.88	39.96	14.04
3,095.29	8.9	V	2.13	30.69	14.88	26.84	32.28
3,095.29	15.0	H	2.13	30.71	14.88	32.96	26.16
3,482.31	14.4	H	2.24	31.56	14.88	33.32	25.80
3,482.31	17.1	V	2.24	31.46	14.88	35.92	23.20
3,869.18	** 4.5	H	2.36	32.71	14.88	24.69	29.31
3,869.18	** 10.8	V	2.36	32.53	14.88	30.81	23.19

SAMPLE CALCULATION OF LIMIT @ 303 MHz:

(470 - 260)Mhz = 210 MHz
(12500 - 3750)uV/m = 8750 uV/m
8750uV/m/210MHz = 41.67 uV/m/MHz
(303-260)MHz = 43 MHz
43 MHz * 41.67 uV/m/MHz = 1791.81 uV/m
(1791.81 + 3750)uV/m = 5541.81 uV/m limit @ 303 MHz

The transmitter ceases transmitting when the button is released.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: NAM NGUYEN

DATE TESTED: NOVEMBER 25, 2003

APPLICANT: SEDCO INC.

FCC ID: OHRCP-TXHH

REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc

Page 8 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SEDCO INC.

FCC ID: OHRCP-TXHH

CALCULATION OF DUTY CYCLE:

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero (0) frequency span. A plot is then made of the pulse train with a sweep time of 100 milliseconds. This sweep determines the duration of the pulse train, which in this case is milliseconds. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100 millisecond Plot the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the UUT is on within 100 msec. If the pulse train is longer than 100 msec then this number is multiplied by 100 to determine the percentage ON TIME. If the pulse train is less than 100 msec the total on time is divided by the length of the pulse train and then multiplied by 100 to determine the percentage ON TIME. In this case there were 5 short pulses .240 msec long and 5 long pulses 1.170 msec long for a total of 7.05 msec "on-time" within the pulse train. In this case the pulse train was 39.10 msec long. The average field strength is determined by multiplying the peak field strength by the percent on time. In this case the percentage ON time was 14.88 %percent.


$dB = 20 * \log(\text{ON time})$

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 9 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

DUTY CYCLE PLOT SHORT PULSES

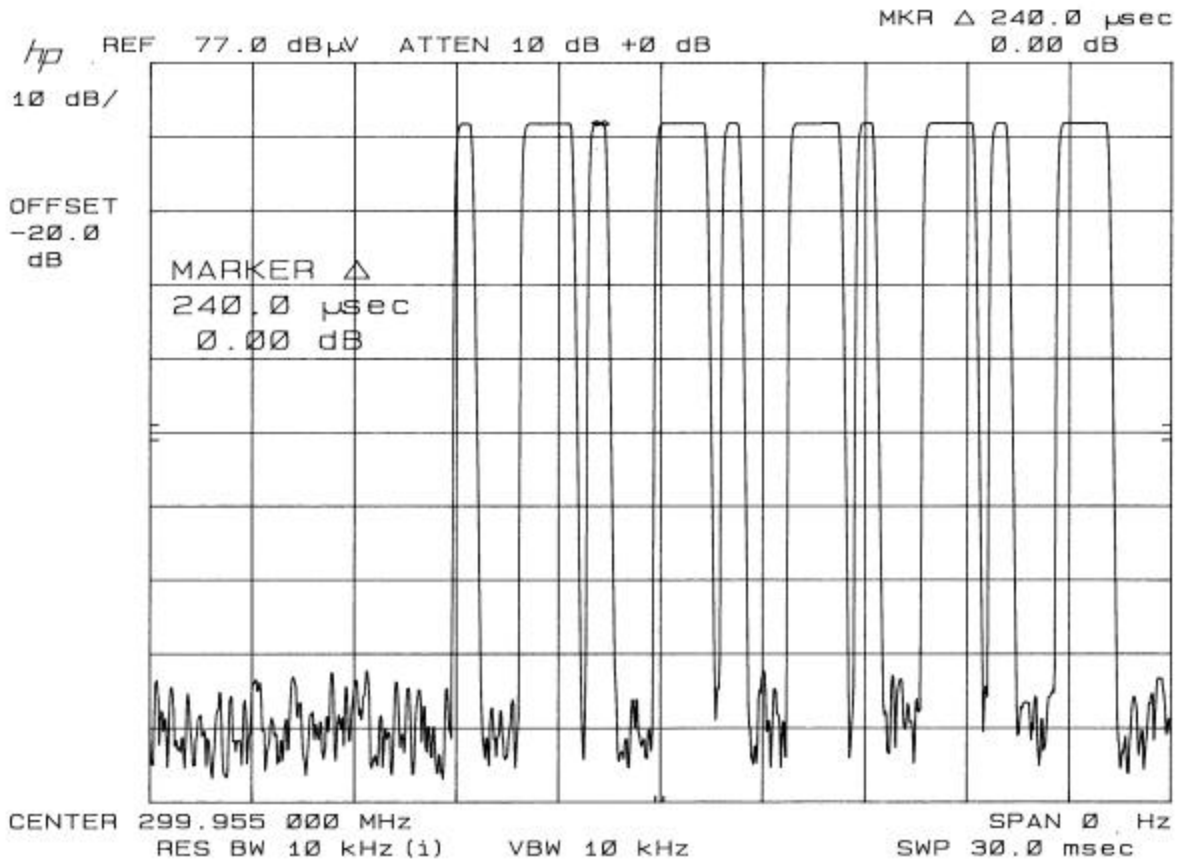


APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 10 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com


DUTY CYCLE PLOT LONG PULSES

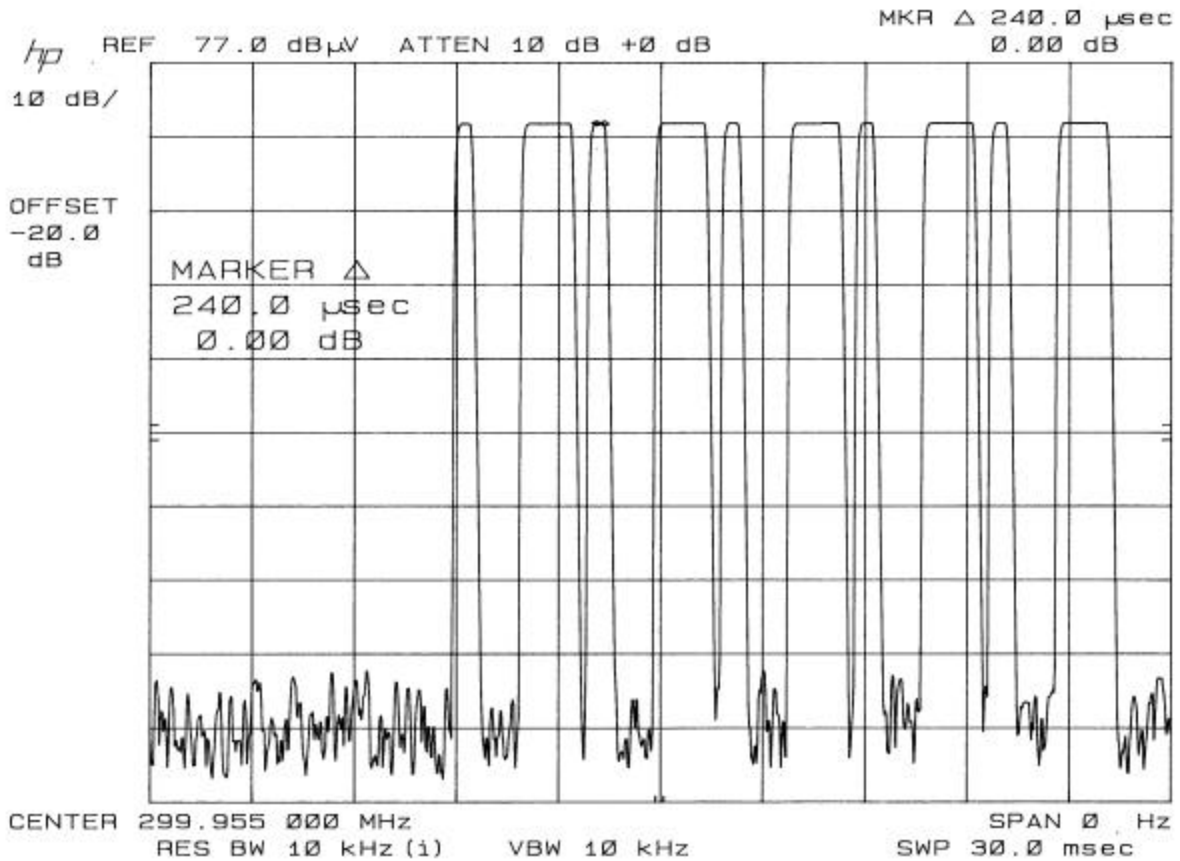

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

DUTY CYCLE PLOT COMPLETE PULSE TRAIN

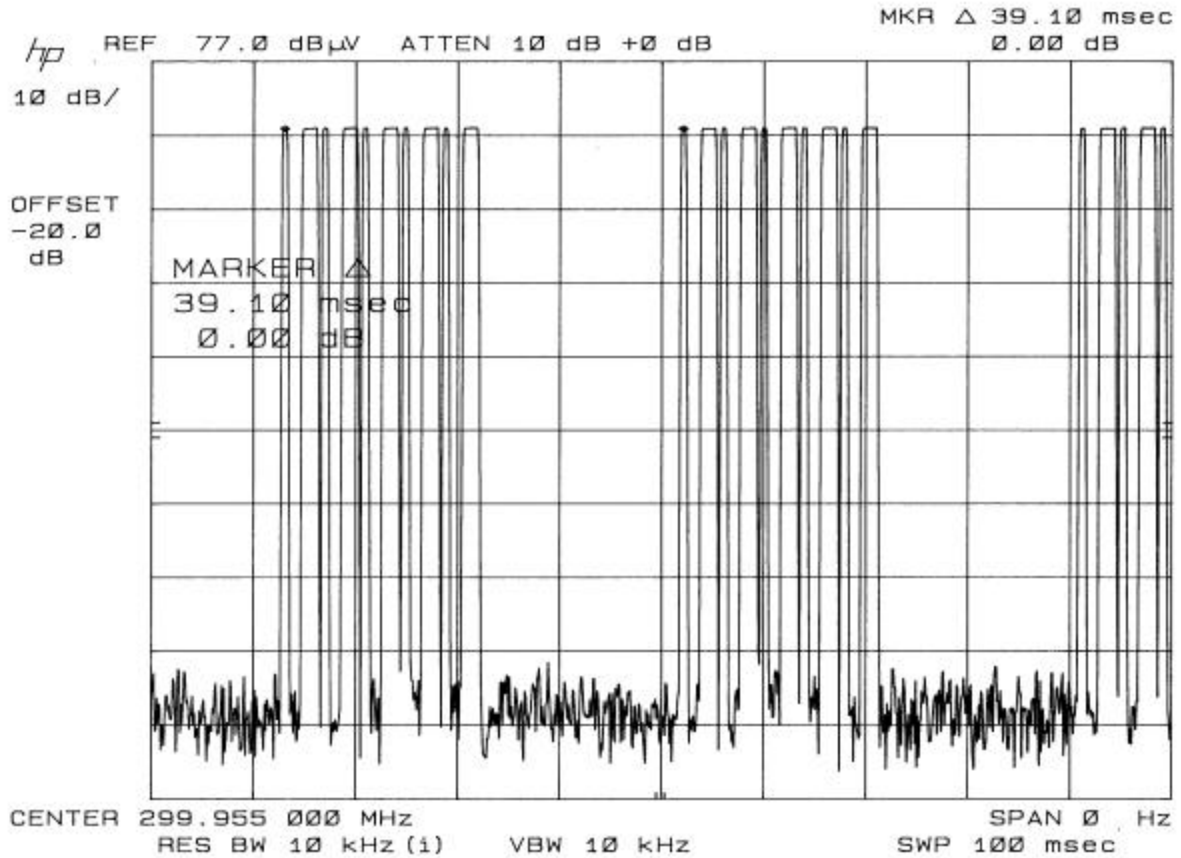

APPLICANT: SEDCO INC.
FCC ID: OHRCP-TXHH
REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc
Page 12 of 14

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: SEDCO INC.

FCC ID: OHRCP-TXHH

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.231(C)

REQUIREMENTS: The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

$$300.00 \text{ MHz} * .0025 = 0.75 \text{ MHz}$$

$$0.75 \text{ MHz} / 2 = +/- 375.00 \text{ kHz}$$

TEST DATA:

THE GRAPH ON THE FOLLOWING PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the plot on the next page was generated. The vertical scale is set to 10 dB per division: the horizontal scale is set to 10 kHz per division.

TEST RESULTS: The unit meets the FCC requirements.

PERFORMED BY: NAM NGUYEN

DATE: NOVEMBER 25, 2003

APPLICANT: SEDCO INC.

FCC ID: OHRCP-TXHH

REPORT #: S\SEDCO_OHR\1553UT3\1553UT3TestReport.doc

Page 13 of 14


TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
 http://www.timcoengr.com
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

OCCUPIED BANDWIDTH

NOTES:

SEDCO INC. _ FCC ID: OHRCP-TXHH
 OCCUPIED BANDWIDTH PLOT

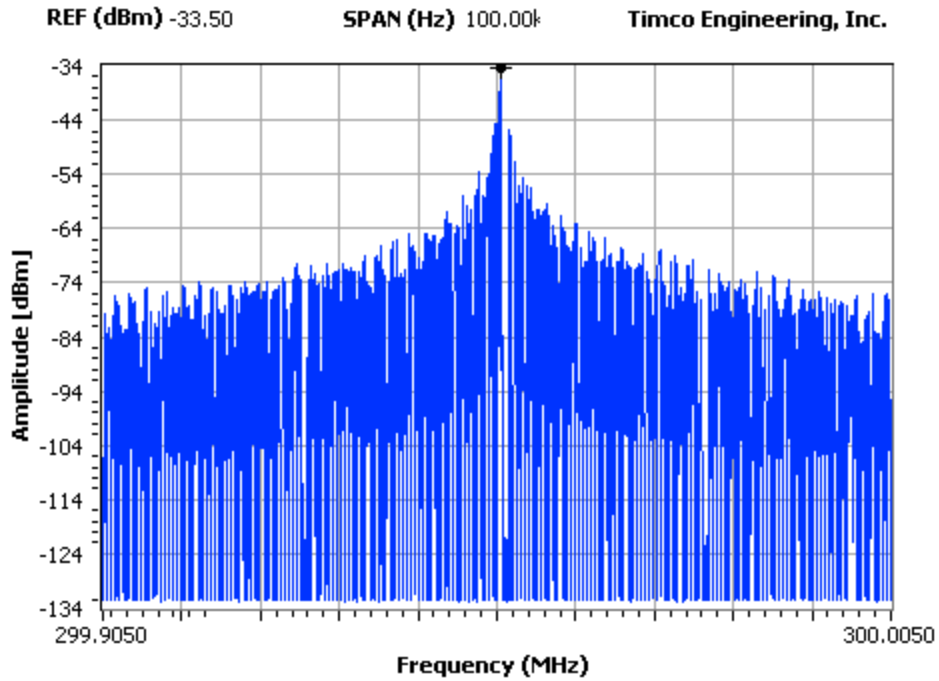

RBW	VBW	ST (sec)	Peak	299.955	-33.80	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
300 Hz	100 kHz	8	MKR2	299.945	-79.60	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Center Frequency (Hz) 299.955M			MKR3	299.905	-120.60	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Marker Delta (Hz) 0.00			HWMK	23.076	6.27	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>