

Appendix B

RF Test Data for BT V4.1(BT LE) (Conducted Measurement)

Product Name: Smart Phone

Trade Mark: XRATECH


Test Model: Brio X31

Environmental Conditions

Temperature:	23.4 ° C
Relative Humidity:	52.5%
ATM Pressure:	100.0 kPa
Test Engineer:	Diamond.Lu
Supervised by:	Tom.Liu


B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

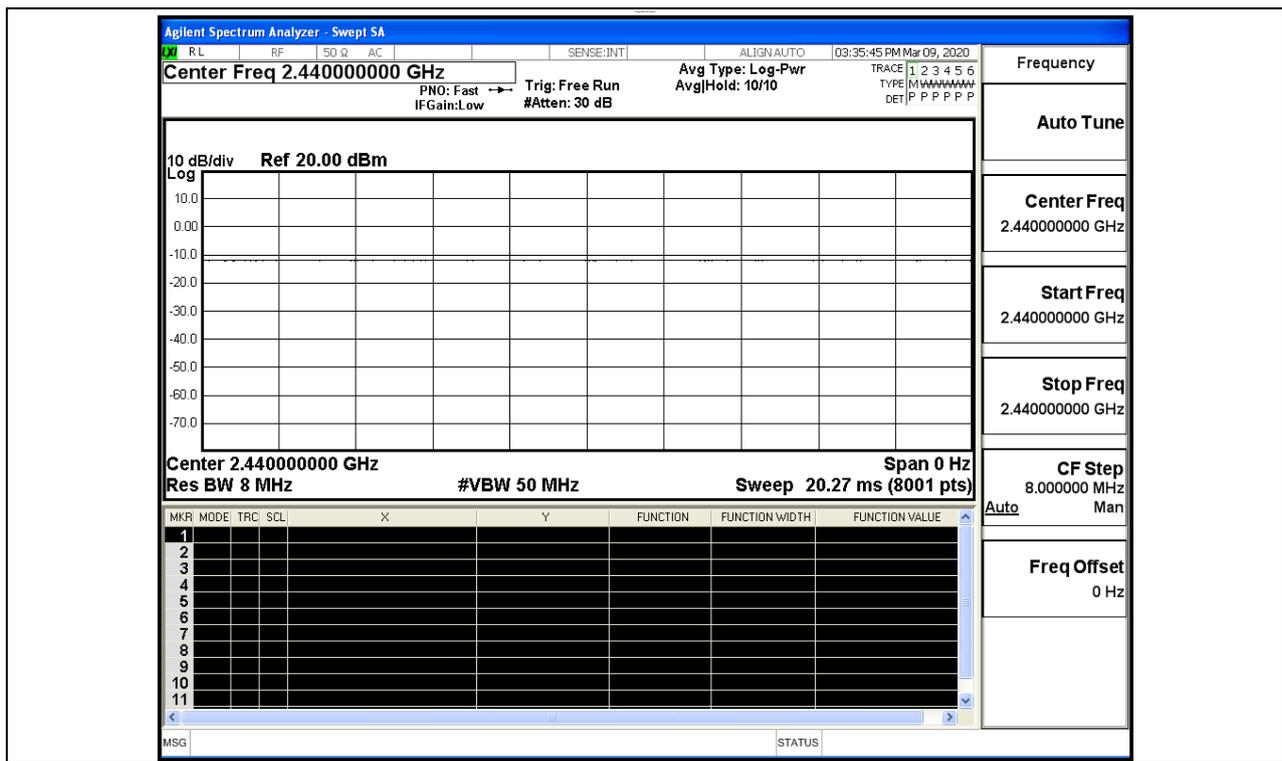


B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-5.003	30	PASS
BT LE	MCH	-4.25	30	PASS
BT LE	HCH	-5.222	30	PASS

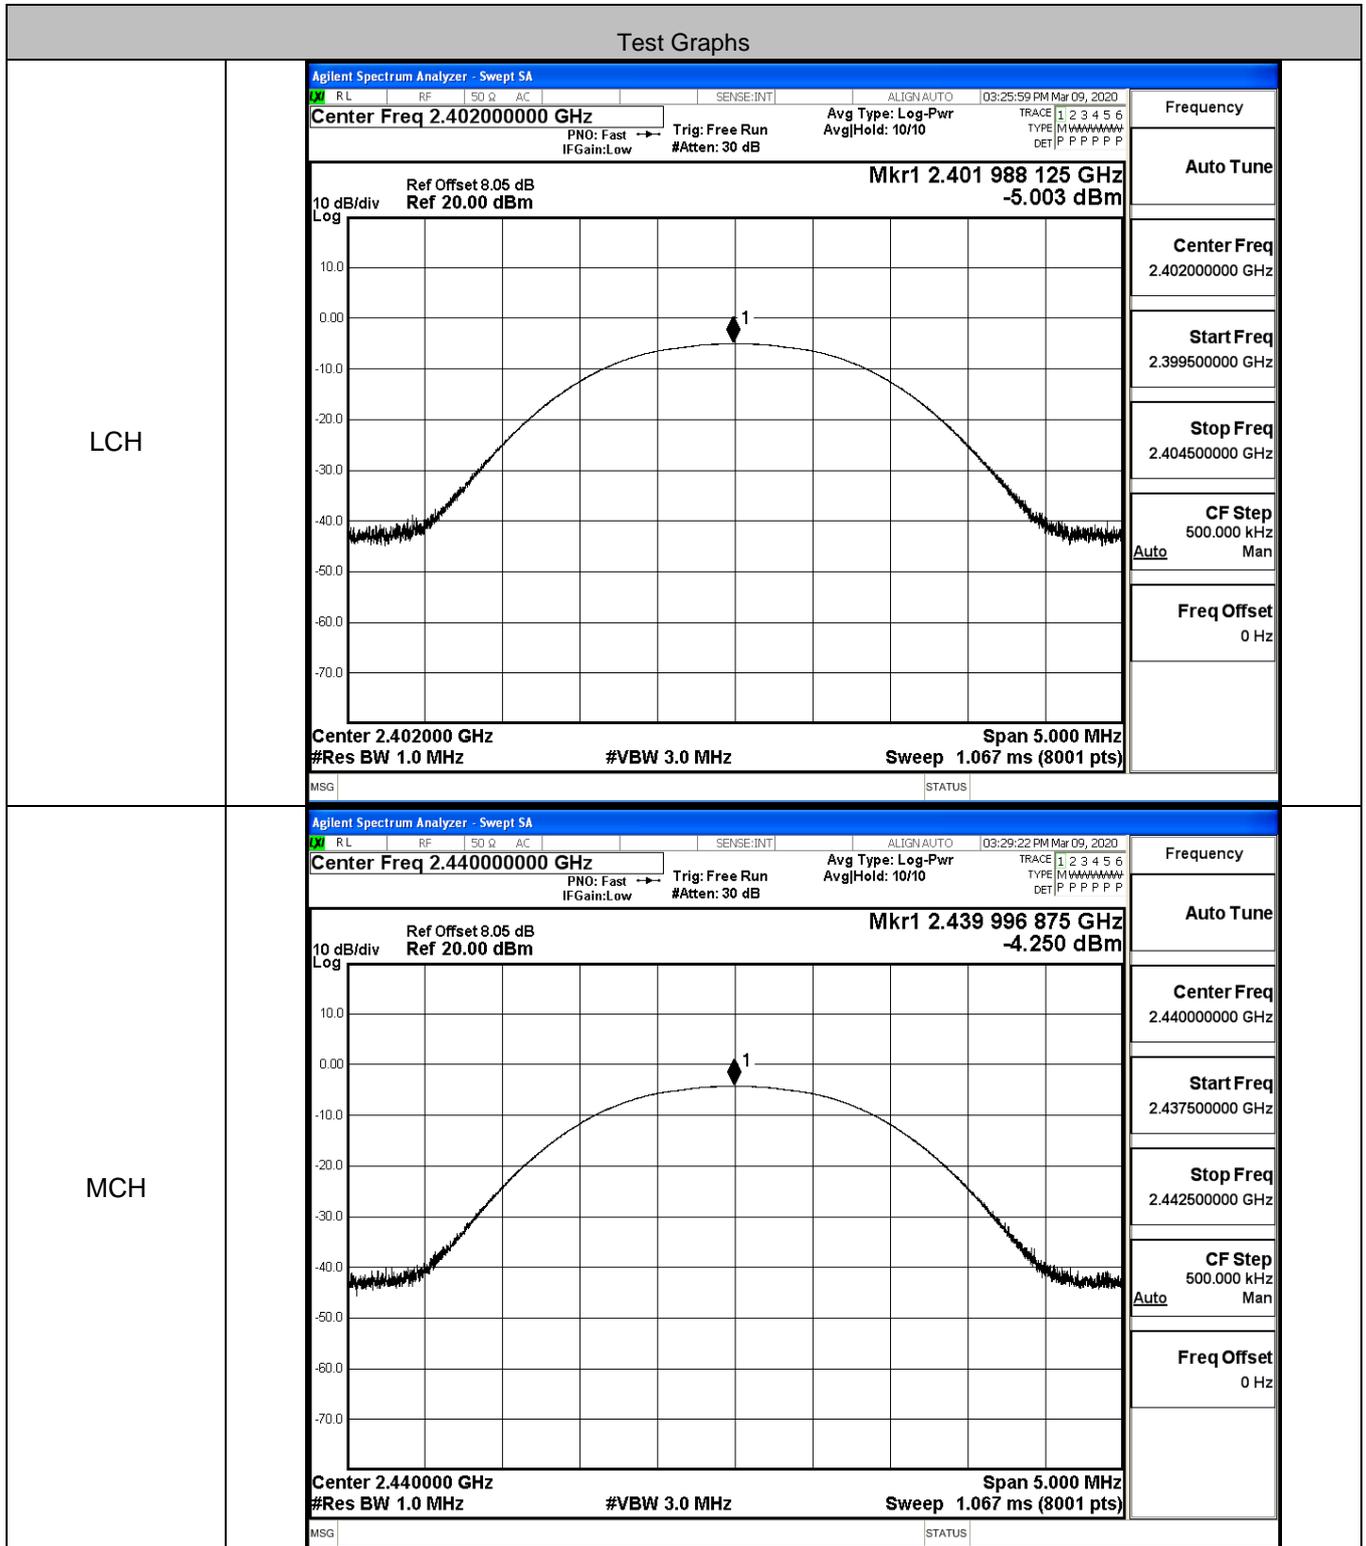



HCH

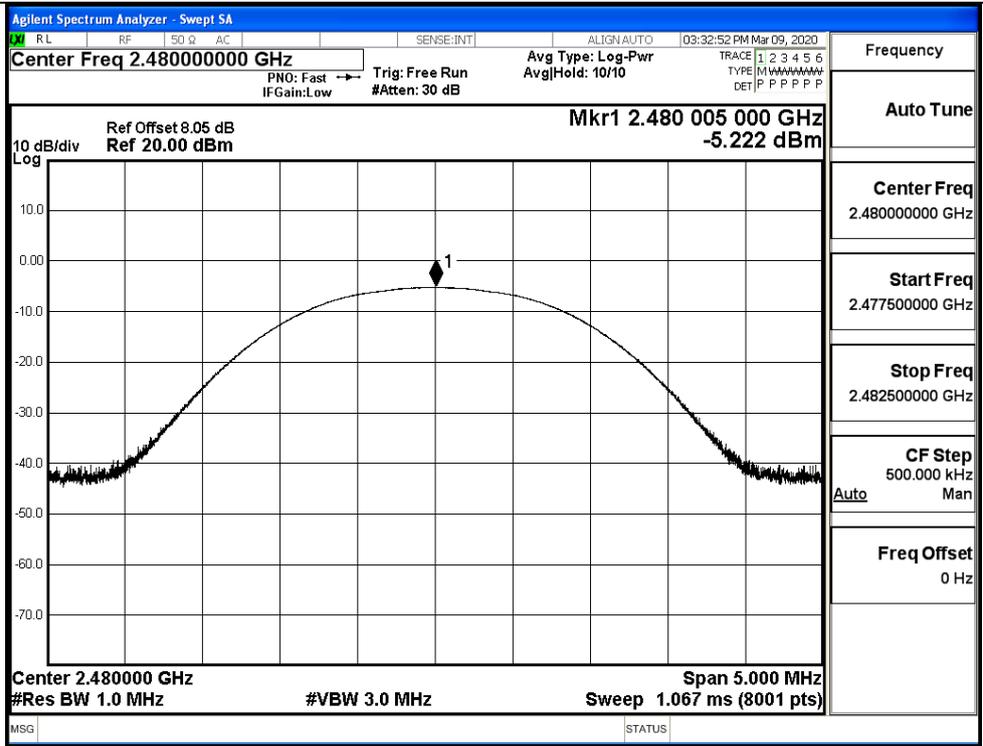


B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-21.216	8	PASS
BT LE	MCH	-20.501	8	PASS
BT LE	HCH	-21.158	8	PASS

Test Graphs

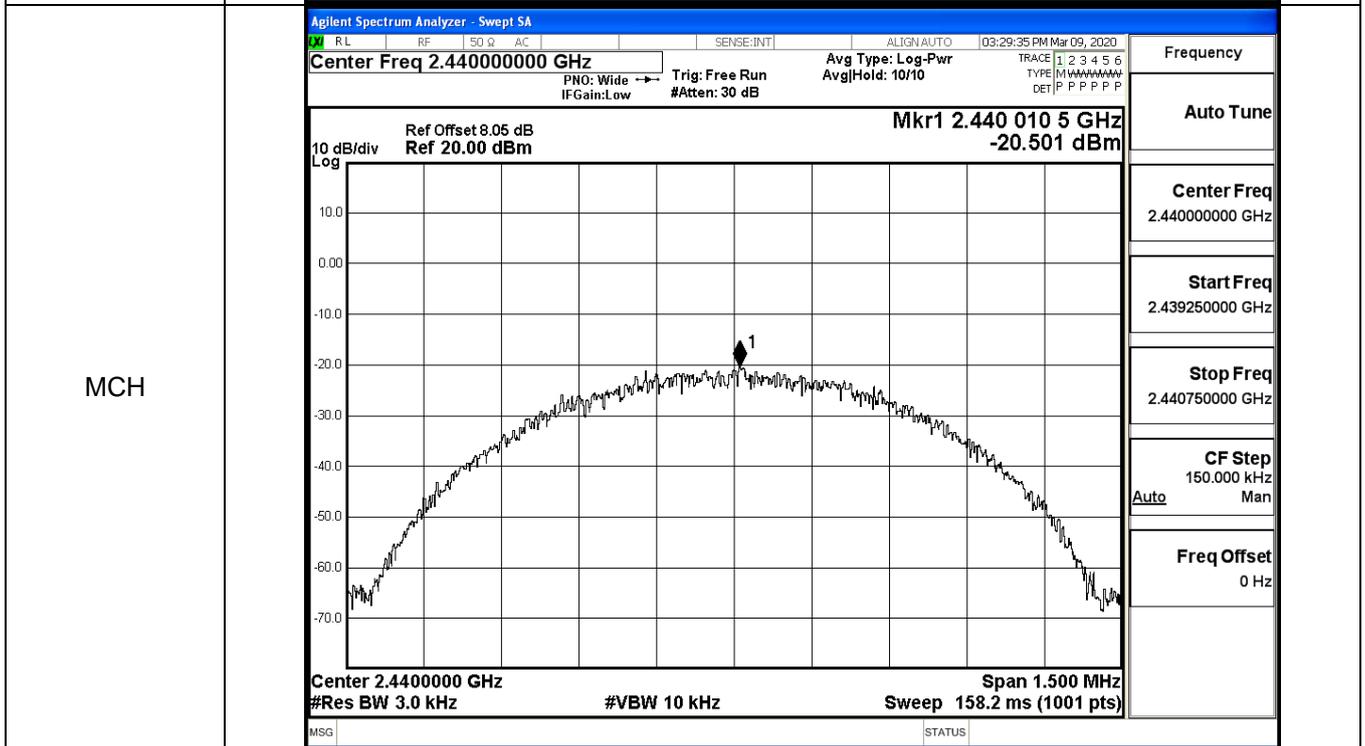
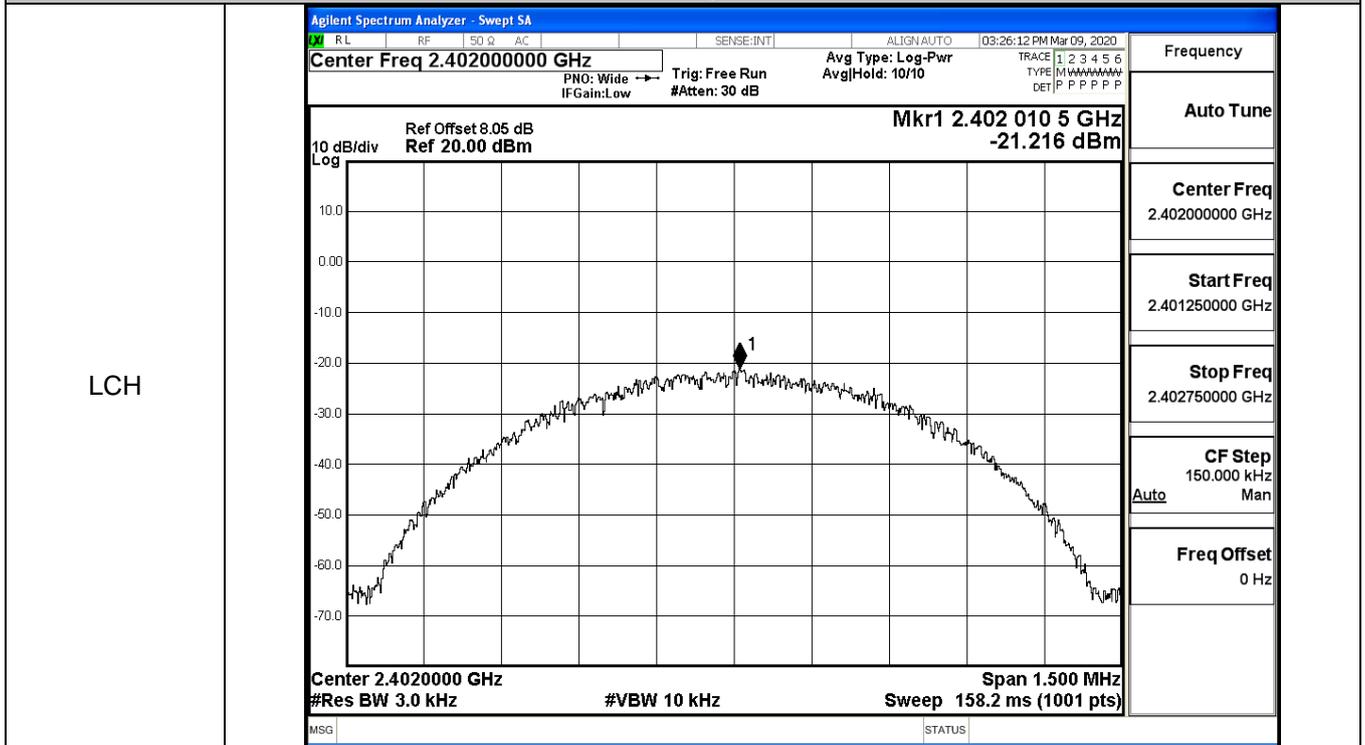


HCH

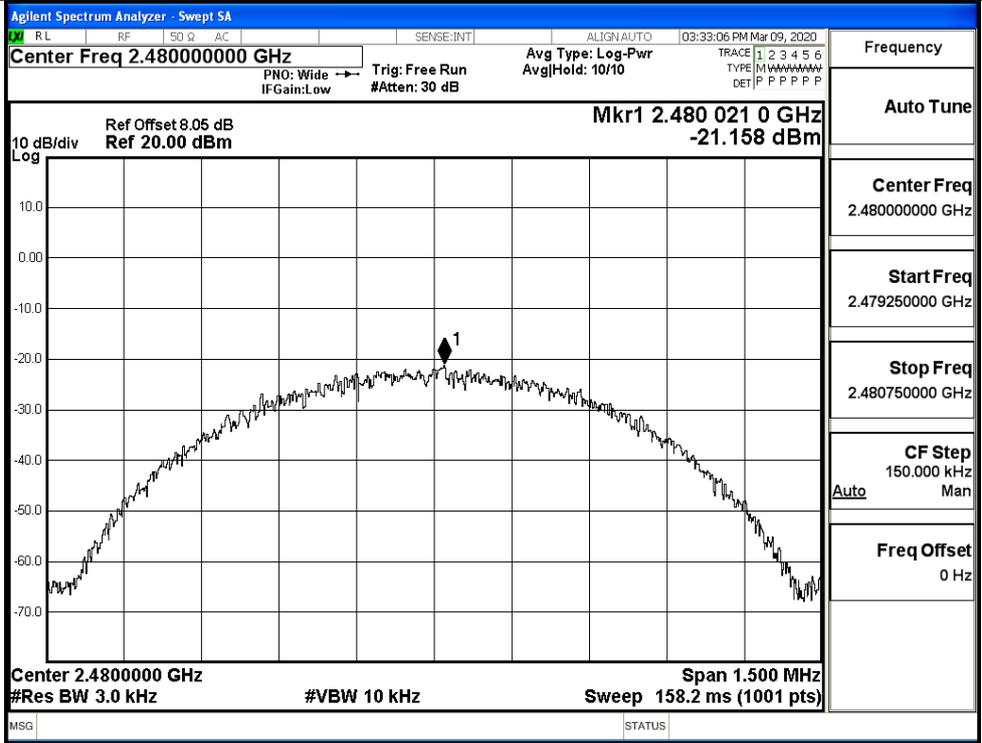


B.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6388	≥0.5	PASS
BT LE	MCH	0.6454	≥0.5	PASS
BT LE	HCH	0.6421	≥0.5	PASS

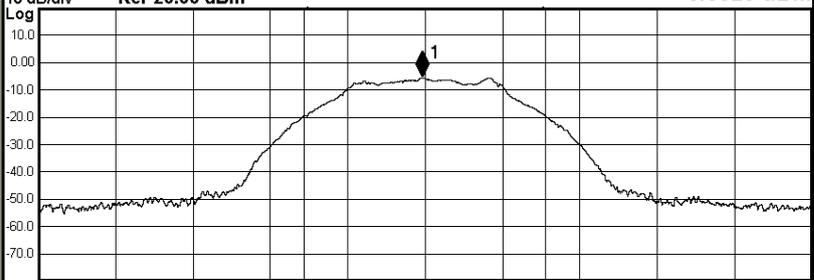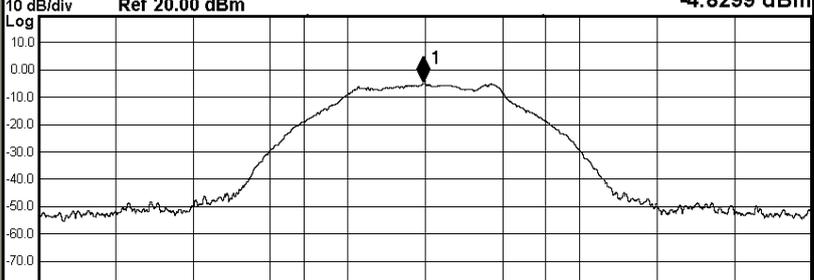Test Graphs													
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 03:25:48 PM Mar 09, 2020</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None Trig: Free Run AvgHold>1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="text-align: right; margin: 0;">Mkr1 2.4019895 GHz -5.5823 dBm</p>  </div> <p style="margin: 0;">Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: small; border-collapse: collapse;"> <tr> <td style="width: 50%;">Occupied Bandwidth</td> <td style="width: 50%;">Total Power</td> </tr> <tr> <td style="text-align: center;">929.45 kHz</td> <td style="text-align: center;">0.99 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> </tr> <tr> <td style="text-align: center;">-669 Hz</td> <td style="text-align: center;">99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> </tr> <tr> <td style="text-align: center;">638.8 kHz</td> <td style="text-align: center;">-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	929.45 kHz	0.99 dBm	Transmit Freq Error	OBW Power	-669 Hz	99.00 %	x dB Bandwidth	x dB	638.8 kHz	-6.00 dB
Occupied Bandwidth	Total Power												
929.45 kHz	0.99 dBm												
Transmit Freq Error	OBW Power												
-669 Hz	99.00 %												
x dB Bandwidth	x dB												
638.8 kHz	-6.00 dB												
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 03:29:11 PM Mar 09, 2020</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None Trig: Free Run AvgHold>1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="text-align: right; margin: 0;">Mkr1 2.4399936 GHz -4.8299 dBm</p>  </div> <p style="margin: 0;">Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: small; border-collapse: collapse;"> <tr> <td style="width: 50%;">Occupied Bandwidth</td> <td style="width: 50%;">Total Power</td> </tr> <tr> <td style="text-align: center;">932.54 kHz</td> <td style="text-align: center;">1.71 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> </tr> <tr> <td style="text-align: center;">-1.294 kHz</td> <td style="text-align: center;">99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> </tr> <tr> <td style="text-align: center;">645.4 kHz</td> <td style="text-align: center;">-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	932.54 kHz	1.71 dBm	Transmit Freq Error	OBW Power	-1.294 kHz	99.00 %	x dB Bandwidth	x dB	645.4 kHz	-6.00 dB
Occupied Bandwidth	Total Power												
932.54 kHz	1.71 dBm												
Transmit Freq Error	OBW Power												
-1.294 kHz	99.00 %												
x dB Bandwidth	x dB												
645.4 kHz	-6.00 dB												


HCH

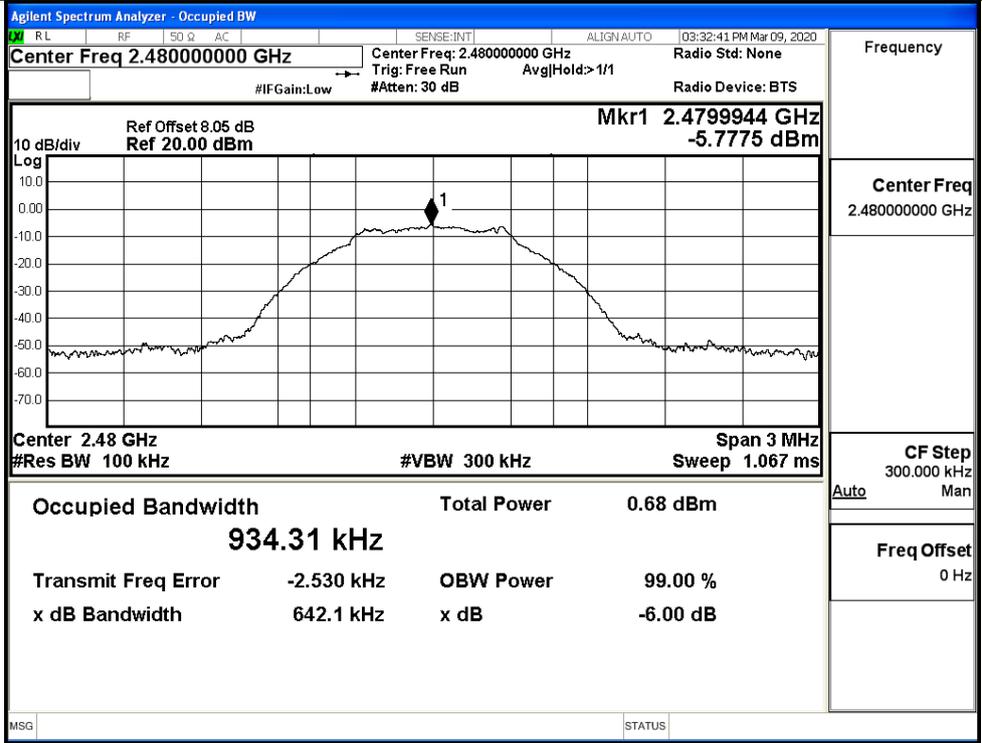

Frequency	Center Freq 2.480000000 GHz
CF Step	300.000 kHz Auto Man
Freq Offset	0 Hz

B.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-5.612	-37.922	-25.612	PASS
BT LE	MCH	-5.062	-35.926	-25.062	PASS
BT LE	HCH	-5.911	-36.769	-25.911	PASS

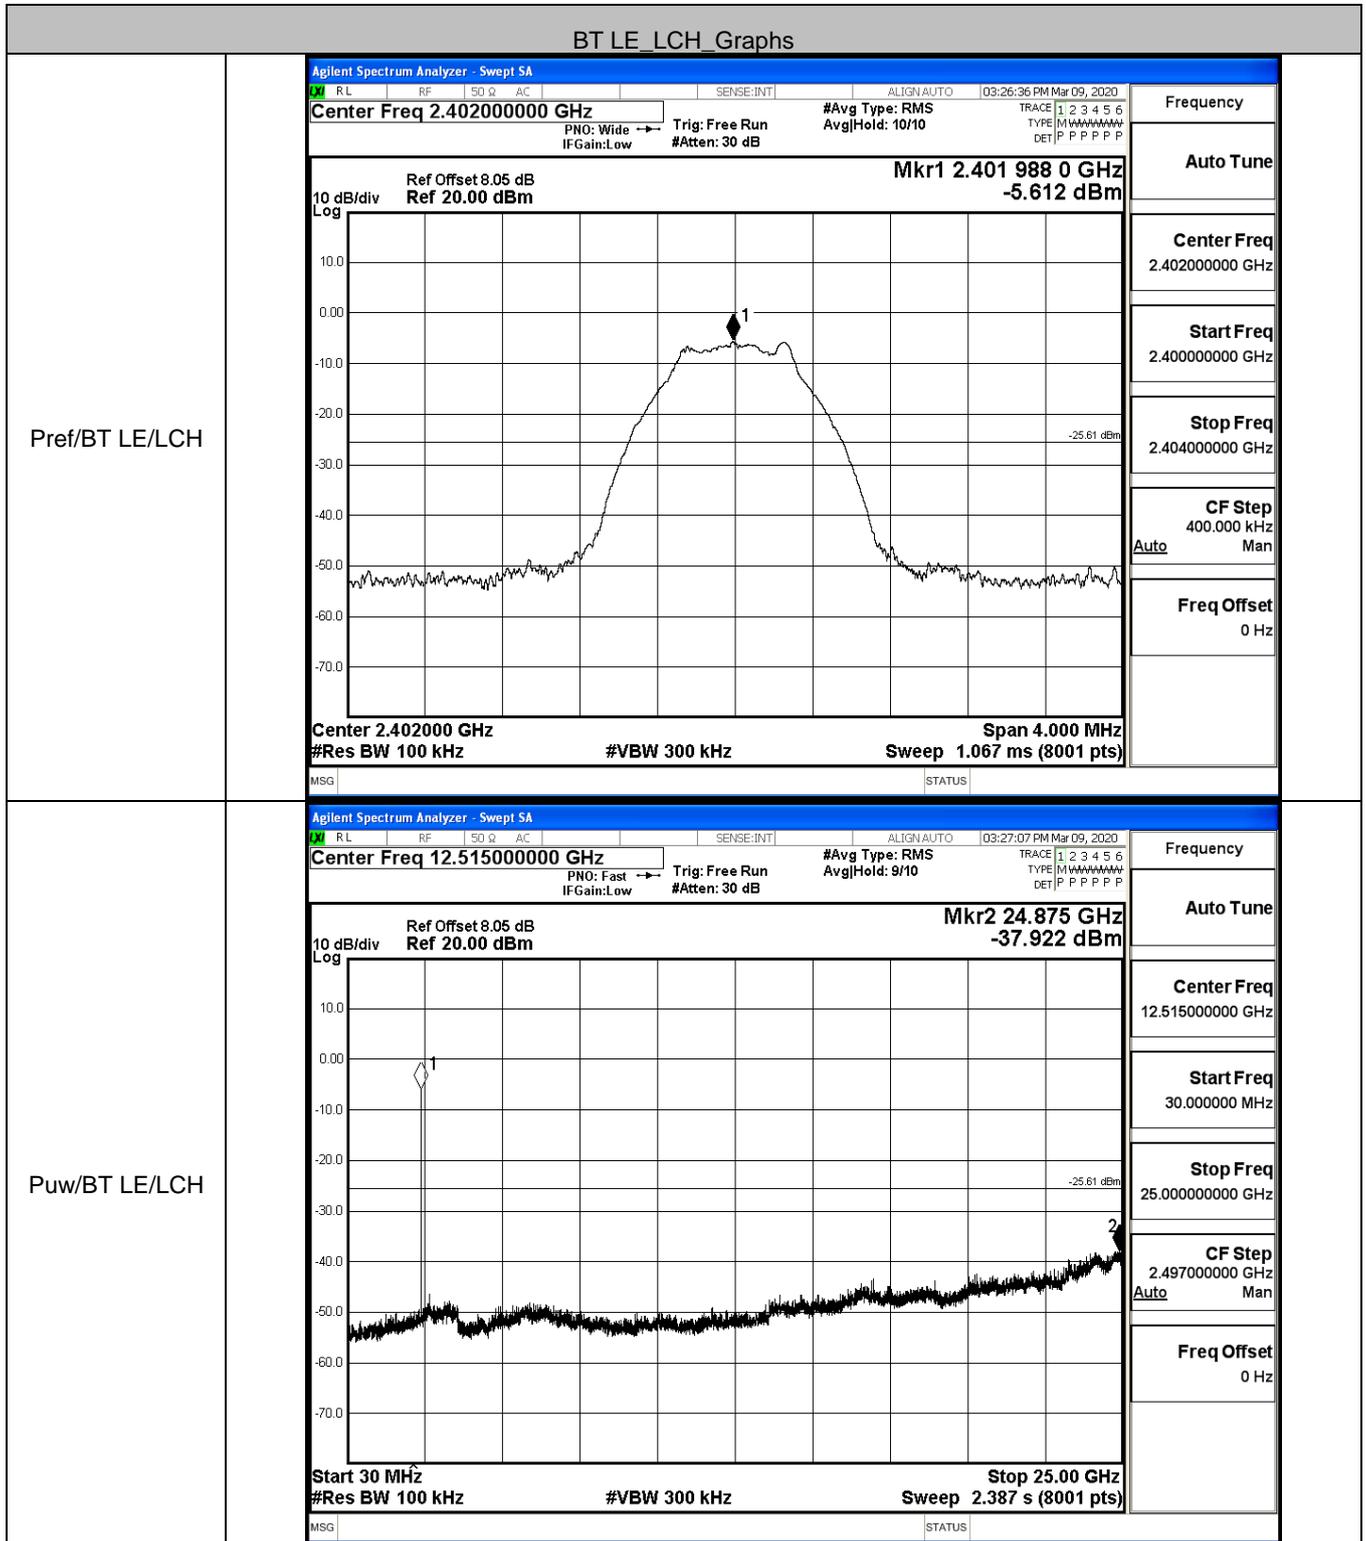


--	--

BT LE_MCH_Graphs

Pref/BT LE/MCH

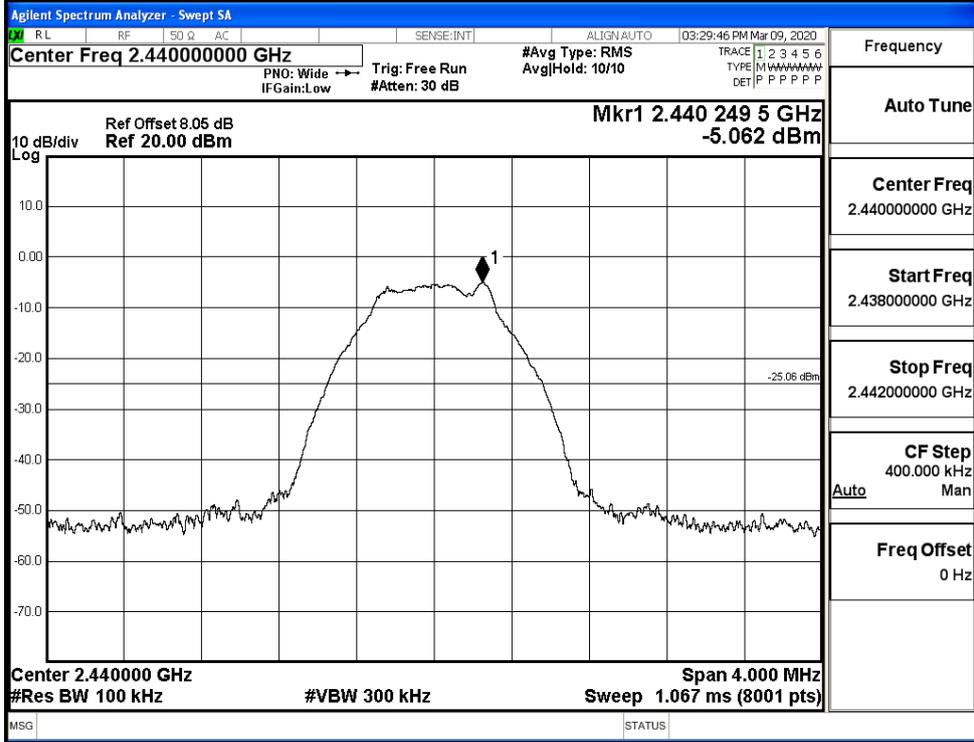


Puw/BT LE/MCH

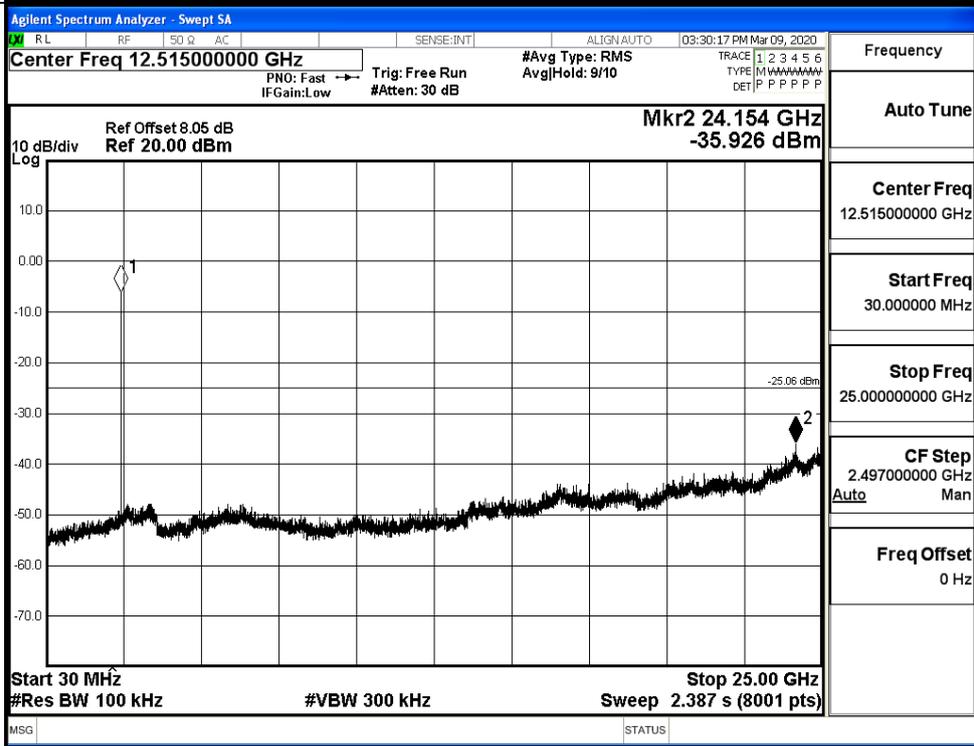


BT LE_HCH_Graphs

Pref/BT LE/HCH

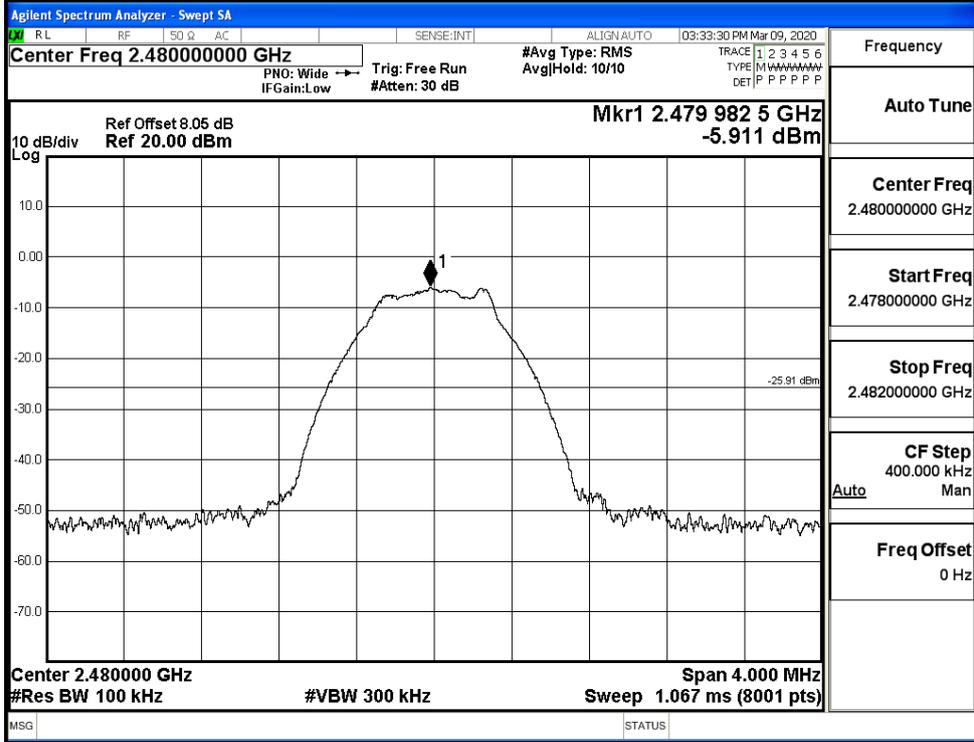



Puw/BT LE/HCH

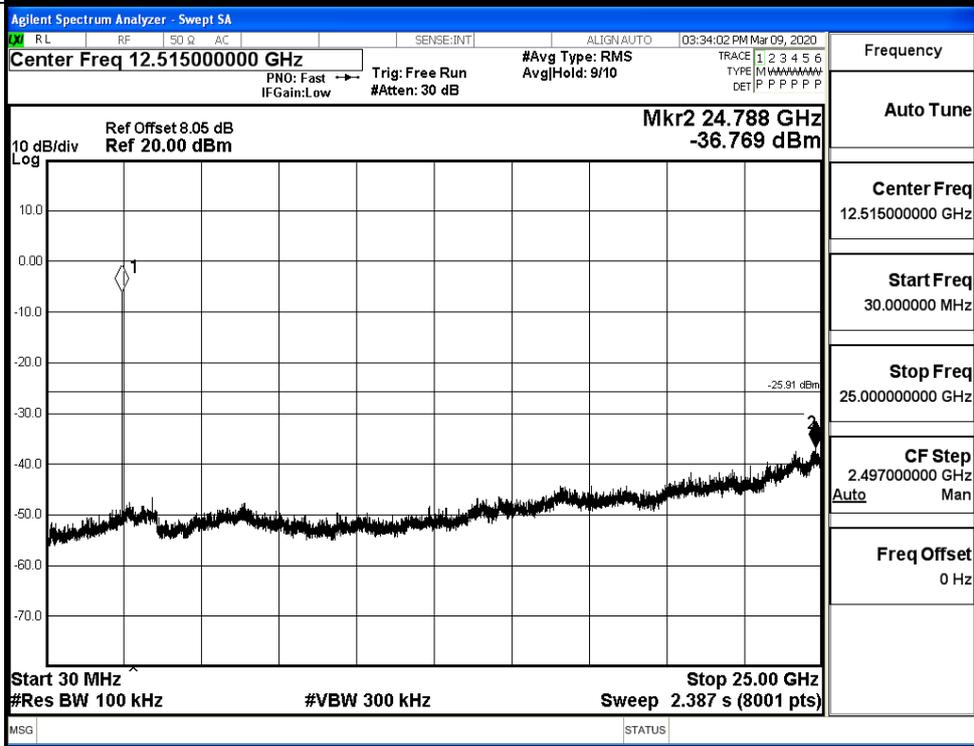

B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-5.862	-49.938	-25.86	PASS
BT LE	HCH	-6.070	-49.804	-26.07	PASS


Test Graphs

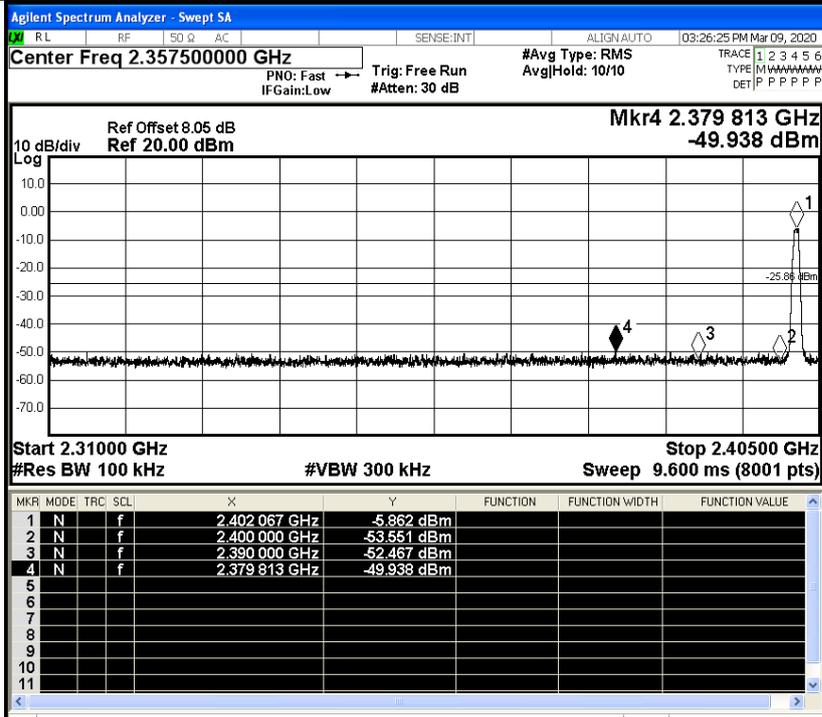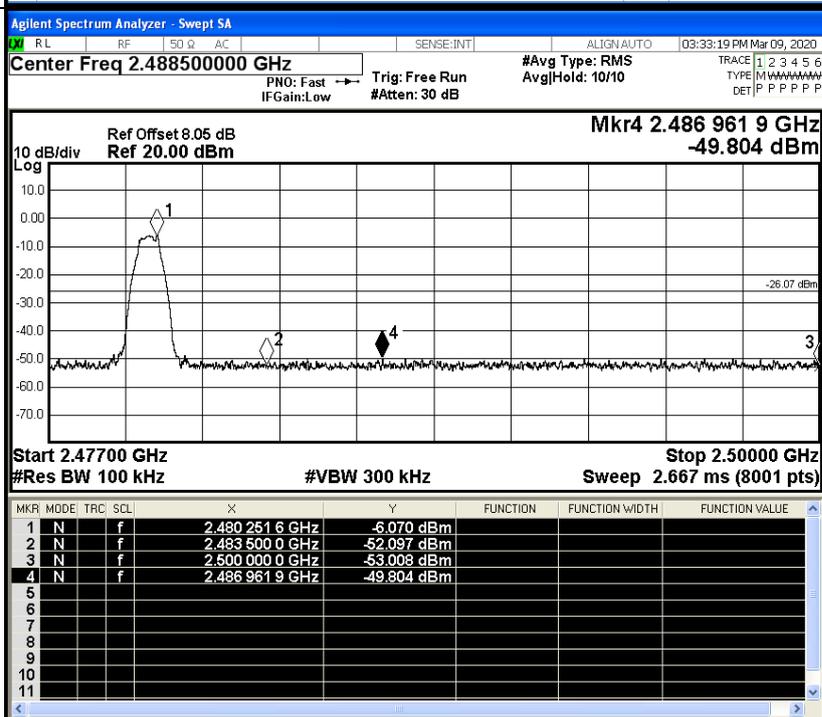LCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.357500000 GHz Mkr4 2.379 813 GHz -49.938 dBm Start 2.31000 GHz Stop 2.40500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (8001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.402 067 GHz</td><td>-5.862 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-53.551 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-52.467 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.379 813 GHz</td><td>-49.938 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.402 067 GHz	-5.862 dBm				2	N	f		2.400 000 GHz	-53.551 dBm				3	N	f		2.390 000 GHz	-52.467 dBm				4	N	f		2.379 813 GHz	-49.938 dBm				Frequency Auto Tune Center Freq 2.357500000 GHz Start Freq 2.310000000 GHz Stop Freq 2.405000000 GHz CF Step 9.500000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.402 067 GHz	-5.862 dBm																																										
2	N	f		2.400 000 GHz	-53.551 dBm																																										
3	N	f		2.390 000 GHz	-52.467 dBm																																										
4	N	f		2.379 813 GHz	-49.938 dBm																																										
HCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.488500000 GHz Mkr4 2.486 961 9 GHz -49.804 dBm Start 2.47700 GHz Stop 2.50000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (8001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.480 251 6 GHz</td><td>-6.070 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 0 GHz</td><td>-52.097 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 0 GHz</td><td>-53.008 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.486 961 9 GHz</td><td>-49.804 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.480 251 6 GHz	-6.070 dBm				2	N	f		2.483 500 0 GHz	-52.097 dBm				3	N	f		2.500 000 0 GHz	-53.008 dBm				4	N	f		2.486 961 9 GHz	-49.804 dBm				Frequency Auto Tune Center Freq 2.488500000 GHz Start Freq 2.477000000 GHz Stop Freq 2.500000000 GHz CF Step 2.300000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.480 251 6 GHz	-6.070 dBm																																										
2	N	f		2.483 500 0 GHz	-52.097 dBm																																										
3	N	f		2.500 000 0 GHz	-53.008 dBm																																										
4	N	f		2.486 961 9 GHz	-49.804 dBm																																										


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.15	2.0	0	54.11	PEAK	74	PASS
		Ant1	2310.0	-53.55	2.0	0	43.71	AV	54	PASS
		Ant1	2390.0	-42.58	2.0	0	54.68	PEAK	74	PASS
		Ant1	2390.0	-53.18	2.0	0	44.08	AV	54	PASS
	2480	Ant1	2483.5	-41.02	2.0	0	56.24	PEAK	74	PASS
		Ant1	2483.5	-52.45	2.0	0	44.81	AV	54	PASS
		Ant1	2500.0	-42.61	2.0	0	54.65	PEAK	74	PASS
		Ant1	2500.0	-52.22	2.0	0	45.04	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

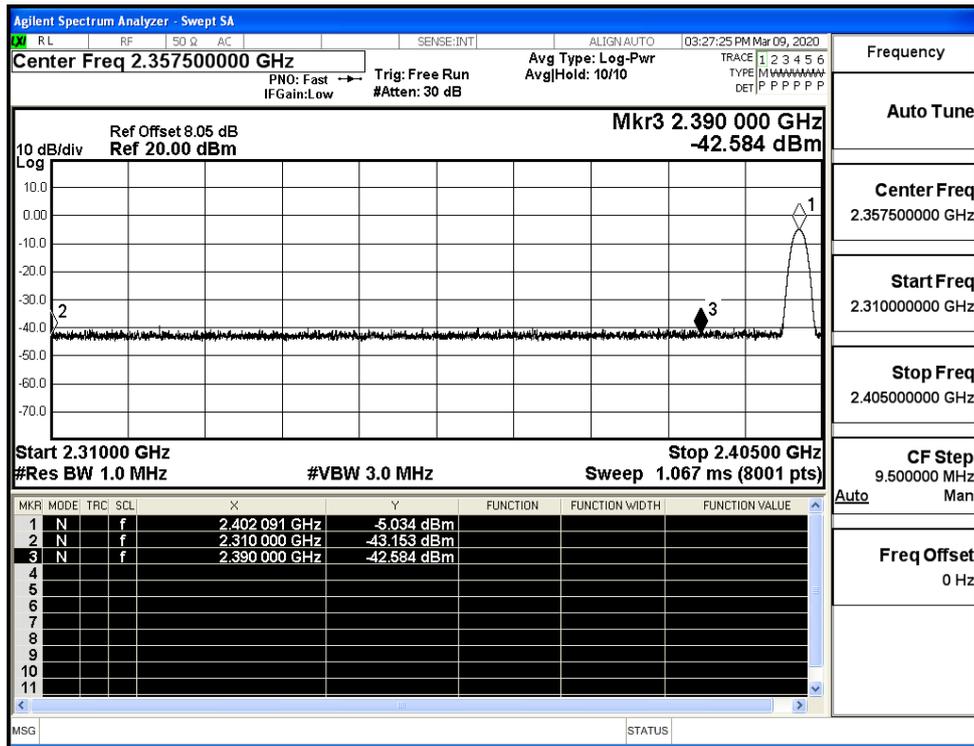

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

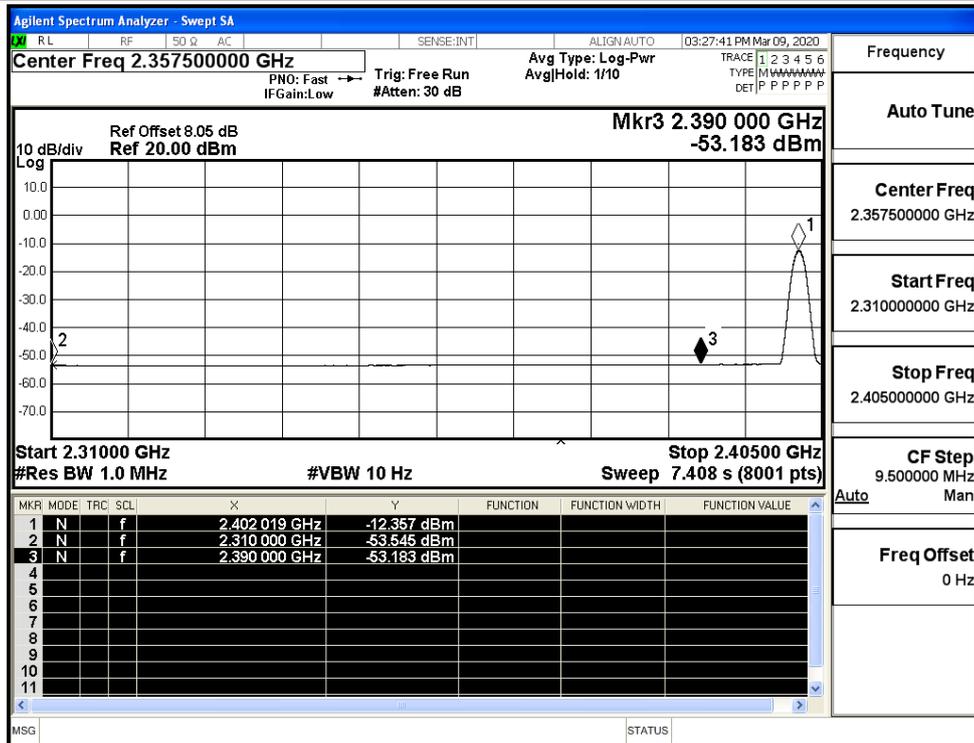

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

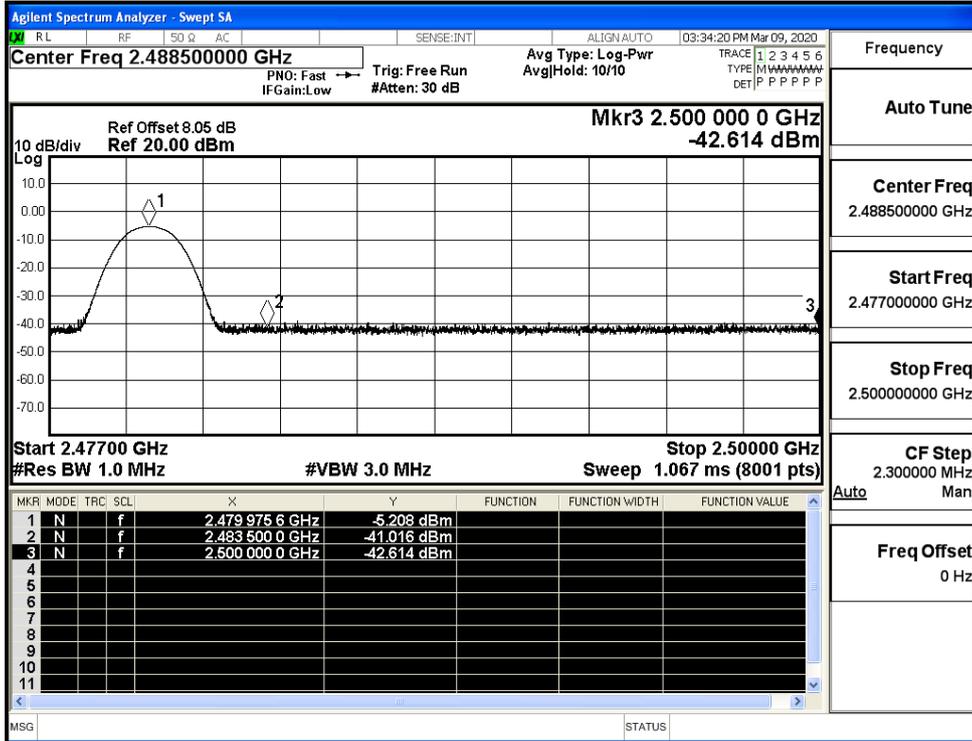

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

