

## Test Data


### Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
HVNT	a	5745	Ant2	5744.9795	-3.57	Within authorized band	Pass
HVNT	a	5745	Ant4	5744.979	-3.66		Pass
LVNT	a	5745	Ant2	5744.9795	-3.57		Pass
LVNT	a	5745	Ant4	5744.9795	-3.57		Pass
NVHT	a	5745	Ant2	5744.9795	-3.57		Pass
NVHT	a	5745	Ant4	5744.9795	-3.57		Pass
NVLT	a	5745	Ant2	5744.98	-3.48		Pass
NVLT	a	5745	Ant4	5744.98	-3.48		Pass
NVNT	a	5745	Ant2	5744.98	-3.48		Pass
NVNT	a	5745	Ant4	5744.9805	-3.39		Pass
HVNT	ac20	5745	Sum	5744.979	-3.66		Pass
LVNT	ac20	5745	Sum	5744.98	-3.48		Pass
NVHT	ac20	5745	Sum	5744.978	-3.83		Pass
NVLT	ac20	5745	Sum	5744.9815	-3.22		Pass
NVNT	ac20	5745	Sum	5744.983	-2.96		Pass
HVNT	ax20	5745	Sum	5744.9815	-3.22		Pass
LVNT	ax20	5745	Sum	5744.982	-3.13		Pass
NVHT	ax20	5745	Sum	5744.983	-2.96		Pass
NVLT	ax20	5745	Sum	5744.9845	-2.7		Pass
NVNT	ax20	5745	Sum	5744.9865	-2.35		Pass
HVNT	ax40	5755	Sum	5754.987	-2.26		Pass
LVNT	ax40	5755	Sum	5754.988	-2.09		Pass
NVHT	ax40	5755	Sum	5754.9895	-1.82		Pass
NVLT	ax40	5755	Sum	5754.9905	-1.65		Pass
NVNT	ax40	5755	Sum	5754.994	-1.04		Pass
HVNT	ax80	5775	Sum	5774.9755	-4.24		Pass
LVNT	ax80	5775	Sum	5774.976	-4.16		Pass
NVHT	ax80	5775	Sum	5774.977	-3.98		Pass
NVLT	ax80	5775	Sum	5774.978	-3.81		Pass
NVNT	ax80	5775	Sum	5774.979	-3.64		Pass
HVNT	n20	5745	Sum	5744.9785	-3.74		Pass
LVNT	n20	5745	Sum	5744.9795	-3.57		Pass
NVHT	n20	5745	Sum	5744.981	-3.31		Pass
NVLT	n20	5745	Sum	5744.9825	-3.05		Pass
NVNT	n20	5745	Sum	5744.977	-4		Pass
HVNT	n40	5755	Sum	5754.9785	-3.74		Pass
LVNT	n40	5755	Sum	5754.979	-3.65		Pass
NVHT	n40	5755	Sum	5754.977	-4		Pass
NVLT	n40	5755	Sum	5754.981	-3.3		Pass


NVNT	n40	5755	Sum	5754.982	-3.13		Pass
Remark: "NTNV" means Normal Temperature Normal Voltage, "NVHT" means Normal Voltage High Temperature, "NVL" means Normal Voltage Low Temperature, "LVNT" means Low Voltage Normal Temperature, "HVNT" means High Voltage Normal Temperature.							

Test Graphs


Freq. Stability HVNT a 5745MHz Ant2

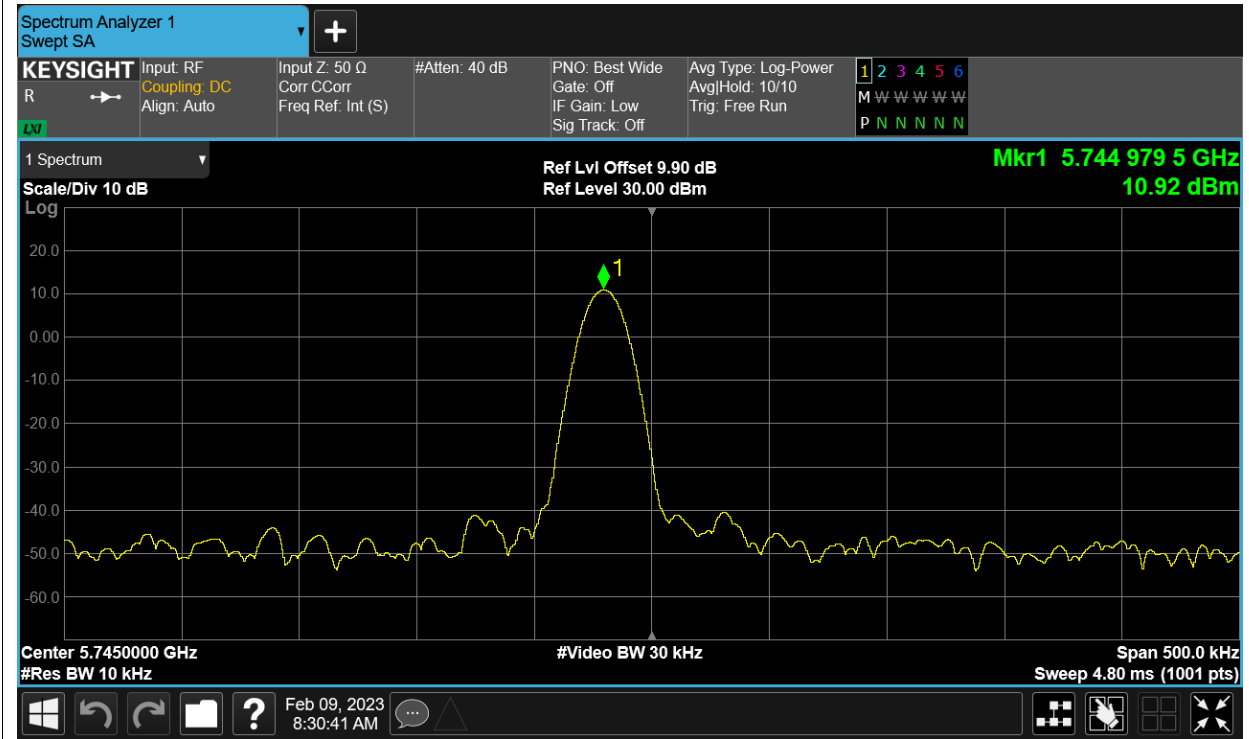


Freq. Stability HVNT a 5745MHz Ant4

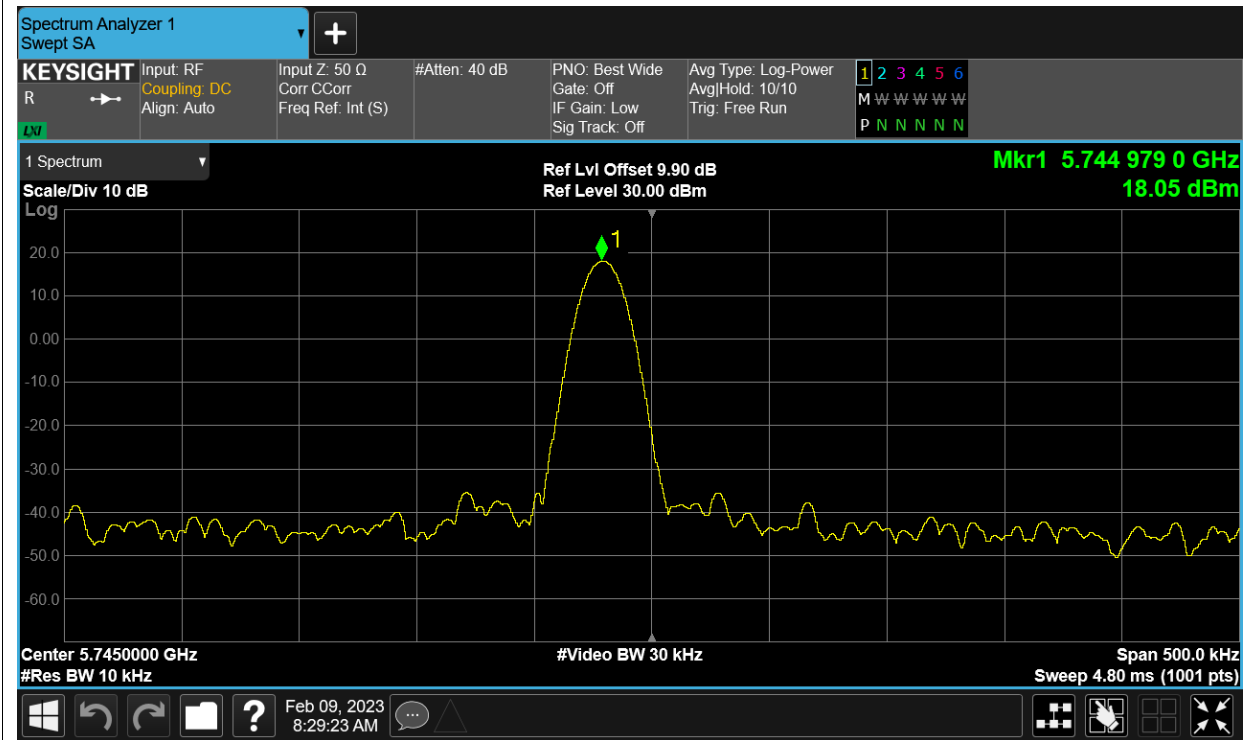


Freq. Stability LVNT a 5745MHz Ant2

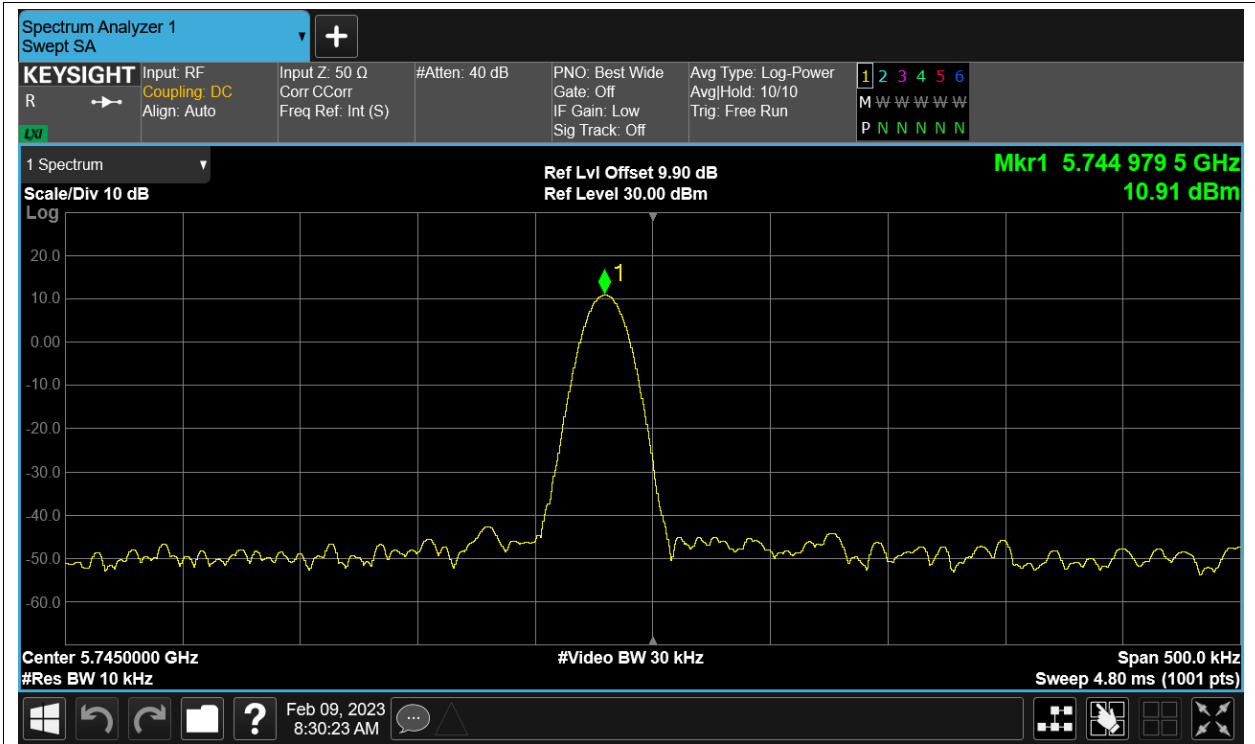


Freq. Stability LVNT a 5745MHz Ant4

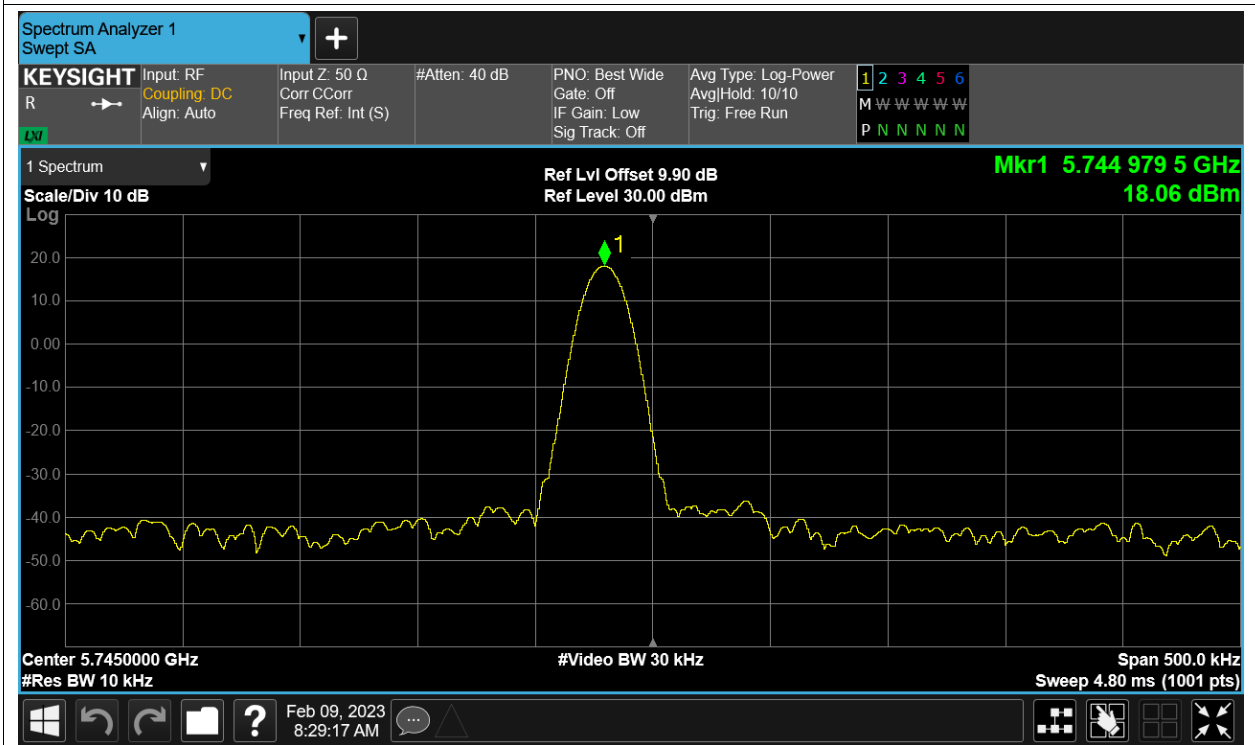


Freq. Stability NVHT a 5745MHz Ant2

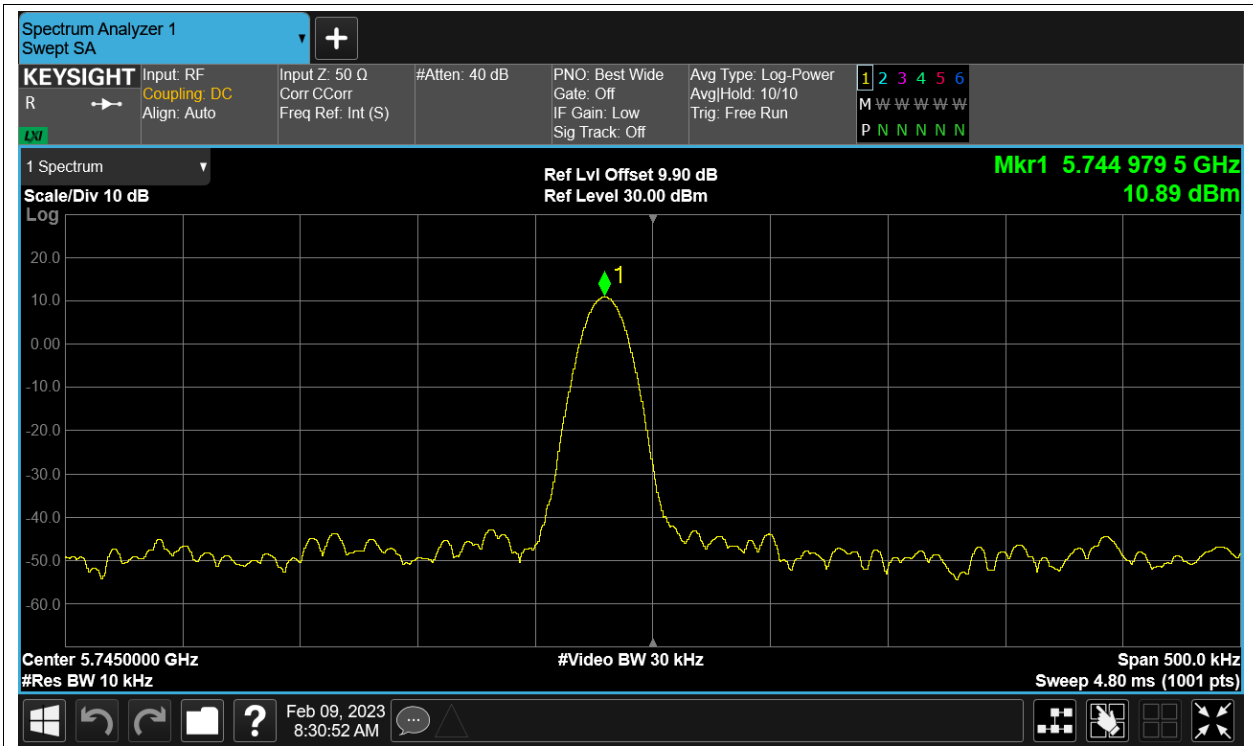


Freq. Stability NVHT a 5745MHz Ant4

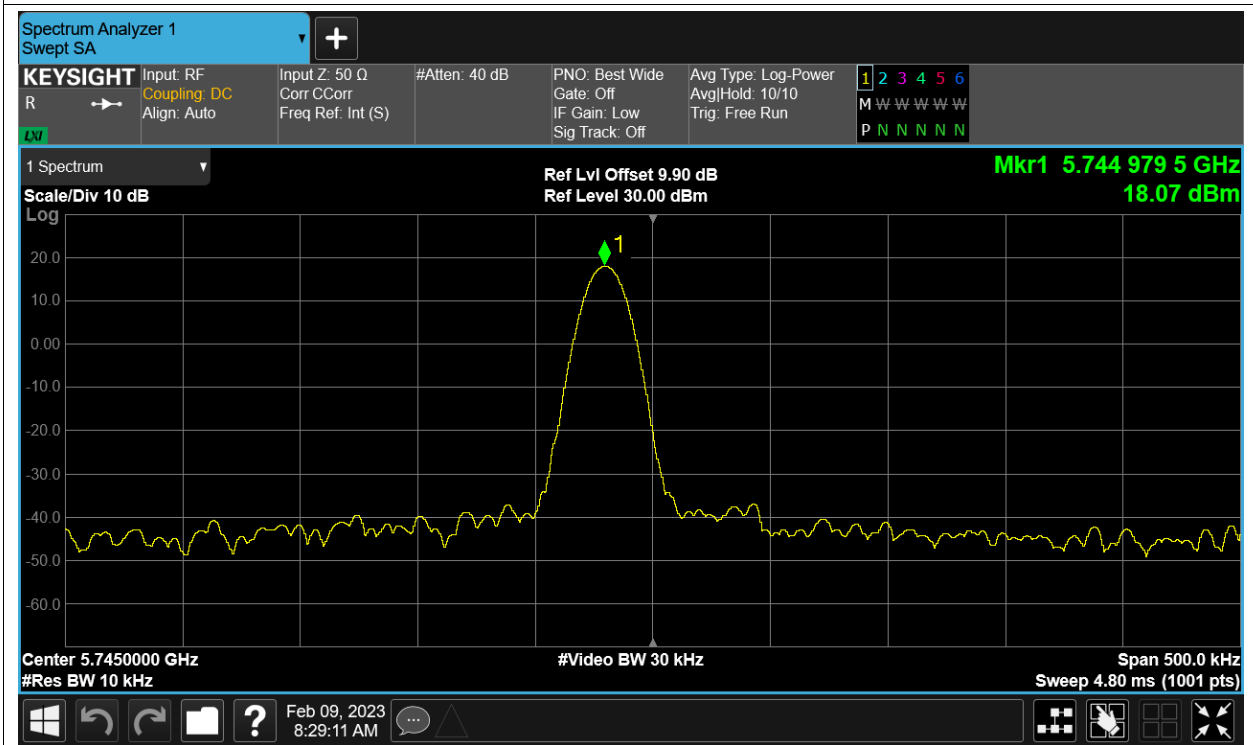


Freq. Stability NVLT a 5745MHz Ant2

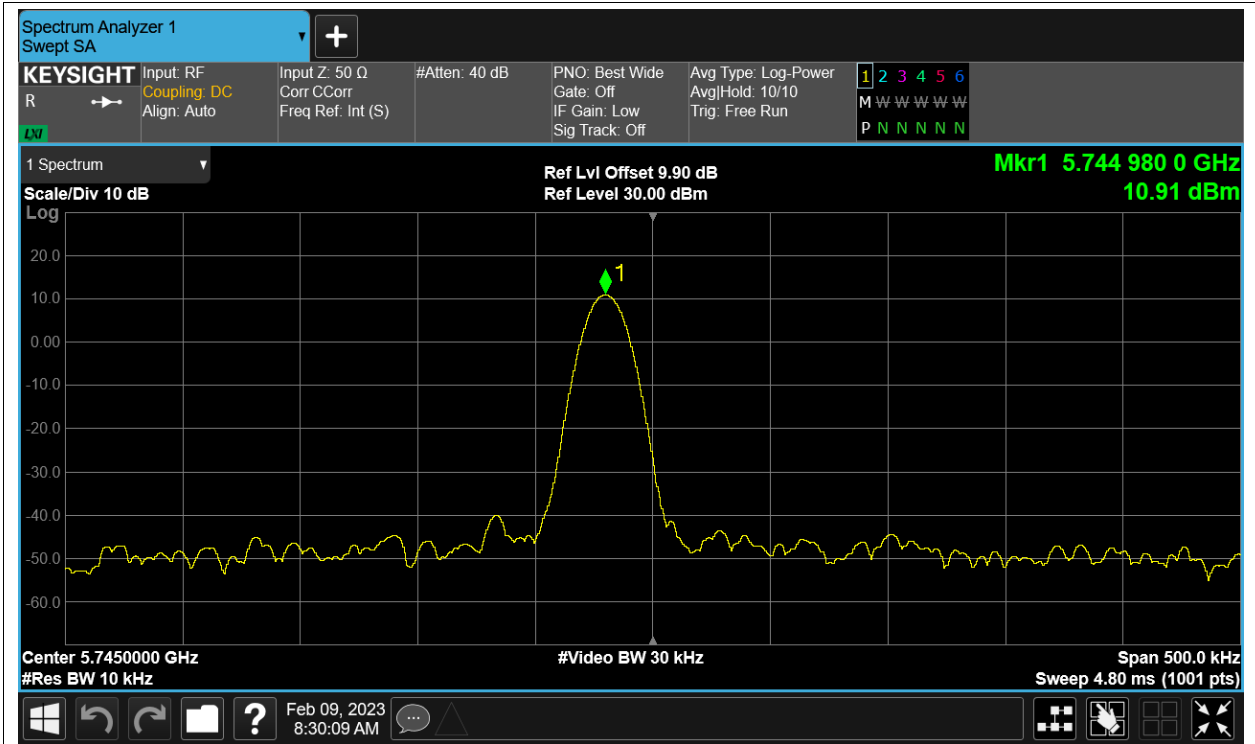


Freq. Stability NVLT a 5745MHz Ant4

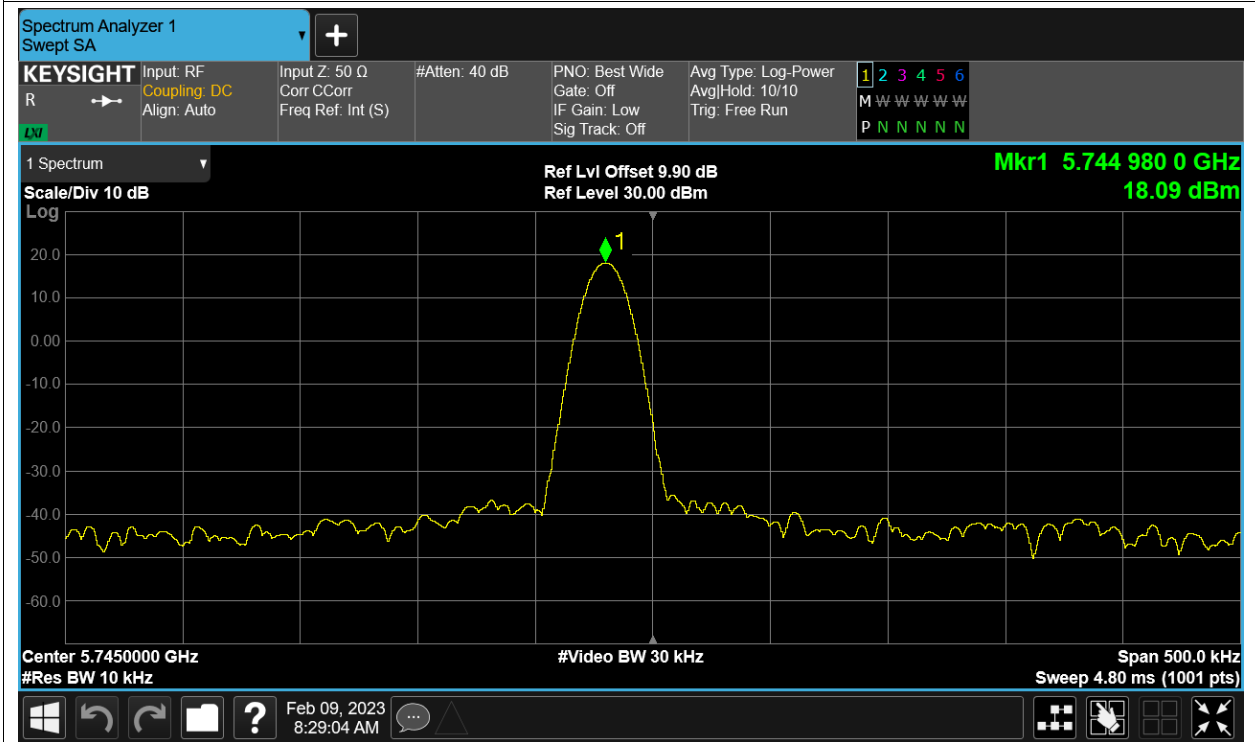


Freq. Stability NVNT a 5745MHz Ant2

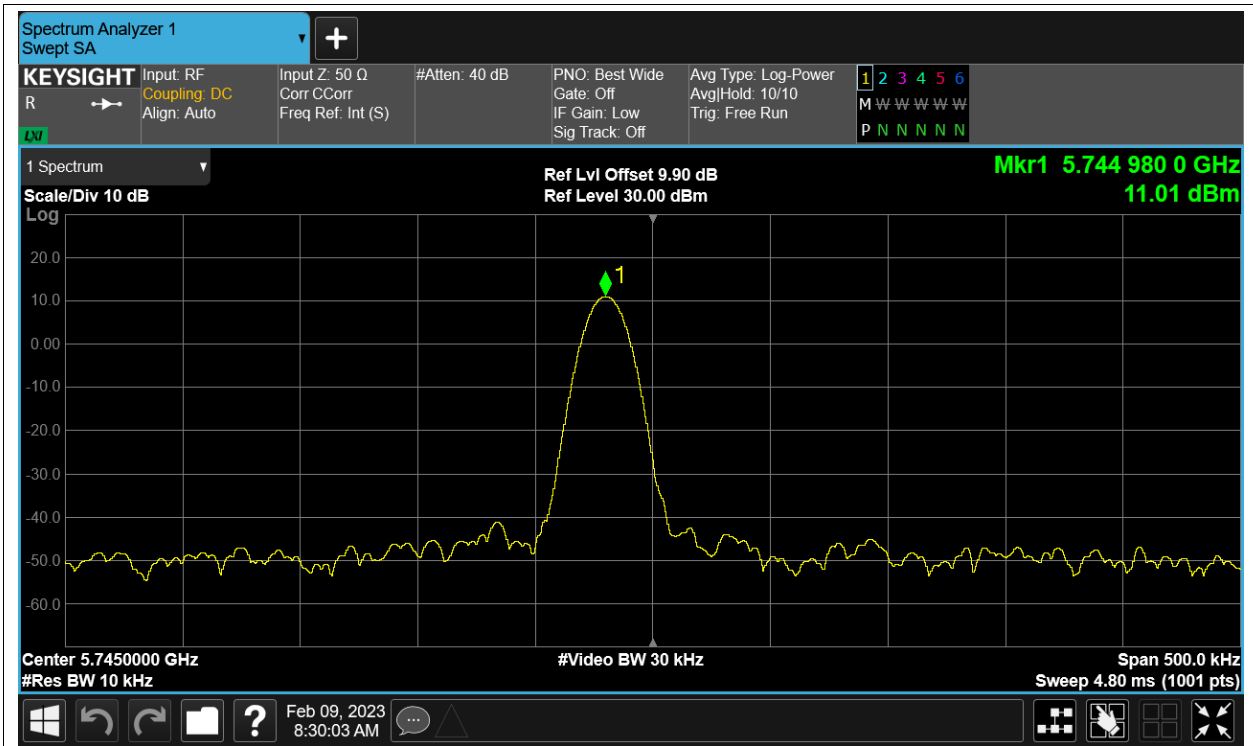


Freq. Stability NVNT a 5745MHz Ant4

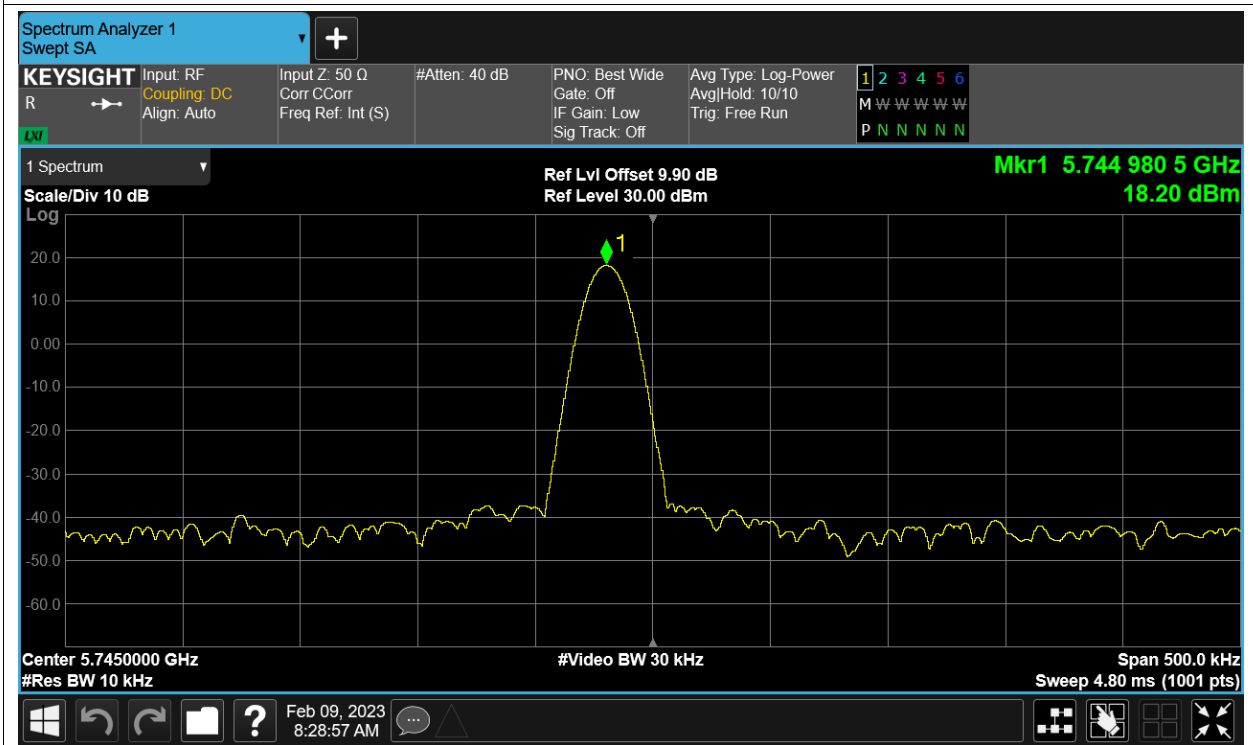

Freq. Stability HVNT ac20 5745MHz Sum

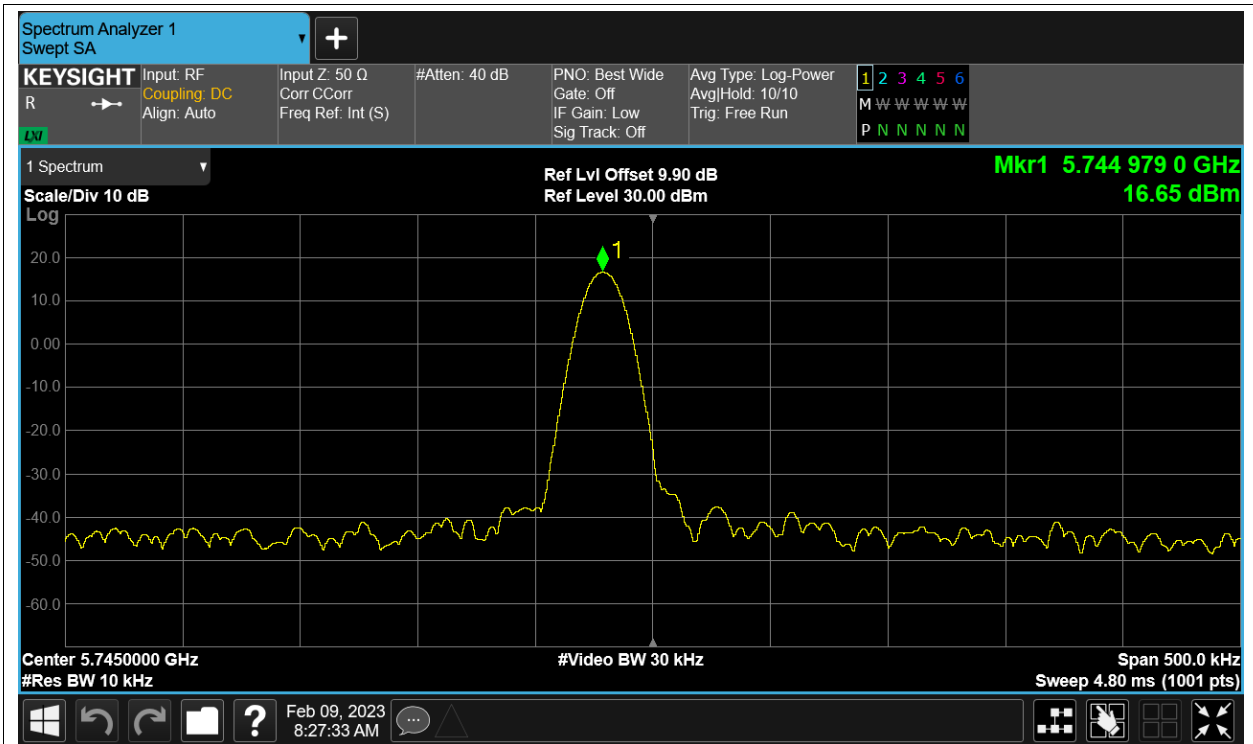


Freq. Stability LVNT ac20 5745MHz Sum

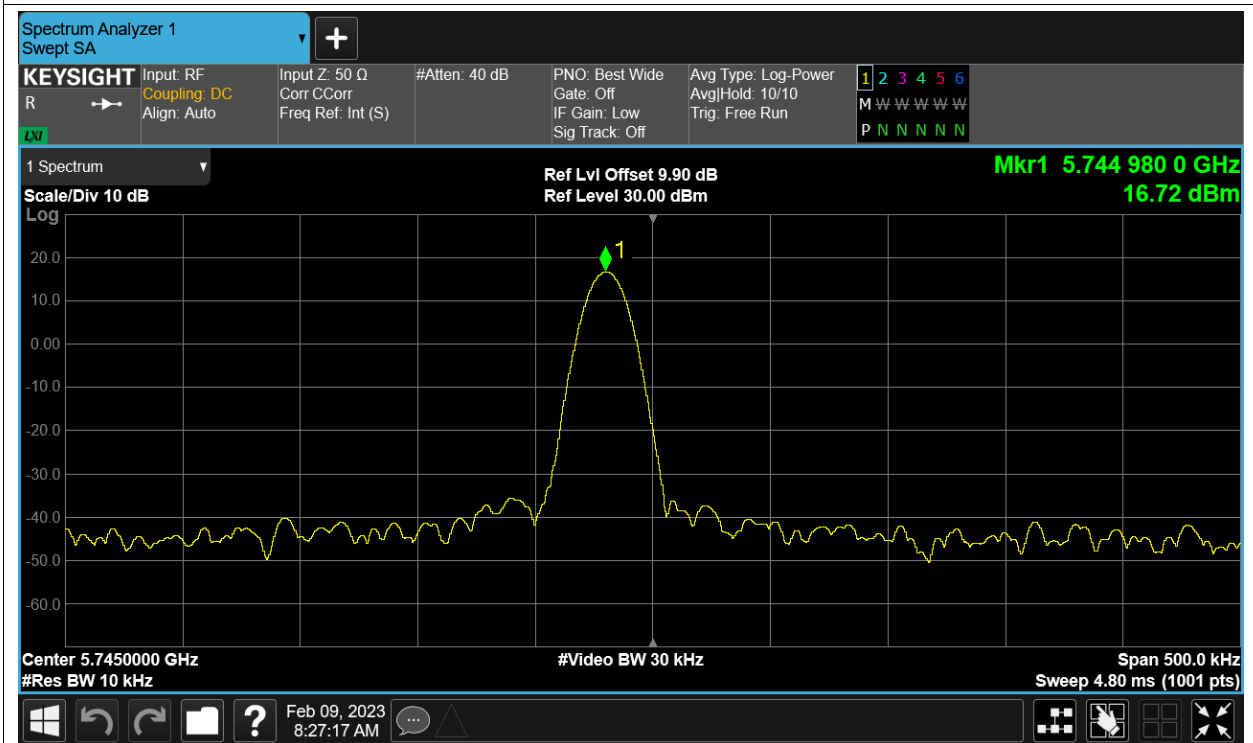


Freq. Stability NVHT ac20 5745MHz Sum




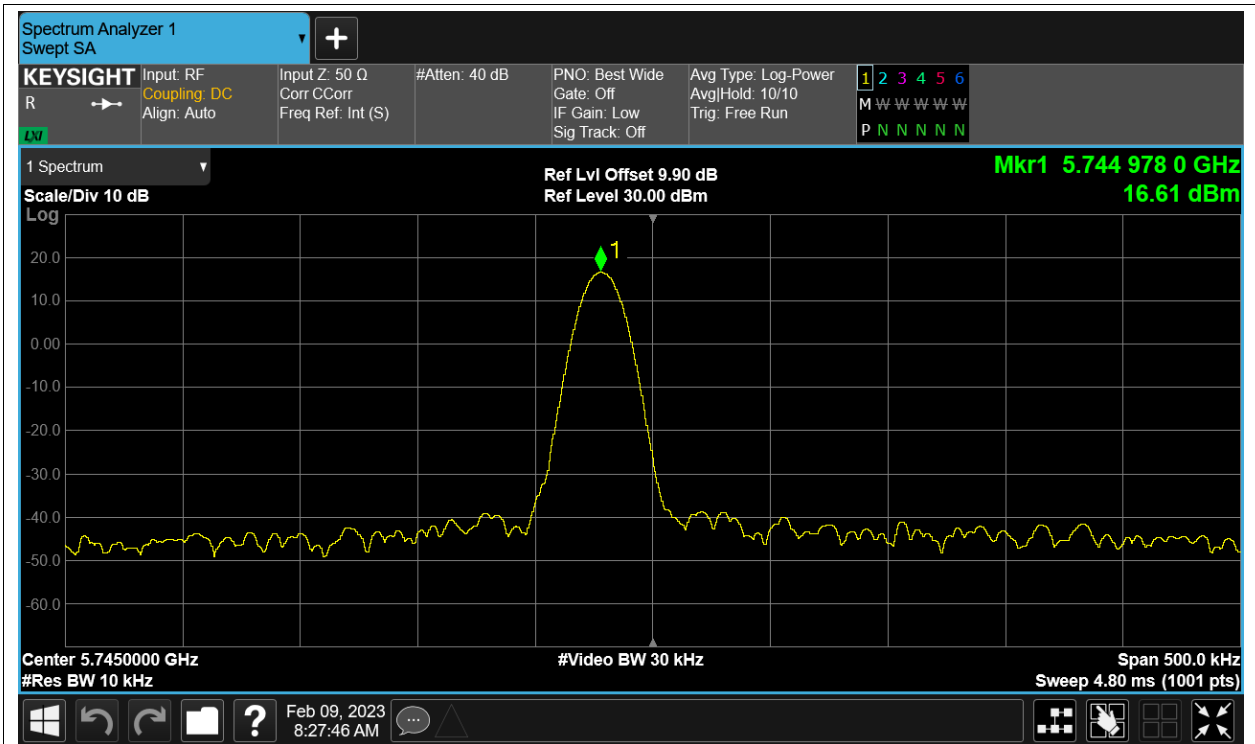


Freq. Stability NVLT ac20 5745MHz Sum

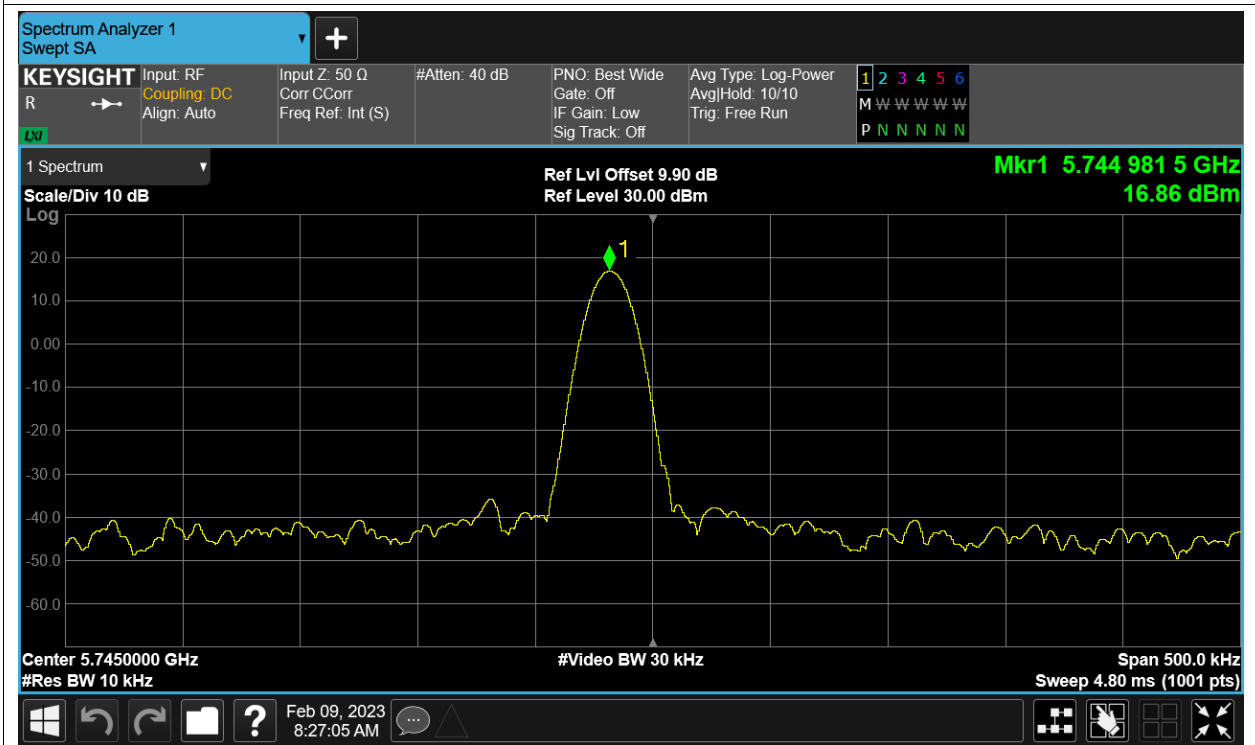


Freq. Stability NVNT ac20 5745MHz Sum

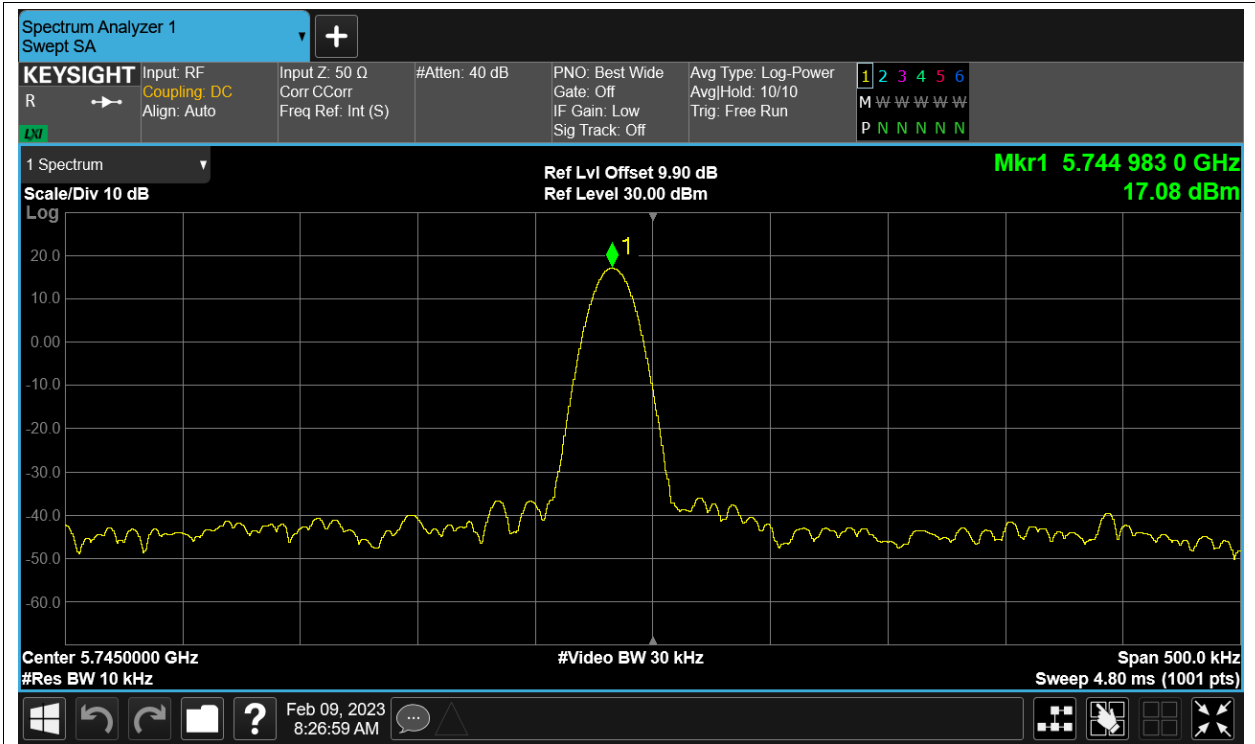


Freq. Stability HVNT ax20 5745MHz Sum

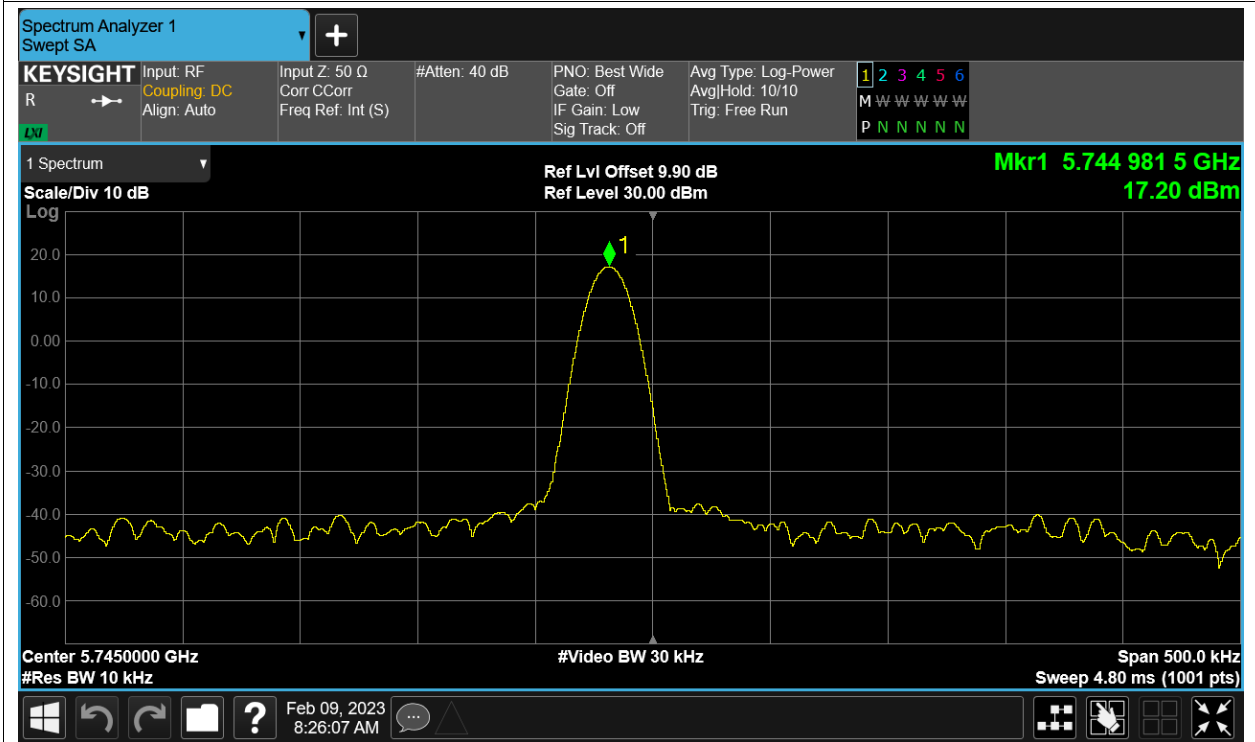


Freq. Stability LVNT ax20 5745MHz Sum

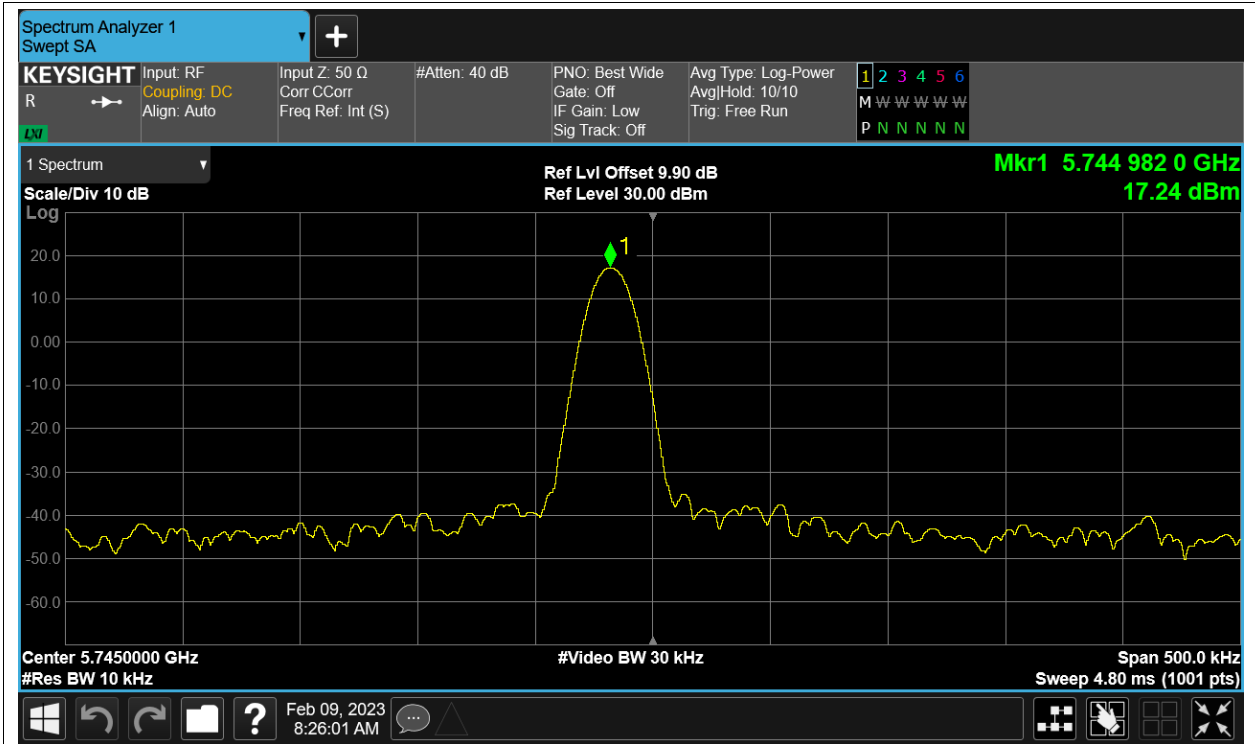


Freq. Stability NVHT ax20 5745MHz Sum

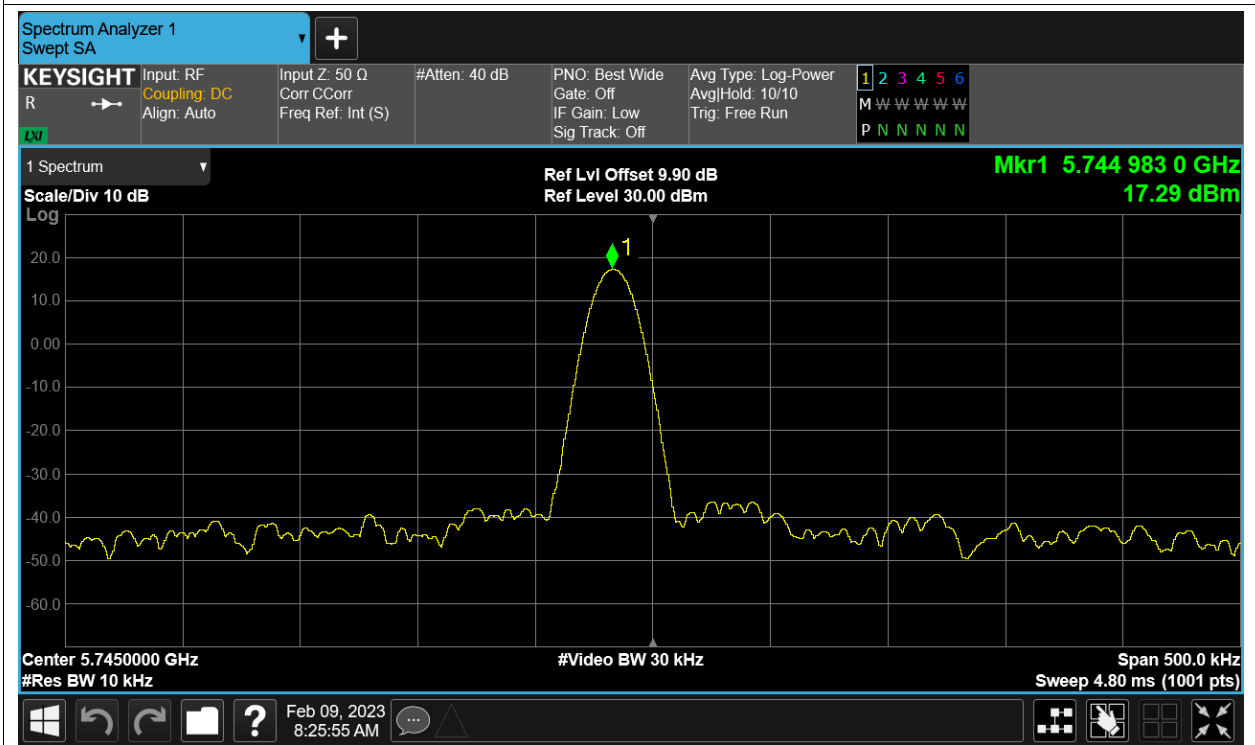


Freq. Stability NVLT ax20 5745MHz Sum

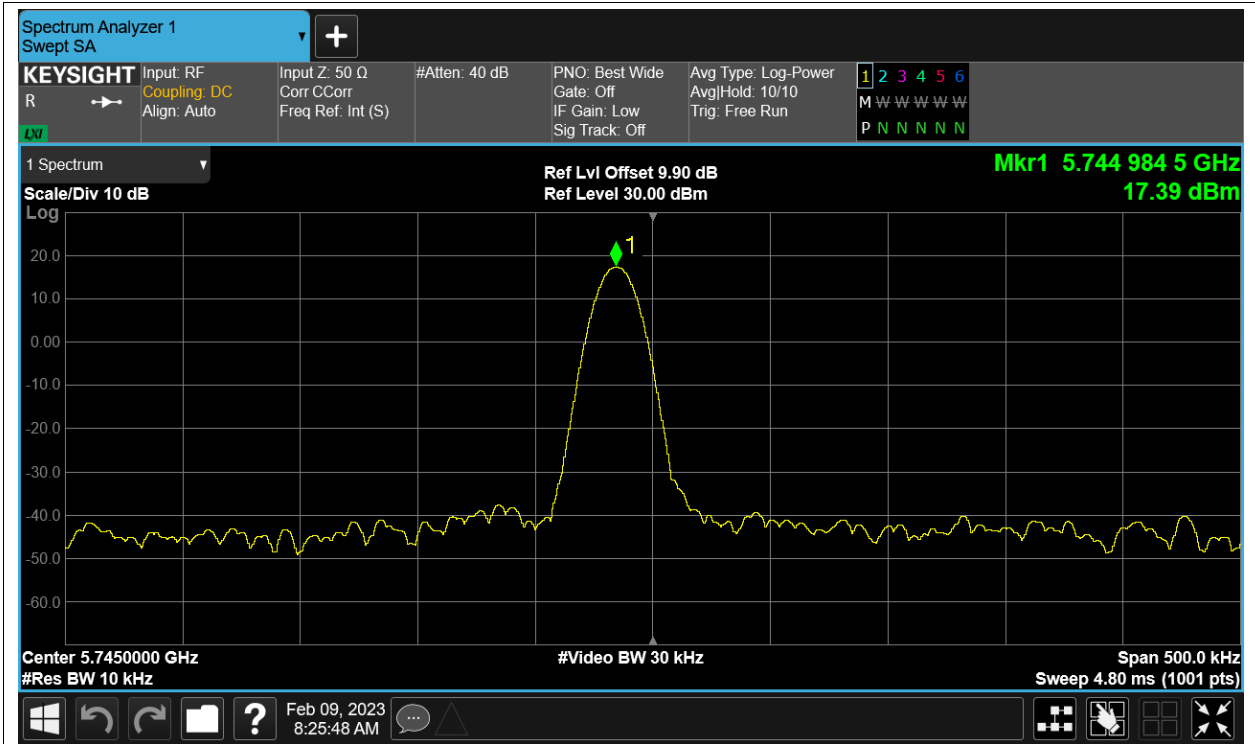


Freq. Stability NVNT ax20 5745MHz Sum

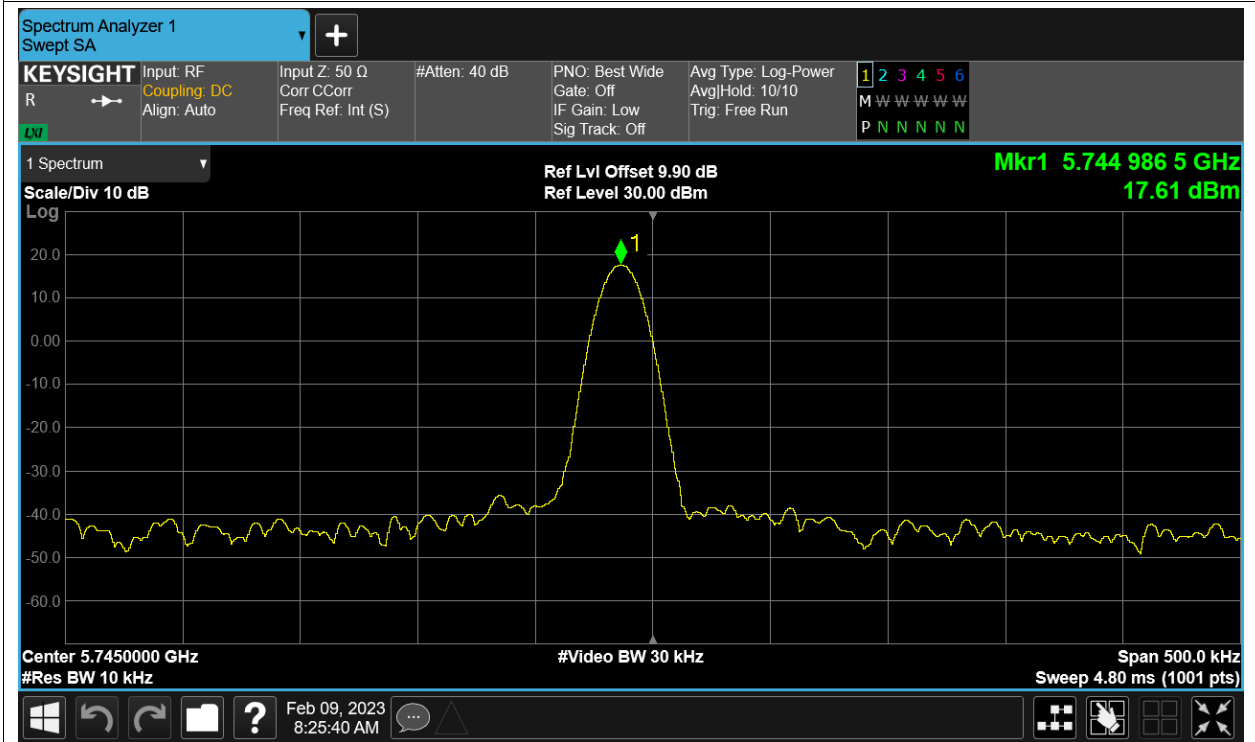


Freq. Stability HVNT ax40 5755MHz Sum

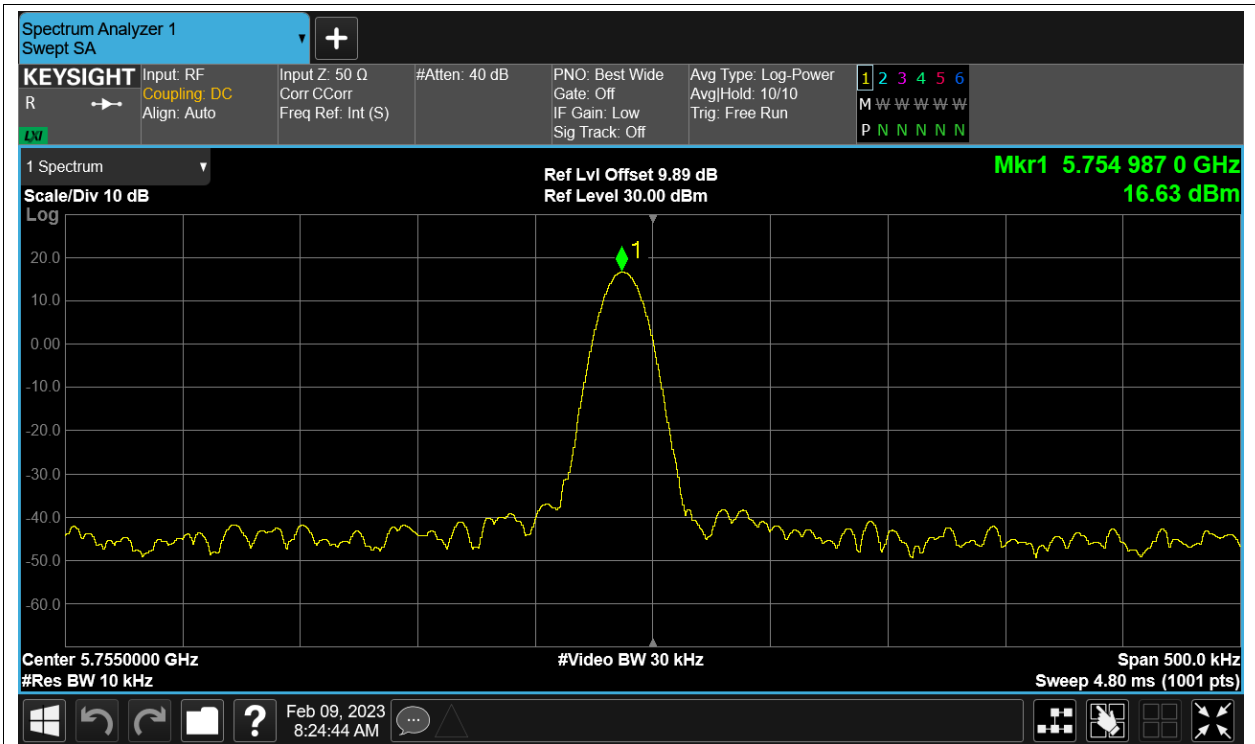


Freq. Stability LVNT ax40 5755MHz Sum

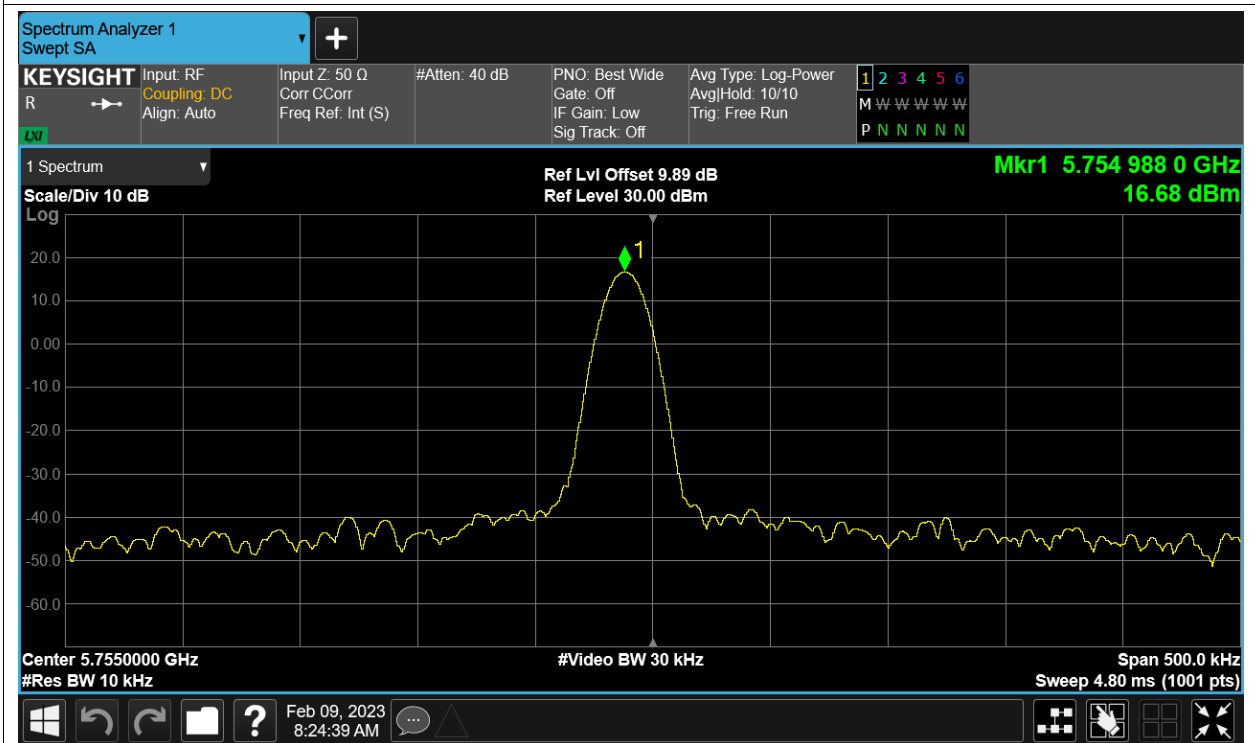


Freq. Stability NVHT ax40 5755MHz Sum

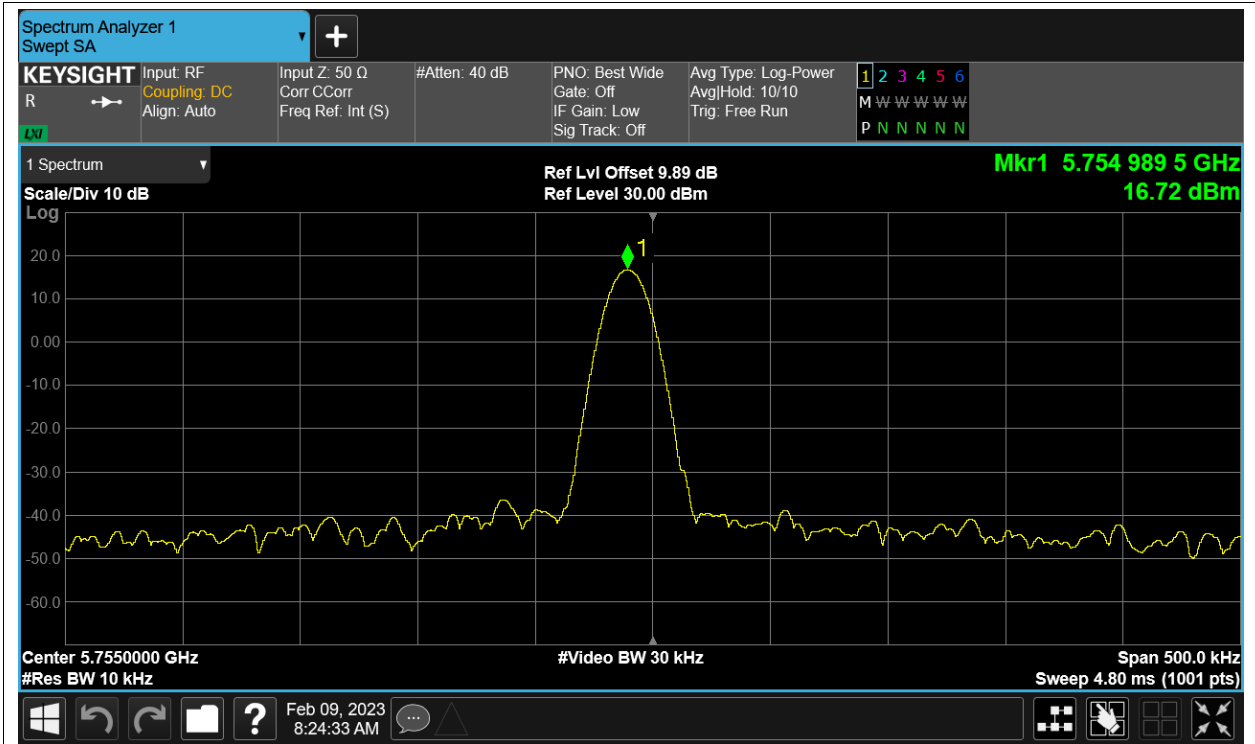


Freq. Stability NVLT ax40 5755MHz Sum

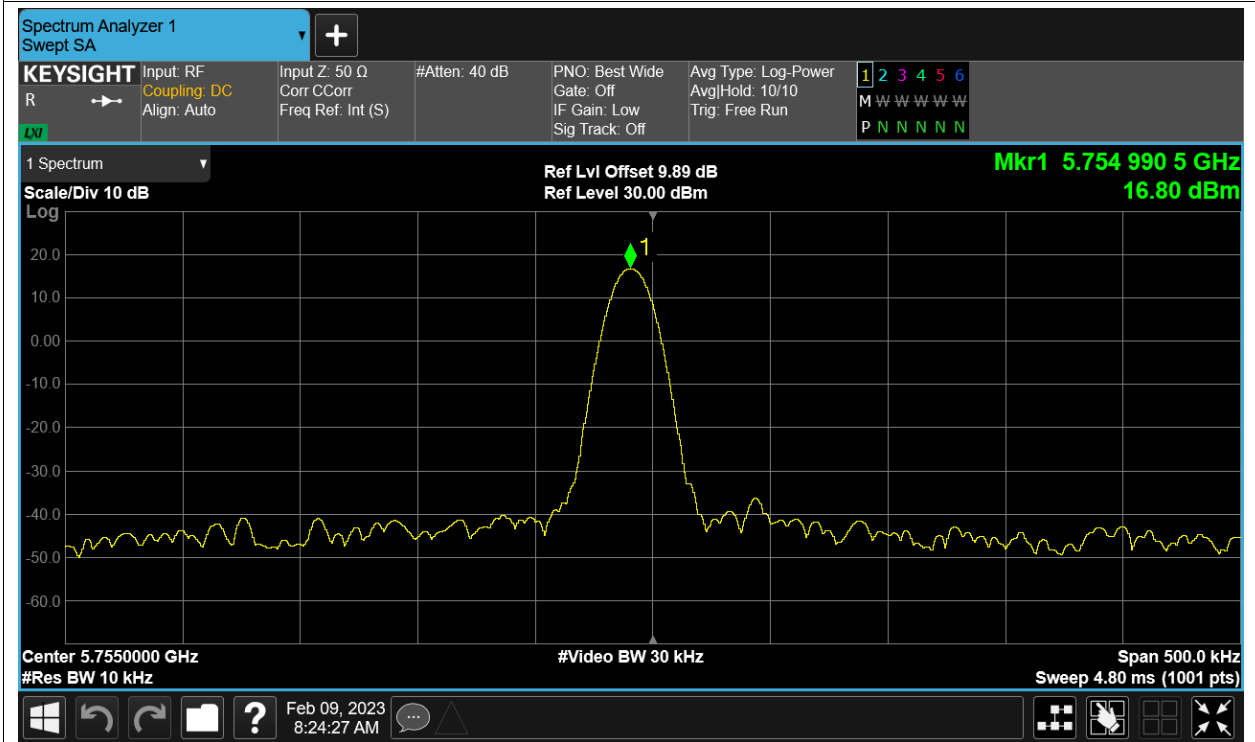


Freq. Stability NVNT ax40 5755MHz Sum

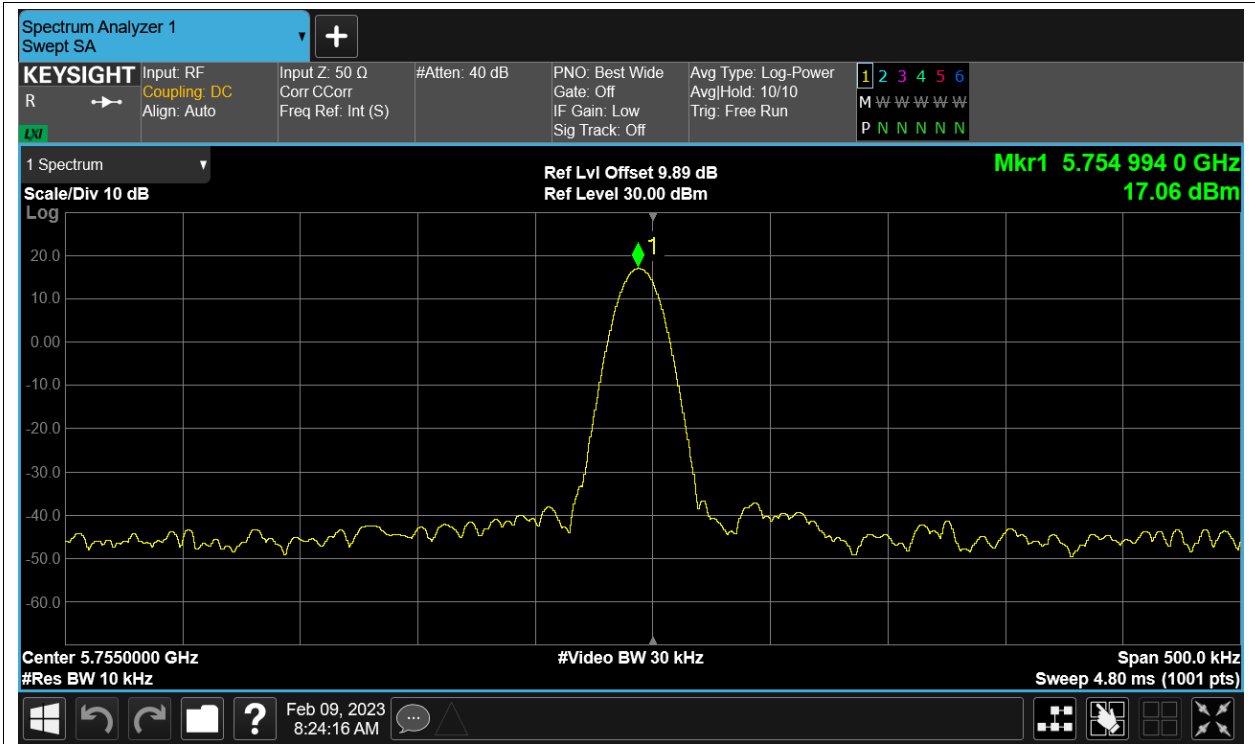


Freq. Stability HVNT ax80 5775MHz Sum

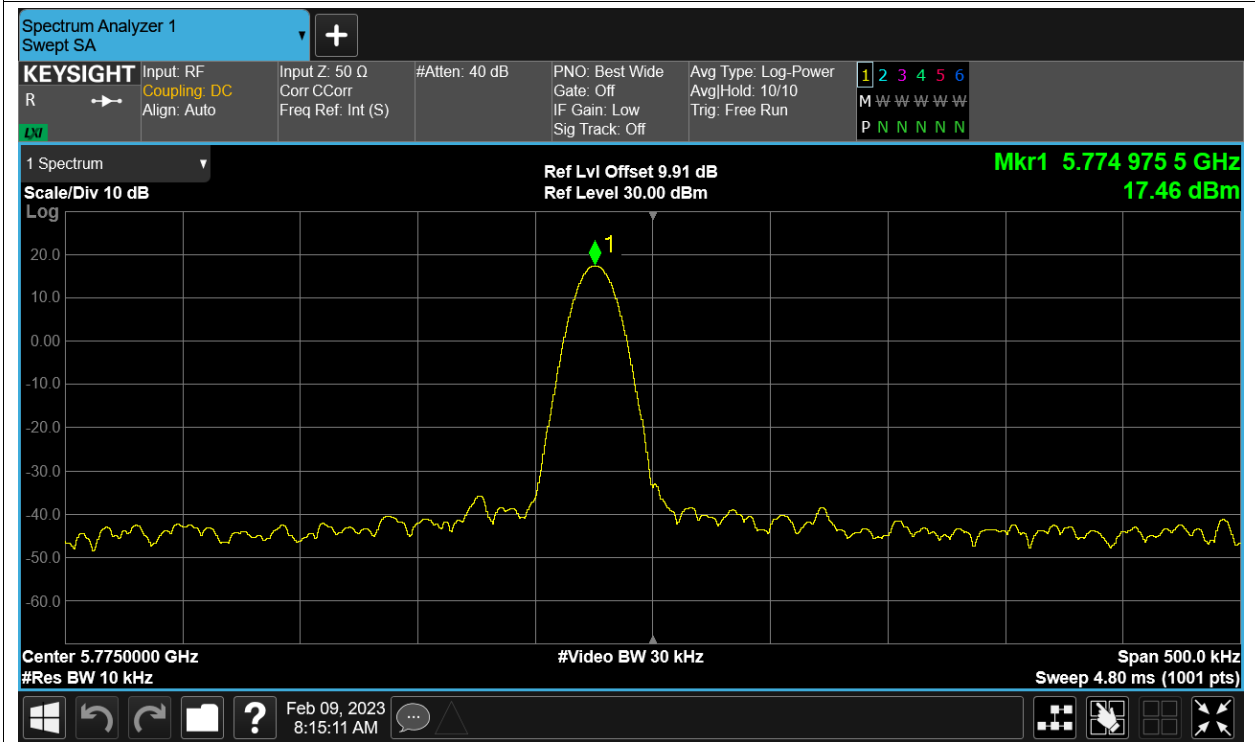

Freq. Stability LVNT ax80 5775MHz Sum

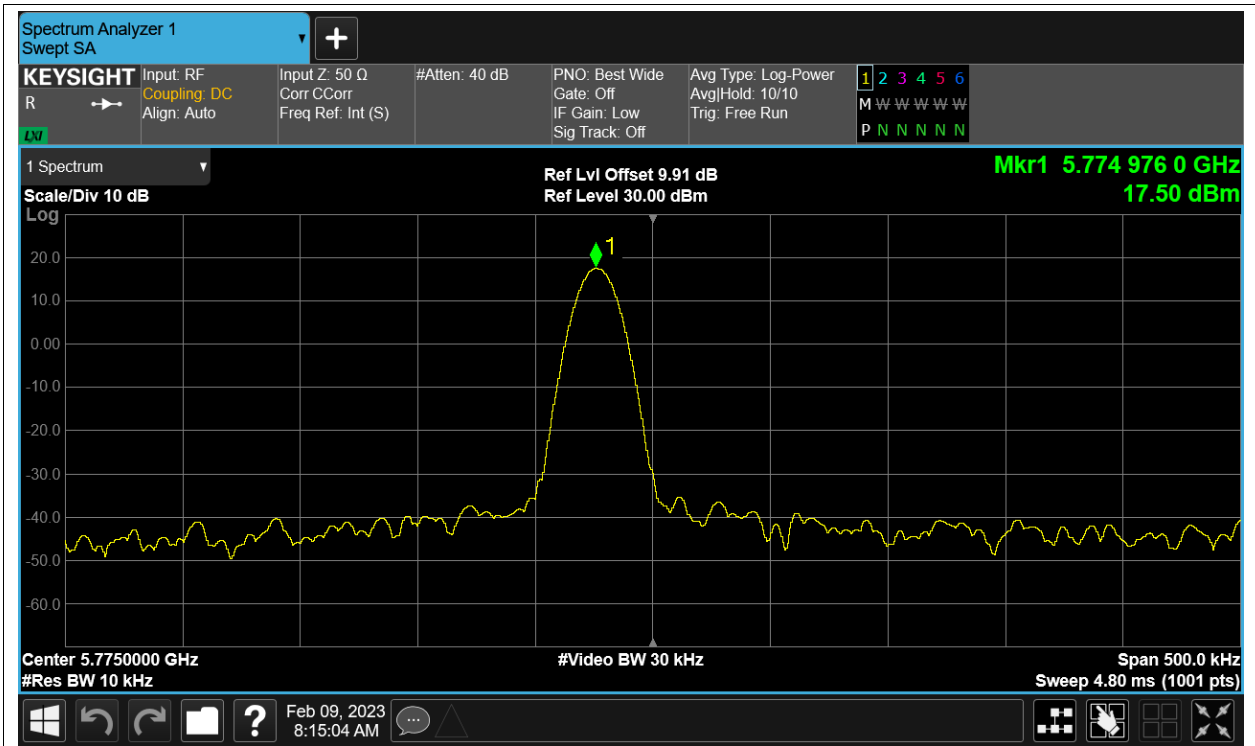


Freq. Stability NVHT ax80 5775MHz Sum

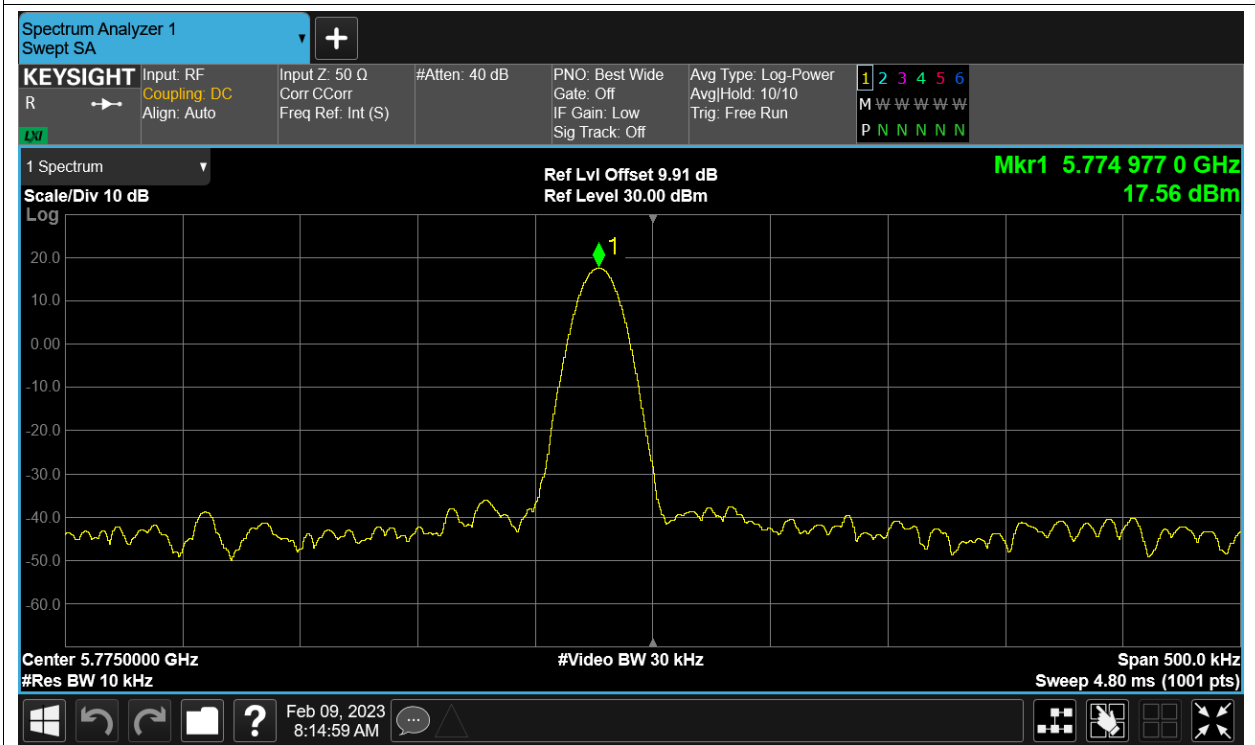


Freq. Stability NVLT ax80 5775MHz Sum




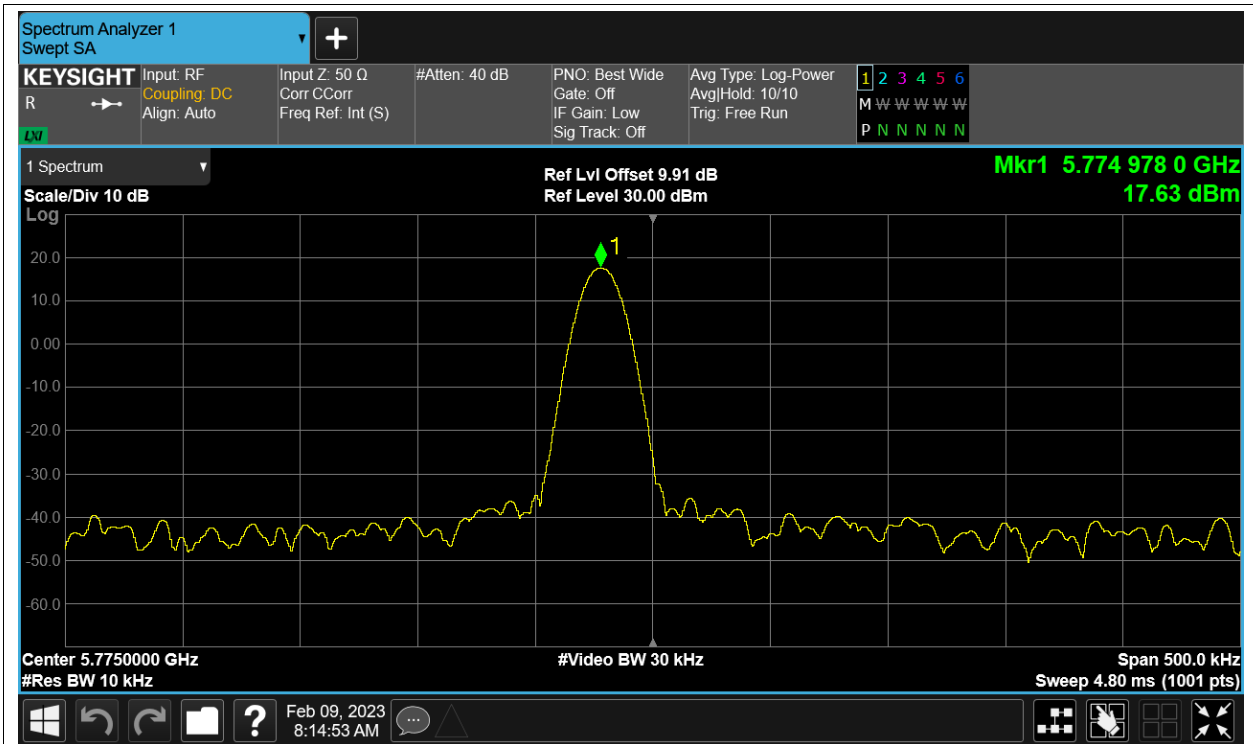


Freq. Stability NVNT ax80 5775MHz Sum

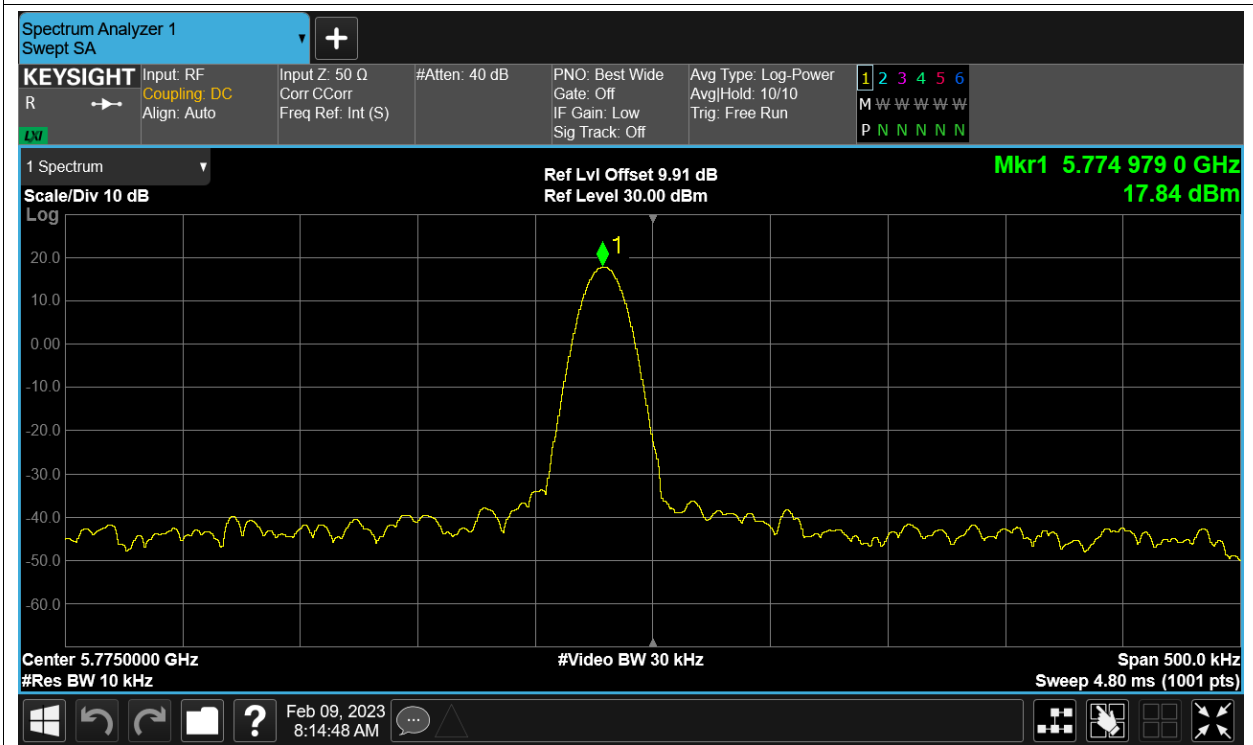


Freq. Stability HVNT n20 5745MHz Sum

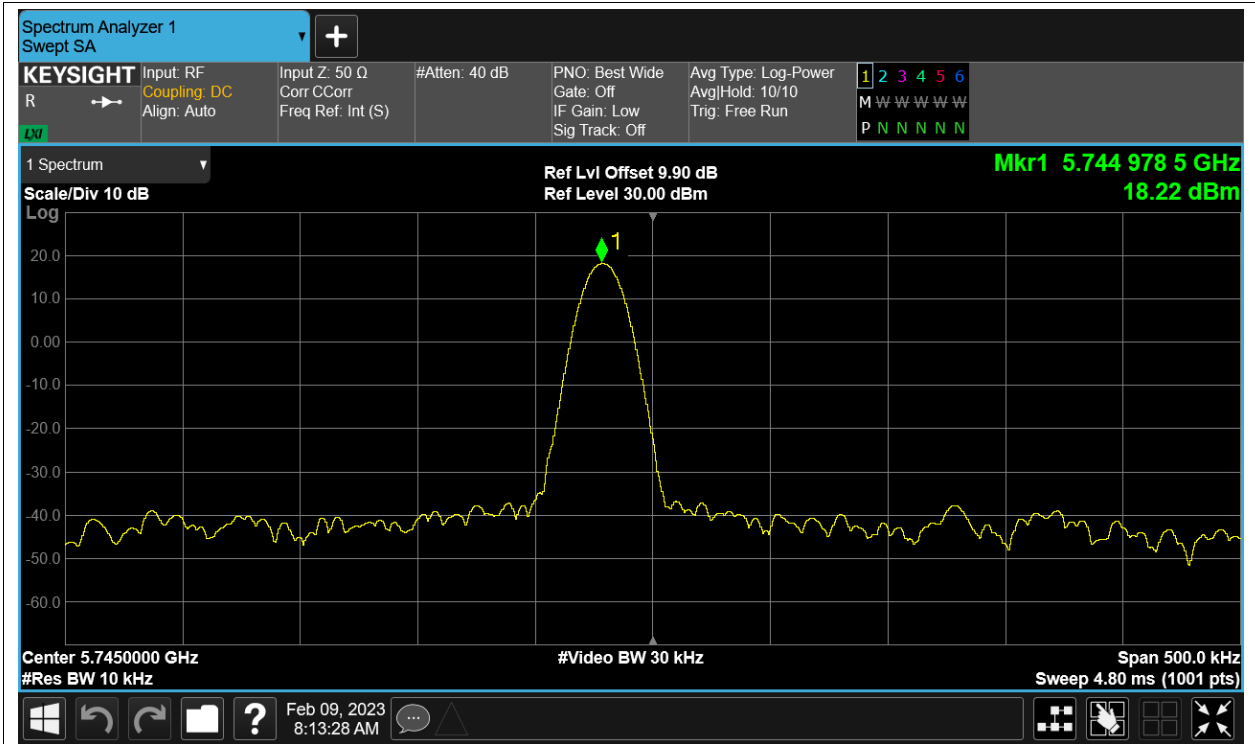


Freq. Stability LVNT n20 5745MHz Sum

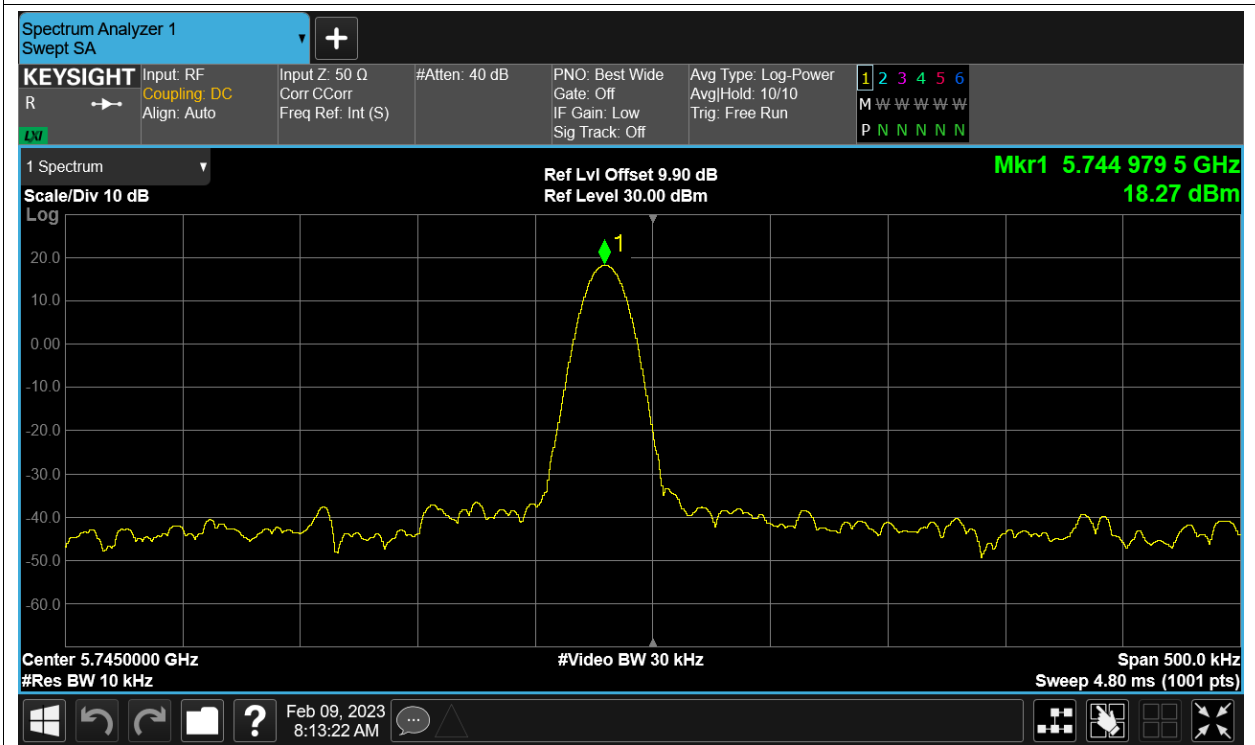


Freq. Stability NVHT n20 5745MHz Sum

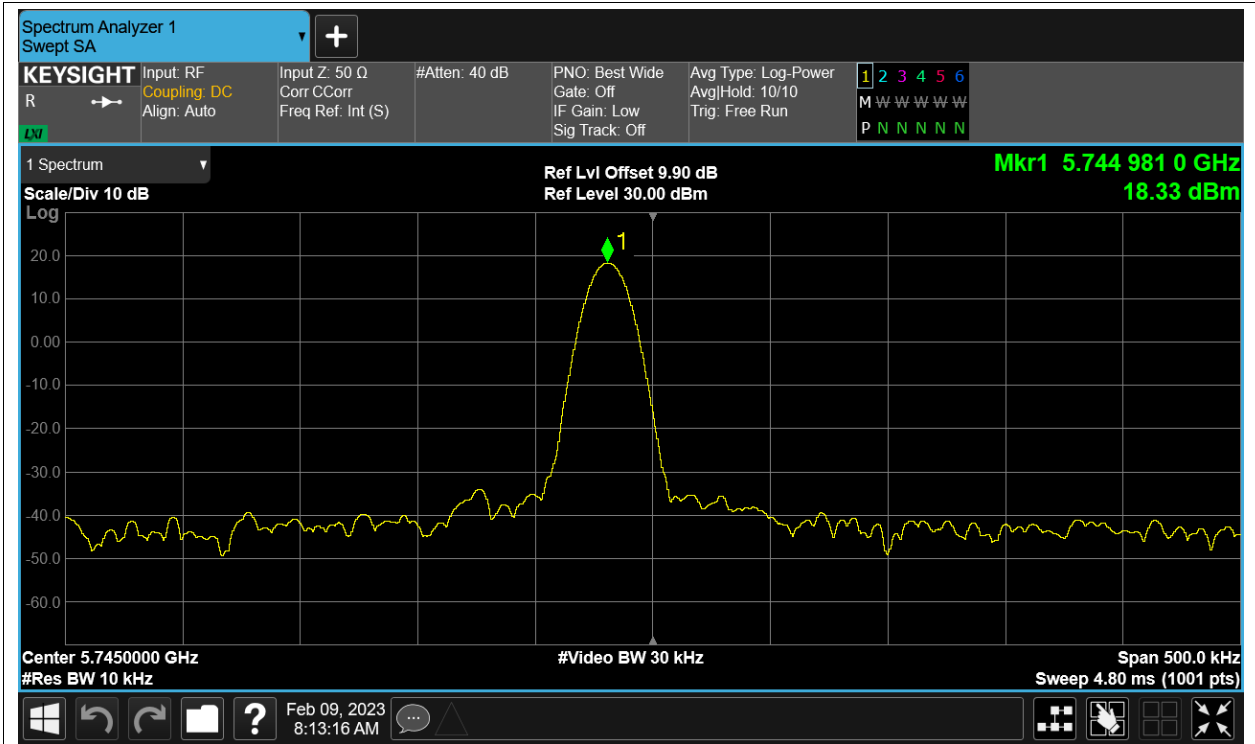


Freq. Stability NVLT n20 5745MHz Sum

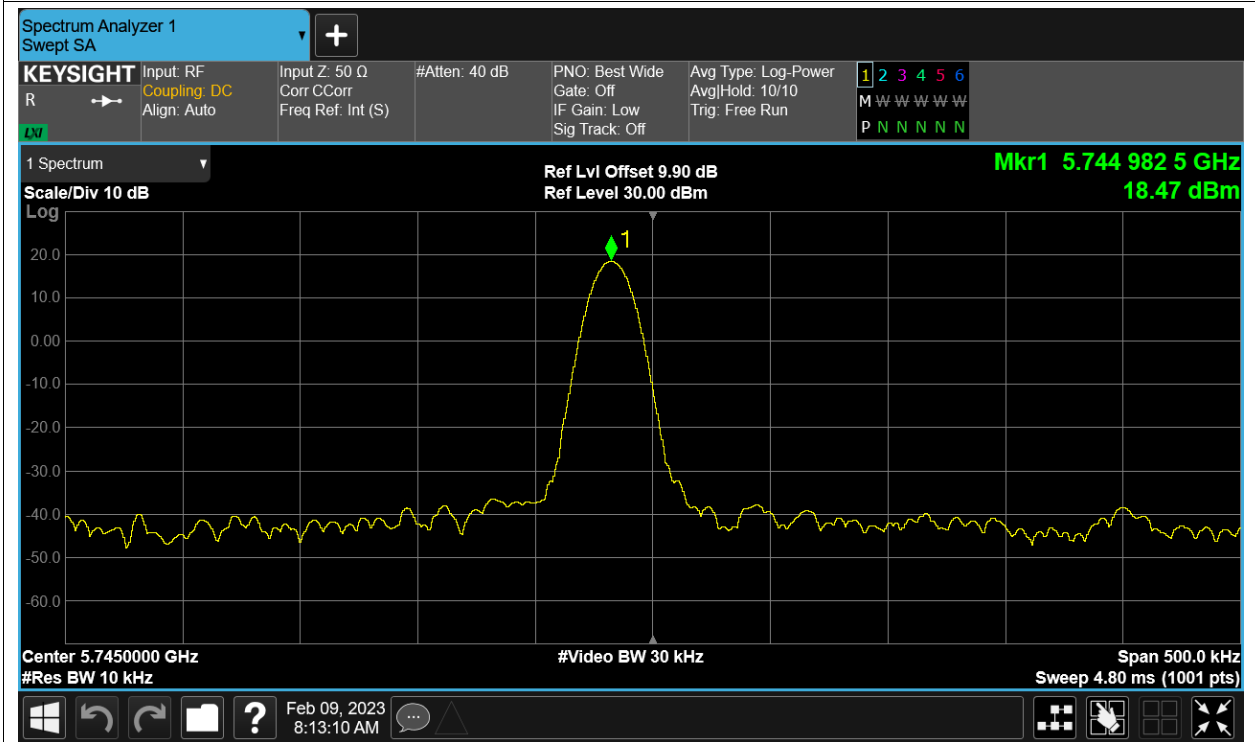


Freq. Stability NVNT n20 5745MHz Sum

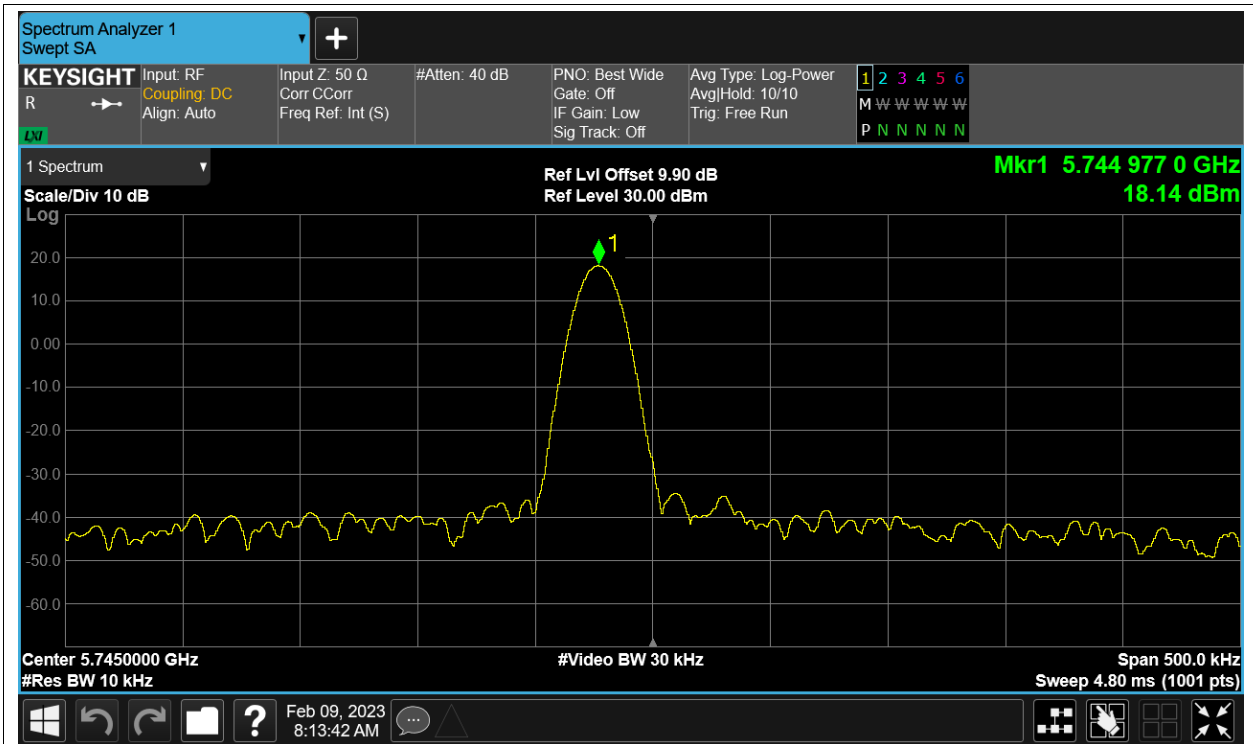


Freq. Stability HVNT n40 5755MHz Sum

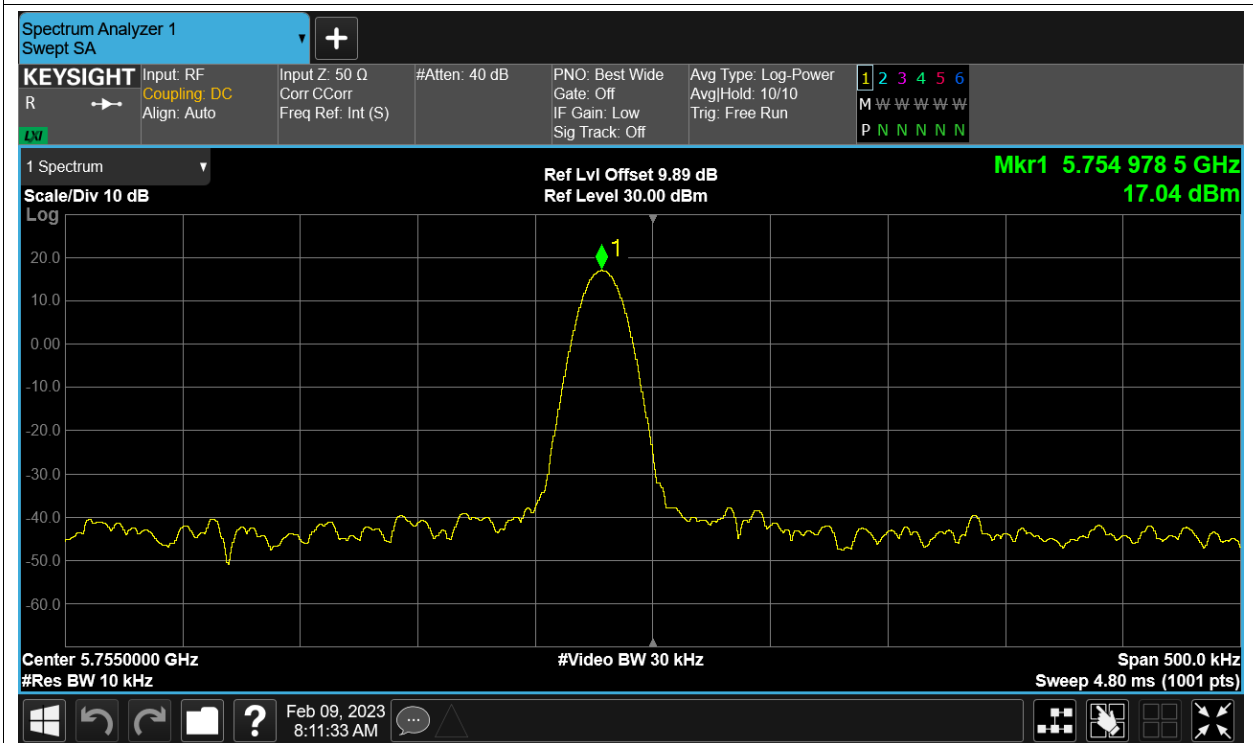


Freq. Stability LVNT n40 5755MHz Sum

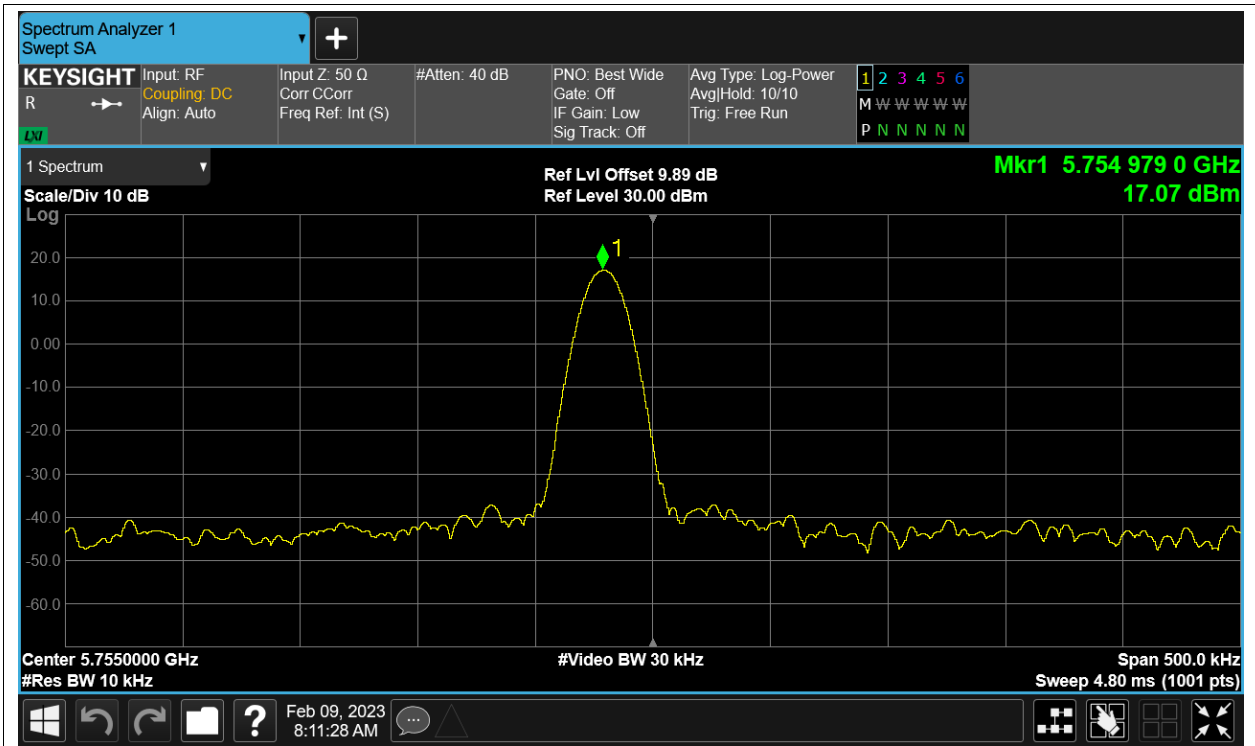


Freq. Stability NVHT n40 5755MHz Sum

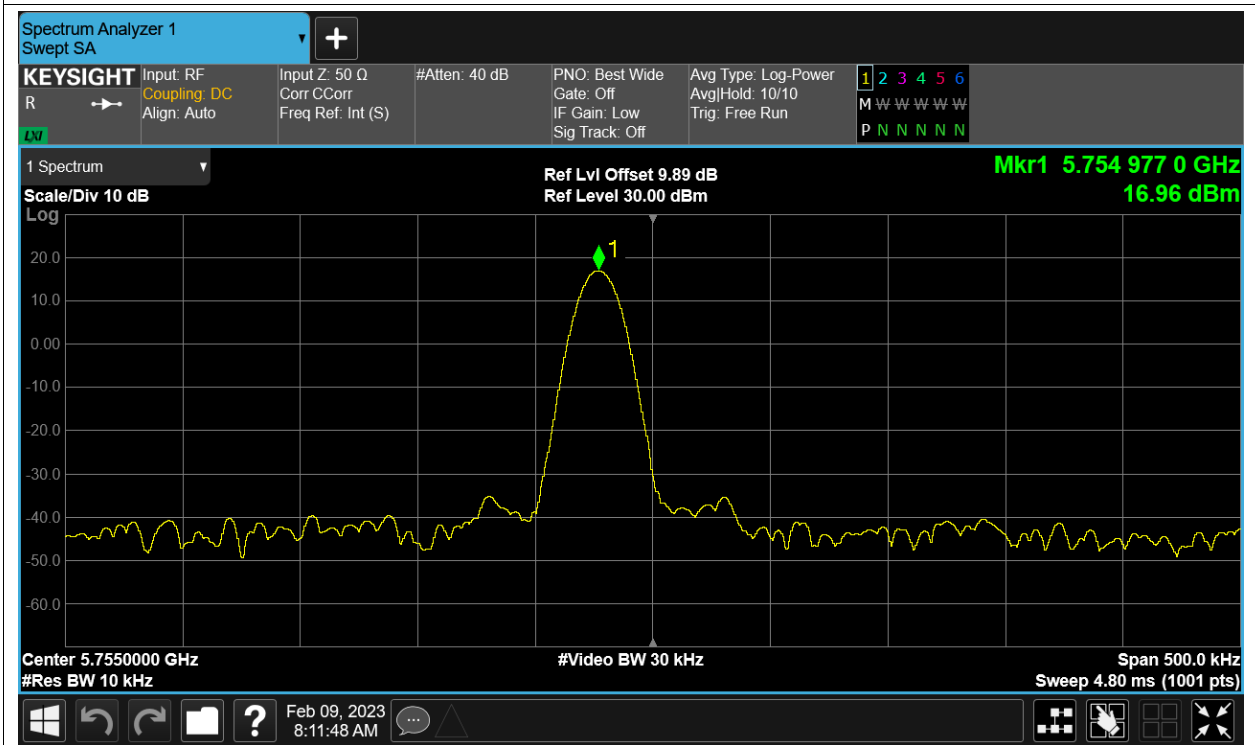

Freq. Stability NVLT n40 5755MHz Sum

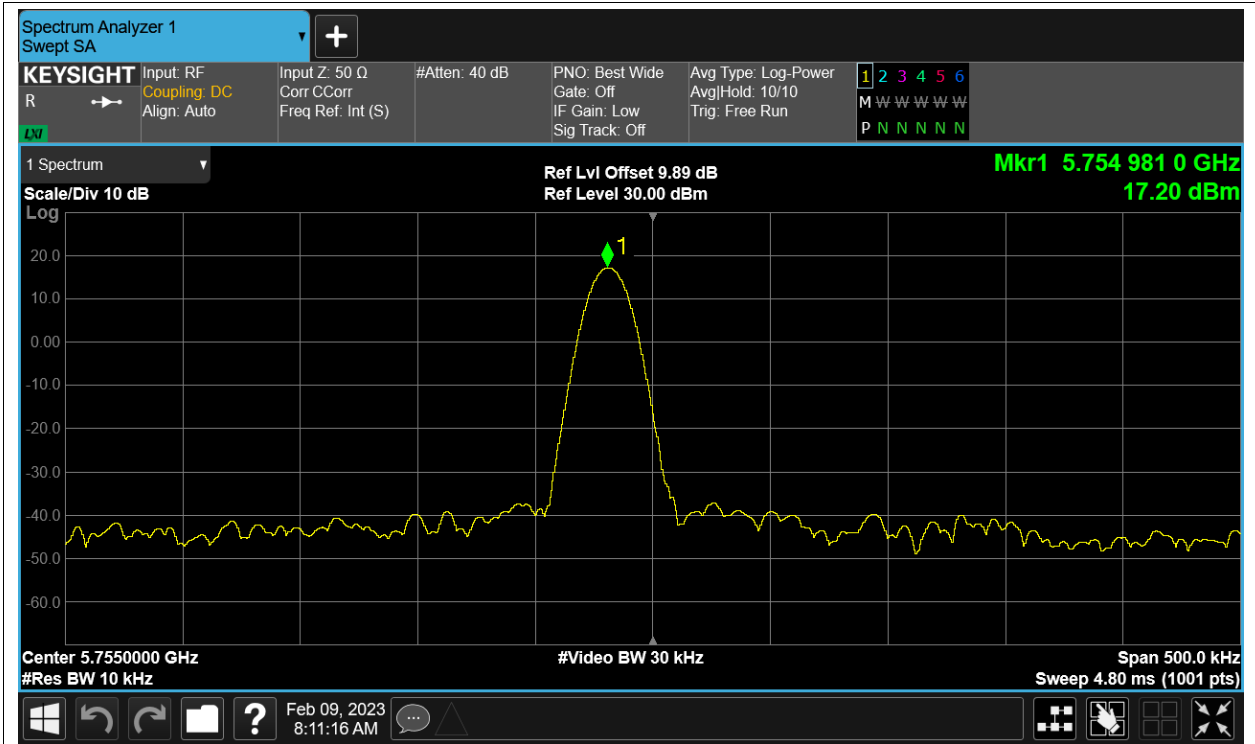

Freq. Stability NVNT n40 5755MHz Sum

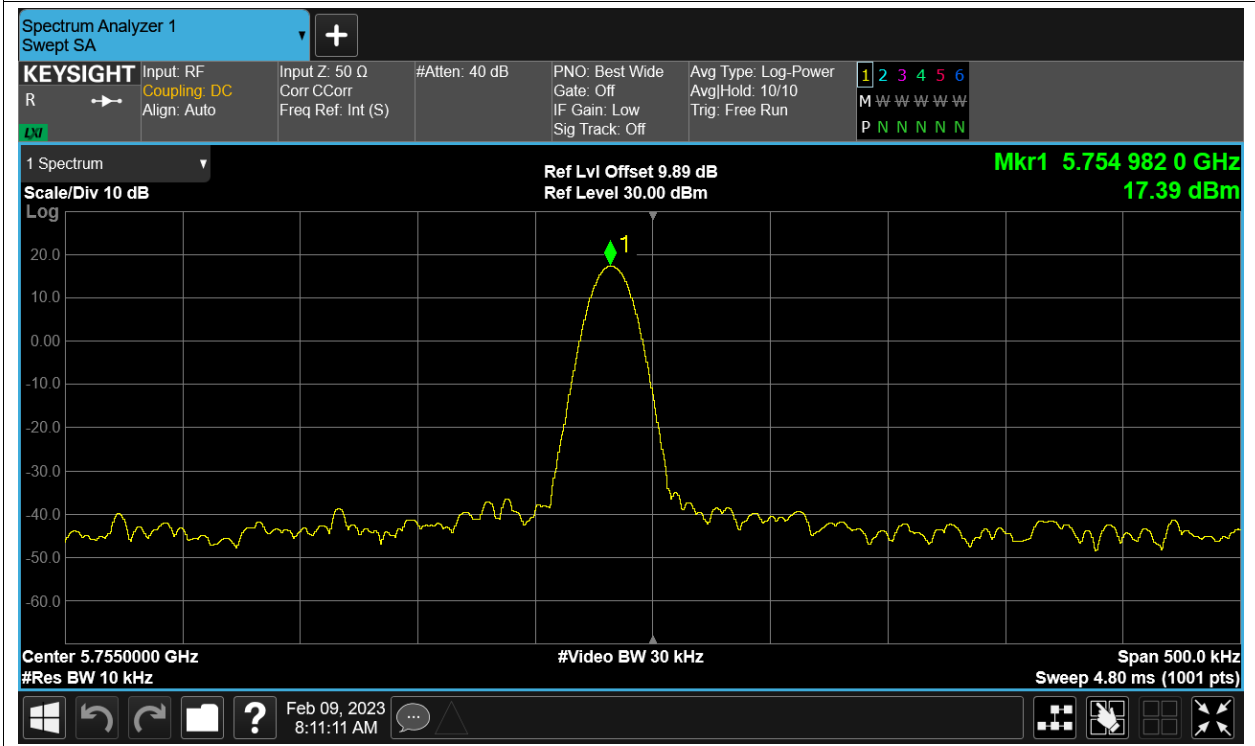


## Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5745	Ant2	100	0
NVNT	a	5785	Ant2	100	0
NVNT	a	5825	Ant2	100	0
NVNT	a	5745	Ant4	100	0
NVNT	a	5785	Ant4	100	0
NVNT	a	5825	Ant4	100	0
NVNT	ac20	5745	Sum	100	0
NVNT	ac20	5785	Sum	100	0
NVNT	ac20	5825	Sum	100	0
NVNT	ac40	5755	Sum	100	0
NVNT	ac40	5795	Sum	100	0
NVNT	ac80	5775	Sum	100	0
NVNT	ax20	5745	Sum	100	0
NVNT	ax20	5785	Sum	100	0
NVNT	ax20	5825	Sum	100	0
NVNT	ax40	5755	Sum	100	0
NVNT	ax40	5795	Sum	100	0
NVNT	ax80	5775	Sum	100	0
NVNT	n20	5745	Sum	100	0
NVNT	n20	5785	Sum	100	0
NVNT	n20	5825	Sum	100	0
NVNT	n40	5755	Sum	100	0
NVNT	n40	5795	Sum	100	0

Test Graphs

Duty Cycle NVNT a 5745MHz Ant2

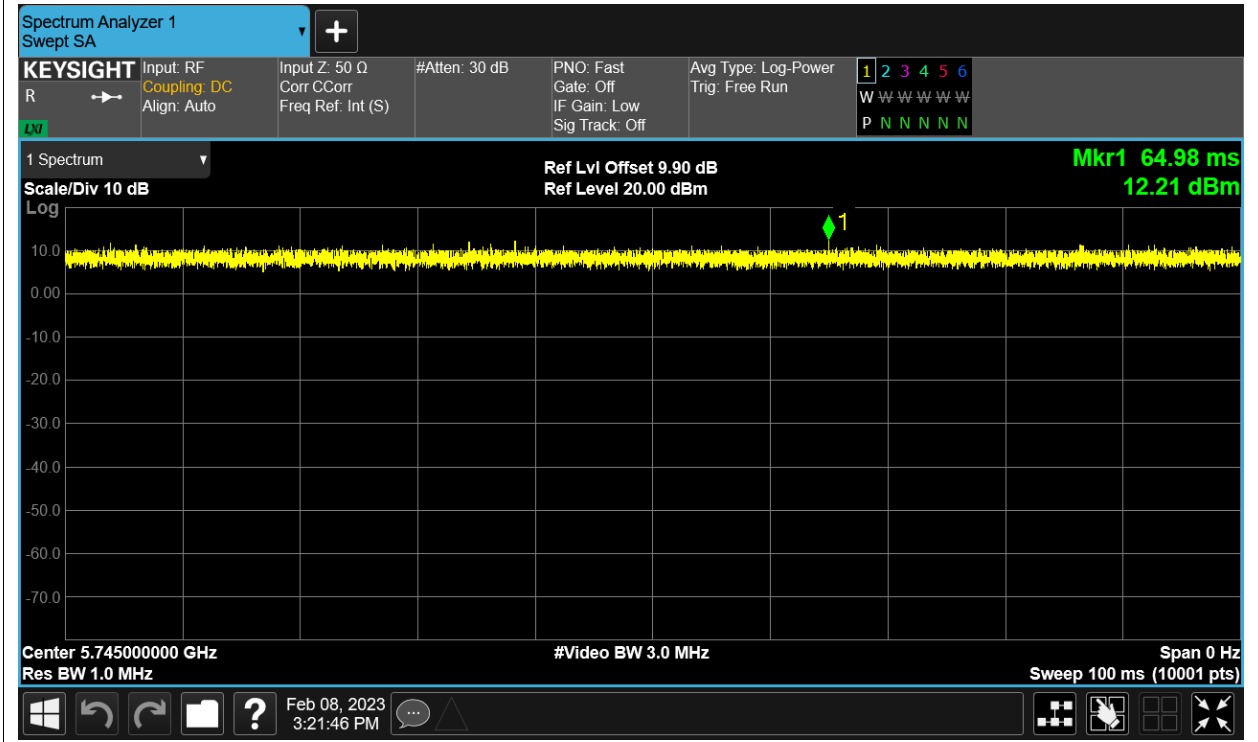


Duty Cycle NVNT a 5785MHz Ant2

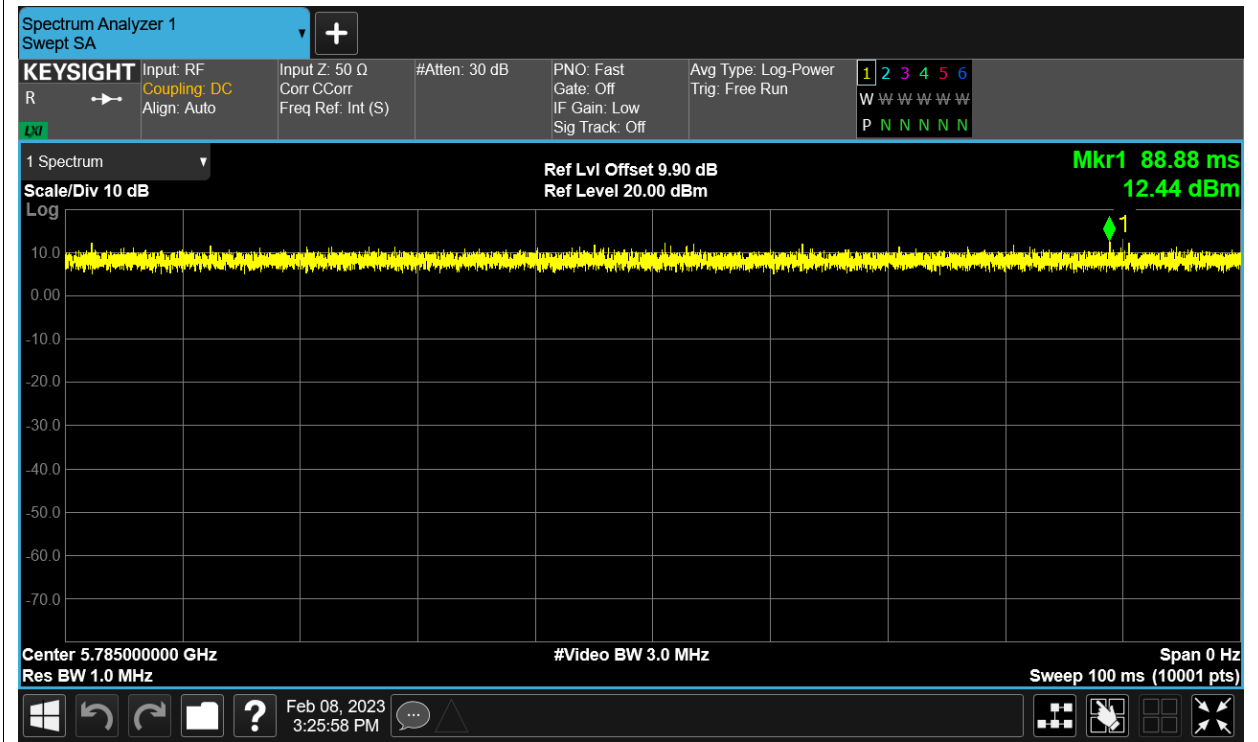


Duty Cycle NVNT a 5825MHz Ant2




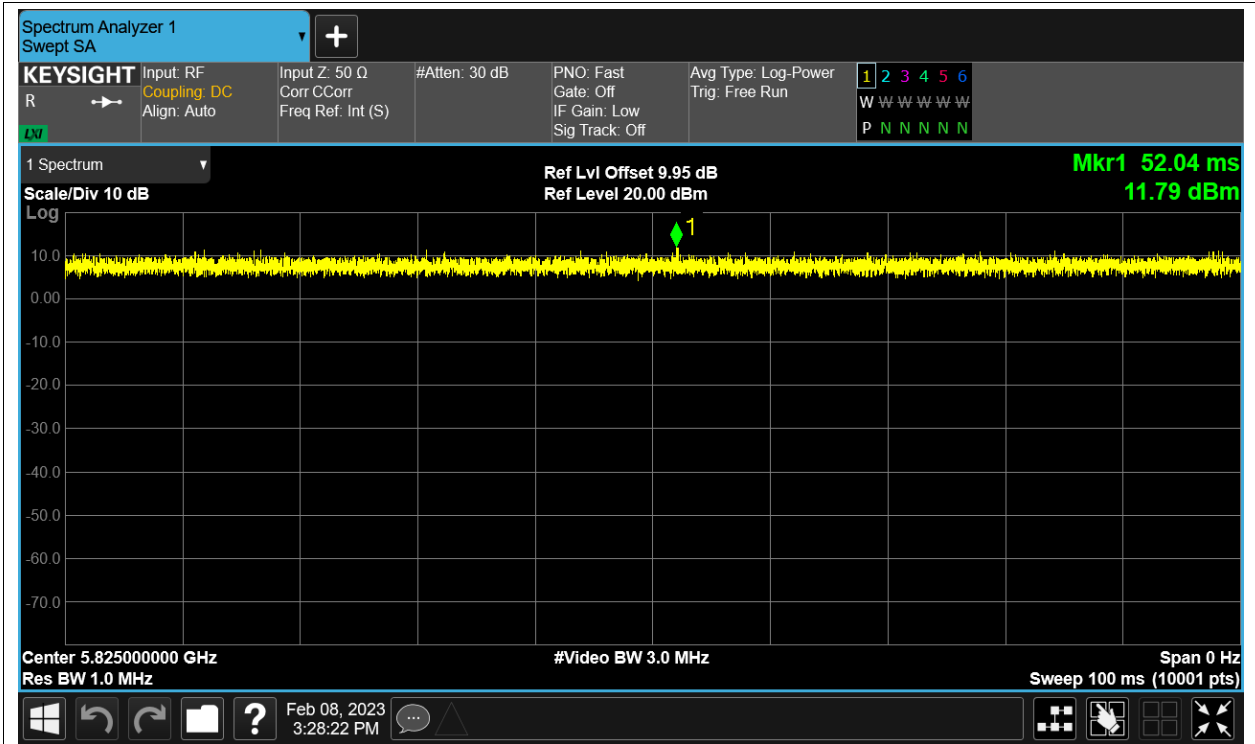


Duty Cycle NVNT a 5745MHz Ant4

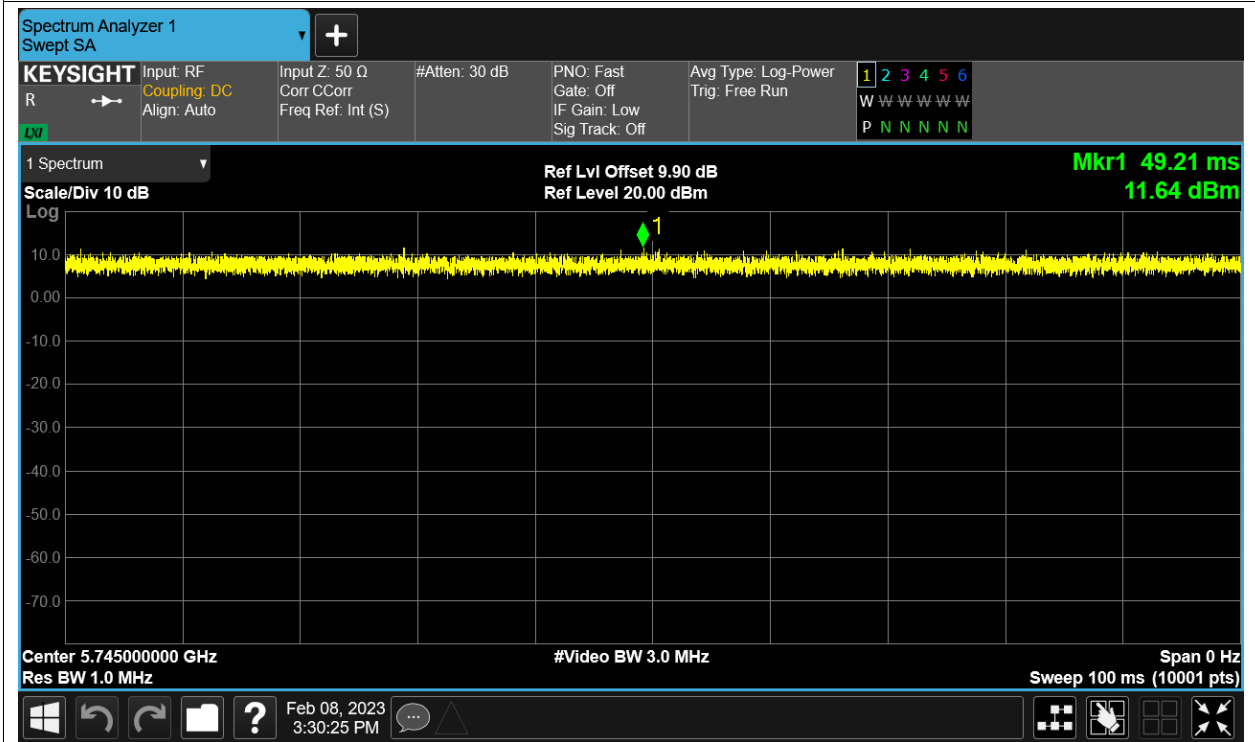


Duty Cycle NVNT a 5785MHz Ant4

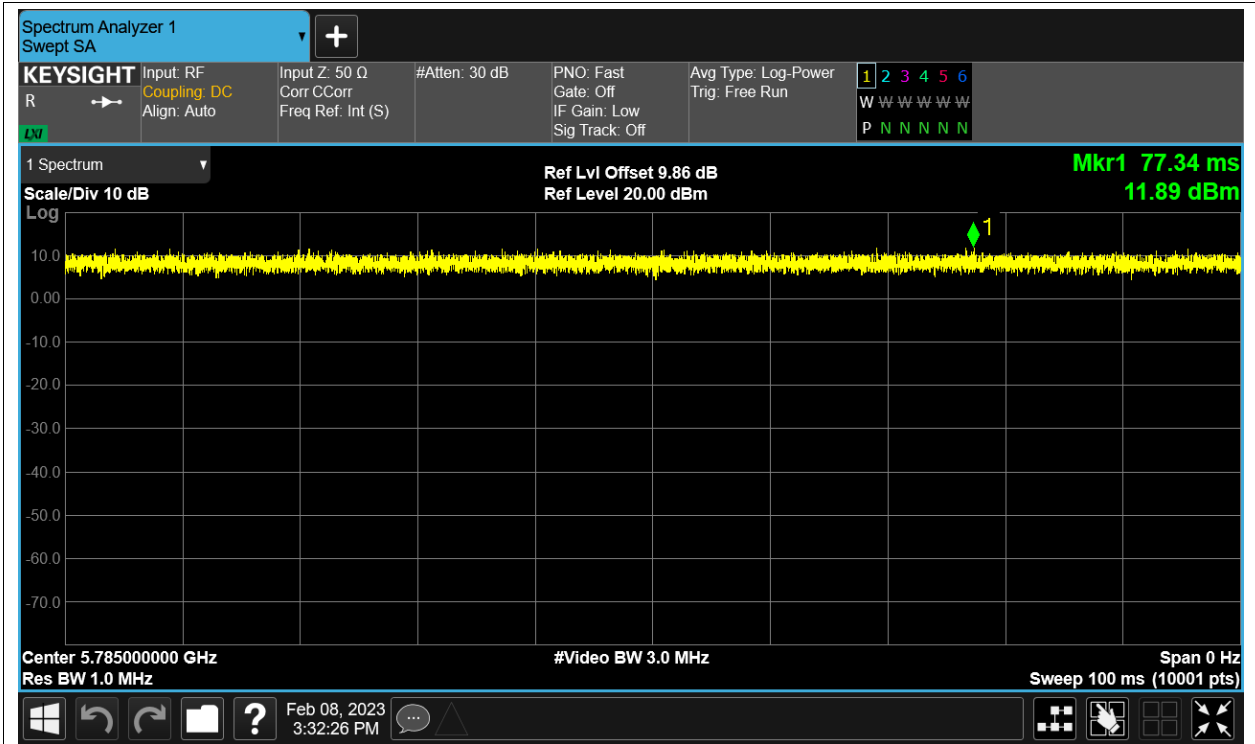


Duty Cycle NVNT a 5825MHz Ant4

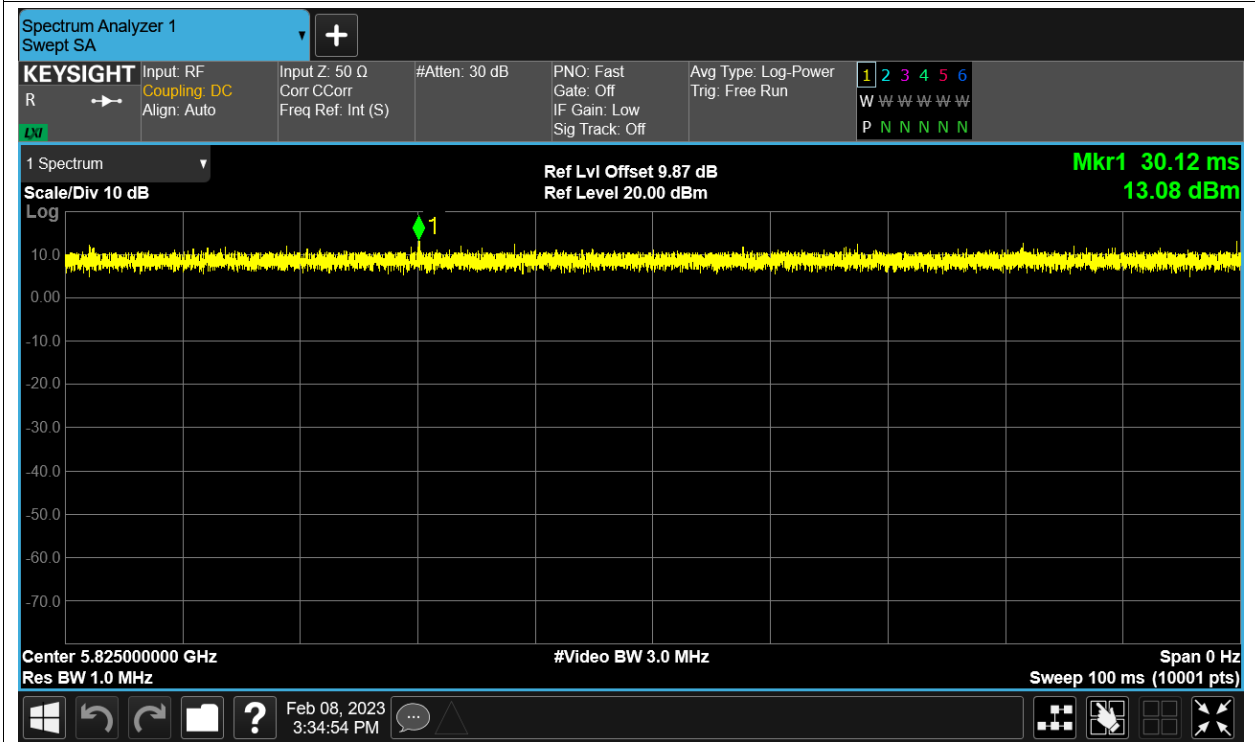


Duty Cycle NVNT ac20 5745MHz Sum

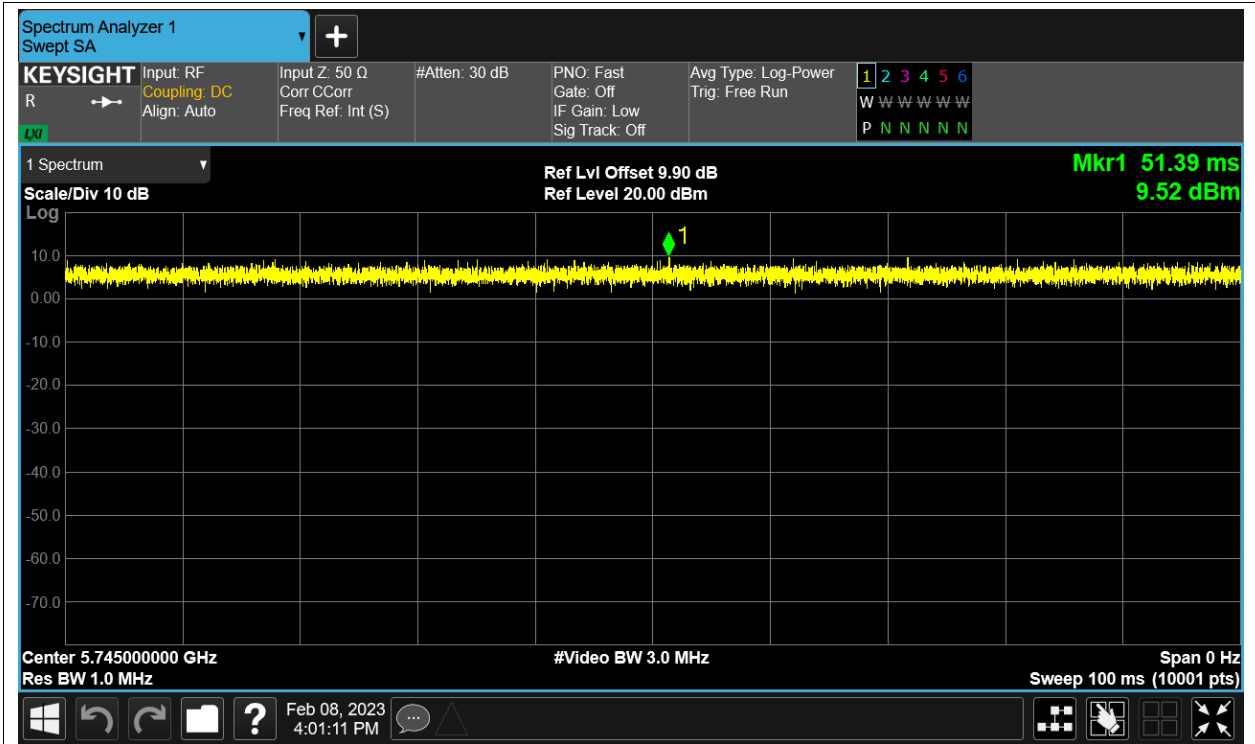


Duty Cycle NVNT ac20 5785MHz Sum

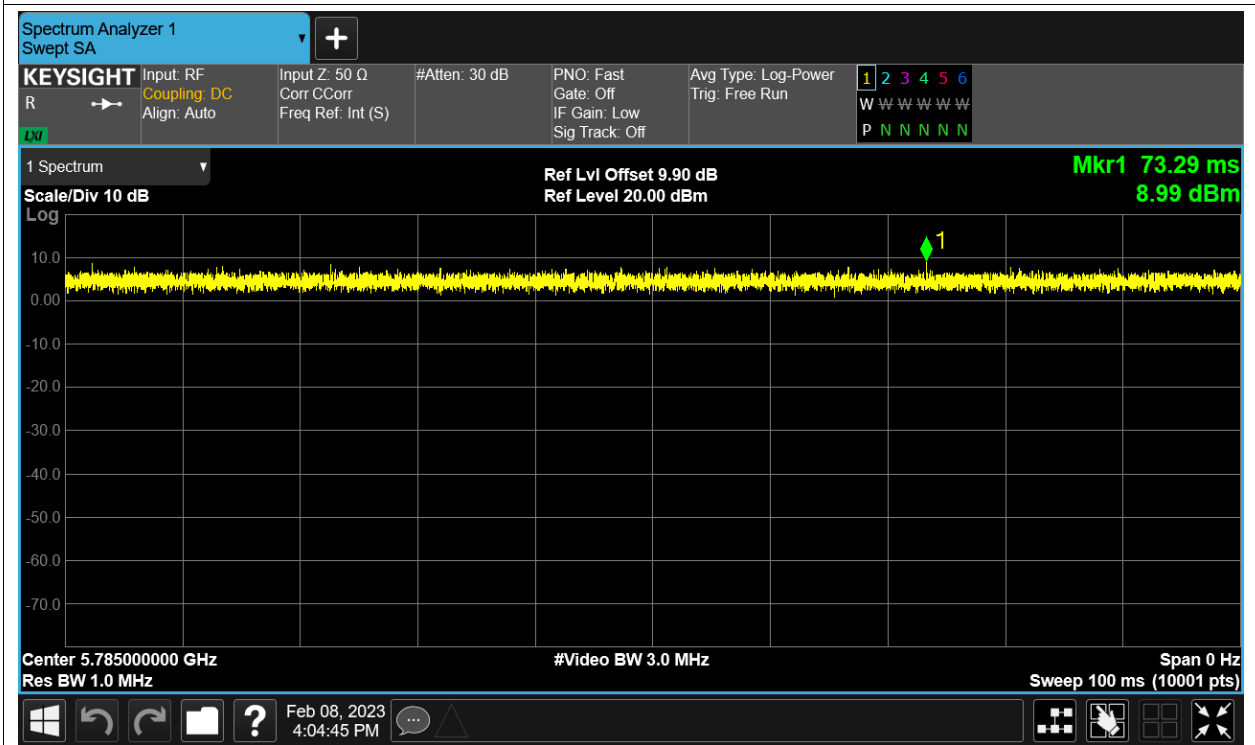


Duty Cycle NVNT ac20 5825MHz Sum

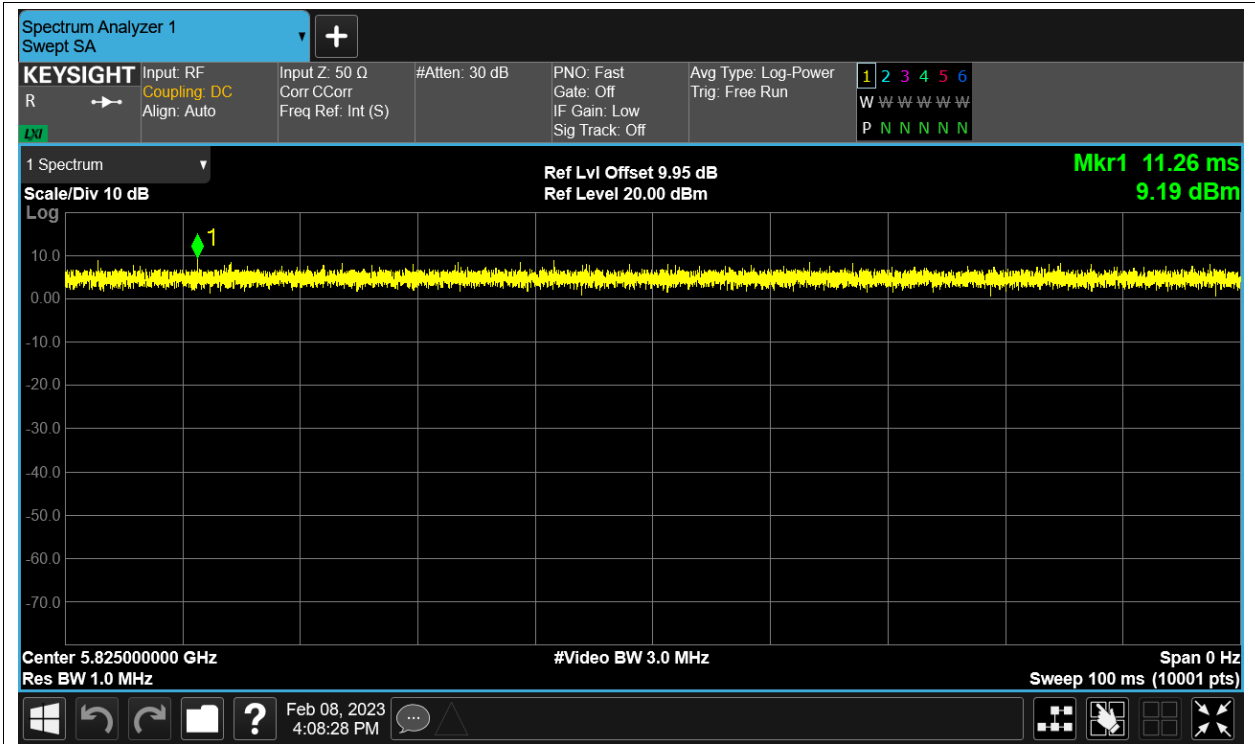


Duty Cycle NVNT ac40 5755MHz Sum

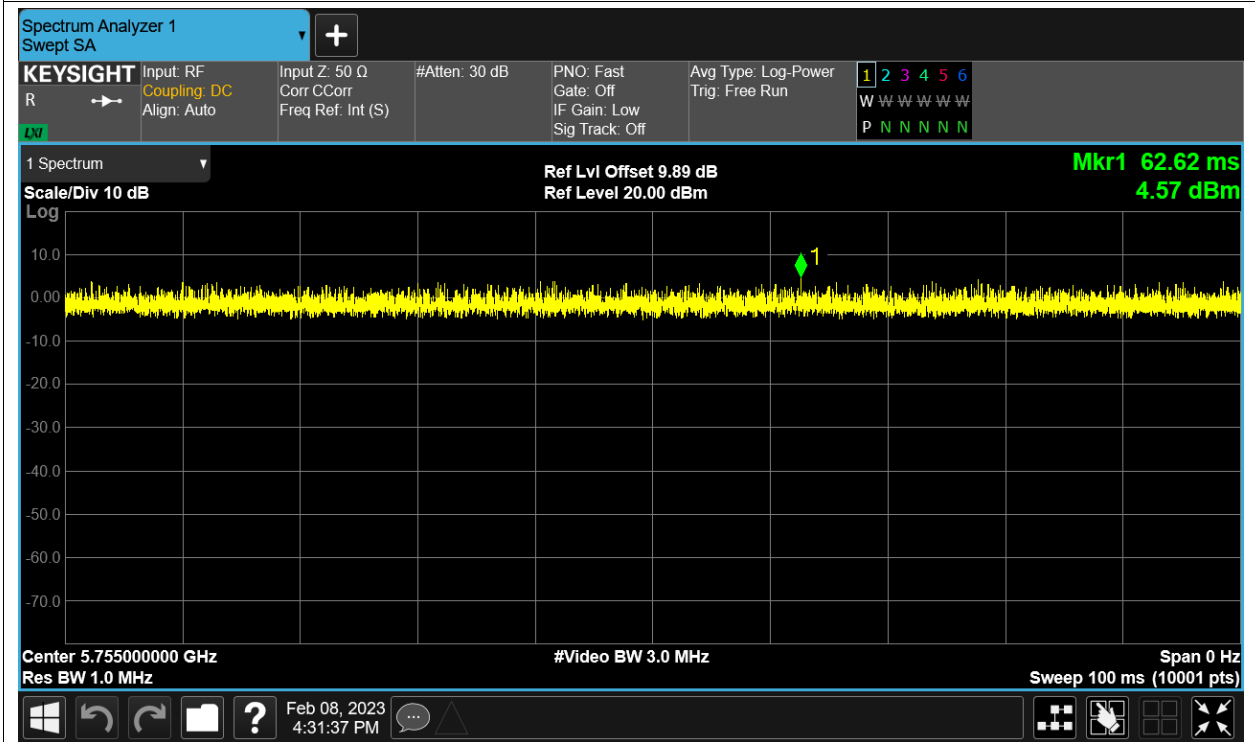


Duty Cycle NVNT ac40 5795MHz Sum

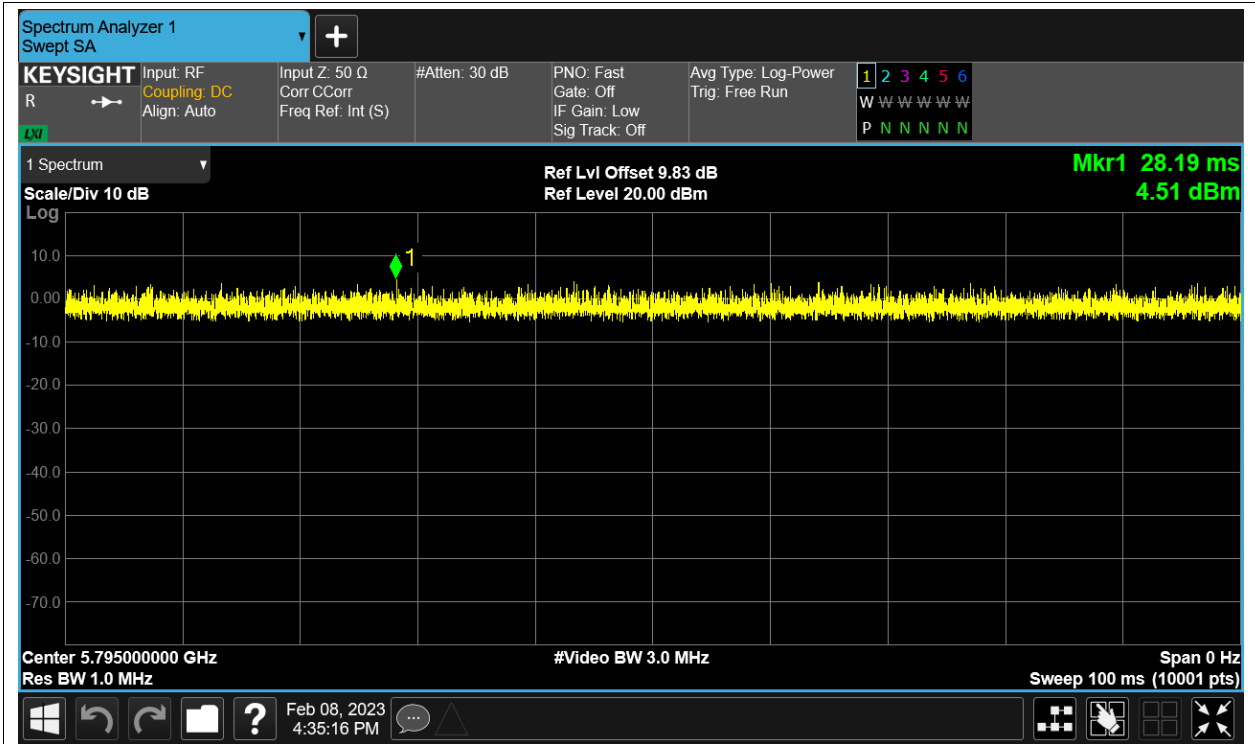


Duty Cycle NVNT ac80 5775MHz Sum

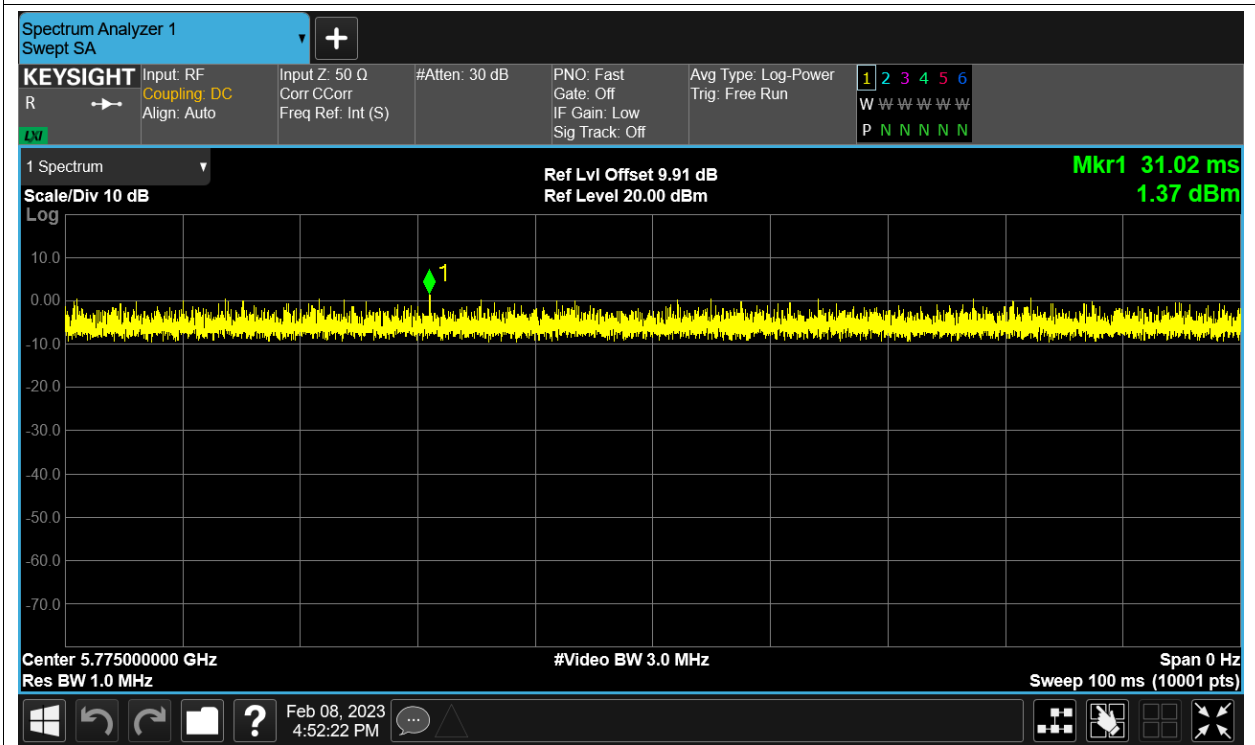


Duty Cycle NVNT ax20 5745MHz Sum

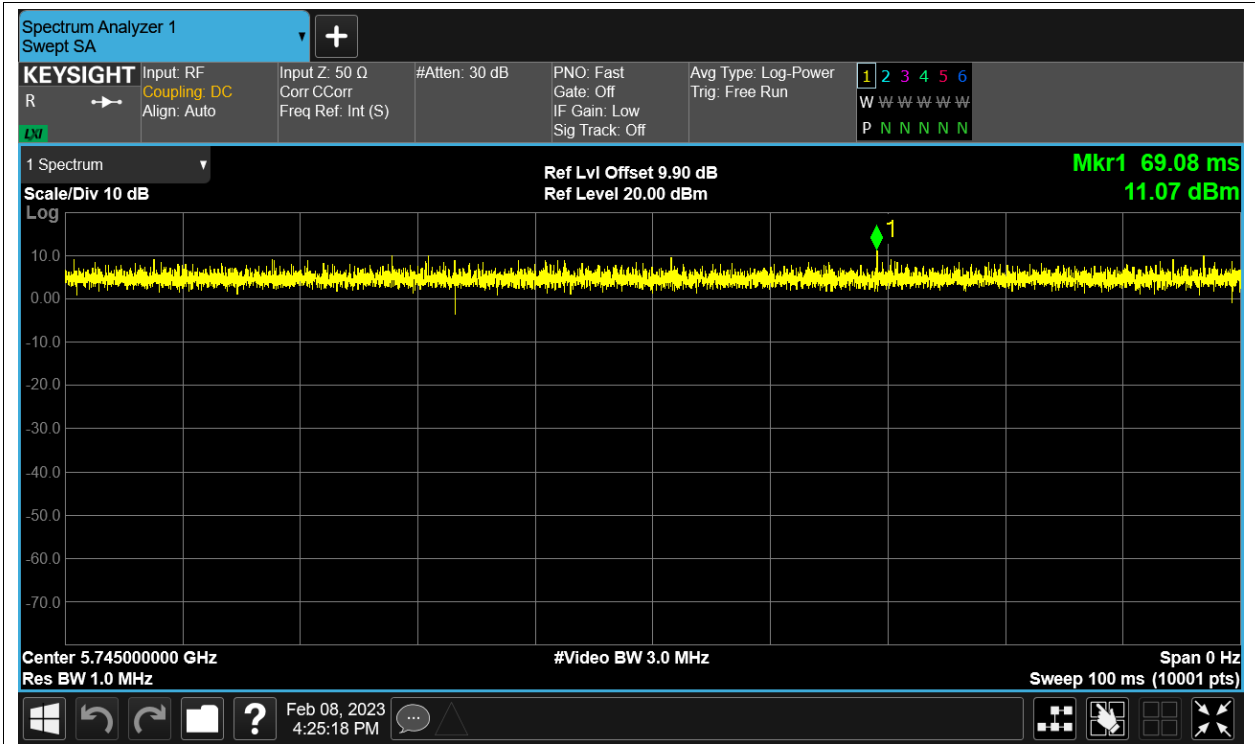


Duty Cycle NVNT ax20 5785MHz Sum

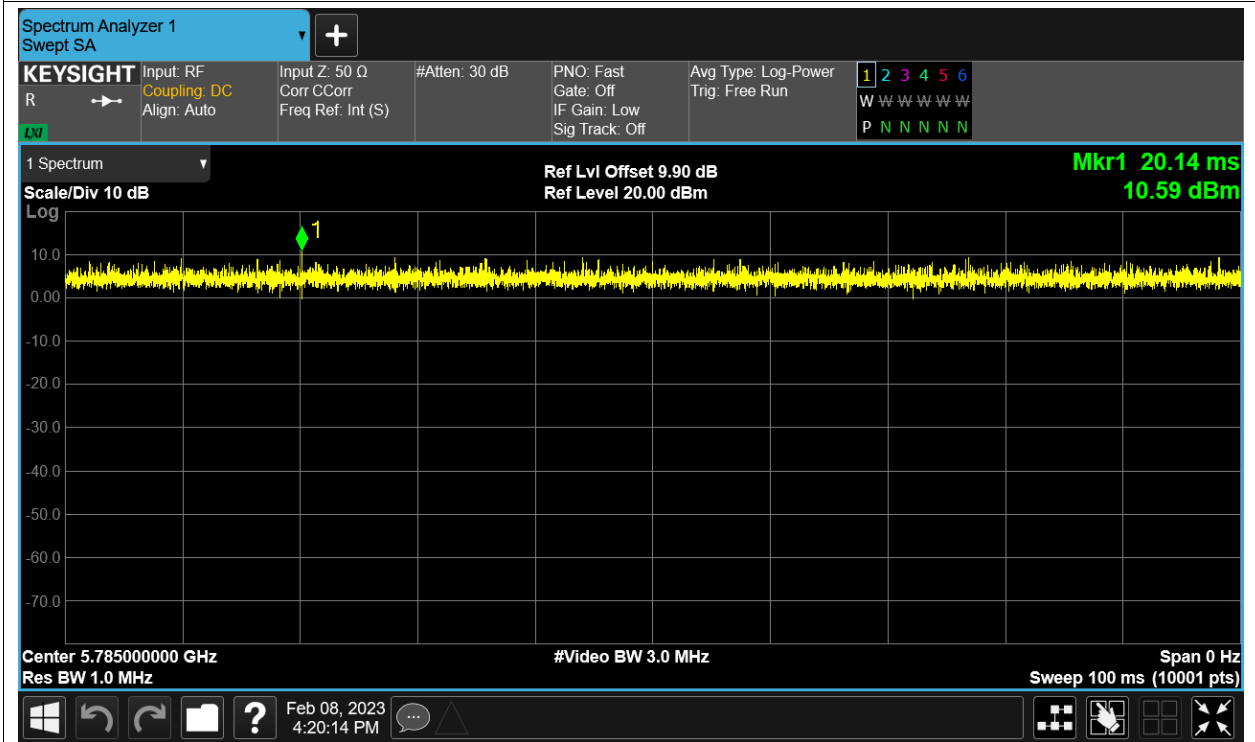


Duty Cycle NVNT ax20 5825MHz Sum

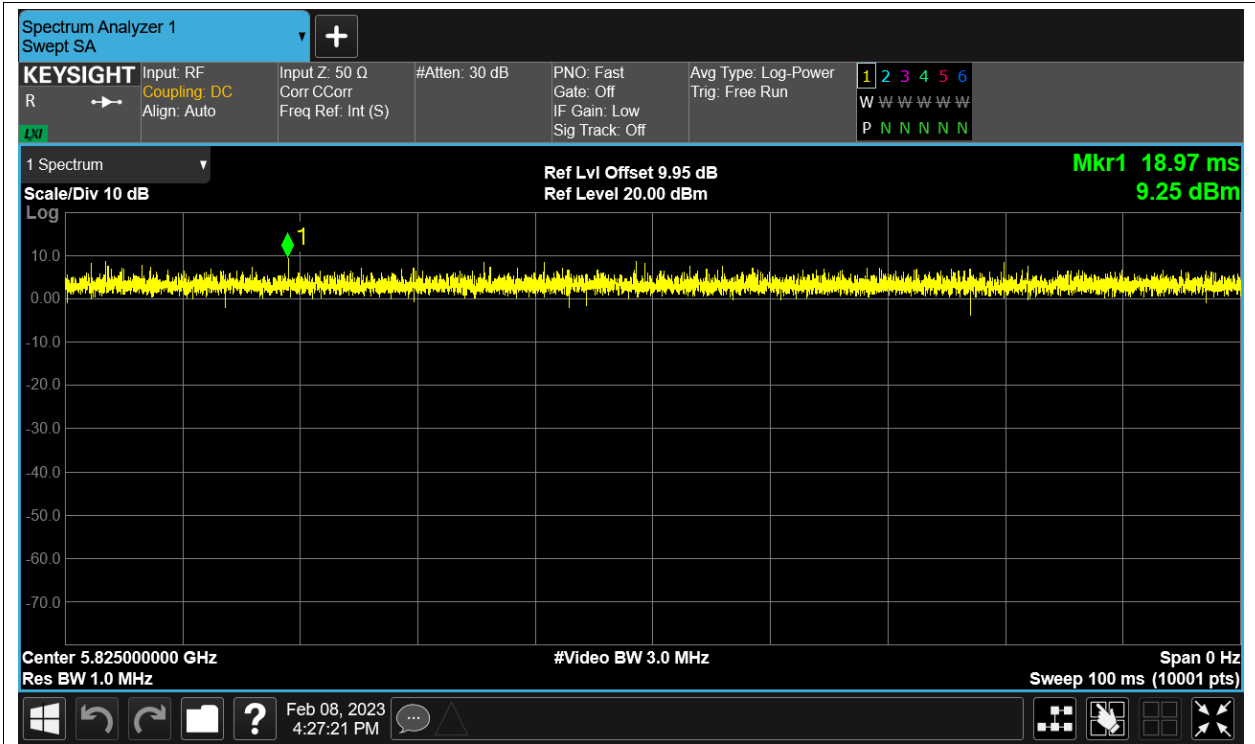


Duty Cycle NVNT ax40 5755MHz Sum

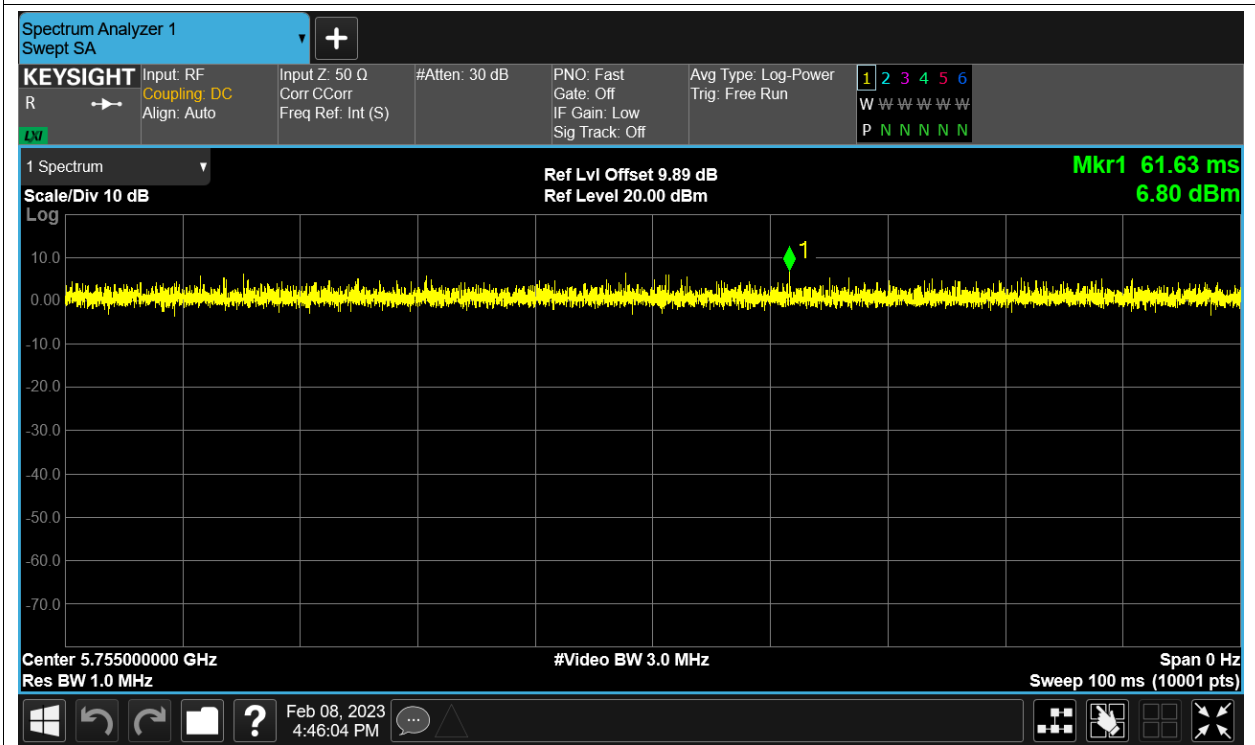

Duty Cycle NVNT ax40 5795MHz Sum

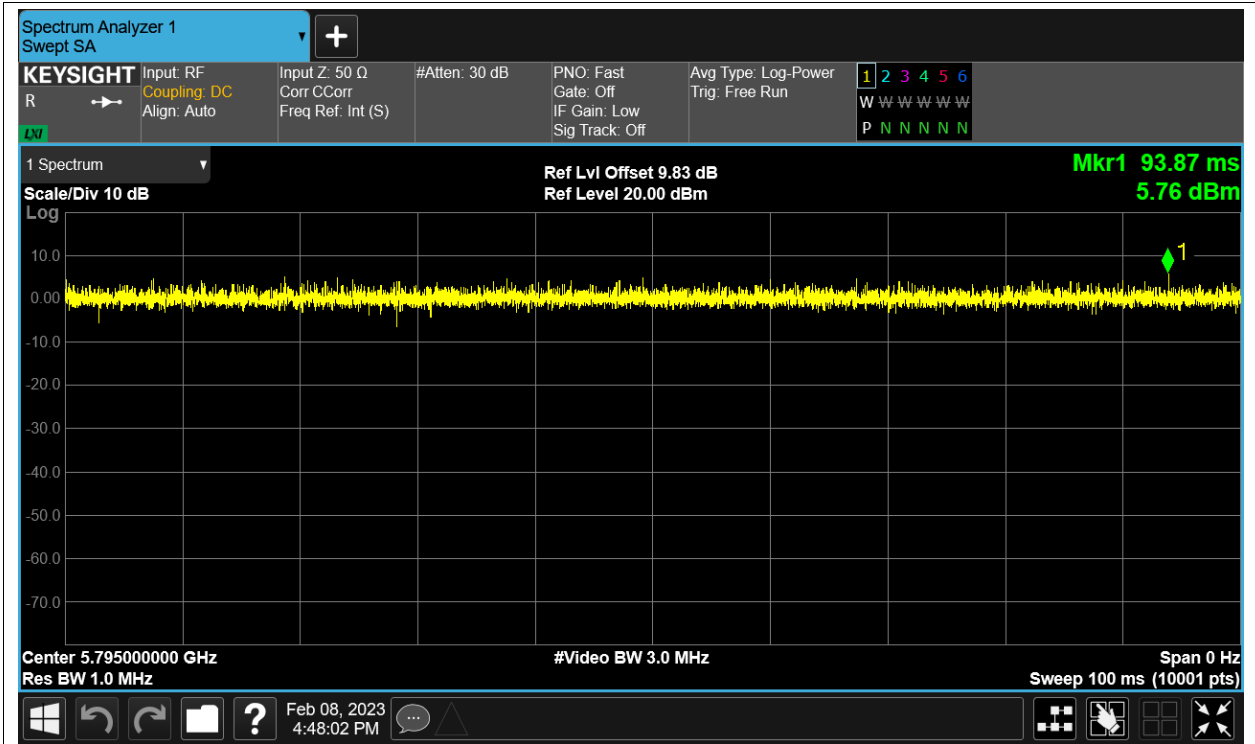


Duty Cycle NVNT ax80 5775MHz Sum

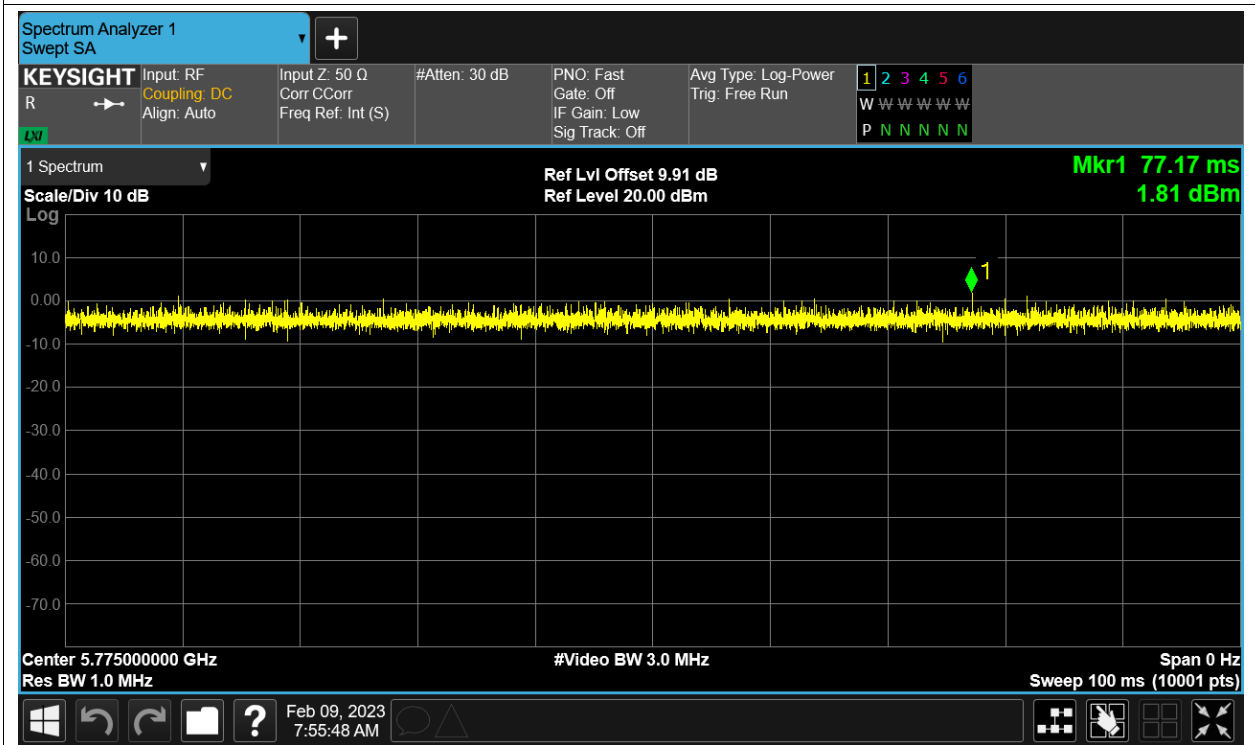


Duty Cycle NVNT n20 5745MHz Sum




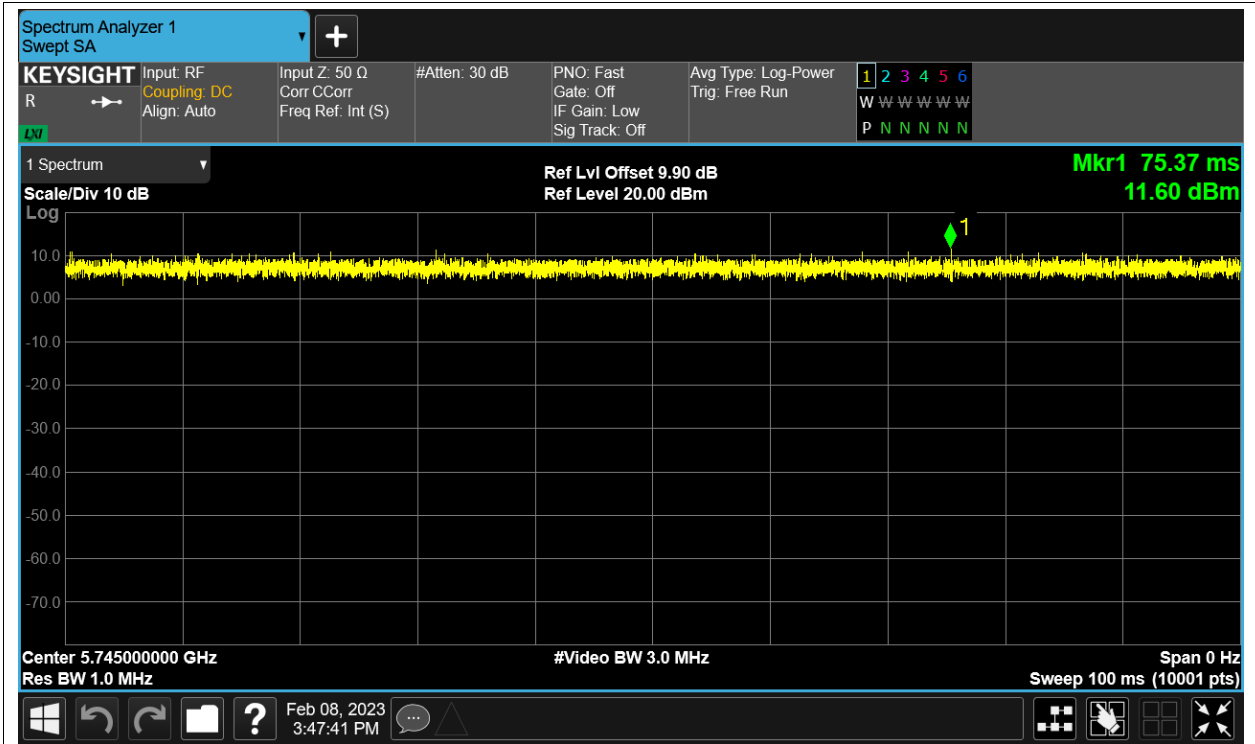


Duty Cycle NVNT n20 5785MHz Sum

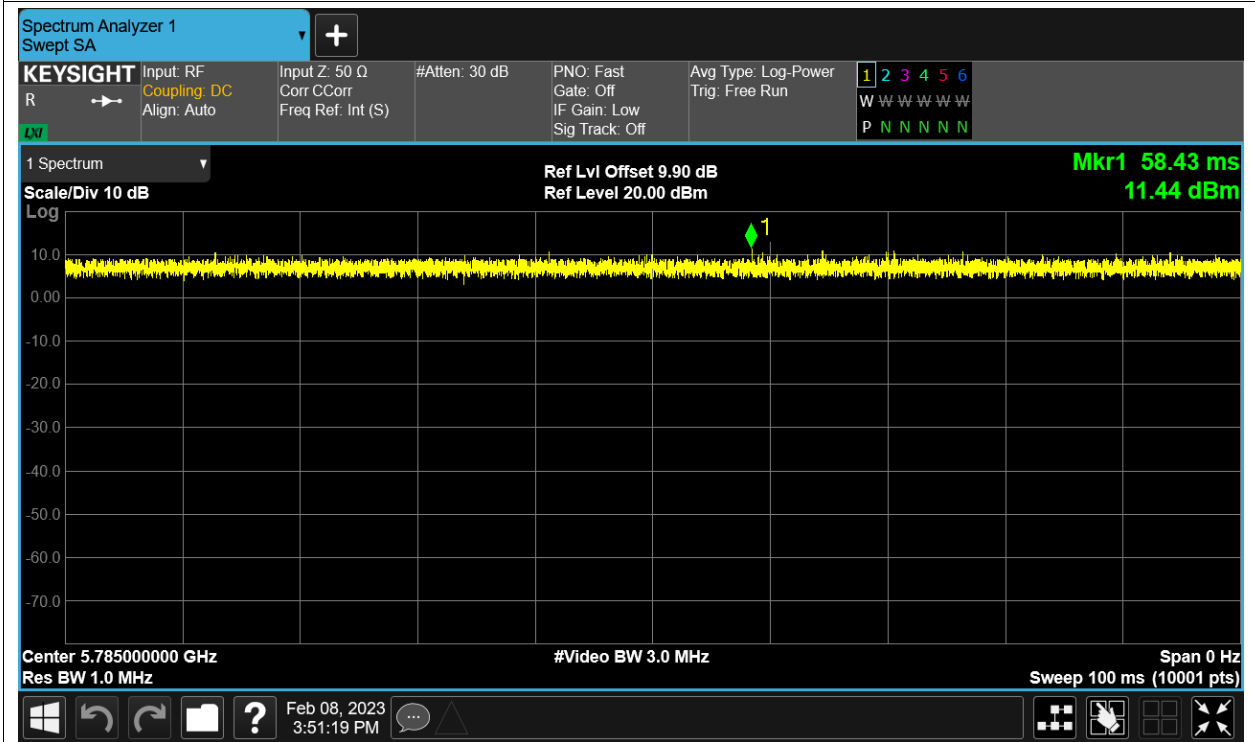


Duty Cycle NVNT n20 5825MHz Sum

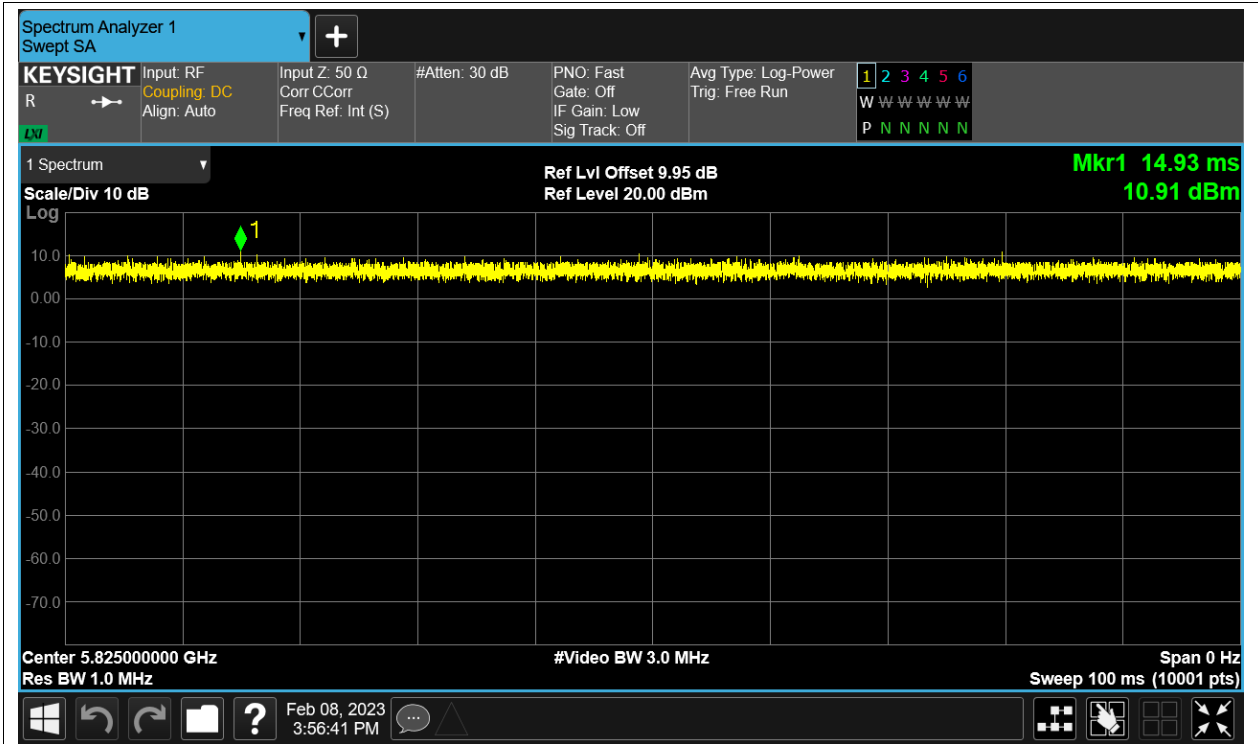

Duty Cycle NVNT n40 5755MHz Sum

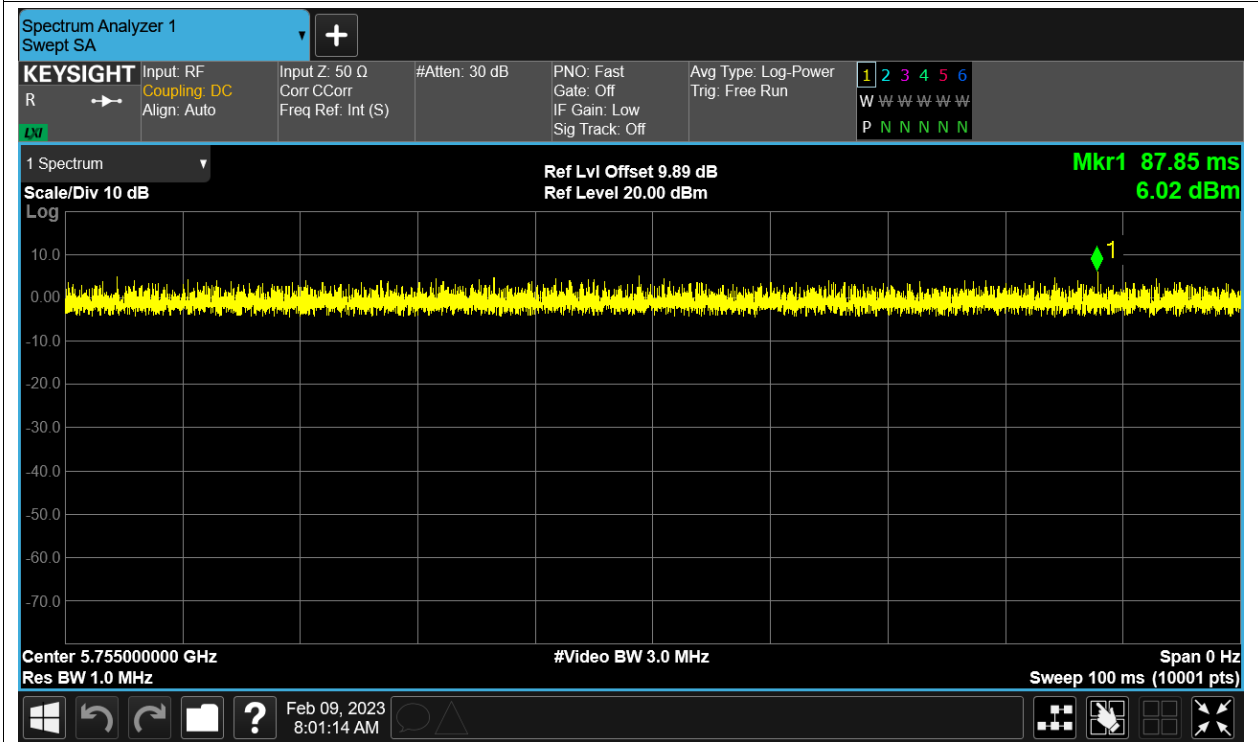

Duty Cycle NVNT n40 5795MHz Sum

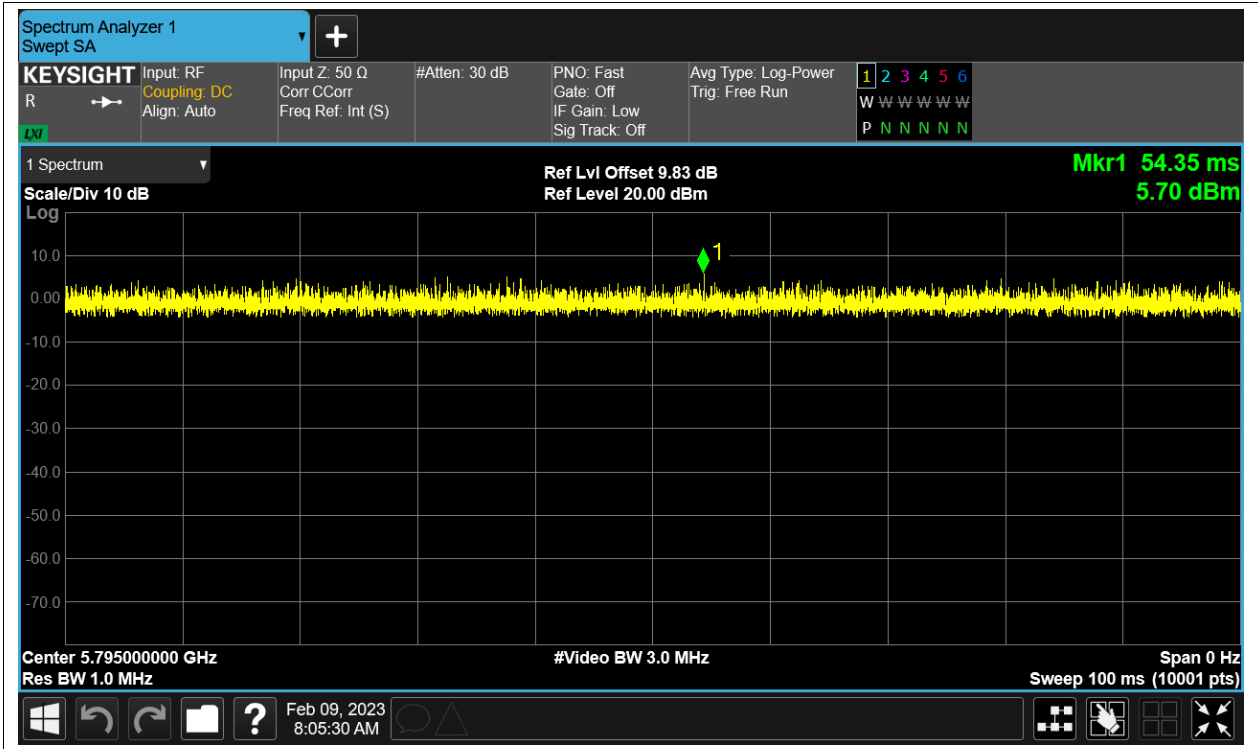



## Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	14.49	0	14.49	30	Pass
NVNT	a	5785	Ant2	14.57	0	14.57	30	Pass
NVNT	a	5825	Ant2	14.18	0	14.18	30	Pass
NVNT	a	5745	Ant4	13.96	0	13.96	30	Pass
NVNT	a	5785	Ant4	14.49	0	14.49	30	Pass
NVNT	a	5825	Ant4	15.08	0	15.08	30	Pass
NVNT	ac20	5745	Ant2	12.2	0	12.2	30	Pass
NVNT	ac20	5745	Ant4	11.5	0	11.5	30	Pass
NVNT	ac20	5745	Sum	14.874	0	14.874	30	Pass
NVNT	ac20	5785	Ant2	11.24	0	11.24	30	Pass
NVNT	ac20	5785	Ant4	12.68	0	12.68	30	Pass
NVNT	ac20	5785	Sum	15.03	0	15.03	30	Pass
NVNT	ac20	5825	Ant2	11.53	0	11.53	30	Pass
NVNT	ac20	5825	Ant4	12.28	0	12.28	30	Pass
NVNT	ac20	5825	Sum	14.931	0	14.931	30	Pass
NVNT	ac40	5755	Ant2	11.68	0	11.68	30	Pass
NVNT	ac40	5755	Ant4	11.2	0	11.2	30	Pass
NVNT	ac40	5755	Sum	14.457	0	14.457	30	Pass
NVNT	ac40	5795	Ant2	11.68	0	11.68	30	Pass
NVNT	ac40	5795	Ant4	11.36	0	11.36	30	Pass
NVNT	ac40	5795	Sum	14.533	0	14.533	30	Pass
NVNT	ac80	5775	Ant2	11.68	0	11.68	30	Pass
NVNT	ac80	5775	Ant4	11.55	0	11.55	30	Pass
NVNT	ac80	5775	Sum	14.626	0	14.626	30	Pass
NVNT	ax20	5745	Ant2	10.93	0	10.93	30	Pass
NVNT	ax20	5745	Ant4	10.35	0	10.35	30	Pass
NVNT	ax20	5745	Sum	13.66	0	13.66	30	Pass
NVNT	ax20	5785	Ant2	10.97	0	10.97	30	Pass
NVNT	ax20	5785	Ant4	10.79	0	10.79	30	Pass
NVNT	ax20	5785	Sum	13.891	0	13.891	30	Pass
NVNT	ax20	5825	Ant2	9.95	0	9.95	30	Pass
NVNT	ax20	5825	Ant4	11	0	11	30	Pass
NVNT	ax20	5825	Sum	13.517	0	13.517	30	Pass
NVNT	ax40	5755	Ant2	11.13	0	11.13	30	Pass
NVNT	ax40	5755	Ant4	10.81	0	10.81	30	Pass
NVNT	ax40	5755	Sum	13.983	0	13.983	30	Pass
NVNT	ax40	5795	Ant2	10.72	0	10.72	30	Pass
NVNT	ax40	5795	Ant4	10.46	0	10.46	30	Pass
NVNT	ax40	5795	Sum	13.602	0	13.602	30	Pass
NVNT	ax80	5775	Ant2	10.66	0	10.66	30	Pass

NVNT	ax80	5775	Ant4	10.35	0	10.35	30	Pass
NVNT	ax80	5775	Sum	13.518	0	13.518	30	Pass
NVNT	n20	5745	Ant2	13.71	0	13.71	39	Pass
NVNT	n20	5745	Ant4	13.02	0	13.02	39	Pass
NVNT	n20	5745	Sum	16.389	0	16.389	39	Pass
NVNT	n20	5785	Ant2	13.61	0	13.61	30	Pass
NVNT	n20	5785	Ant4	13.28	0	13.28	30	Pass
NVNT	n20	5785	Sum	16.458	0	16.458	30	Pass
NVNT	n20	5825	Ant2	13.35	0	13.35	30	Pass
NVNT	n20	5825	Ant4	13.97	0	13.97	30	Pass
NVNT	n20	5825	Sum	16.681	0	16.681	30	Pass
NVNT	n40	5755	Ant2	12.49	0	12.49	30	Pass
NVNT	n40	5755	Ant4	12.06	0	12.06	30	Pass
NVNT	n40	5755	Sum	15.291	0	15.291	30	Pass
NVNT	n40	5795	Ant2	12.72	0	12.72	30	Pass
NVNT	n40	5795	Ant4	12.48	0	12.48	30	Pass
NVNT	n40	5795	Sum	15.612	0	15.612	30	Pass

### -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	a	5745	Ant2	15.73	0.5	Pass
NVNT	a	5785	Ant2	15.679	0.5	Pass
NVNT	a	5825	Ant2	15.798	0.5	Pass
NVNT	a	5745	Ant4	16.291	0.5	Pass
NVNT	a	5785	Ant4	15.5	0.5	Pass
NVNT	a	5825	Ant4	16.3	0.5	Pass
NVNT	ac20	5745	Ant2	16.766	0.5	Pass
NVNT	ac20	5745	Ant4	16.293	0.5	Pass
NVNT	ac20	5785	Ant2	17.224	0.5	Pass
NVNT	ac20	5785	Ant4	16.889	0.5	Pass
NVNT	ac20	5825	Ant2	17.187	0.5	Pass
NVNT	ac20	5825	Ant4	16.073	0.5	Pass
NVNT	ac40	5755	Ant2	35.127	0.5	Pass
NVNT	ac40	5755	Ant4	35.046	0.5	Pass
NVNT	ac40	5795	Ant2	35.366	0.5	Pass
NVNT	ac40	5795	Ant4	34.821	0.5	Pass
NVNT	ac80	5775	Ant2	76.393	0.5	Pass
NVNT	ac80	5775	Ant4	76.344	0.5	Pass
NVNT	ax20	5745	Ant2	18.58	0.5	Pass
NVNT	ax20	5745	Ant4	18.559	0.5	Pass
NVNT	ax20	5785	Ant2	18.822	0.5	Pass
NVNT	ax20	5785	Ant4	18.226	0.5	Pass
NVNT	ax20	5825	Ant2	18.788	0.5	Pass
NVNT	ax20	5825	Ant4	18.834	0.5	Pass
NVNT	ax40	5755	Ant2	37.944	0.5	Pass
NVNT	ax40	5755	Ant4	37.783	0.5	Pass
NVNT	ax40	5795	Ant2	37.232	0.5	Pass
NVNT	ax40	5795	Ant4	37.861	0.5	Pass
NVNT	ax80	5775	Ant2	77.605	0.5	Pass
NVNT	ax80	5775	Ant4	77.948	0.5	Pass
NVNT	n20	5745	Ant2	17.266	0.5	Pass
NVNT	n20	5745	Ant4	16.901	0.5	Pass
NVNT	n20	5785	Ant2	17.294	0.5	Pass
NVNT	n20	5785	Ant4	16.643	0.5	Pass
NVNT	n20	5825	Ant2	17.039	0.5	Pass
NVNT	n20	5825	Ant4	16.266	0.5	Pass
NVNT	n40	5755	Ant2	36.047	0.5	Pass
NVNT	n40	5755	Ant4	36.277	0.5	Pass
NVNT	n40	5795	Ant2	35.035	0.5	Pass
NVNT	n40	5795	Ant4	35.648	0.5	Pass

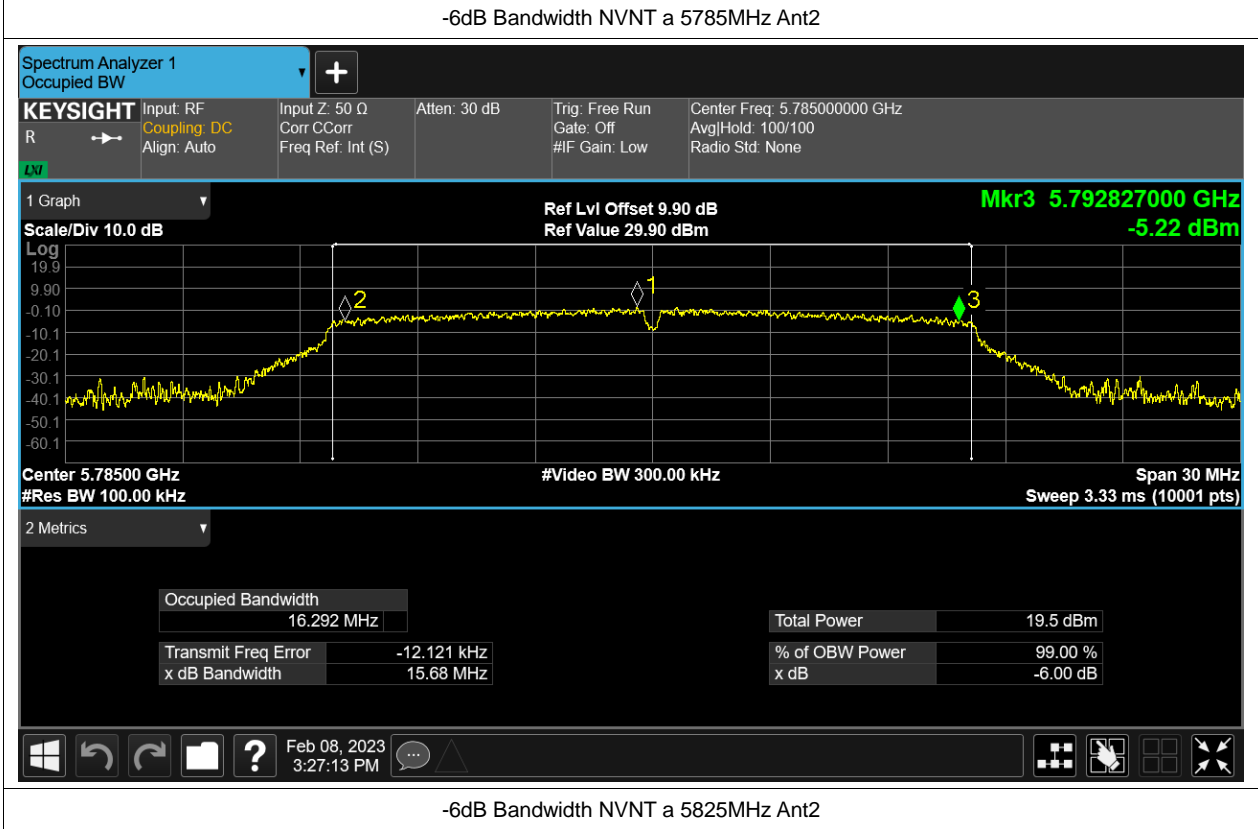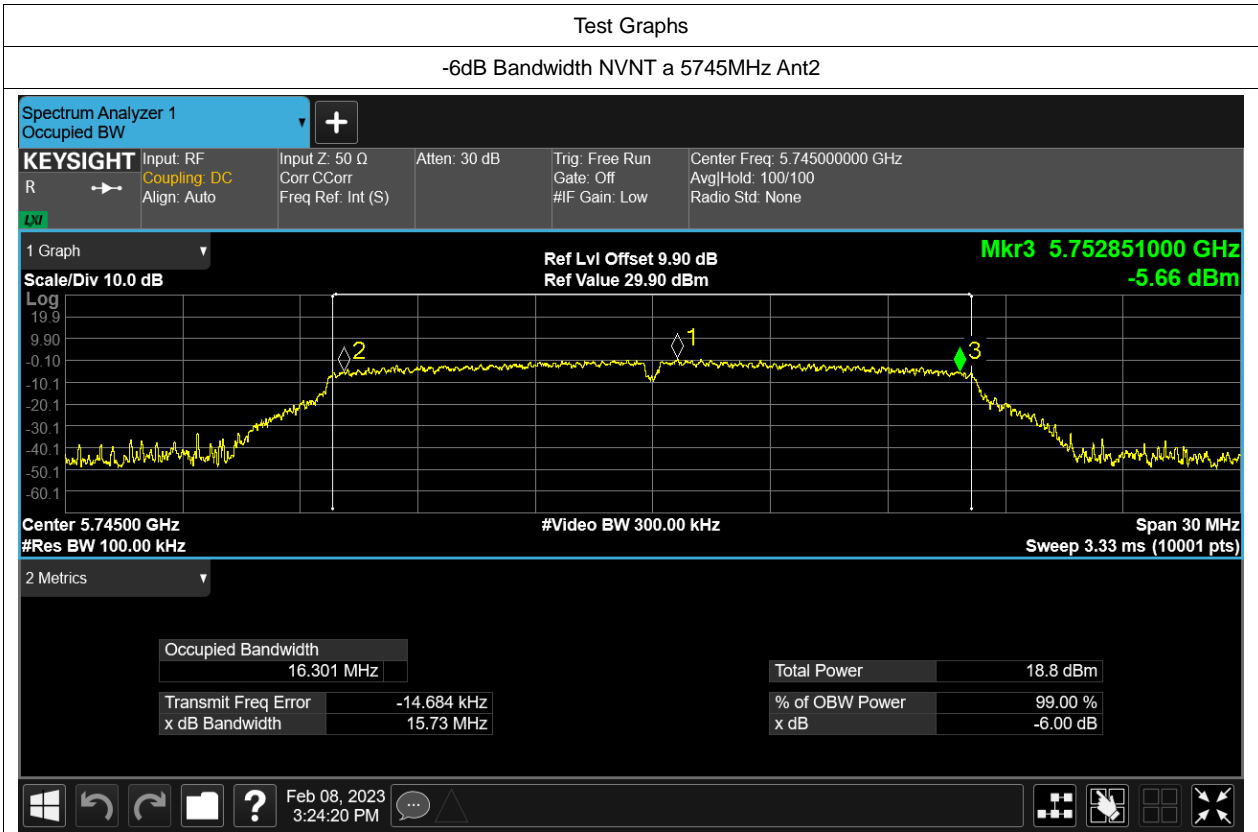

-6dB Bandwidth NVNT a 5825MHz Ant2



-6dB Bandwidth NVNT a 5745MHz Ant4

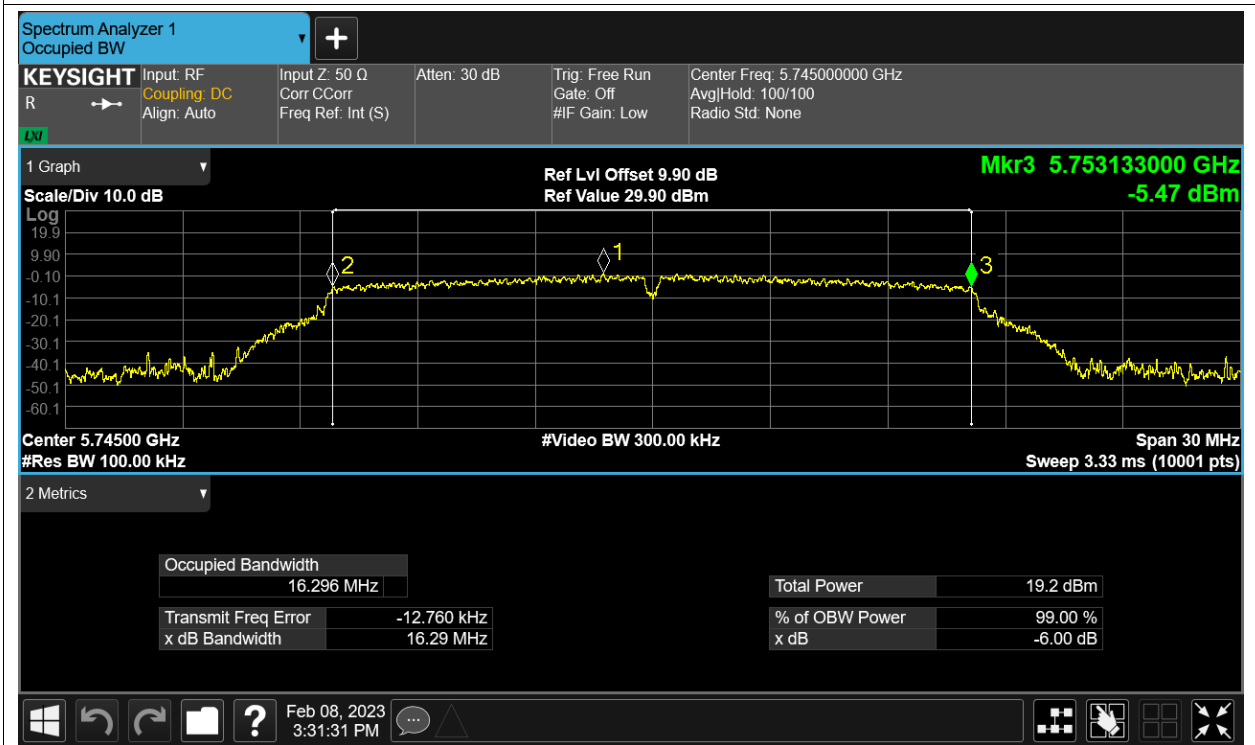


-6dB Bandwidth NVNT a 5785MHz Ant4






-6dB Bandwidth NVNT a 5825MHz Ant4

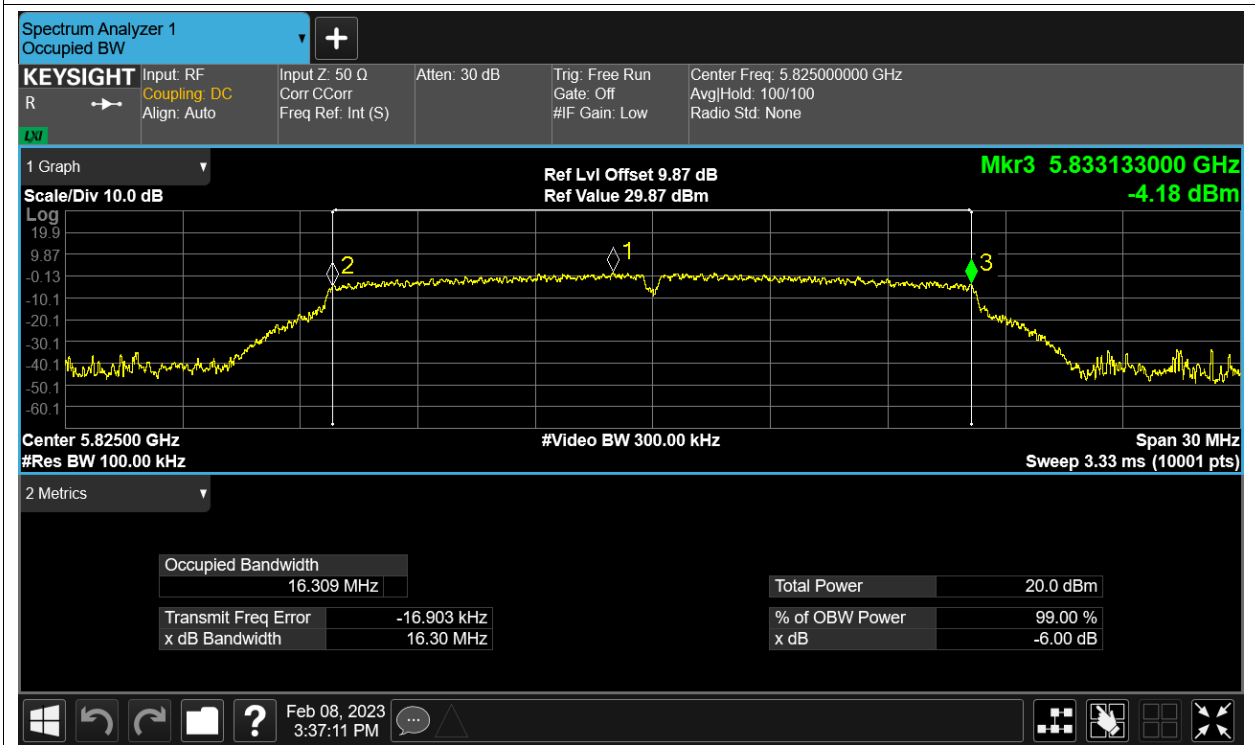


-6dB Bandwidth NVNT ac20 5745MHz Ant2




-6dB Bandwidth NVNT ac20 5745MHz Ant4

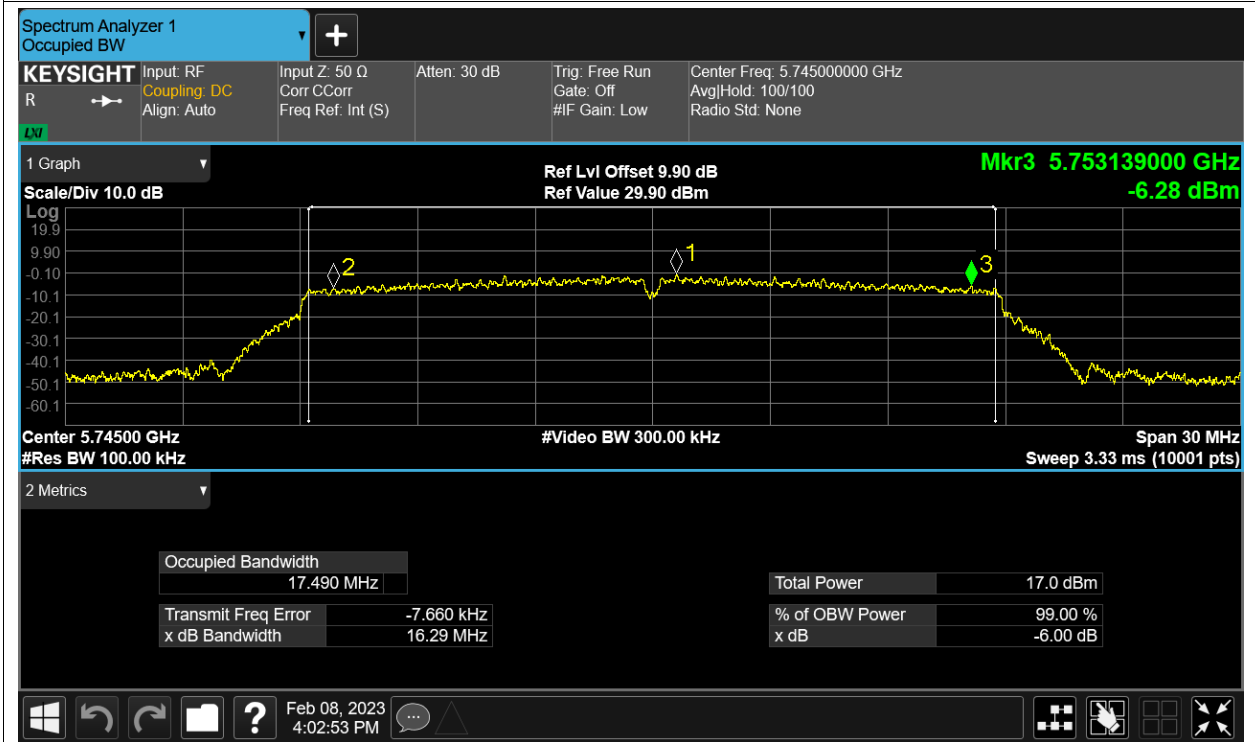


-6dB Bandwidth NVNT ac20 5785MHz Ant2

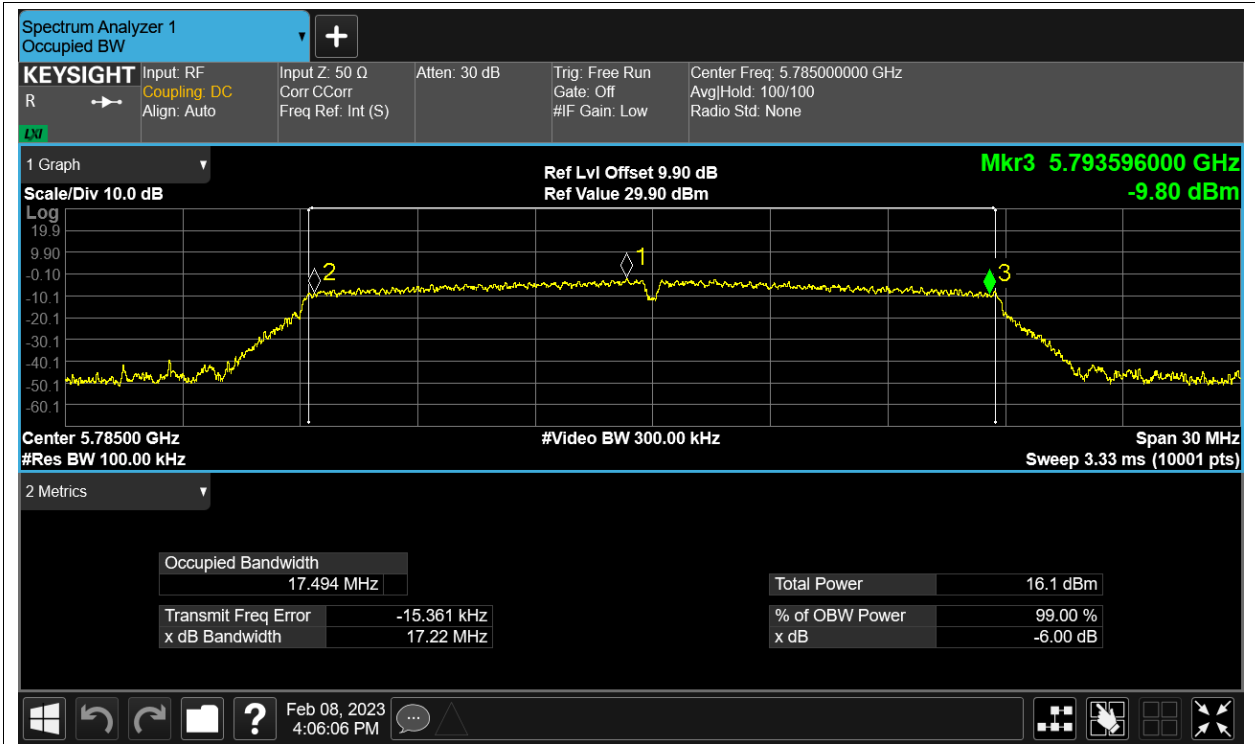

-6dB Bandwidth NVNT ac20 5785MHz Ant4

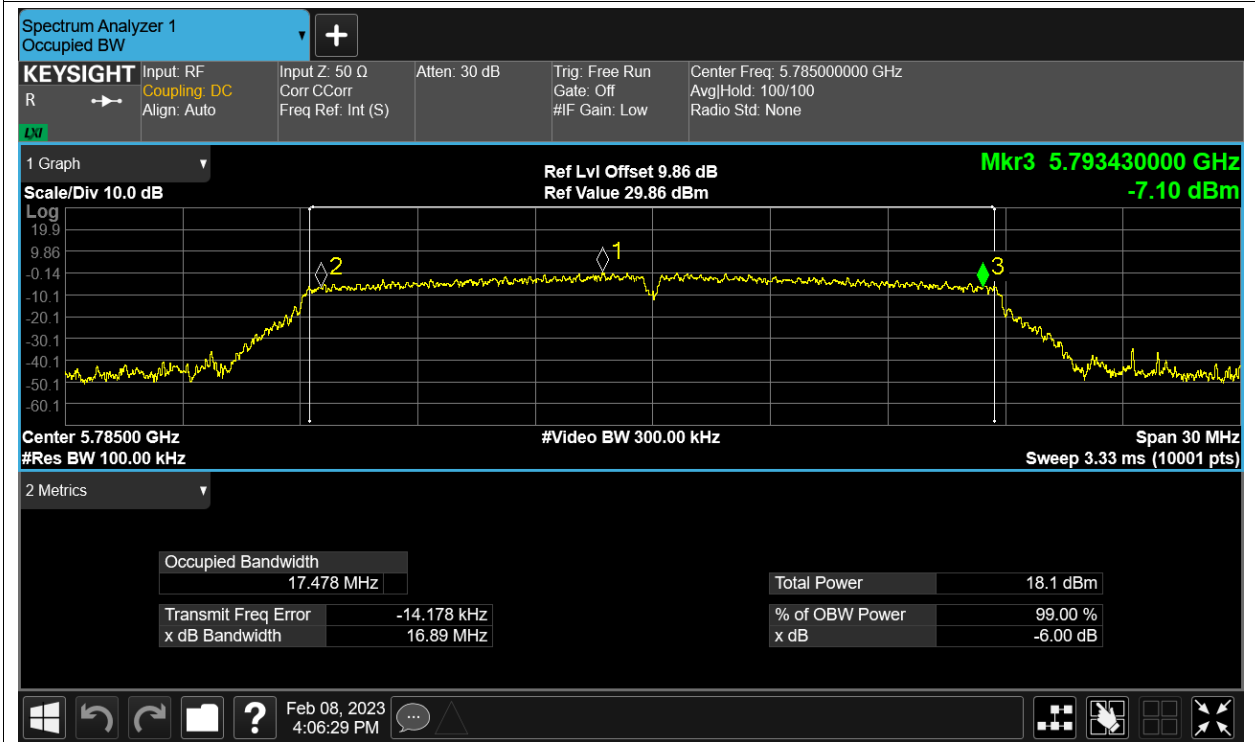

-6dB Bandwidth NVNT ac20 5825MHz Ant2

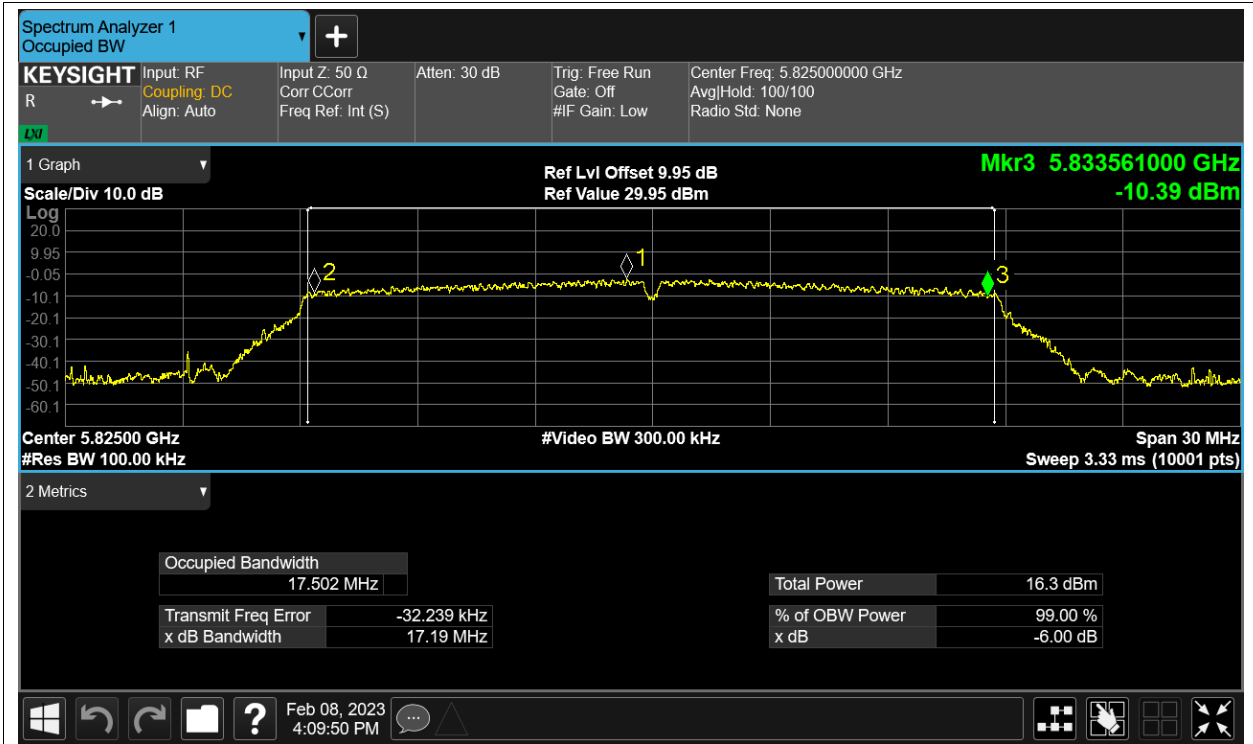


-6dB Bandwidth NVNT ac20 5825MHz Ant4




-6dB Bandwidth NVNT ac40 5755MHz Ant2



-6dB Bandwidth NVNT ac40 5755MHz Ant4

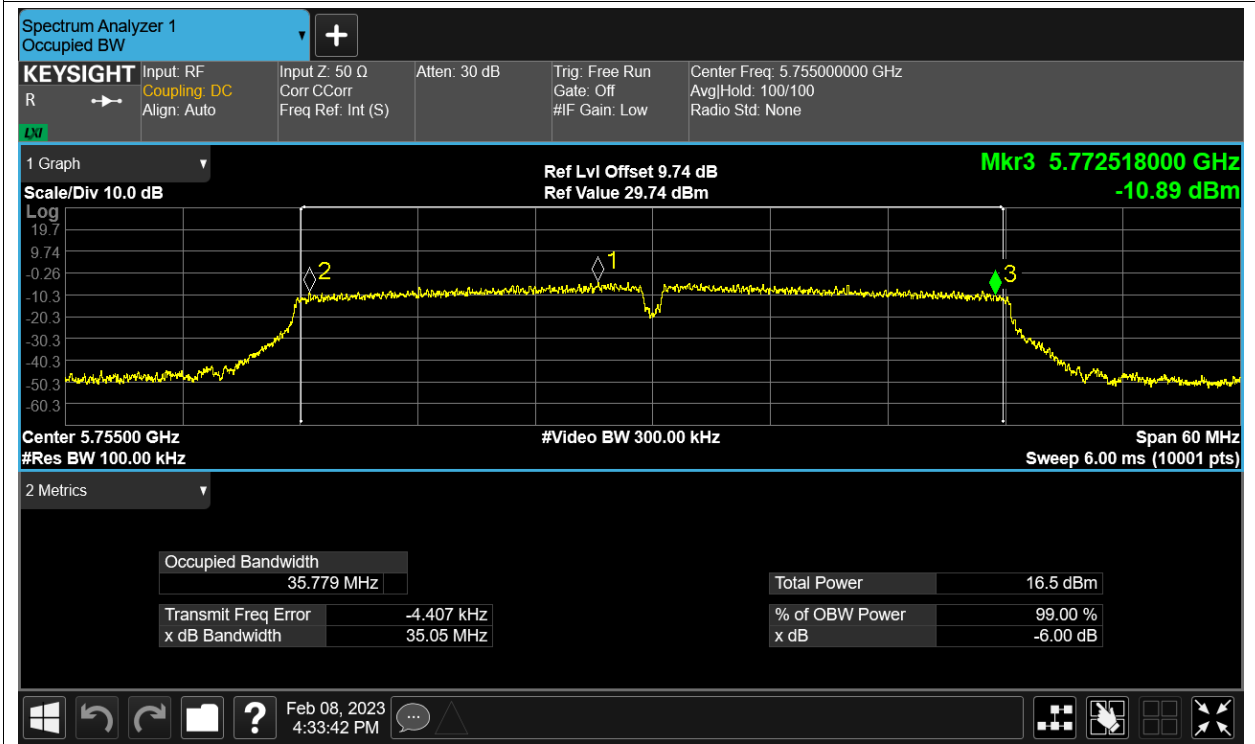


-6dB Bandwidth NVNT ac40 5795MHz Ant2

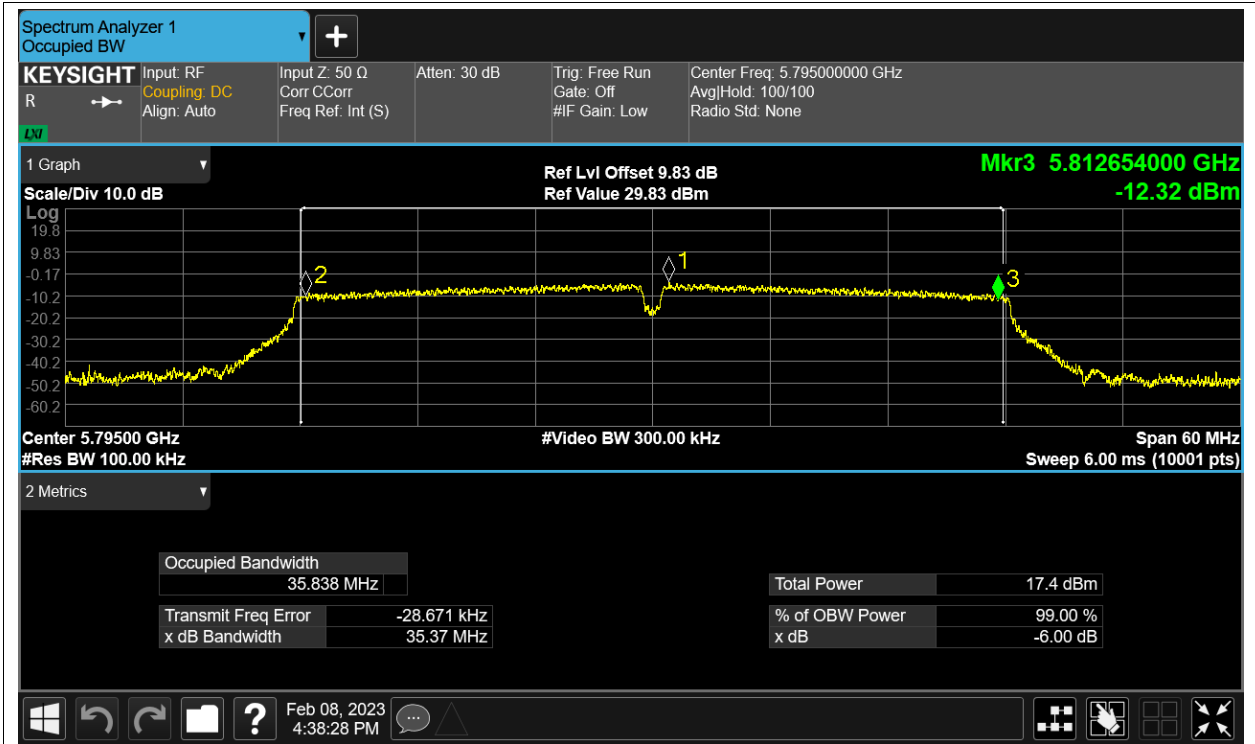


-6dB Bandwidth NVNT ac40 5795MHz Ant4




-6dB Bandwidth NVNT ac80 5775MHz Ant2

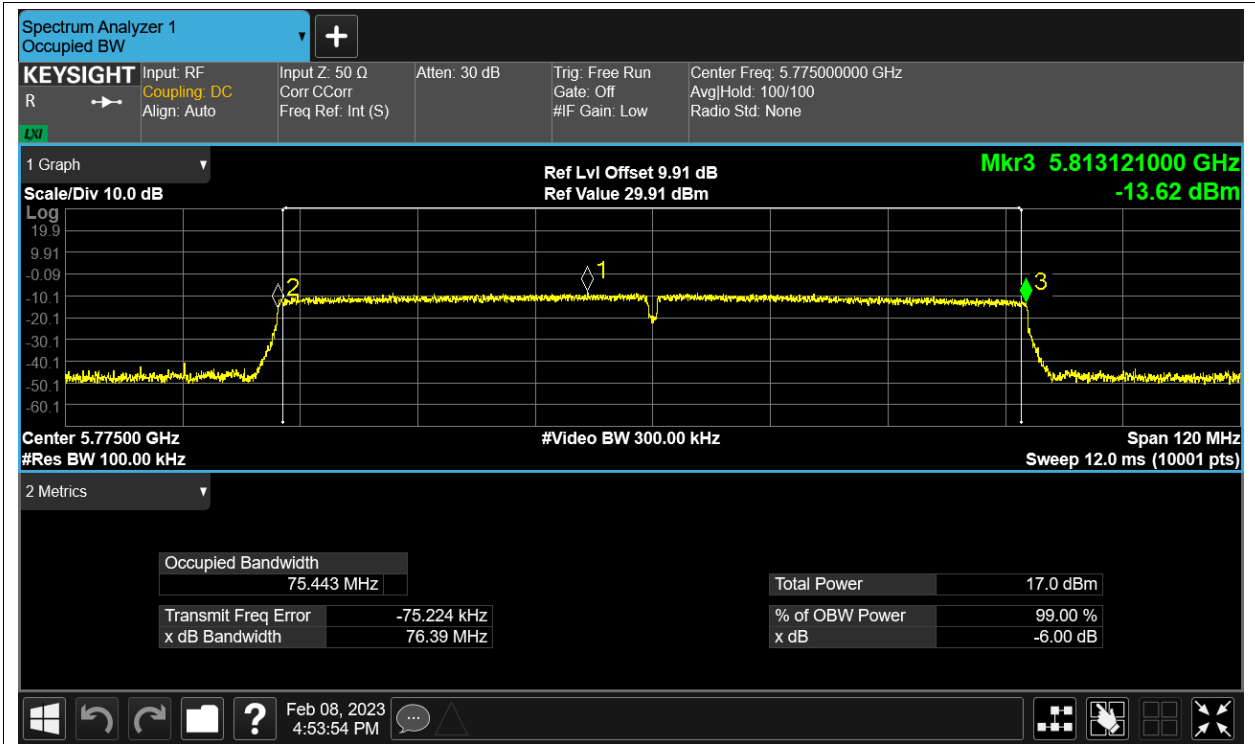


-6dB Bandwidth NVNT ac80 5775MHz Ant4

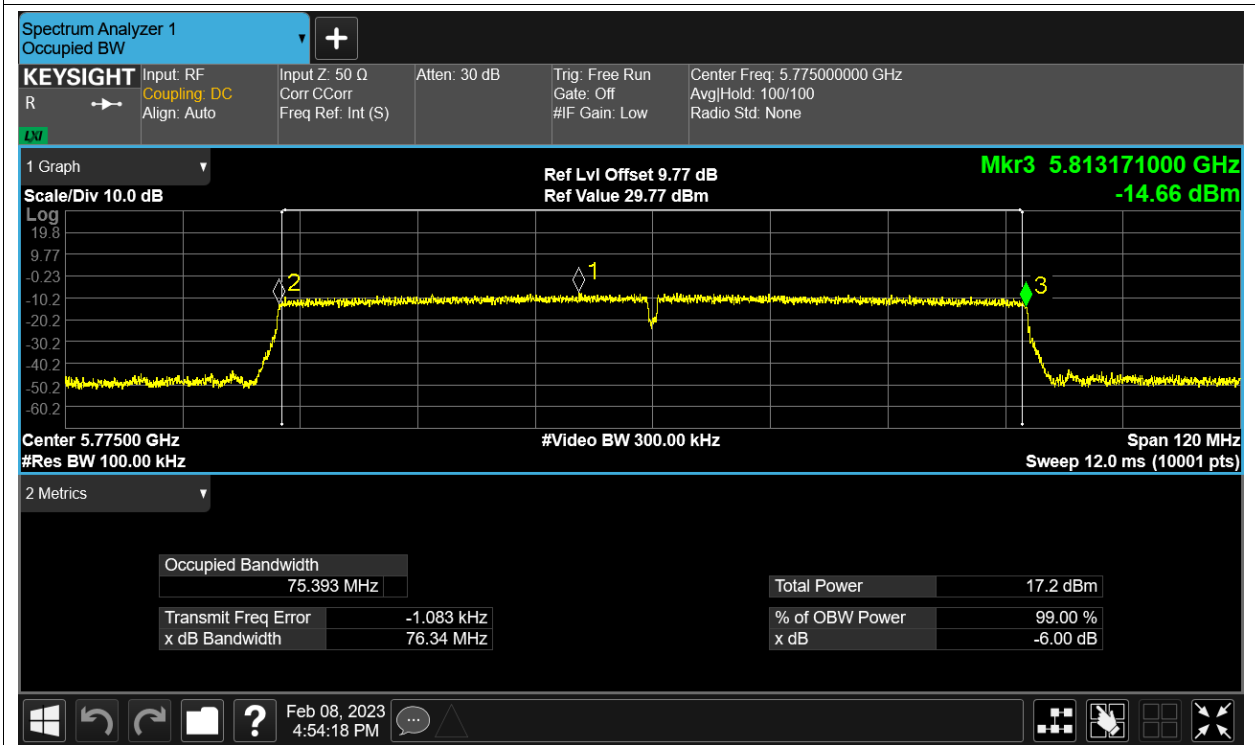

-6dB Bandwidth NVNT ax20 5745MHz Ant2

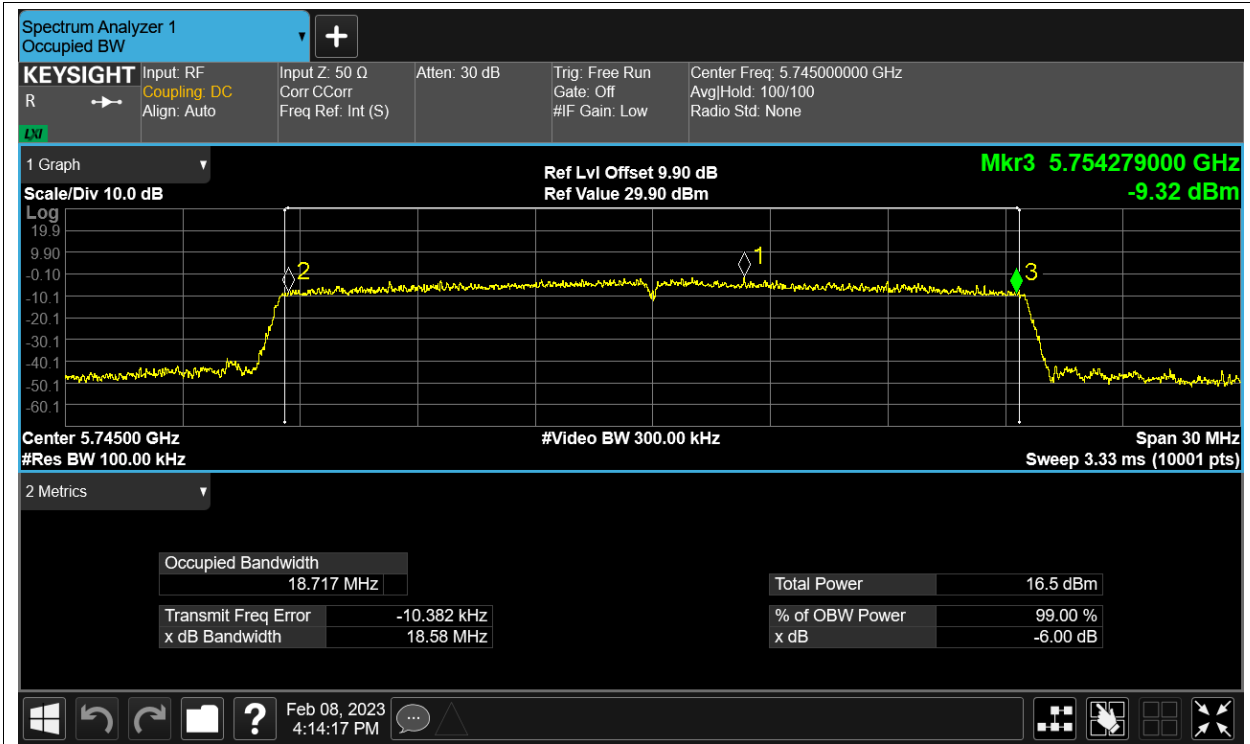


-6dB Bandwidth NVNT ax20 5745MHz Ant4

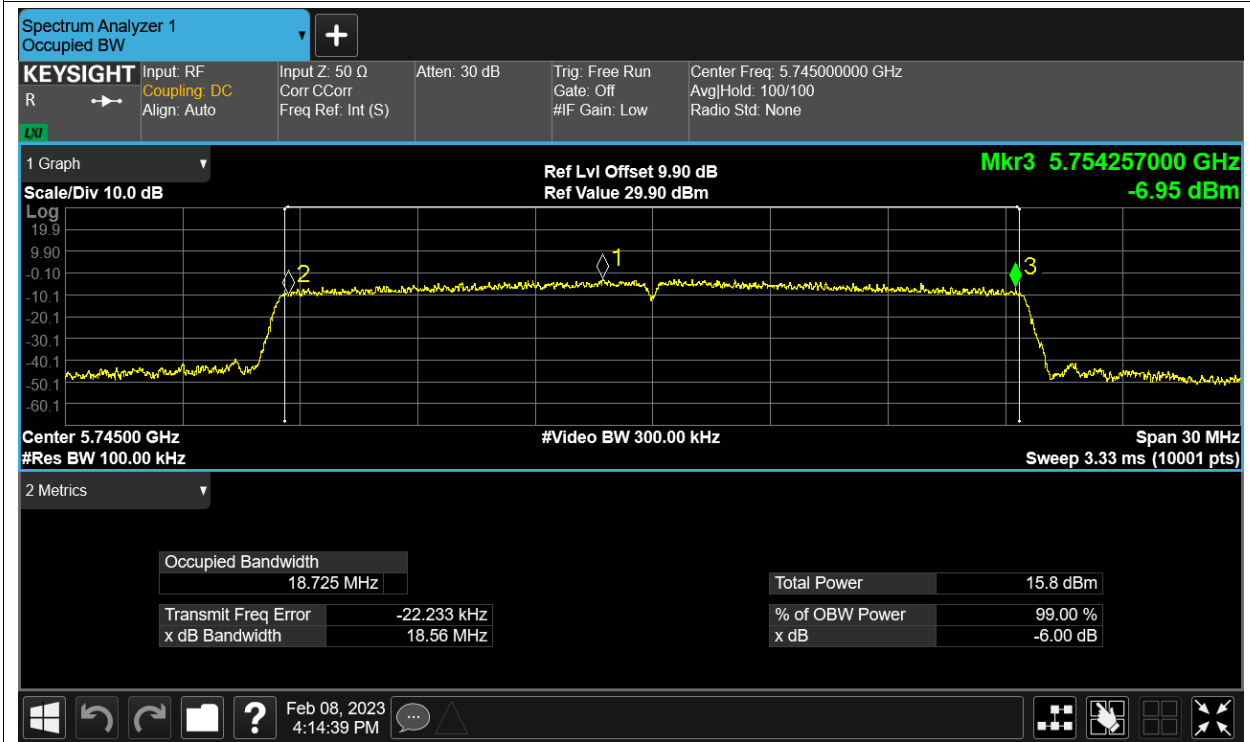


-6dB Bandwidth NVNT ax20 5785MHz Ant2




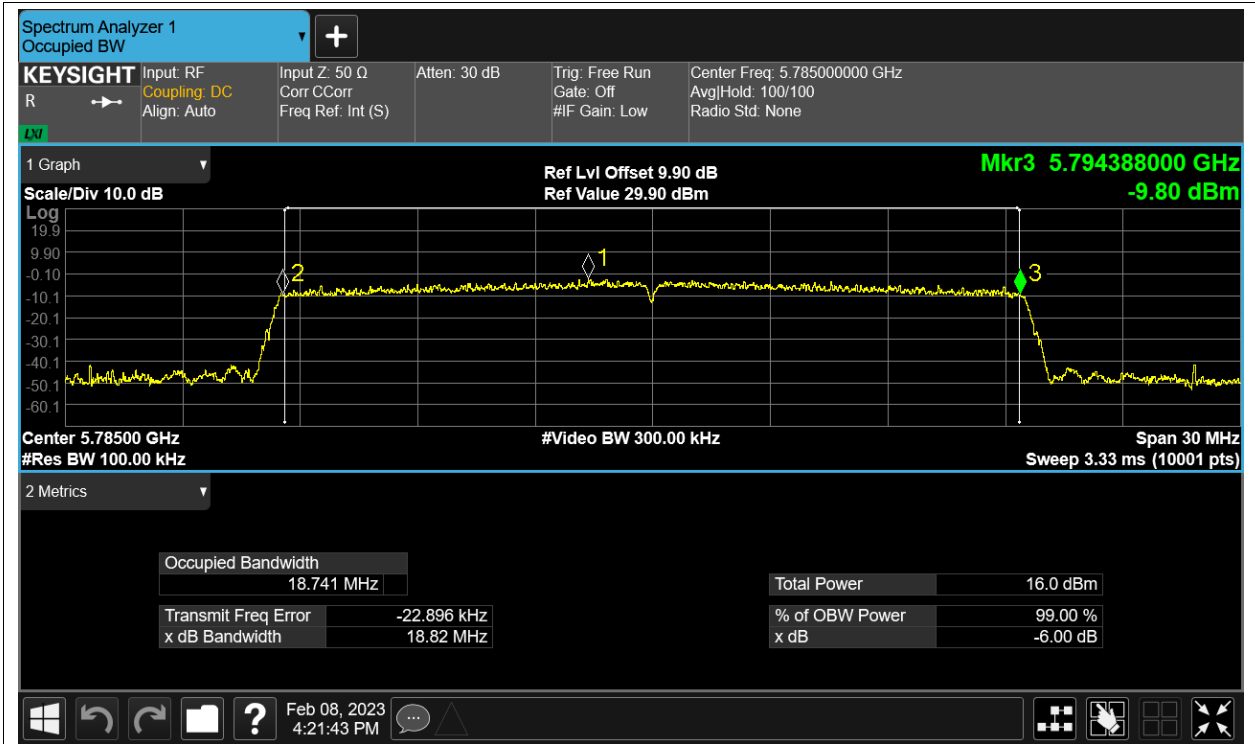


-6dB Bandwidth NVNT ax20 5785MHz Ant4

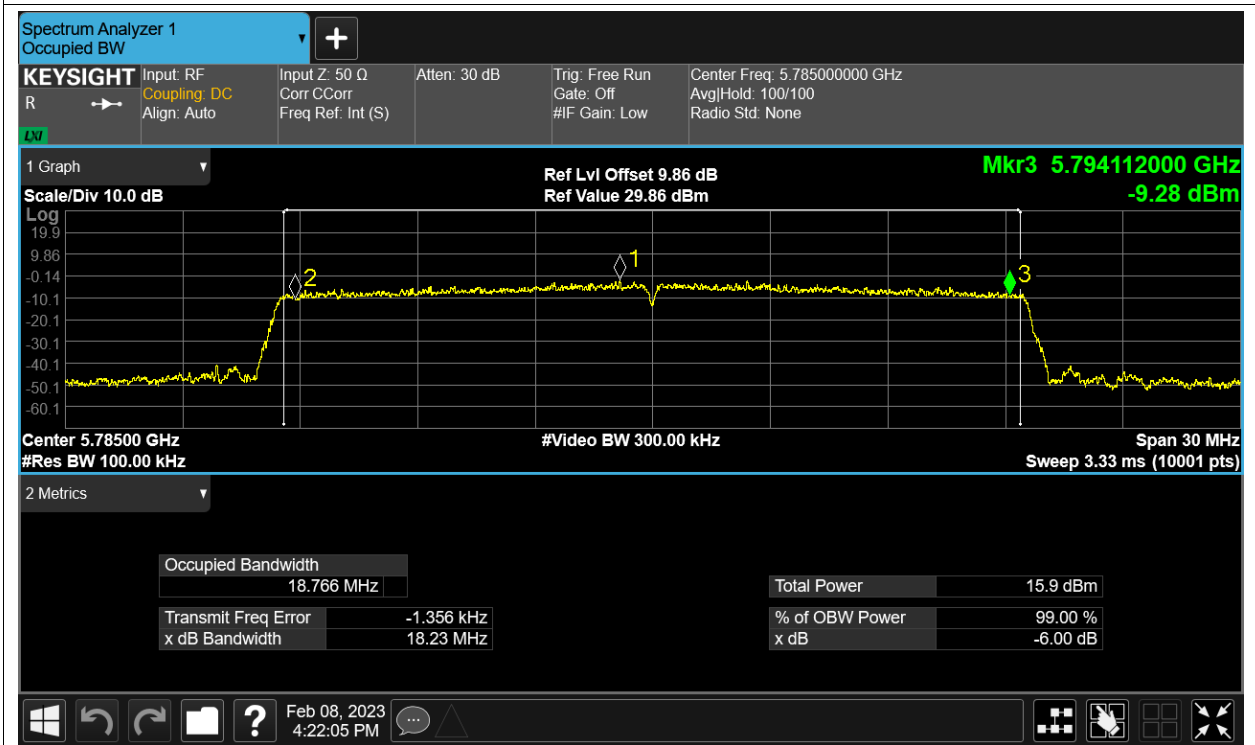


-6dB Bandwidth NVNT ax20 5825MHz Ant2

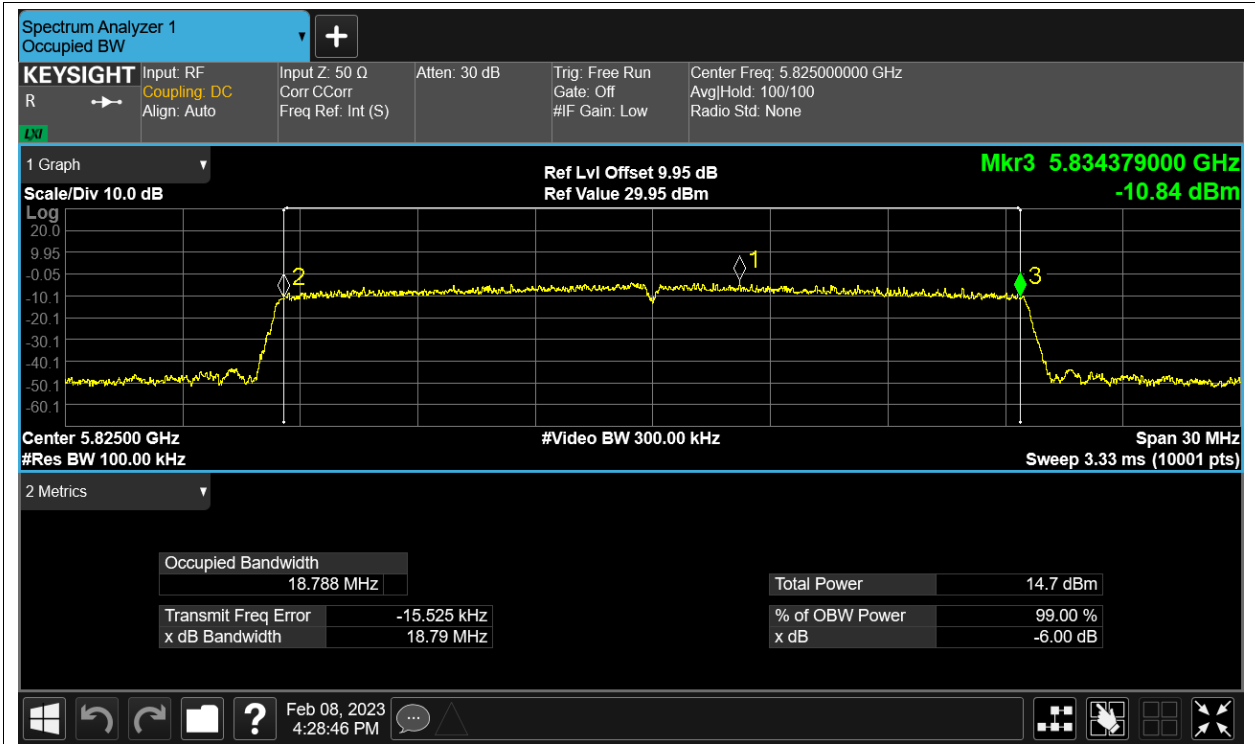


-6dB Bandwidth NVNT ax20 5825MHz Ant4

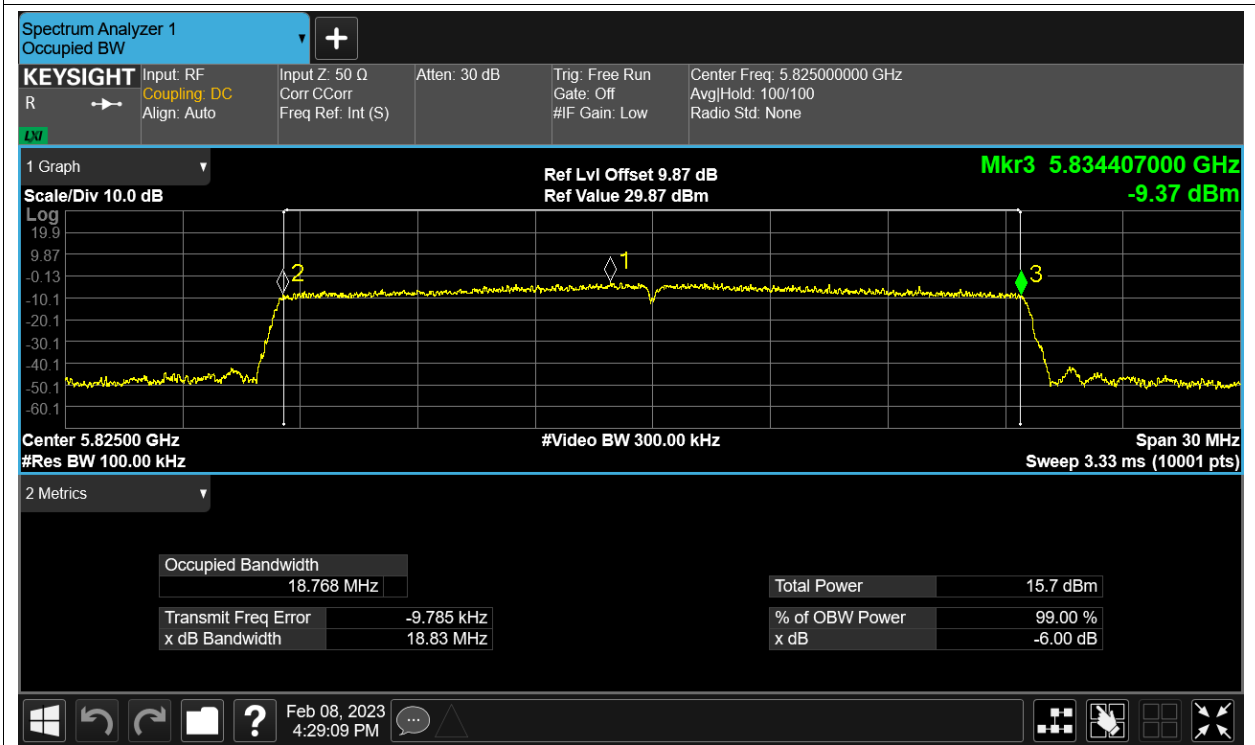

-6dB Bandwidth NVNT ax40 5755MHz Ant2

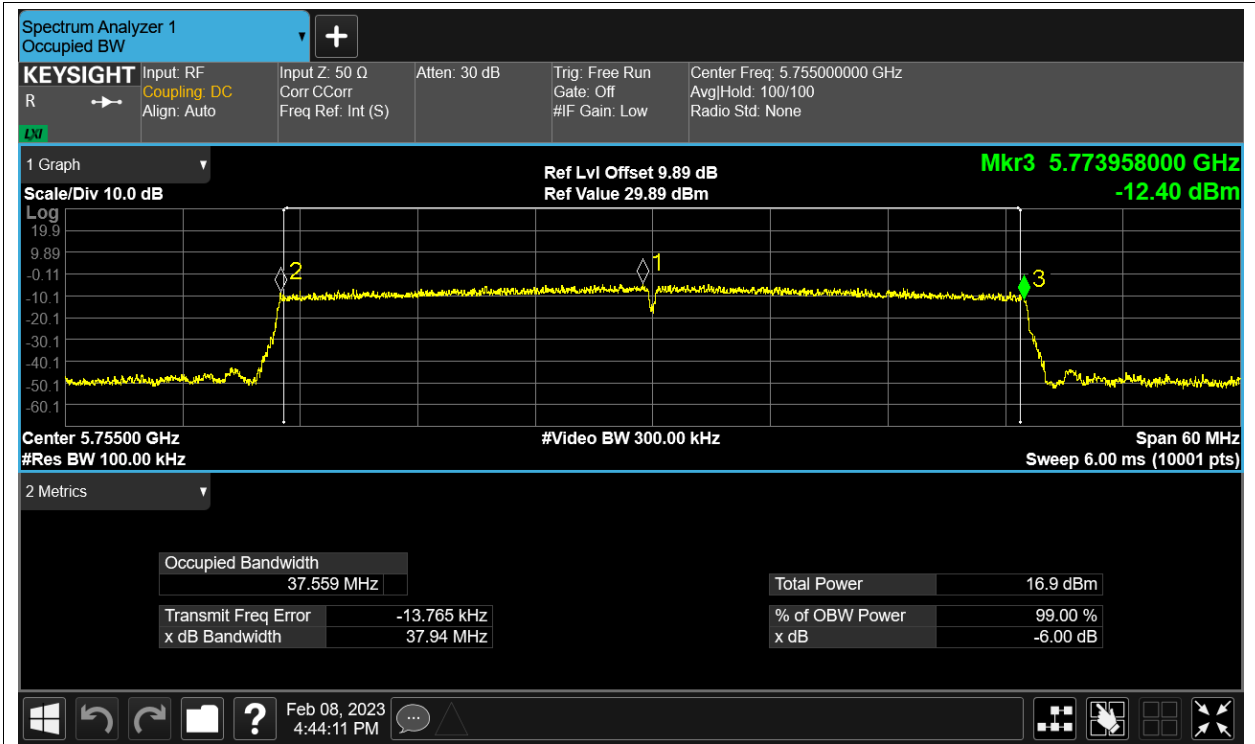


-6dB Bandwidth NVNT ax40 5755MHz Ant4

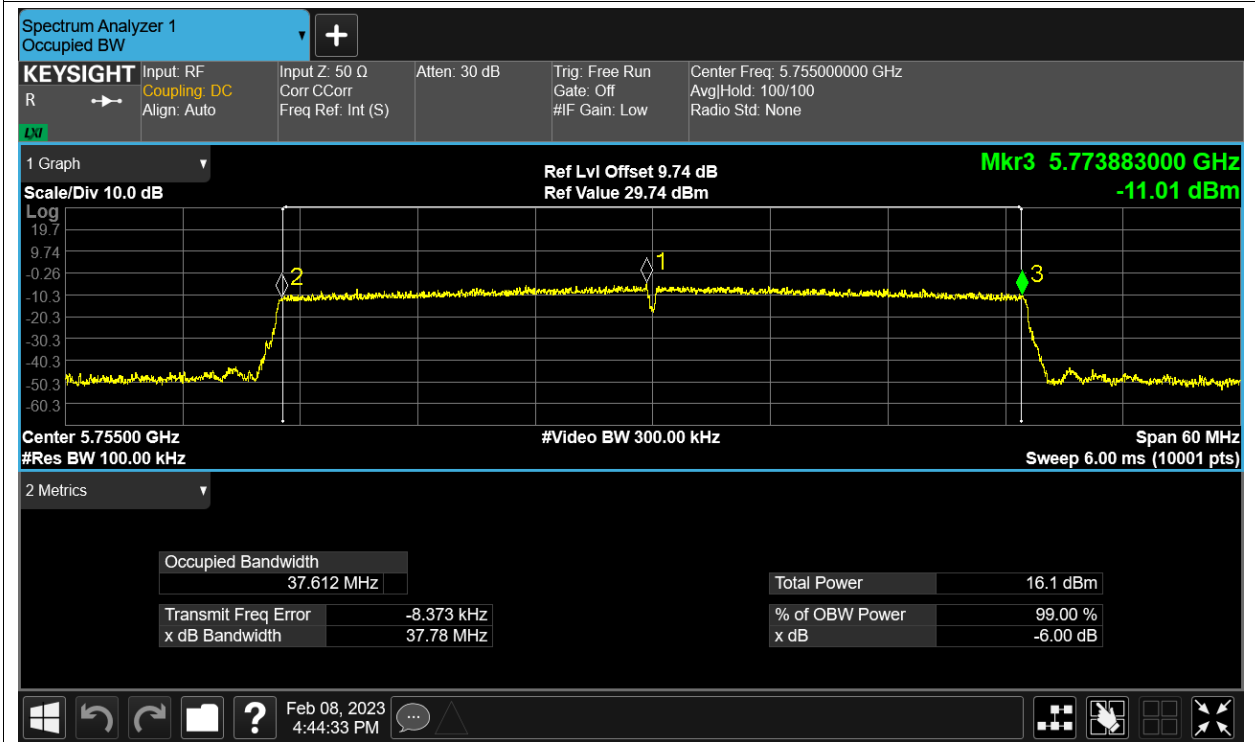


-6dB Bandwidth NVNT ax40 5795MHz Ant2




-6dB Bandwidth NVNT ax40 5795MHz Ant4

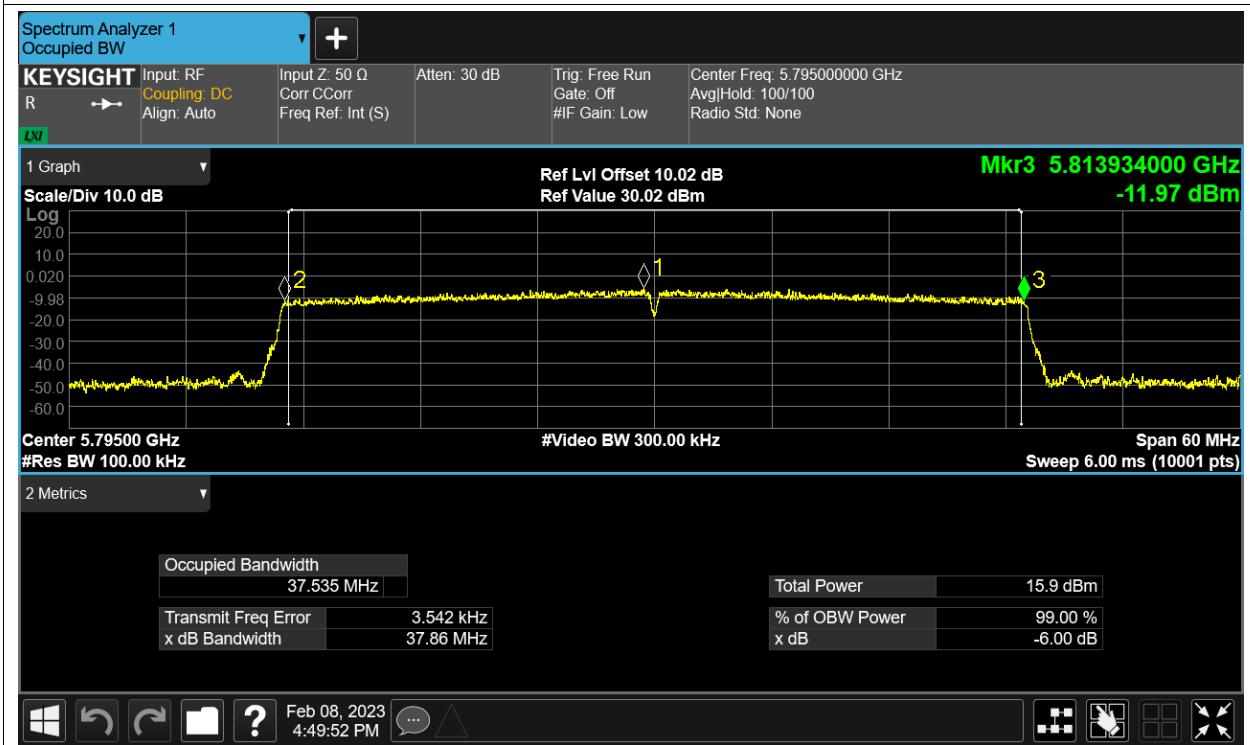

-6dB Bandwidth NVNT ax80 5775MHz Ant2

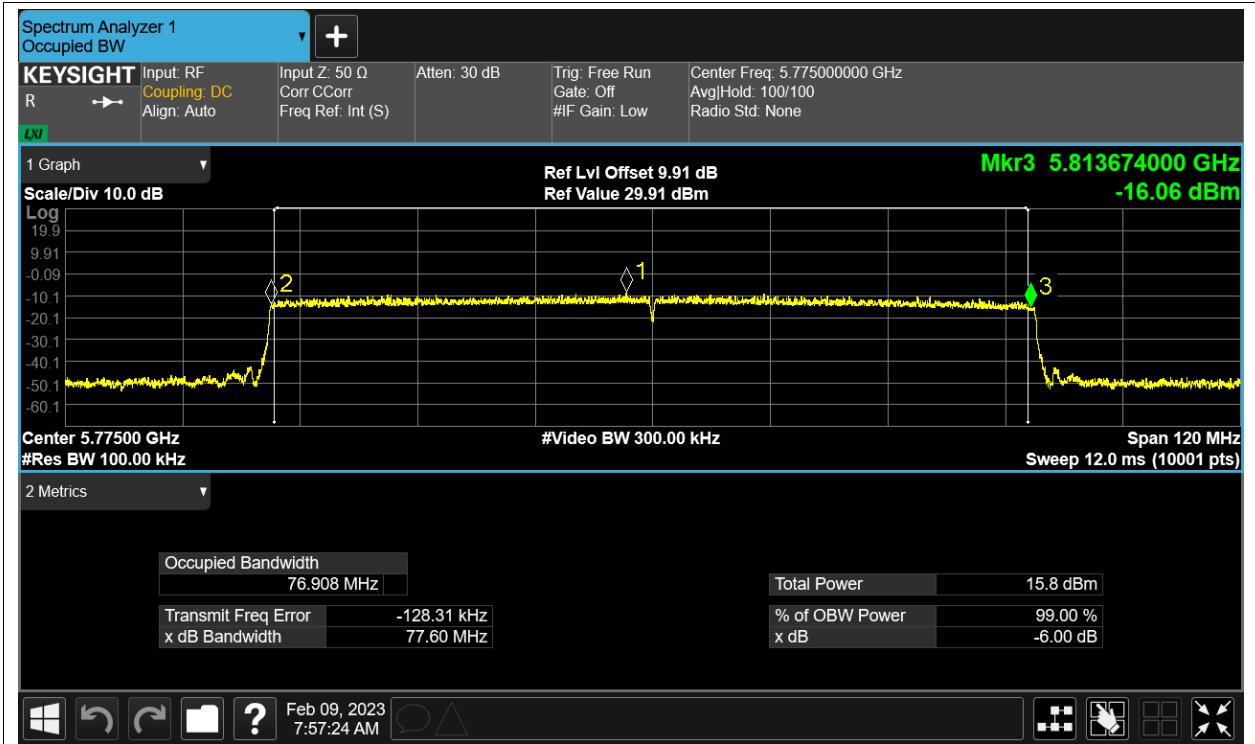

-6dB Bandwidth NVNT ax80 5775MHz Ant4

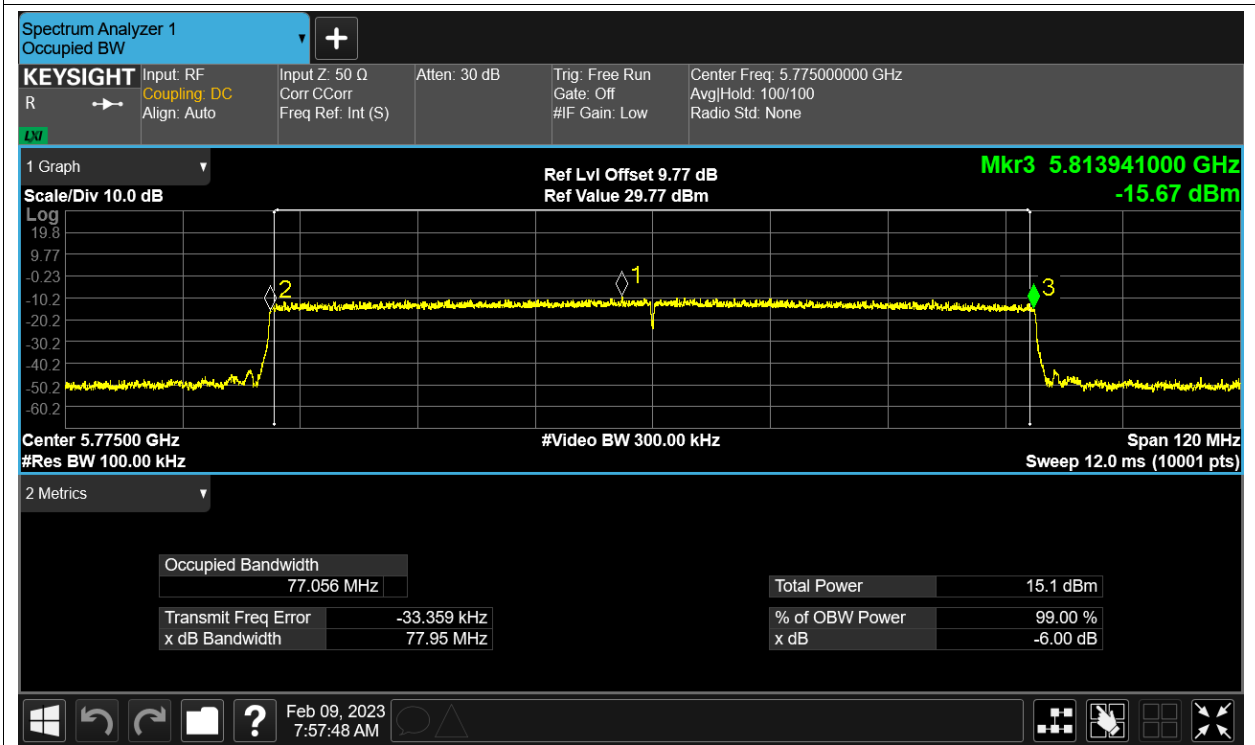

-6dB Bandwidth NVNT n20 5745MHz Ant2