

6. Appendix F Dynamic Frequency Selection (DFS)



Test Items	Remark	Result
Channel Closing Transmission Time	Applicable	PASS
Channel Move Time	Applicable	PASS

Note: This phone can only be used as a slave without radar detection function.



Measurement Record(the worst case)

Measurement data below:

5210MHz			
Test Items	Value (s)	Limit (s)	Test Result
Channel Closing Transmission Time	0.0272	0.26	Pass
Channel Move Time	0.8817	10	Pass

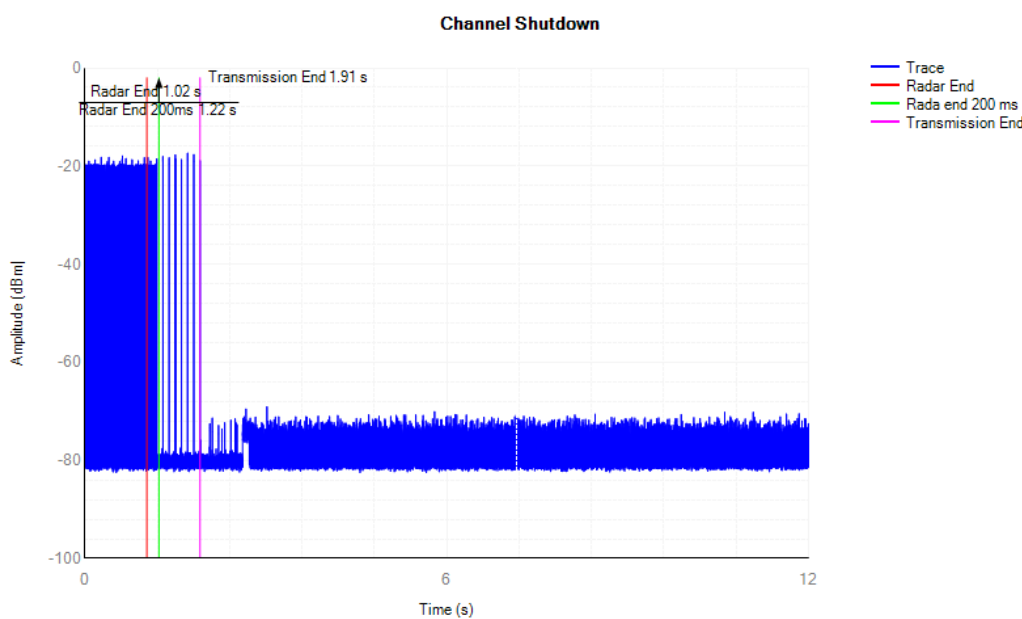
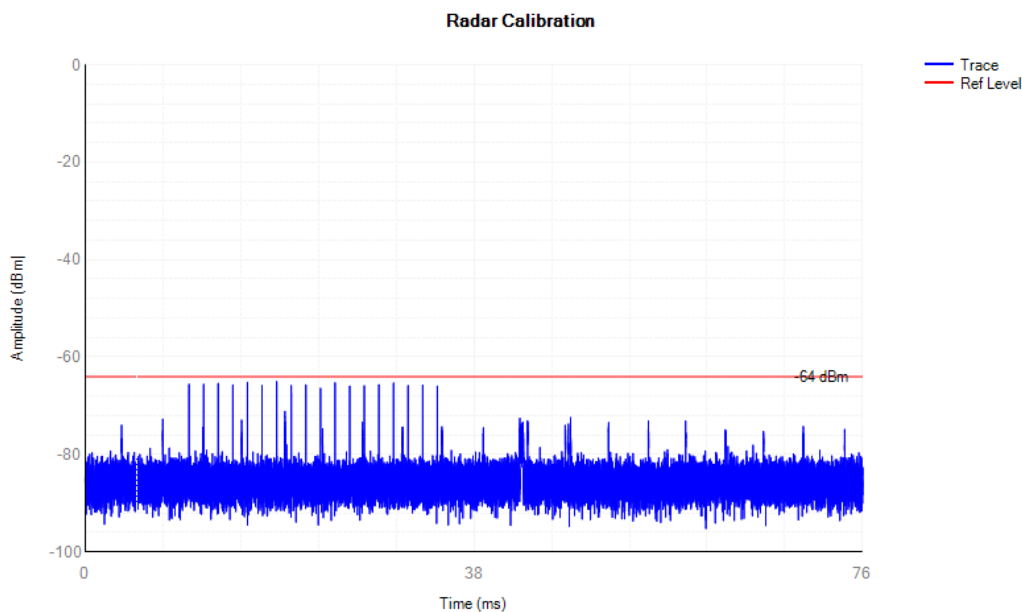


5320MHz			
Test Items	Value (s)	Limit (s)	Test Result
Channel Closing Transmission Time	0.0223	0.26	Pass
Channel Move Time	0.8102	10	Pass

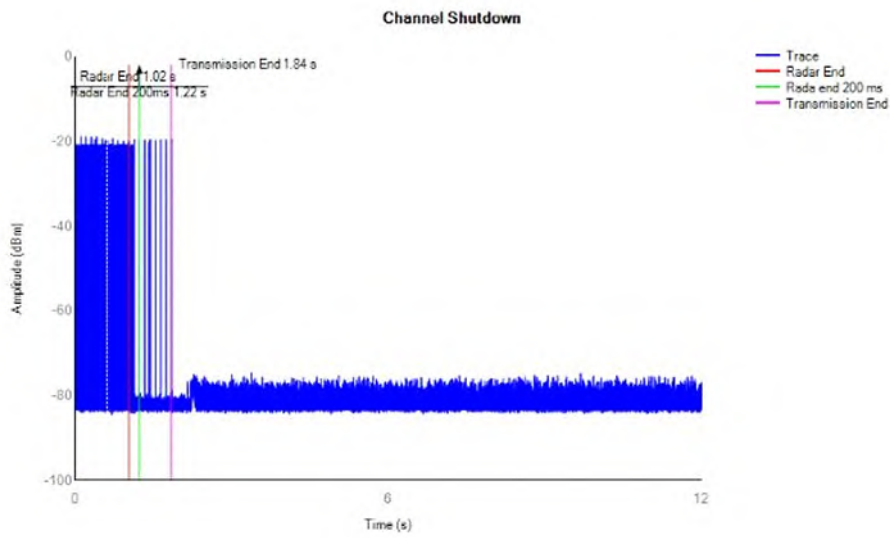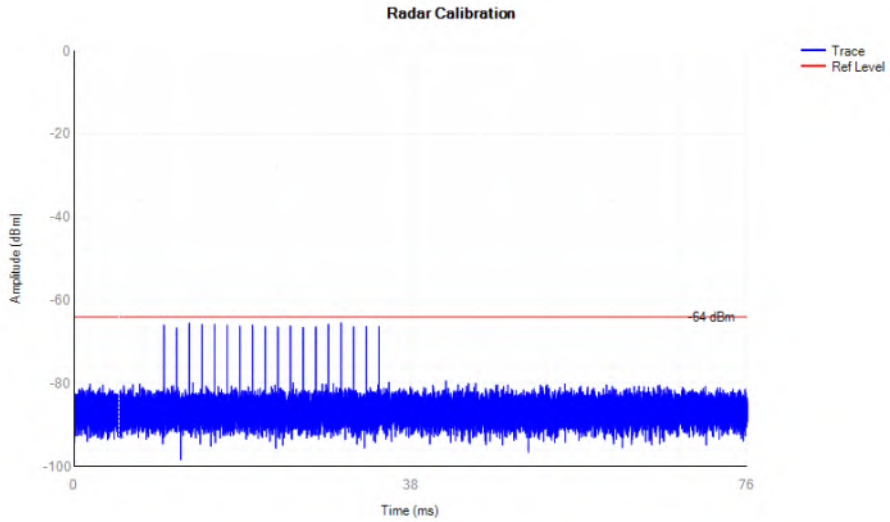

Measurement data below:

5500MHz			
Test Items	Value (s)	Limit (s)	Test Result
Channel Closing Transmission Time	0.0377	0.26	Pass
Channel Move Time	0.8952	10	Pass

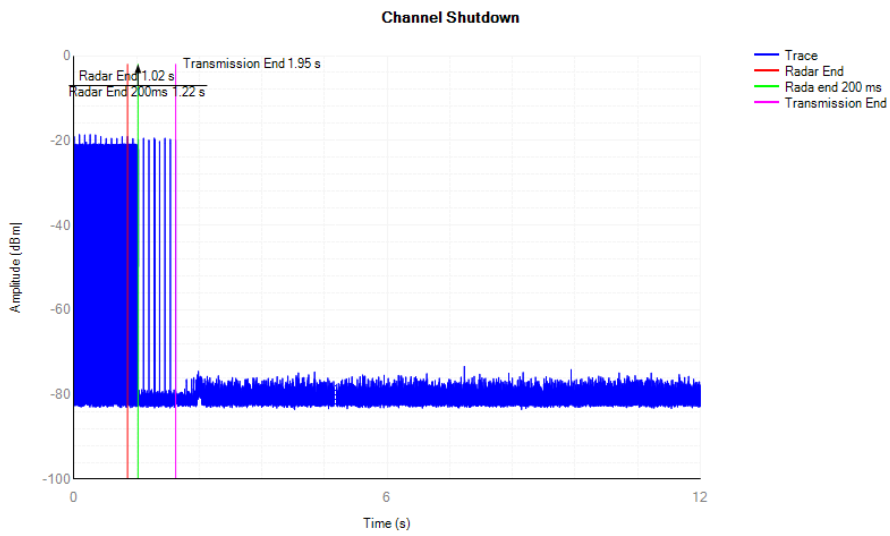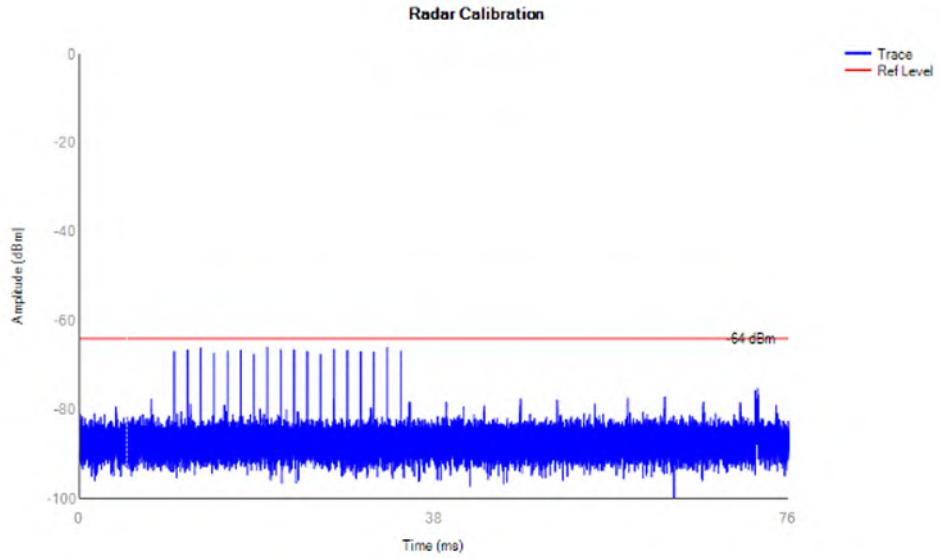

7. Appendix G Duty Cycle

ANT1

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
a	5180	77.52	1.11
a	5240	79.05	1.02
a	5260	78.66	1.04
a	5320	78.66	1.04
a	5500	77.52	1.11
a	5700	79.05	1.02
a	5745	77.86	1.09
a	5825	73.77	1.32
n20	5180	72.8	1.38
n20	5240	74.34	1.29
n20	5260	73.17	1.36
n20	5320	73.16	1.36
n20	5500	75.86	1.2
n20	5700	73.17	1.36
n20	5745	72.8	1.38
n20	5825	72.08	1.42
n40	5190	69.5	1.58
n40	5230	68.83	1.62
n40	5270	70.87	1.5
n40	5310	69.5	1.58
n40	5510	70.07	1.54
n40	5670	68.76	1.63
n40	5755	70.17	1.54
n40	5795	49.27	3.07
ac20	5180	73.66	1.33
ac20	5240	73.29	1.35
ac20	5260	74.08	1.3
ac20	5320	74.04	1.31
ac20	5500	74.02	1.31
ac20	5700	73.29	1.35
ac20	5745	74.04	1.31
ac20	5825	73.28	1.35
ac40	5190	71.12	1.48
ac40	5230	49.06	3.09
ac40	5270	69.76	1.56
ac40	5310	71.04	1.48
ac40	5510	70.32	1.53
ac40	5670	52.61	2.79
ac40	5755	71.01	1.49
ac40	5795	67.90	1.68
ac80	5210	51.22	2.91
ac80	5290	50.43	2.97
ac80	5530	51.14	2.91
ac80	5610	50.46	2.97
ac80	5775	50.39	2.98
ax160	5250	44.13	3.55
ax160	5570	44.25	3.54
ax20	5180	67.6	1.7
ax20	5240	68.84	1.62
ax20	5260	68.01	1.67
ax20	5320	68.08	1.67
ax20	5500	53.74	2.7
ax20	5700	69.69	1.57
ax20	5745	68.49	1.64
ax20	5825	68.01	1.67
ax40	5190	60.13	2.21
ax40	5230	56.71	2.46
ax40	5270	59.42	2.26
ax40	5310	57.14	2.43
ax40	5510	56.07	2.51
ax40	5670	57.14	2.43

ax40	5755	57.14	2.43
ax40	5795	58.26	2.35
ax80	5210	44.23	3.54
ax80	5290	44.81	3.49
ax80	5530	44.16	3.55
ax80	5610	47.46	3.24
ax80	5775	44.77	3.49

ANT2

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
a	5180	72.44	1.4
a	5240	71.07	1.48
a	5260	71.4	1.46
a	5320	71.77	1.44
a	5500	72.05	1.42
a	5700	77.86	1.09
a	5745	78.66	1.04
a	5825	72.06	1.42
n20	5180	73.21	1.35
n20	5240	79.62	0.99
n20	5260	78.75	1.04
n20	5320	80.56	0.94
n20	5500	73.16	1.36
n20	5700	74.3	1.29
n20	5745	73.92	1.31
n20	5825	80.06	0.97
n40	5190	61.74	2.09
n40	5230	63.37	1.98
n40	5270	64.51	1.9
n40	5310	63.93	1.94
n40	5510	63.27	1.99
n40	5670	62.72	2.03
n40	5755	70.17	1.54
n40	5795	62.62	2.03
ac20	5180	79.71	0.99
ac20	5240	80.15	0.96
ac20	5260	73.66	1.33
ac20	5320	72.97	1.37
ac20	5500	80.16	0.96
ac20	5700	80.16	0.96
ac20	5745	80.15	0.96
ac20	5825	74.04	1.31
ac40	5190	63.1	2
ac40	5230	64.22	1.92
ac40	5270	64.22	1.92
ac40	5310	64.22	1.92
ac40	5510	64.15	1.93
ac40	5670	64.79	1.89
ac40	5755	63.56	1.97
ac40	5795	70.32	1.53
ac80	5210	50.5	2.97
ac80	5290	50.43	2.97
ac80	5530	44.88	3.48
ac80	5610	45.44	3.43
ac80	5775	45.3	3.44
ax160	5250	44.38	3.52
ax160	5570	44.42	3.52
ax20	5180	75.28	1.23
ax20	5240	76.36	1.17
ax20	5260	75.86	1.2
ax20	5320	76.89	1.14
ax20	5500	76.88	1.14
ax20	5700	76.37	1.17
ax20	5745	67.6	1.7
ax20	5825	68.42	1.65
ax40	5190	57.8	2.38

ax40	5230	58.26	2.35
ax40	5270	57.25	2.42
ax40	5310	57.8	2.38
ax40	5510	58.32	2.34
ax40	5670	58.26	2.35
ax40	5755	57.7	2.39
ax40	5795	57.7	2.39
ax80	5210	44.2	3.55
ax80	5290	44.77	3.49
ax80	5530	46.1	3.36
ax80	5610	45.48	3.42
ax80	5775	44.69	3.5

ANT1

