



# WINNF-TS-0122 Test Report

APPLICANT	Nokia Shanghai Bell Co., Ltd.
EQUIPMENT	FastMile 4G Receiver
BRAND NAME	NOKIA
MODEL NAME	4G06-A
FCC ID	2ADZR4G06A
REFERENCE	WINNF-TS-0122 Version V1.0.1

The product was received on Aug. 22, 2019 and testing was started from Jan. 09, 2020 and completed on Feb. 04, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in WINNF-TS-0122 Version V1.0.1 and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Reviewed by:

William Chen / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Approved by:

Jones Tsai / Manager



## Table of Contents

<b>Revision History -----</b>	<b>4</b>
<b>1. Administration Data -----</b>	<b>5</b>
1.1 Testing Laboratory -----	5
1.2 Applicant-----	5
1.3 Manufacturer -----	5
<b>2. General Information -----</b>	<b>6</b>
2.1 Description of Equipment Under Test (EUT)-----	6
2.2 Protocol Test Summary -----	7
2.3 Time test for getting Grant Summary-----	8
2.4 Support Equipment -----	8
2.5 Test Equipment List-----	8
<b>3. Measurement Environment -----</b>	<b>9</b>
3.1 Test configuration without Domain Proxy-----	10
3.2 Standards -----	11
3.3 Protocol test procedure -----	11
3.4 Time test for getting Grant Procedure-----	11
<b>4. Protocol Test Results -----</b>	<b>12</b>
4.1 [WINNF.FT.C.REG.1] Multi-Step registration -----	12
4.2 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102) -----	13
4.3 [WINNF.FT.C.REG.10] Pending registration (responseCode 200) -----	14
4.4 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103) -----	15
4.5 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101) -----	16
4.6 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)-----	17
4.7 [WINNF.FT.C.REG.18] Group Error (responseCode 201)-----	18
4.8 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE) -----	19
4.9 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT) -----	20
4.10 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response) -----	21
4.11 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DREGISTER)-----	23
4.12 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT)-----	24
4.13 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response -----	25
4.14 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response -----	26
4.15 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)-----	28
4.16 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat) -----	29
4.17 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat) -----	30

4.18 [WINNF.FT.C.HBT.11] Successful Grant Renewal in Heartbeat Test Case -----	31
4.19 [WINNF.FT.C.MES.3] Grant Response contains measReportConfig -----	33
4.20 [WINNF.FT.C.MES.4] Heartbeat Response contains measReportConfig -----	35
4.21 [WINNF.FT.C.RLQ.1] Successful Relinquishment-----	37
4.22 [WINNF.FT.C.RLQ.3] Unsuccessful Relinquishment, responseCode=102-----	38
4.23 [WINNF.FT.C.RLQ.5] Unsuccessful Relinquishment, responseCode=103-----	39
4.24 [WINNF.FT.C.DRG.1] Successful Deregistration -----	40
4.25 [WINNF.FT.C.DRG.3] Deregistration responseCode=102-----	41
4.26 [WINNF.FT.C.DRG.5] Deregistration responseCode=103-----	42
4.27 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness -----	43
4.28 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate -----	44
4.29 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate-----	45
4.30 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA	46
4.31 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted -----	47
4.32 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement-----	48
<b>5. Result of Time test for getting Grant -----</b>	<b>50</b>
5.1 1 second within any 10-second period -----	50
5.2 10 seconds within any 300-second period -----	51
5.3 20 seconds within any 3600-second period -----	52
<b>6. UUT register with the SAS irrespective of power levels-----</b>	<b>53</b>
6.1 Test Procedure-----	53
6.2 Result -----	53

**Appendix A. Setup Plot****Appendix B. RF measurement plots**



## Revision History



## 1. Administration Data

### 1.1 Testing Laboratory

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

### 1.2 Applicant

<b>Company Name</b>	Nokia Shanghai Bell Co., Ltd.
<b>Address</b>	388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China

### 1.3 Manufacturer

<b>Company Name</b>	Nokia Shanghai Bell Co., Ltd.
<b>Address</b>	388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China



## 2. General Information

### 2.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
<b>EUT Type</b>	FastMile 4G Receiver
<b>Brand Name</b>	NOKIA
<b>Model Name</b>	4G06-A
<b>FCC ID</b>	2ADZR4G06A
<b>Professional Installation</b>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<b>UUT Category</b>	<input type="checkbox"/> Category A <input checked="" type="checkbox"/> Category B
<b>Unit Under Test in Test ID</b>	<input type="checkbox"/> UUT with Domain Proxy <input checked="" type="checkbox"/> UUT without Domain Proxy
<b>Air Interface Supported</b>	LTE Band 48
<b>Air Interface Tested</b>	LTE Band 48
<b>UUT HW Version</b>	3TG00171AB
<b>UUT SW Version</b>	FMR2003 E0115

## 2.2 Protocol Test Summary

Section	Test Case ID	Test Case Title	Test Result
6.1.4.1.1	WINNF.FT.C.REG.1	Multi-Step registration	PASS
6.1.4.2.1	WINNF.FT.C.REG.8	Missing Required parameters (responseCode 102)	PASS
6.1.4.2.3	WINNF.FT.C.REG.10	Pending registration (responseCode 200)	PASS
6.1.4.2.5	WINNF.FT.C.REG.12	Invalid parameter (responseCode 103)	PASS
6.1.4.2.7	WINNF.FT.C.REG.14	Blacklisted CBSD (responseCode 101)	PASS
6.1.4.2.9	WINNF.FT.C.REG.16	Unsupported SAS protocol version (responseCode 100)	PASS
6.1.4.2.11	WINNF.FT.C.REG.18	Group Error (responseCode 201)	PASS
6.3.4.2.1	WINNF.FT.C.GRA.1	Unsuccessful Grant responseCode=400 (INTERFERENCE)	PASS
6.3.4.2.2	WINNF.FT.C.GRA.2	Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	PASS
6.4.4.1.1	WINNF.FT.C.HBT.1	Heartbeat Success Case (first Heartbeat Response)	PASS
6.4.4.2.1	WINNF.FT.C.HBT.3	Heartbeat responseCode=105 (DEREGISTER)	PASS
6.4.4.2.2	WINNF.FT.C.HBT.4	Heartbeat responseCode=500 (TERMINATED_GRANT)	PASS
6.4.4.2.3	WINNF.FT.C.HBT.5	Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	PASS
6.4.4.2.4	WINNF.FT.C.HBT.6	Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	PASS
6.4.4.2.5	WINNF.FT.C.HBT.7	Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	PASS
6.4.4.3.1	WINNF.FT.C.HBT.9	Heartbeat Response Absent (First Heartbeat)	PASS
6.4.4.3.2	WINNF.FT.C.HBT.10	Heartbeat Response Absent (Subsequent Heartbeat)	PASS
6.4.4.4.1	WINNF.FT.C.HBT.11	Successful Grant Renewal in Heartbeat Test Case	PASS
6.5.4.2.3	WINNF.FT.C.MES.3	Grant Response contains measReportConfig	PASS
6.1.4.1.1	WINNF.FT.C.REG.1	Multi-Step registration	PASS
6.5.4.2.4	WINNF.FT.C.MES.4	Heartbeat Response contains measReportConfig	PASS
6.6.4.1.1	WINNF.FT.C.RLQ.1	Successful Relinquishment	PASS
6.6.4.2.1	WINNF.FT.C.RLQ.3	Unsuccessful Relinquishment, responseCode=102	PASS
6.6.4.3.1	WINNF.FT.C.RLQ.5	Unsuccessful Relinquishment, responseCode=103	PASS
6.7.4.1.1	WINNF.FT.C.DRG.1	Successful Dereistration	PASS



Section	Test Case ID	Test Case Title	Test Result
6.7.4.2.1	WINNF.FT.C.DRG.3	Deregistration responseCode=102	PASS
6.7.4.3.1	WINNF.FT.C.DRG.5	Deregistration responseCode=103	PASS
6.8.4.1.1	WINNF.FT.C.SCS.1	Successful TLS connection between UUT and SAS Test Harness	PASS
6.8.4.2.1	WINNF.FT.C.SCS.2	TLS failure due to revoked certificate	PASS
6.8.4.2.2	WINNF.FT.C.SCS.3	TLS failure due to expired server certificate	PASS
6.8.4.2.3	WINNF.FT.C.SCS.4	TLS failure when SAS Test Harness certificate is issued by unknown CA	PASS
6.8.4.2.4	WINNF.FT.C.SCS.5	TLS failure when certificate at the SAS Test Harness is corrupted	PASS
7.1.4.1.1	WINNF.PT.C.HBT	UUT RF Transmit Power Measurement	PASS

### 2.3 Time test for getting Grant Summary

Trail	Time limit	Monitoring time	Measured result	Verdict
1	1 second	10 seconds	8.19ms	PASS
2	10 seconds	300 seconds	60ms	PASS
3	20 seconds	3600 seconds	7.74s	PASS

### 2.4 Support Equipment

Name	Manufacturer	Type/Model	Serial Number	FCC ID
Q710	Ruckus	P01-Q710-US02	991929000175	S9GQ710US00

### 2.5 Test Equipment List


Name	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
Spectrum Analyzer	Keysight	N9010A	MY57120184	Nov. 20, 2019	Nov. 19, 2020

### 3. Measurement Environment

Measurement Environment Information	
<b>SAS Test Harness version</b>	1.0.0.3
<b>Operating System</b>	Windows 10
<b>TLS version</b>	V 1.2
<b>Python version</b>	V 2.7

Conditional Test Case		
Y	C1	Mandatory for UUT which supports multi-step registration message
N	C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.
N	C3	Mandatory for UUT which supports single-step registration containing CPIsigned data in the registration message.
N	C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type
Y	C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.
N	C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.

### 3.1 Test configuration without Domain Proxy

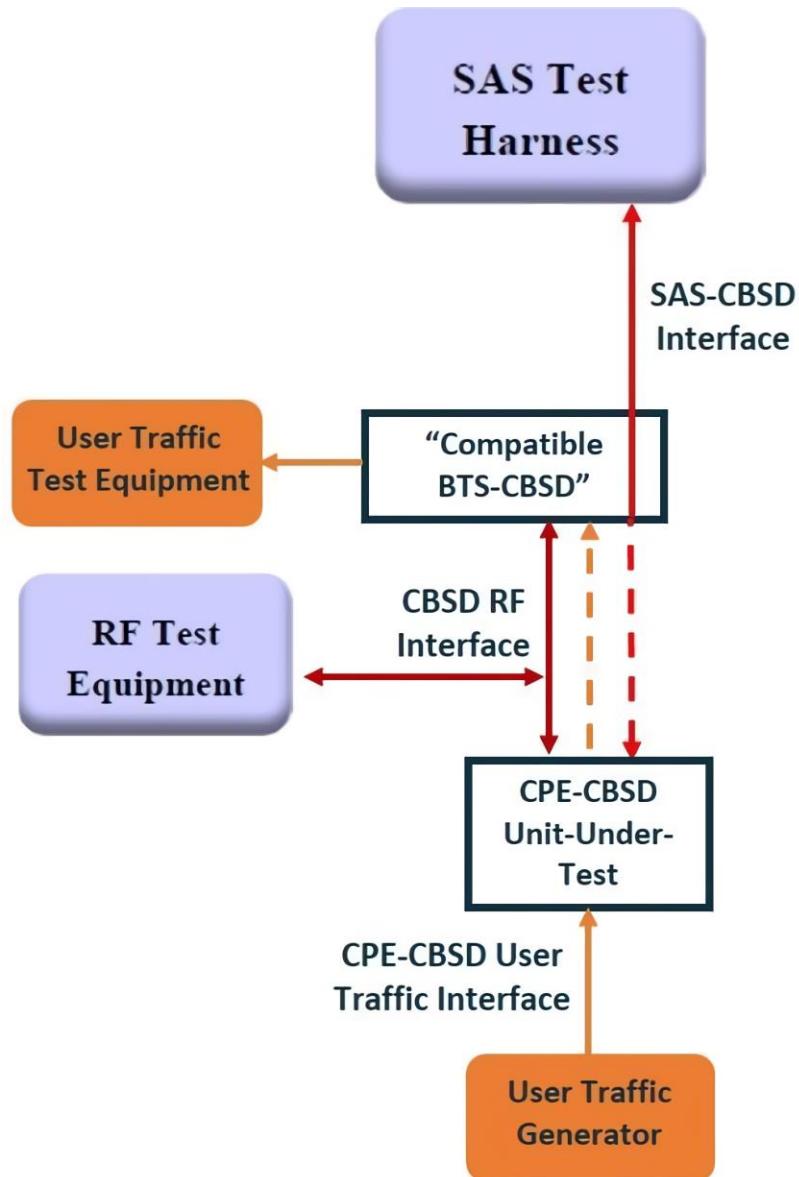

### 3.2 Standards

- [n.1]. FCC KDB 940660 D02 CPE-CBSD Handshake Procedures v02, 22 October 2019
- [n.2]. WINNF-TS-0122 Version 1.0.1, “Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT)”, 28 September 2018

### 3.3 Protocol test procedure

The test cases for SAS<->CBSD protocol in [n.2] apply for CPE-CBSD device type. Following the [n.1], when running the test cases in [n.2] for CPE-CBSD device type, verify that

1. CPE-CBSD can begin transmitting its RF only after receiving radio signal from its compatible BTS-CBSD.
2. For all CPE-CBSD RF transmissions, the CPE-CBSD UUT radio frequency range and bandwidth are less or equal to the frequency range and bandwidth of its compatible BTS-CBSD.
3. Judging the last execution step appearing in [n.2] with “User data traffics” instead of “RF transmission.”

### 3.4 Time test for getting Grant Procedure

Use the WinnForum SAS Harness run test case WINNF.FT.C.GRA.1. Without answering the last question in WINNF.FT.C.GRA.1 will keep UUT’s grant request being rejected, then measure the time.

## 4. Protocol Test Results

### 4.1 [WINNF.FT.C.REG.1] Multi-Step registration

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	<p>CBSD sends correct Registration request information, as specified in [n.5], to the SAS Test Harness:</p> <ul style="list-style-type: none"><li>• The required userId, fcId and cbsdSerialNumber registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges.</li><li>• Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.</li></ul> <p>Note: It is outside the scope of this document to test the Registration information that is supplied via another means.</p>	PASS
3	<ul style="list-style-type: none"><li>• SAS Test Harness sends a CBSD Registration Response as follows:<ul style="list-style-type: none"><li>– <i>cbsdId</i> = C</li><li>– <i>measReportConfig</i> shall not be included</li><li>– <i>responseCode</i> = 0</li></ul></li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.2 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS



#### 4.3 [WINNF.FT.C.REG.10] Pending registration (responseCode 200)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =200) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.4 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =103) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.5 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =101) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.6 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =100) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS



#### 4.7 [WINNF.FT.C.REG.18] Group Error (responseCode 201)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"><li>– SAS response does not include <i>cbsdId</i></li><li>– <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =201) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

**4.8 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness, with <i>cbsdId</i> = C</li></ul>	--
2	UUT sends valid Grant Request.	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"><li>• <i>cbsdId</i>=C</li><li>• <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.9 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT\_CONFLICT)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness, with <i>cbsdId</i> = C</li></ul>	--
2	UUT sends valid Grant Request.	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"><li>• <i>cbsdId</i>=C</li><li>• <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =401) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

**4.10[WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness, with <i>cbsdId</i> = C</li></ul>	--
2	UUT sends a message: <ul style="list-style-type: none"><li>• If message is type Spectrum Inquiry Request, go to step 3, or</li><li>• If message is type Grant Request, go to step 5</li></ul>	--
3	UUT sends Spectrum Inquiry Request. Validate: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• List of frequencyRange objects sent by UUT are within the CBRS frequency range</li></ul>	PASS
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>availableChannel</i> is an array of <i>availableChannel</i> objects</li><li>• <i>responseCode</i> = 0</li></ul>	--
5	UUT sends Grant Request message. Validate: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>maxEIRP</i> is at or below the limit appropriate for CBSD category as defined by Part 96</li><li>• <i>operationFrequencyRange</i>, F, sent by UUT is a valid range within the CBRS band</li></ul>	PASS
6	SAS Test Harness sends a Grant Response message, including the parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G = a valid grant ID</li><li>• <i>grantExpireTime</i> = UTC time greater than duration of the test</li><li>• <i>responseCode</i> = 0</li></ul>	--
7	UUT sends a first Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "GRANTED"</li></ul>	PASS



#	Test Execution Steps	Results
8	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	--
9	For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul> and SAS Test Harness responds with a Heartbeat Response message including the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	PASS
10	Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify: <ul style="list-style-type: none"><li>• UUT does not transmit at any time prior to completion of the first heartbeat response</li><li>• UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F.</li></ul>	PASS

#### 4.11 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	--
	<ul style="list-style-type: none"><li>• <i>transmitExpireTime</i> = <i>T</i> = Current UTC time</li><li>• <i>responseCode</i> = 105 (DEREGISTER)</li></ul>	
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall stop transmission within (<i>T</i> + 60 seconds) of completion of step 3</li></ul>	PASS

**4.12[WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED\_GRANT)**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = T = current UTC time</li><li>• <i>responseCode</i> = 500 (TERMINATED_GRANT)</li></ul>	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall stop transmission within (T + 60 seconds) of completion of step 3</li></ul>	PASS

#### 4.13[WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED\_GRANT) in First Heartbeat Response

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsdId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "GRANTED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = T = current UTC time</li><li>• <i>responseCode</i> = 501 (SUSPENDED_GRANT)</li></ul>	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "GRANTED"</li></ul> <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li></ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"><li>• UUT does not transmit at any time</li></ul>	PASS

#### 4.14[WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED\_GRANT) in Subsequent Heartbeat Response

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsdId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = T = current UTC time</li><li>• <i>responseCode</i> = 501 (SUSPENDED_GRANT)</li></ul>	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--



5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "GRANTED"</li></ul> <p>B. UUT sends a Relinquishment Request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbdsId</i> = C</li><li>• <i>grantId</i> = G</li></ul> <p>Monitor the RF output of the UUT. Verify:</p>	PASS
	<ul style="list-style-type: none"><li>• UUT shall stop transmission within (<math>T + 60</math> seconds) of completion of step 3</li></ul>	



## 4.15[WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC\_OP\_PARAM)

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = T = Current UTC Time</li><li>• <i>responseCode</i> = 502 (UNSYNC_OP_PARAM)</li></ul>	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	<p>Monitor the SAS-CBSD interface. Verify:</p> <ul style="list-style-type: none"><li>• UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters:<ul style="list-style-type: none"><li>◦ <i>cbdsId</i> = C</li><li>◦ <i>grantId</i> = G</li></ul></li></ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall stop transmission within (T+60) seconds of completion of step 3.</li></ul>	PASS

**4.16[WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "GRANTED"</li></ul>	PASS
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--
4	<p>Monitor the RF output of the UUT from start of test to 60 seconds after step 3.</p> <p>Verify:</p> <ul style="list-style-type: none"><li>• At any time during the test, UUT shall not transmit on RF interface</li></ul>	PASS

**4.17[WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li><li>◦ <i>grantExpireTime</i> = UTC time greater than duration of the test</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall stop all transmission on RF interface within (<i>transmitExpireTime</i> + 60 seconds), using the <i>transmitExpireTime</i> sent in Step 3.</li></ul>	PASS

**4.18[WINNF.FT.C.HBT.11] Successful Grant Renewal in Heartbeat Test Case**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has registered successfully with SAS Test Harness</li><li>• UUT has a valid single grant as follows:<ul style="list-style-type: none"><li>◦ valid <i>cbsId</i> = C</li><li>◦ valid <i>grantId</i> = G</li><li>◦ grant is for frequency range F, power P</li></ul></li><li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface.</li><li>• Grant has the following parameters at the start of the test:<ul style="list-style-type: none"><li>◦ <i>grantExpireTime</i> = UTC time equal to time at start of test + 300 seconds = <i>Tgrant_expire</i></li><li>◦ <i>transmitExpireTime</i> = UTC time equal to time at start of test + 200 seconds</li><li>◦ <i>heartbeatInterval</i> = 60 seconds</li></ul></li></ul>	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>If Heartbeat Request message contains <i>grantRenew</i> = TRUE, go to Step 6, else go to Step 3.</p>	--
3	<p>Verify Heartbeat Request message is sent within the latest specified <i>heartbeatInterval</i>, and is formatted correctly, including:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = "AUTHORIZED"</li></ul>	PASS
4	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC + 200 seconds</li><li>• <i>grantExpireTime</i> = same as Step 1</li><li>• <i>responseCode</i> = 0</li></ul>	--
5	Go to Step 2	--



#	Test Execution Steps	Results
6	Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	PASS
	<ul style="list-style-type: none"><li>• <i>operationState</i> = "AUTHORIZED"</li><li>• <i>grantRenew</i> = TRUE</li></ul>	
7	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>grantExpireTime</i> = UTC time set far in the future</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul>	--
8	Continue to respond to any subsequent Heartbeat Request from CBSD with Heartbeat Response with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = same as Step 7</li><li>• <i>responseCode</i> = 0</li></ul>	--
9	Monitor RF transmission of UUT from start of test until <i>Tgrant_expire</i> + 60 seconds and ensure UUT continues to transmit throughout the time period.	PASS

**4.19 [WINNF.FT.C.MES.3] Grant Response contains measReportConfig**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C and <i>measCapability</i> = “RECEIVED_POWER_WITH_GRANT”</li></ul>	--
2	UUT sends a Grant Request message. Verify Grant Request message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>operationParam</i> is present and format is valid</li></ul>	PASS
3	SAS Test Harness sends a Grant Response message, with the following parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G = valid grant ID</li><li>• <i>grantExpireTime</i> = UTC time in the future</li><li>• <i>heartbeatInterval</i> = 60 seconds</li></ul>	--
	<ul style="list-style-type: none"><li>• <i>measReportConfig</i>= “RECEIVED_POWER_WITH_GRANT”</li><li>• <i>operationParam</i> is set to valid operating parameters</li><li>• <i>channelType</i> = “GAA”</li><li>• <i>responseCode</i> = 0</li></ul>	
4	UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = “GRANTED”</li></ul>	PASS



#	Test Execution Steps	Results
5	<p>If Heartbeat Request message (step 4) contains <i>measReport</i> object, then:</p> <ul style="list-style-type: none"><li>• verify <i>measReport</i> is properly formatted as object <i>rcvdPowerMeasReport</i></li><li>• end test, with PASS result</li></ul> <p>else, if Heartbeat Request message (step 4) does not contain <i>measReport</i> object, then:</p> <p>If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL</p>	PASS
6	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>transmitExpireTime</i> = current UTC time + 200 seconds</li><li>• <i>responseCode</i> = 0</li></ul> <p>Go to Step 4, above</p>	--

**4.20[WINNF.FT.C.MES.4] Heartbeat Response contains measReportConfig**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C and <i>measCapability</i> = “RECEIVED_POWER_WITH_GRANT”</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li></ul>	--
	<ul style="list-style-type: none"><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li><li>• Grant has <i>heartbeatInterval</i> = 60 seconds</li></ul>	
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = “AUTHORIZED”</li></ul>	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>measReportConfig</i> = “RECEIVED_POWER_WITH_GRANT”</li><li>• <i>responseCode</i> = 0</li></ul>	--
4	<p>UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>operationState</i> = “AUTHORIZED”</li></ul>	PASS

#	Test Execution Steps	Results
5	<p>If Heartbeat Request message (step 4) contains <i>measReport</i> object, then:</p> <ul style="list-style-type: none"><li>• verify <i>measReport</i> is properly formatted as object <i>rcvdPowerMeasReport</i></li><li>• end test, with PASS result</li></ul> <p>else, if Heartbeat Request message (step 4) does not contain <i>measReport</i> object, then:</p> <ul style="list-style-type: none"><li>• If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL</li></ul>	PASS
6	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li><li>• <i>responseCode</i> = 0</li></ul> <p>Go to Step 4, above</p>	--

#### 4.21[WINNF.FT.C.RLQ.1] Successful Relinquishment

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--
2	<p>UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	PASS
3	<p>SAS Test Harness shall approve the request with a Relinquishment Response message with parameters:</p> <ul style="list-style-type: none"><li>– <i>cbsdId</i> = C</li><li>– <i>grantId</i> = G</li><li>– <i>responseCode</i> = 0</li></ul>	--
4	<p>After completion of step 3, SAS Test Harness will not provide any additional positive response (<i>responseCode</i>=0) to further request messages from the UUT.</p>	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS

**4.22[WINNF.FT.C.RLQ.3] Unsuccessful Relinquishment, responseCode=102**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul>	--
	Invoke trigger to Relinquish UUT Grant from the SAS Test Harness	
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	--
3	SAS Test Harness shall send a Relinquishment Response message with parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• No <i>grantId</i></li><li>• <i>responseCode</i> = R</li></ul>	--
4	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS

**4.23[WINNF.FT.C.RLQ.5] Unsuccessful Relinquishment, responseCode=103**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul>	--
	Invoke trigger to Relinquish UUT Grant from the SAS Test Harness	
2	<p>UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>grantId</i> = G</li></ul>	--
3	<p>SAS Test Harness shall send a Relinquishment Response message with parameters:</p> <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• No <i>grantId</i></li><li>• <i>responseCode</i> = R</li></ul>	--
4	<p>After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i>=103) to further request messages from the UUT.</p>	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</li></ul>	PASS

#### 4.24[WINNF.FT.C.DRG.1] Successful Deregistration

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode</i> =0	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId</i> = C.	PASS
4	SAS Test Harness shall approve the request with a Deregistration Response message with parameters: <ul style="list-style-type: none"><li>• <i>cbsdId</i> = C</li><li>• <i>responseCode</i> = 0</li></ul>	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:<ol style="list-style-type: none"><li>A. UUT sending a Registration Request message, as this is not mandatory</li><li>B. UUT sending a Deregistration Request message</li></ol></li></ul>	PASS

**4.25[WINNF.FT.C.DRG.3] Deregistration responseCode=102**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode</i> =0	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId</i> = C	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none"><li>• No <i>cbsdId</i></li><li>• <i>responseCode</i> = 102</li></ul>	--
5	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:</li></ul> <p>A. UUT sending a Registration Request message, as this is not mandatory</p> <p>B. UUT sending a Deregistration Request message</p>	PASS

**4.26[WINNF.FT.C.DRG.5] Deregistration responseCode=103**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C</li><li>• UUT has received a valid grant with <i>grantId</i> = G</li><li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li></ul> <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--
2	UUT sends a Relinquishment request and receives Relinquishment response with <i>responseCode</i> =0	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId</i> = C	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none"><li>• No <i>cbsdId</i></li><li>• <i>responseCode</i> = 103</li></ul>	--
5	After completion of step 3, SAS Test Harness will not provide any positive response ( <i>responseCode</i> =0) to further request messages from the UUT.	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:</li></ul> <p>A. UUT sending a Registration Request message, as this is not mandatory</p> <p>B. UUT sending a Deregistration Request message</p>	PASS

#### 4.27[WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>• UUT shall start CBSD-SAS communication with the security procedure</li><li>• The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate.</li><li>• Configure the SAS Test Harness to accept the security procedure and establish the connection</li></ul>	PASS
2	<ul style="list-style-type: none"><li>• Make sure that Mutual authentication happens between UUT and the SAS Test Harness.</li><li>• Make sure that UUT uses TLS v1.2</li><li>• Make sure that cipher suites from one of the following is selected,<ul style="list-style-type: none"><li>• TLS_RSA_WITH_AES_128_GCM_SHA256</li><li>• TLS_RSA_WITH_AES_256_GCM_SHA384</li><li>• TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA2 56</li><li>• TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA3 84</li><li>• TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256</li></ul></li></ul>	PASS
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"><li>• UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with <i>responseCode</i> = 0 and <i>cbsdId</i>.</li></ul>	PASS
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

**4.28[WINNF.FT.C.SCS.2] TLS failure due to revoked certificate**

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS
2	<ul style="list-style-type: none"><li>Make sure that UUT uses TLS v1.2 for security establishment.</li><li>Make sure UUT selects the correct cipher suite.</li><li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS
3	UUT may retry for the security procedure which shall fail	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS

**4.29[WINNF.FT.C.SCS.3] TLS failure due to expired server certificate**

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS
2	<ul style="list-style-type: none"><li>Make sure that UUT uses TLS v1.2 for security establishment.</li><li>Make sure UUT selects the correct cipher suite.</li><li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS

#### 4.30[WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>• UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS
2	<ul style="list-style-type: none"><li>• Make sure that UUT uses TLS v1.2 for security establishment.</li><li>• Make sure UUT selects the correct cipher suite.</li><li>• UUT shall use CRL or OCSP to verify the validity of the server certificate</li><li>• Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	PASS

#### 4.31[WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted

#	Test Execution Steps	Results
1	<ul style="list-style-type: none"><li>UUT shall start CBSD-SAS communication with the security procedures</li></ul>	PASS
2	<ul style="list-style-type: none"><li>Make sure that UUT uses TLS v1.2 for security establishment.</li><li>Make sure UUT selects the correct cipher suite.</li><li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li><li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li></ul>	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>UUT shall not transmit RF</li></ul>	PASS

#### 4.32[WINNF.PT.C.HBT] UUT RF Transmit Power Measurement


#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li><li>• UUT has registered with the SAS, with CBSID ID = C</li><li>• UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case</li></ul> <p><i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i></p>	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"><li>• UUT sends Heartbeat Request, including:<ul style="list-style-type: none"><li>○ cbsdId = C</li><li>○ grantId = G</li></ul></li><li>• SAS Test Harness responds with Heartbeat Response, including:<ul style="list-style-type: none"><li>○ cbsdId = C</li><li>○ grantId = G</li><li>○ transmitExpireTime = current UTC time + 200 seconds</li><li>○ responseCode = 0</li></ul></li></ul>	--



#	Test Execution Steps	Results
3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method.</p> <p><i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i></p>	PASS


## 5. Result of Time test for getting Grant

### 5.1 1 second within any 10-second period

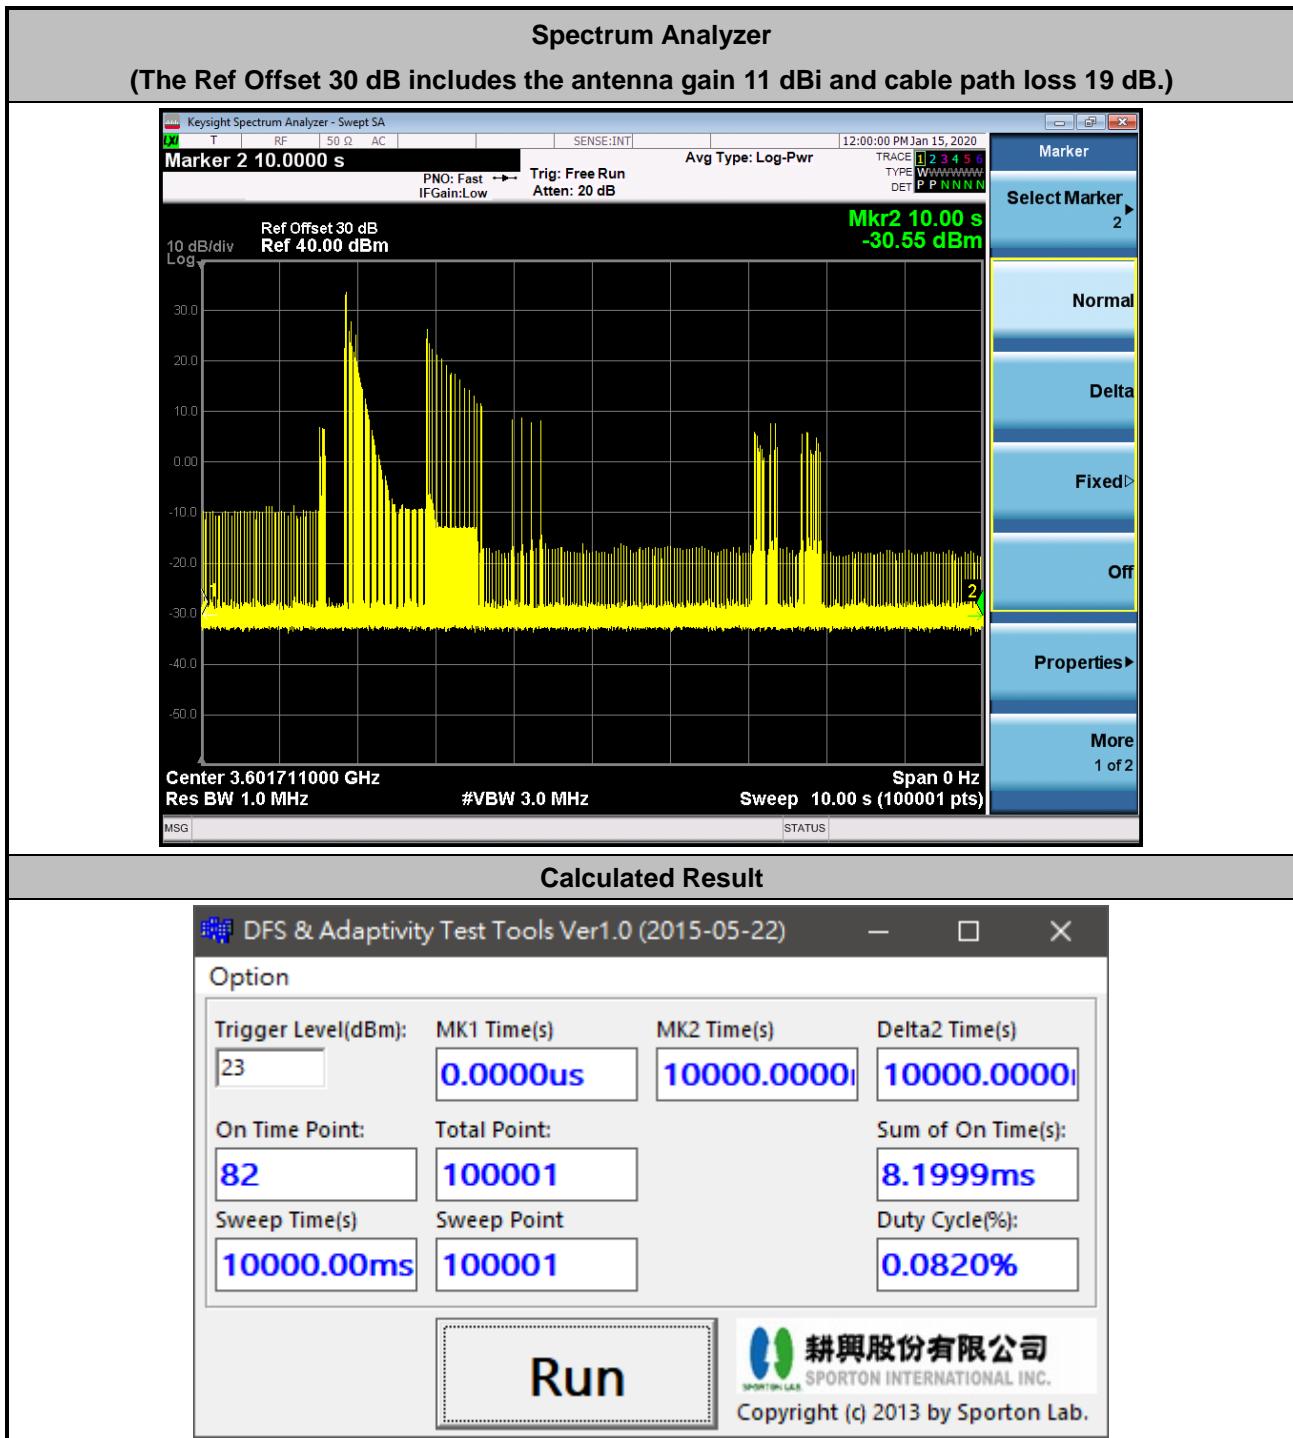

The sum of On Time (aggregated time from marker 1 to 2): 8.19ms < 20s, Pass.

## 5.2 10 seconds within any 300-second period

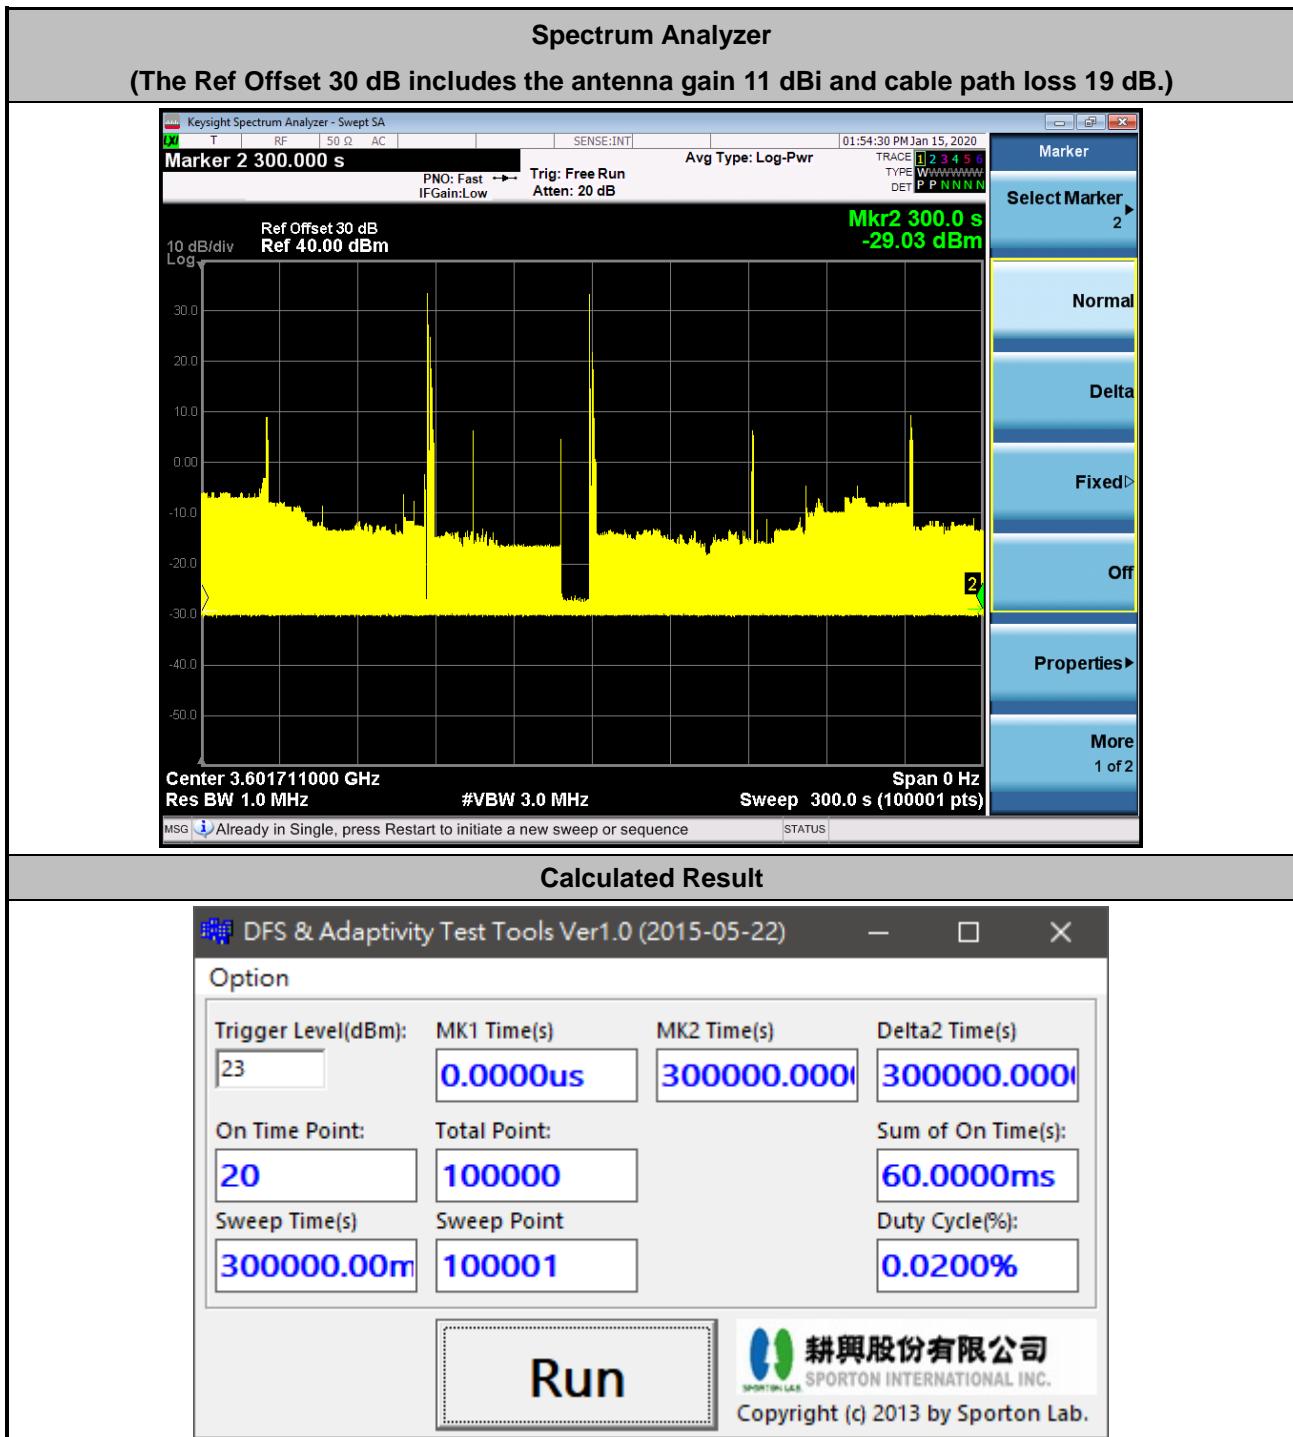


The sum of On Time (aggregated time from marker 1 to 2): 60ms < 20s, Pass.

### 5.3 20 seconds within any 3600-second period

#### Spectrum Analyzer

(The Ref Offset 30 dB includes the antenna gain 11 dBi and cable path loss 19 dB.)

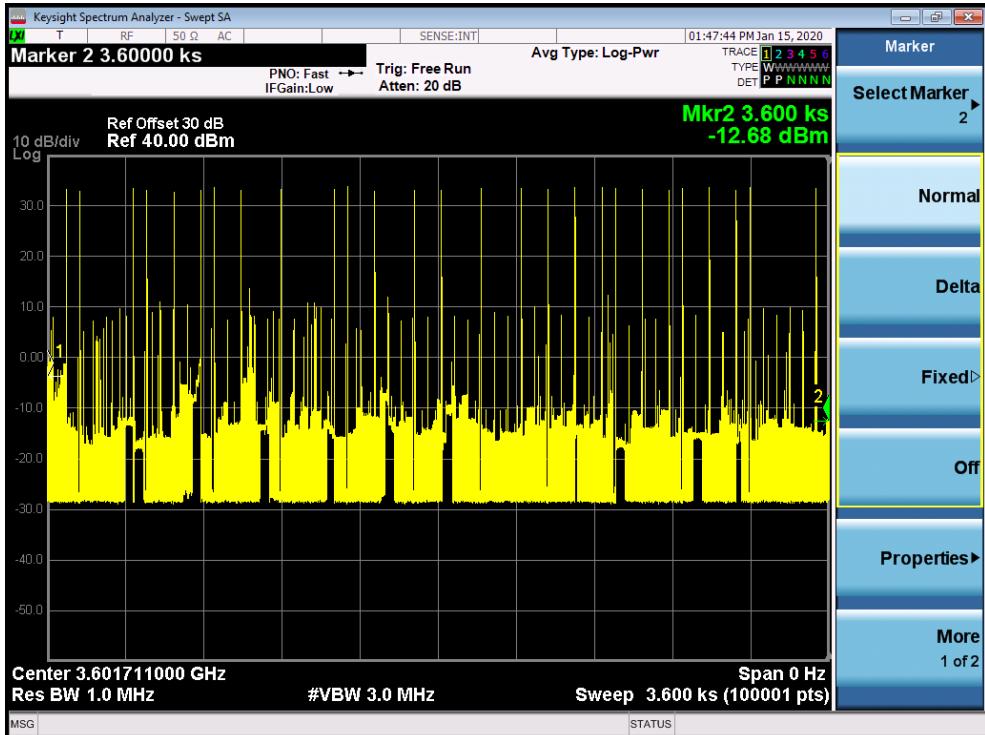

#### Calculated Result



The sum of On Time (aggregated time from marker 1 to 2): 7.74s < 20s, Pass.


## 6. UUT register with the SAS irrespective of power levels

### 6.1 Test Procedure

1. Ensure the UUT power be below 23 dBm EIRP.
2. Make SAS test harness to grant UUT power level above 23 dBm EIRP.
3. Enable UUT, then check UUT power will follow the power limit that SAS test harness authorized.

### 6.2 Result

The UUT will register with the SAS irrespective of power levels at which the device is set to operate – even below 23 dBm.

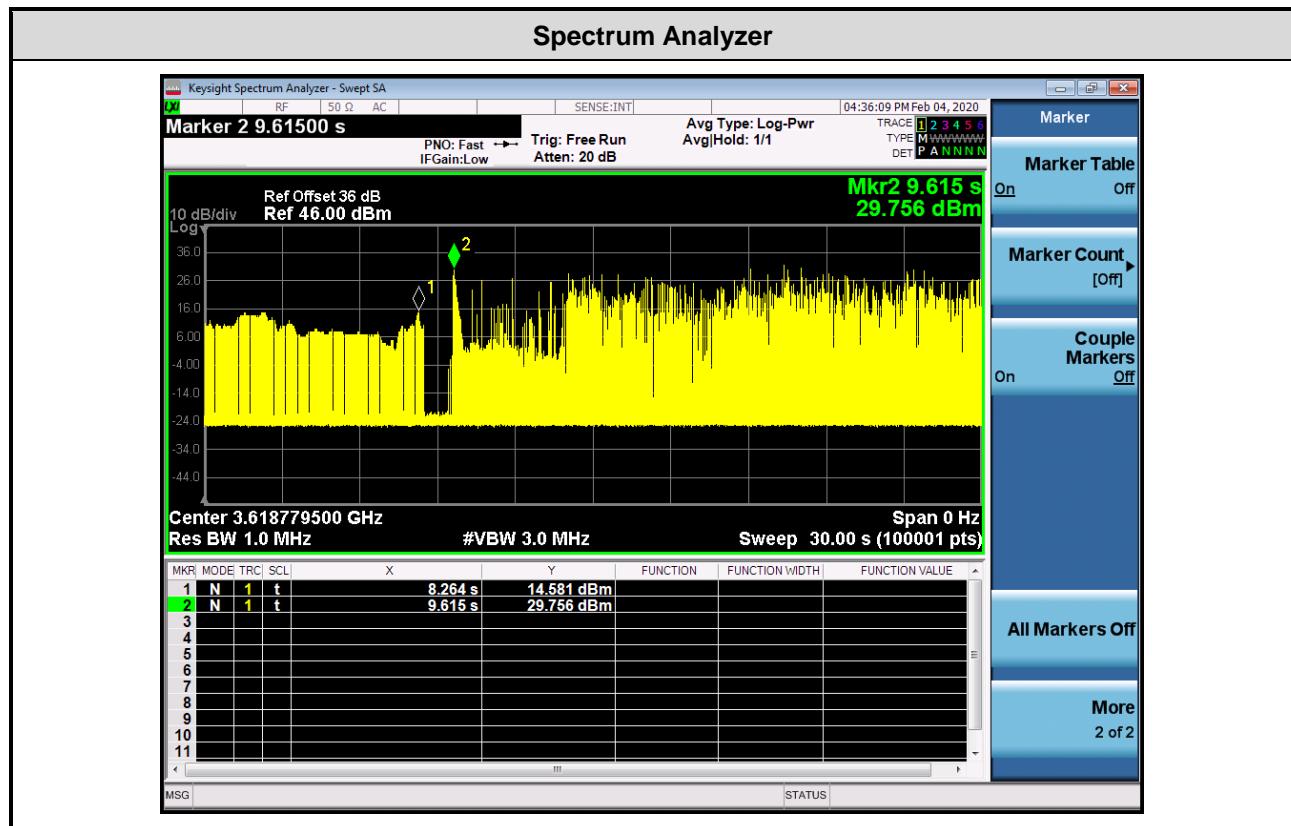

Note : The Ref Offset 36 dB includes the antenna gain 11 dBi and cable path loss 25 dB.

Marker 1 : Signal power before UUT is authorized by the SAS,


Marker 2 : Signal power after UUT is authorized by the SAS.


## Appendix B. RF measurement plots


Report Clause 4.32 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement


SAS authorizes MaxEirp (dBm/MHz)	UUT EIRP PSD (dBm/MHz)
23	22.485 dBm
25	24.467 dBm
27	25.804 dBm
29	28.071 dBm
31	29.462 dBm
33	32.819 dBm
35	33.535 dBm
37	35.470 dBm


Note : The Ref Offset 36 dB includes the antenna gain 11 dBi and cable path loss 25 dB.

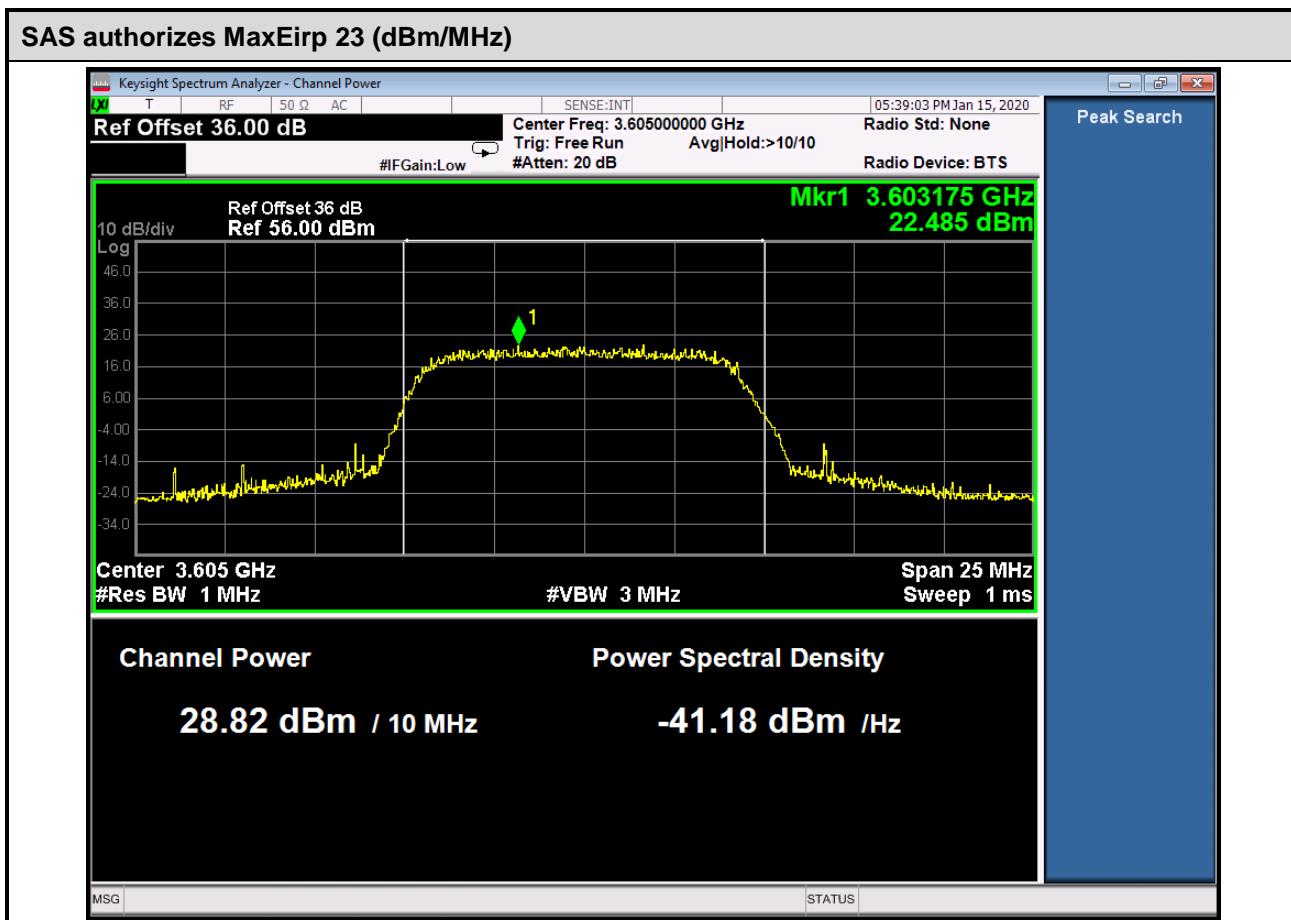


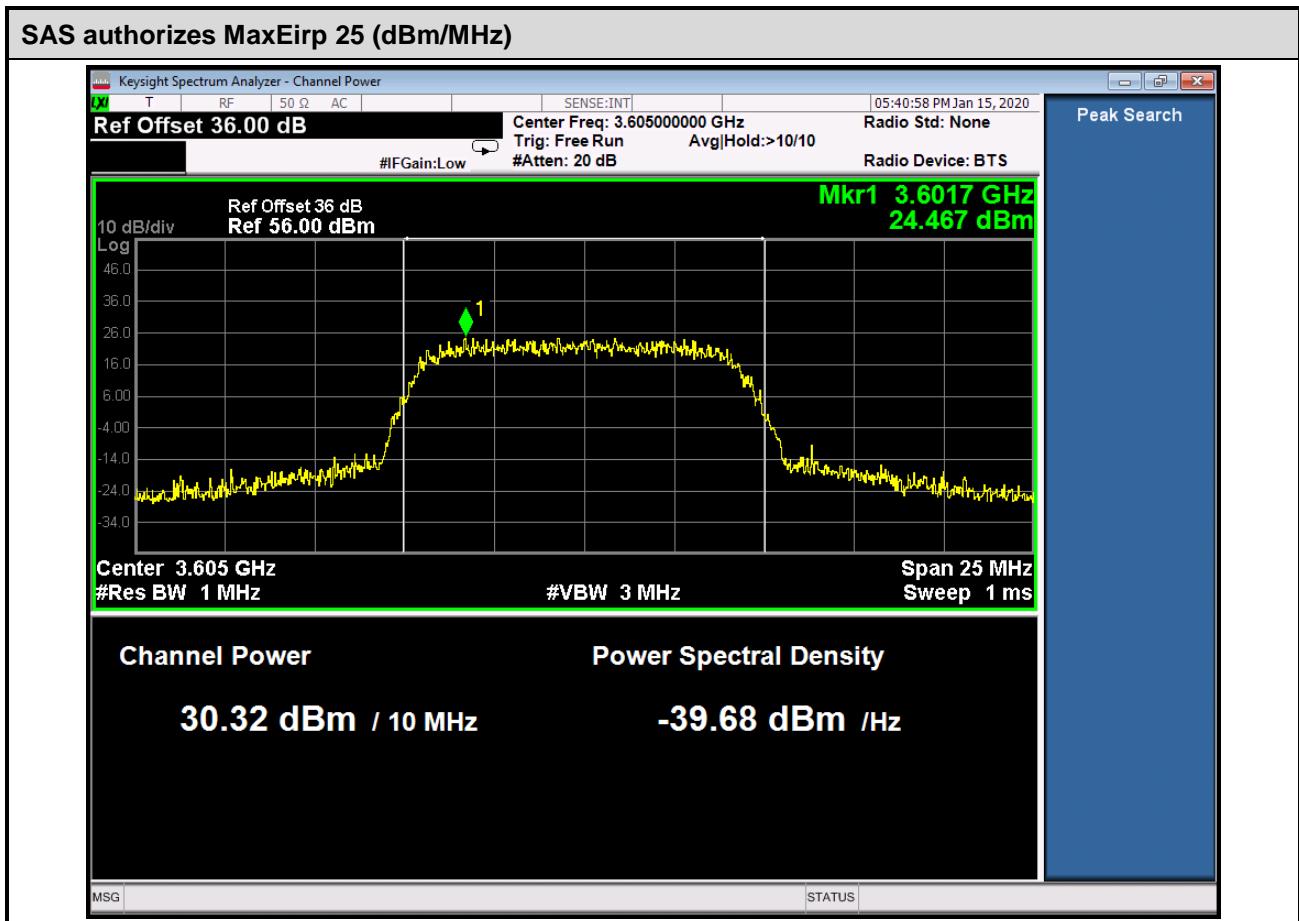


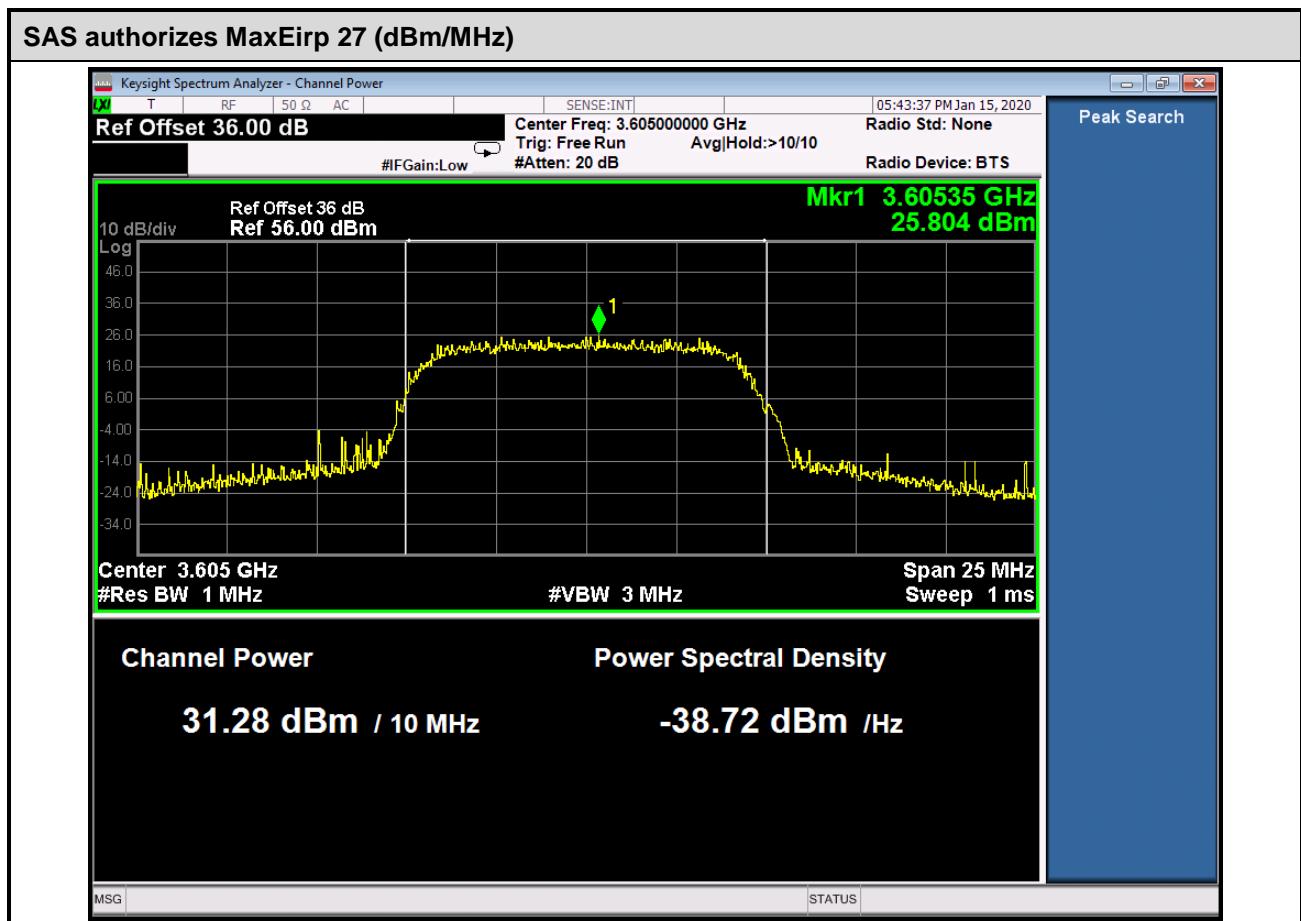


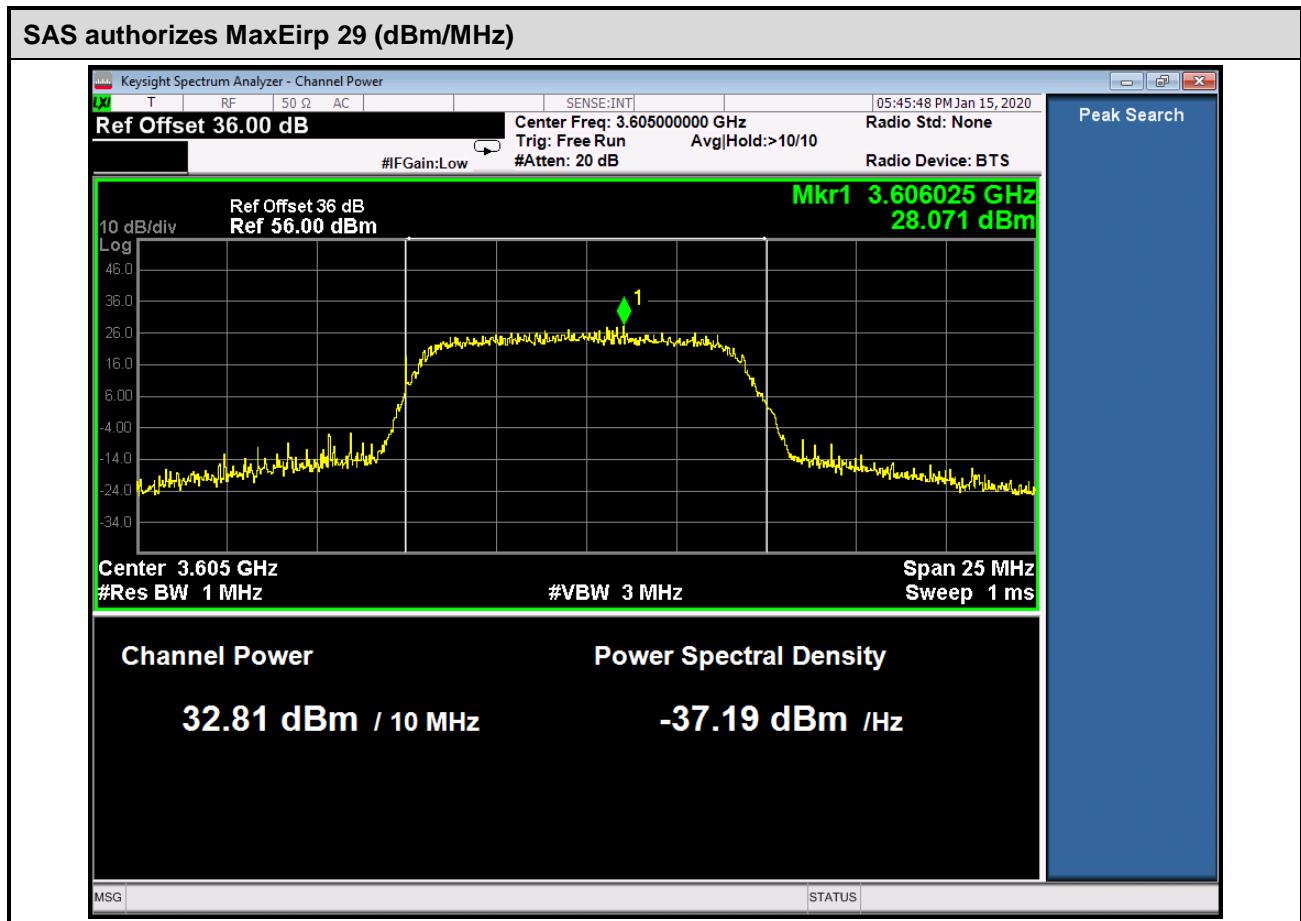

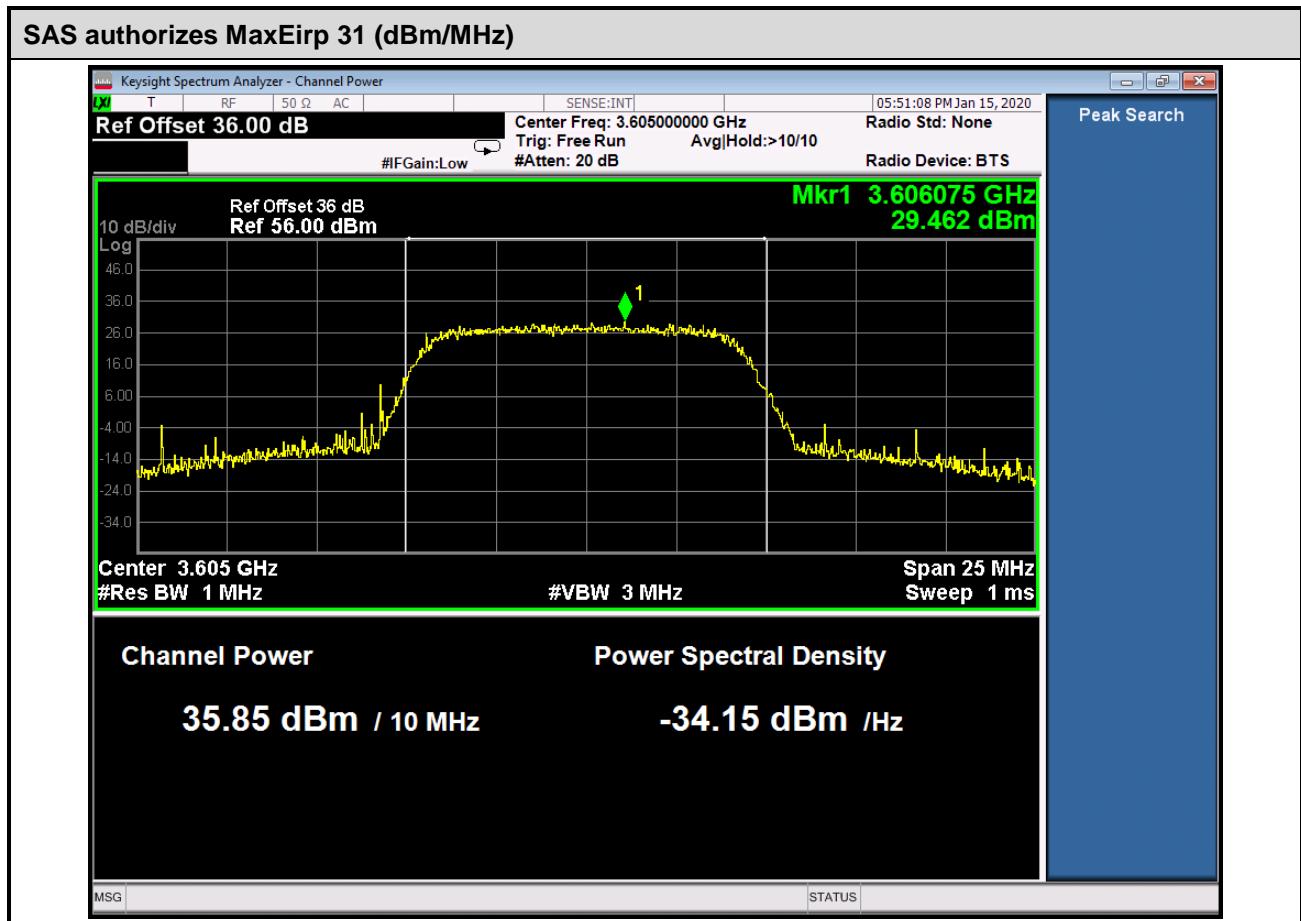

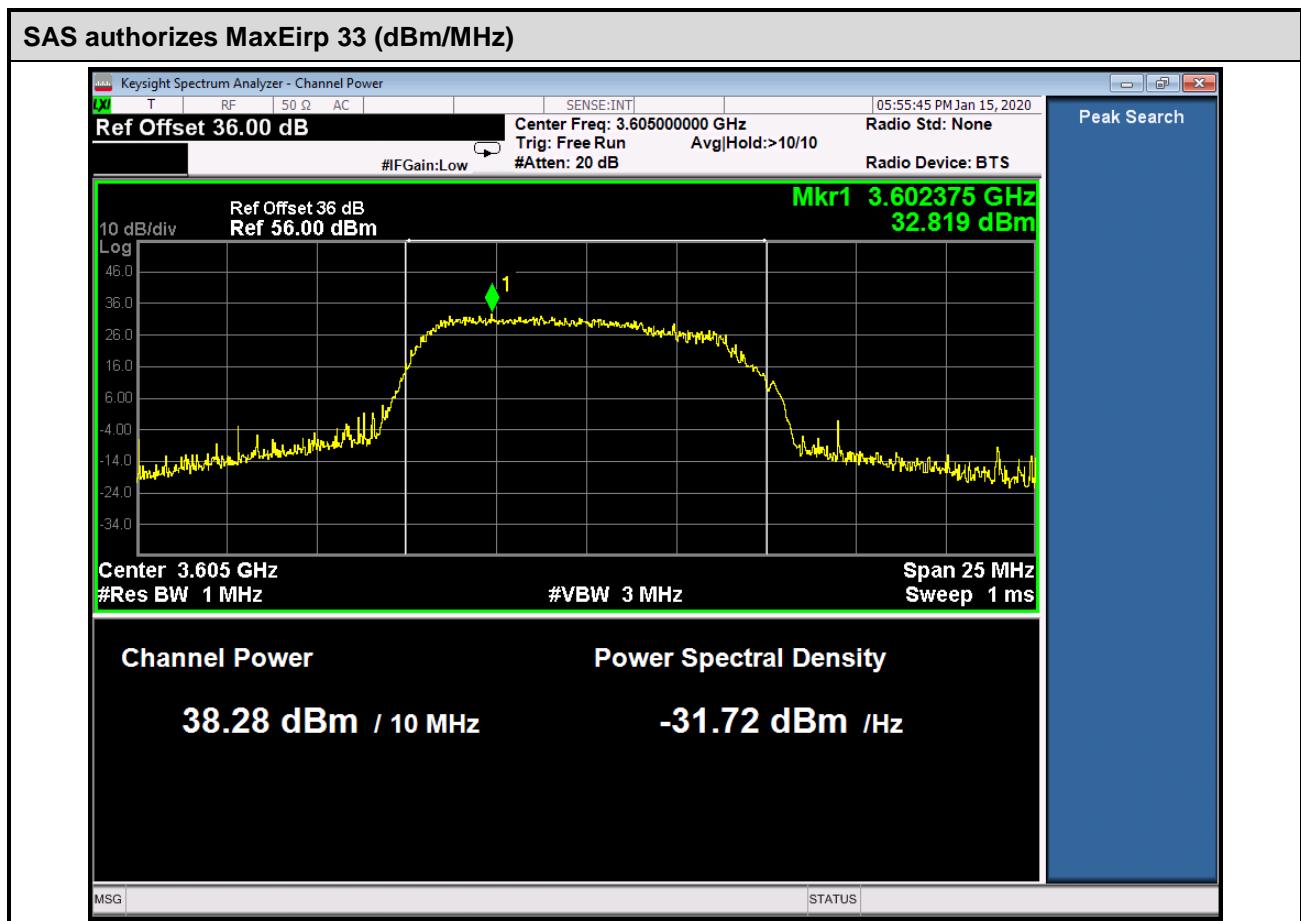

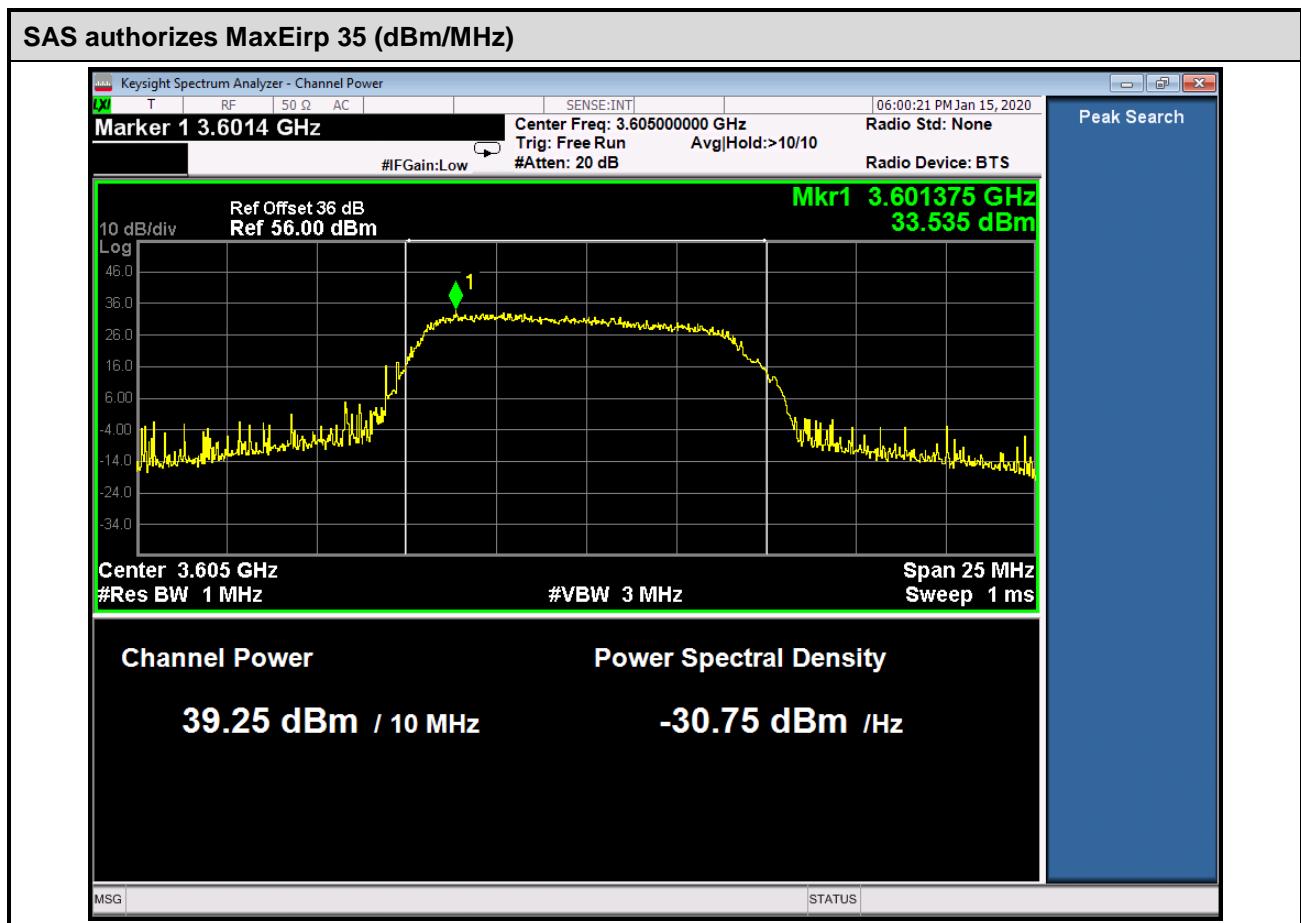

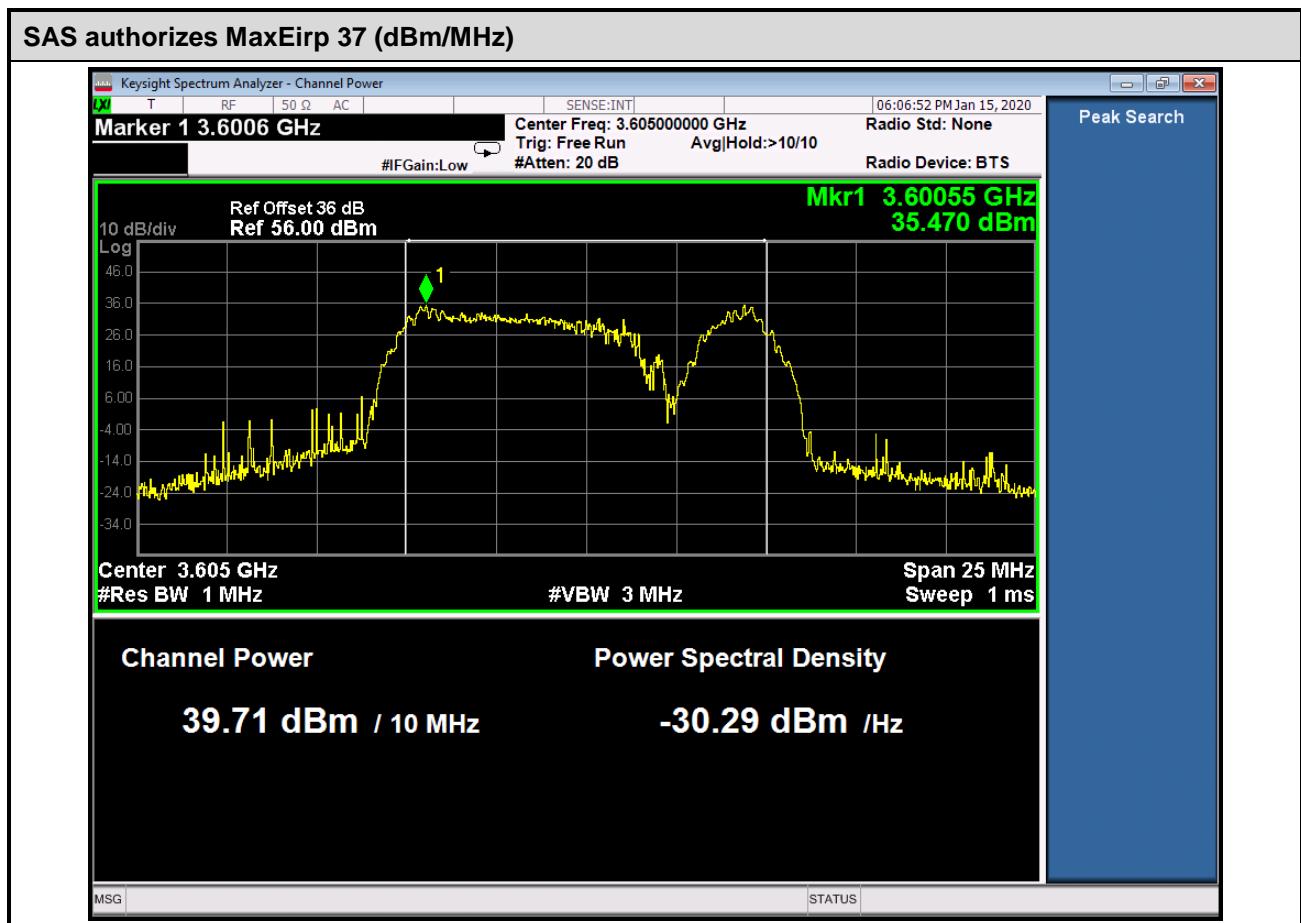

—————THE END—————