



FCC DFS TEST REPORT

FCC ID : 2ADZRBEACON24
Equipment : NOKIA WiFi Beacon 24
Brand Name : NOKIA
Model Name : Beacon 24
Applicant : Nokia Shanghai Bell Co., Ltd.
No.388, Ningqiao Rd, Pilot Free Trade
Zone, Shanghai, 201206 P.R. China
Manufacturer : Nokia of America Corporation
2301 Sugar Bush Rd. Raleigh, NC 27612
Standard : FCC Part 15 Subpart E

The product was received on Nov. 17, 2023 and testing was performed from Nov. 28, 2023 to Dec. 05, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC LP15 (2018-01-10) and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

 1.1 Feature of Equipment Under Test5

 1.2 Modification of EUT5

 1.3 Testing Site6

 1.4 Applied Standards6

 1.5 Support Unit used in test configuration and system6

2 Requirements and Parameters for DFS Test.....7

 2.1 Summary of Dynamic Frequency Selection Test7

 2.2 Applicability of DFS Requirements8

 2.3 DFS Detection Thresholds.....10

 2.4 DFS Response requirement values.....11

 2.5 Short Pulse Radar Test Waveforms12

 2.6 Long Pulse Radar Test Waveform14

 2.7 Frequency Hopping Radar Test Waveform16

3 Calibration Setup and DFS Test Results17

 3.1 Calibration of Radar Waveform17

 3.2 U-NII Detection Bandwidth26

 3.3 Channel Availability Check32

 3.4 In-Service Monitoring: Channel Move Time, Channel Closing Transmission Time and
 Non-Occupancy Period.....37

 3.5 Statistical Performance Check43

4 List of Measuring Equipment.....54

Appendix A. DFS Radar Parameters

Appendix B. Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	7.8.1	U-NII Detection Bandwidth	Pass	-
3.3	7.8.2	Channel Availability Check Time	Pass	-
3.4	7.8.3	Channel Move Time	Pass	-
		Channel Closing Transmission Time	Pass	-
		Non-Occupancy Period Test	Pass	-
3.5	7.8.4	Statistical Performance Check	Pass	-

Conformity Assessment Condition:
The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.

Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen
Report Producer: Rebecca Wu



1 General Description

1.1 Feature of Equipment Under Test

Product Feature
General Specs Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, and Wi-Fi 6GHz 802.11ax/be.
Antenna Type WLAN: PCB Antenna

Remark:

1. The device does not support channel puncturing for DFS purposes.
2. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	DF02-HY

FCC Designation No.: TW1190

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- ♦ FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

1.5 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	HW / FW Version	Power Cord
1.	Notebook	acer	N15C1	PPD-QCNFA435	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2 Requirements and Parameters for DFS Test

2.1 Summary of Dynamic Frequency Selection Test

UNII	Description	Limit
U-NII Band 2-C 5470-5725 MHz	Channel Availability Check Time	> 60sec
	U-NII Detection Bandwidth	> 100% of the U-NII 99% transmission power bandwidth
	Statistical Performance Check	Type 1,2,3,4 >= 60% Type 1~4 and 5 >= 80% Type 6 >= 70%
	Channel Move Time	< 10 sec
	Channel Closing Transmission Time	< 200 ms + aggregate of 60 ms over remaining 10 s period
	Non-Occupancy Period Test	> 30 minutes



2.2 Applicability of DFS Requirements

EUT is considered as a master device.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes



Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note

Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.



2.3 DFS Detection Thresholds

Table 3 below provides the DFS Detection Thresholds for Master Devices as well as Client Devices incorporating In-Service Monitoring.

Table 3: DFS Detection Thresholds for Master Devices

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p>	

The radar *Detection Threshold*, lowest antenna gain is the parameter of Interference radar DFS detection threshold, The Interference Detection Threshold is the (-64dBm) + (1.65) [dBi]+ 1 dB= -61.35 dBm.



2.4 DFS Response requirement values

Table 4 provides the response requirements for Master and Client Devices incorporating DFS.

Table 4: DFS Response Requirement Values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.



2.5 Short Pulse Radar Test Waveforms

Radar Type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1.	See Note 1.
1	1	Test A Test B	Roundup $\left\{ \begin{matrix} \left(\frac{1}{360} \right) \cdot \\ \left(\frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \end{matrix} \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.



Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355.0	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.5	858
19	1139.0	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066



2.6 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms. Each waveform is defined as follows:

Note: The center frequency for each of the 30 trials of the Bin 5 radar shall be randomly selected within 80% of the Occupied Bandwidth.

- (1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- (2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- (3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- (4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- (5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a **transmission period** will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz
- (6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- (7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- (1) The total test signal length is 12 seconds.
- (2) 8 Bursts are randomly generated for the Burst_Count.
- (3) Burst 1 has 2 randomly generated pulses.
- (4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- (5) The PRI is randomly selected to be at 1213 microseconds.
- (6) Bursts 2 through 8 are generated using steps 3 – 5.
- (7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

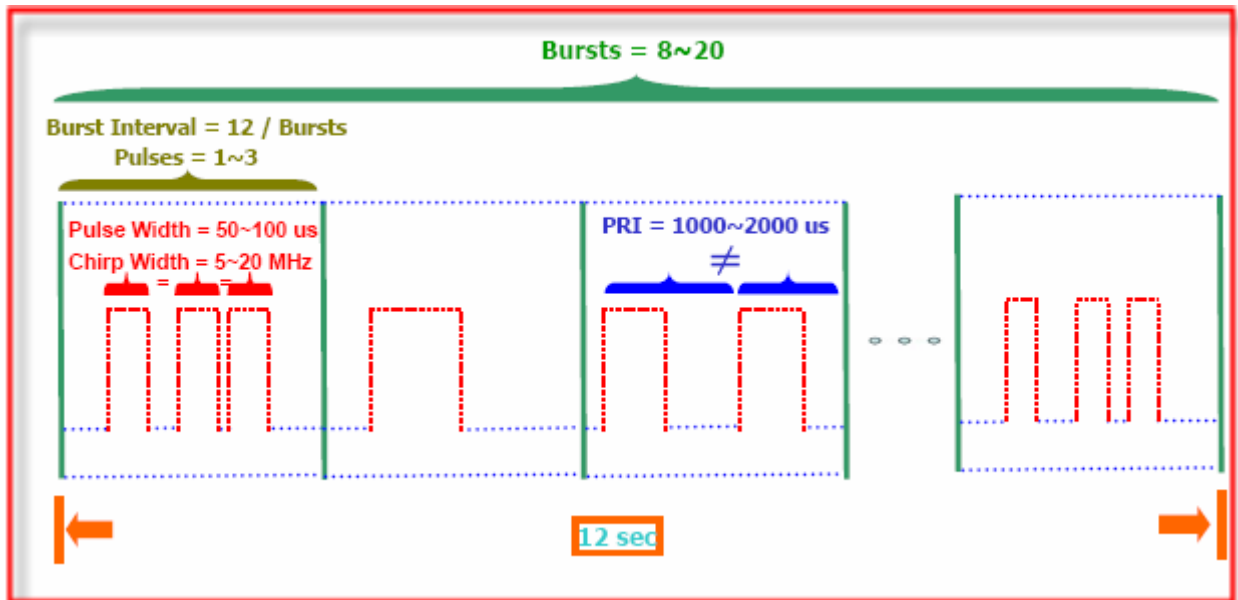


2.7 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

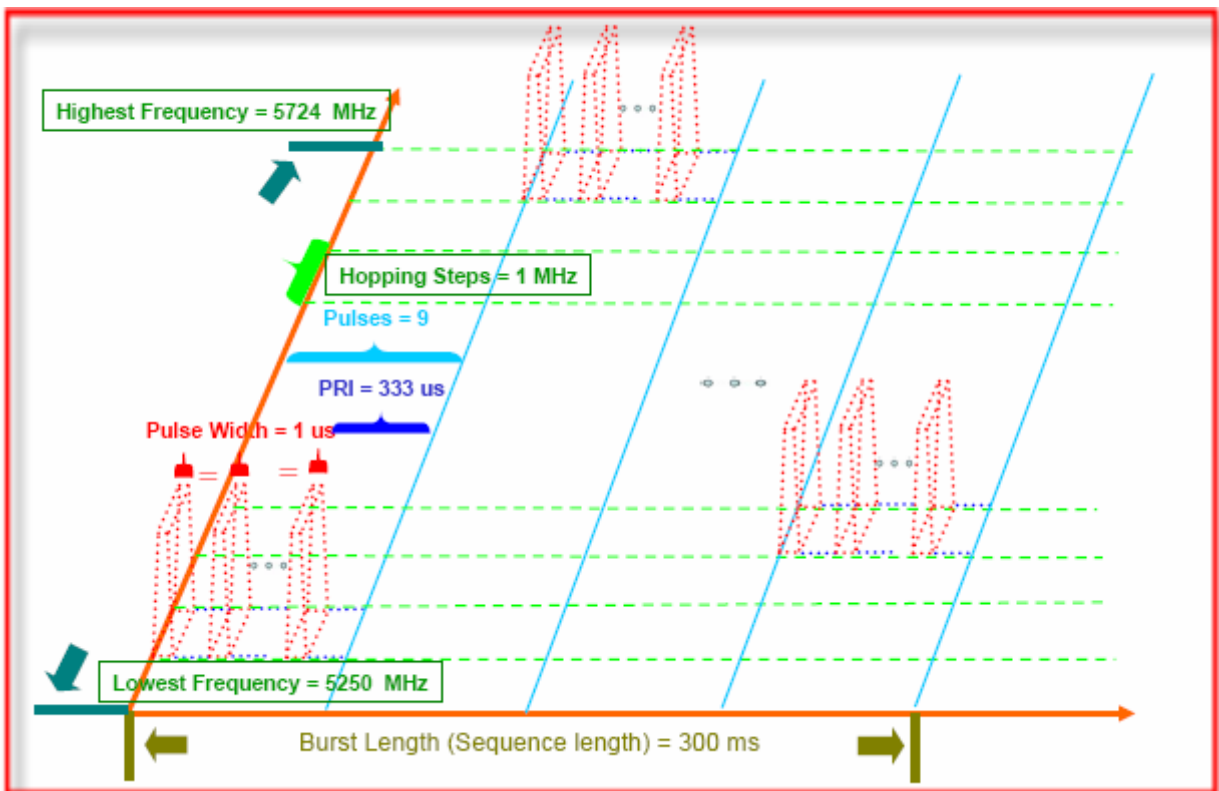


3 Calibration Setup and DFS Test Results

3.1 Calibration of Radar Waveform

3.1.1 Radar Waveform Calibration Procedure

The Interference Radar Detection Threshold Level is $(-64) + (1.65) \text{ [dBi]} + 1\text{dB} = -61.35 \text{ dBm}$ that had been taken into account the output power range and antenna gain. The following equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for radar type 0~6. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz to measure the radar waveform. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $(-64) + (1.65) \text{ [dBi]} + 1\text{dB} = -61.35 \text{ dBm}$. Capture the spectrum analyzer plots on radar waveform.

3.1.2 Conducted Calibration Setup

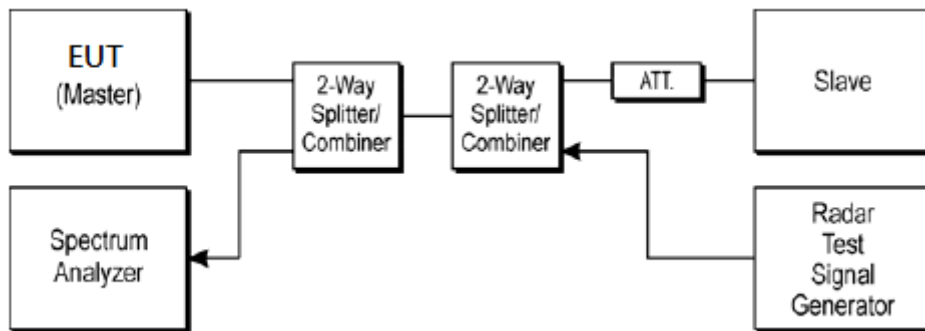






3.1.3 Calibration Deviation

There is no deviation with the original standard.




3.1.4 Radar Waveform Calibration Result

<20MHz / 5500MHz>

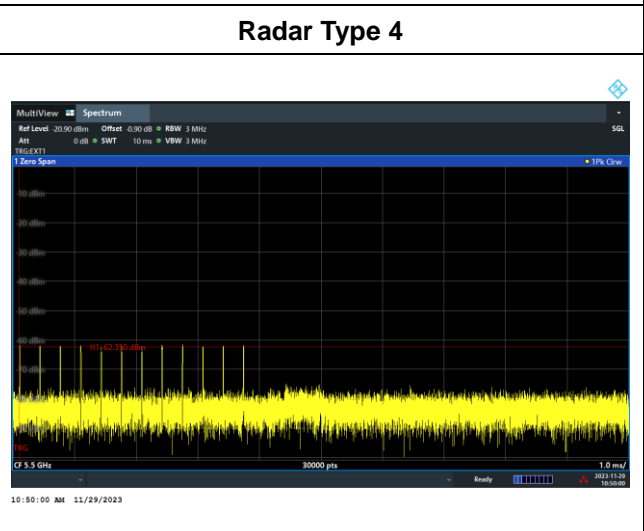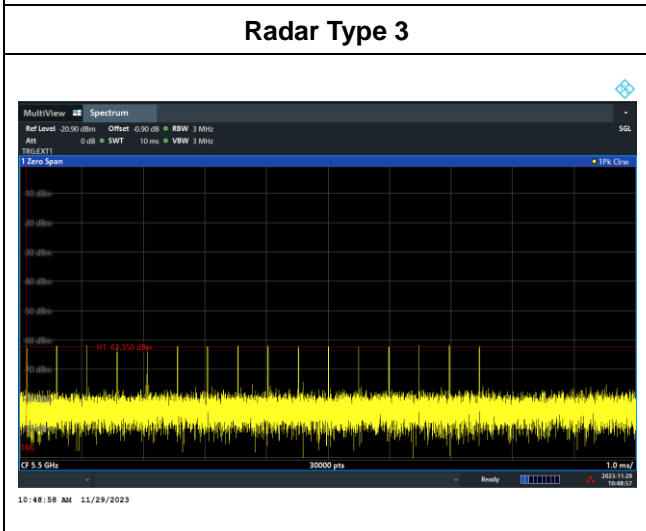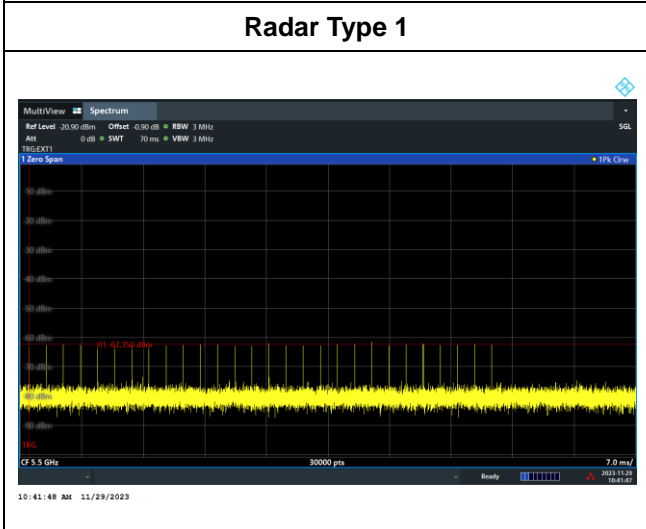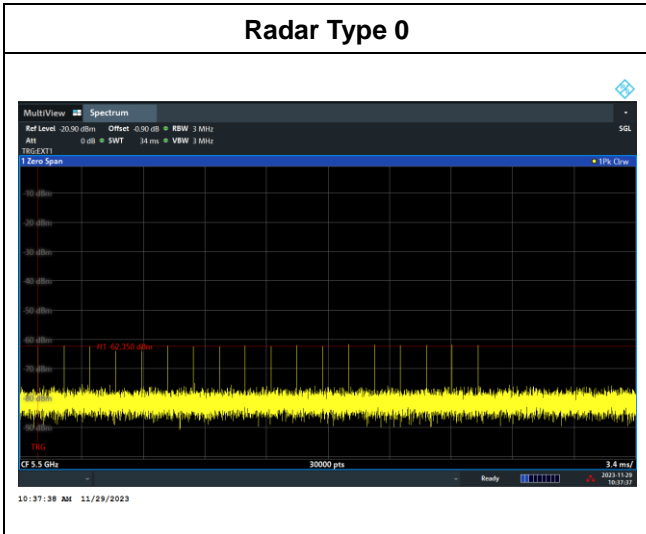




Single Burst of Radar Type 5





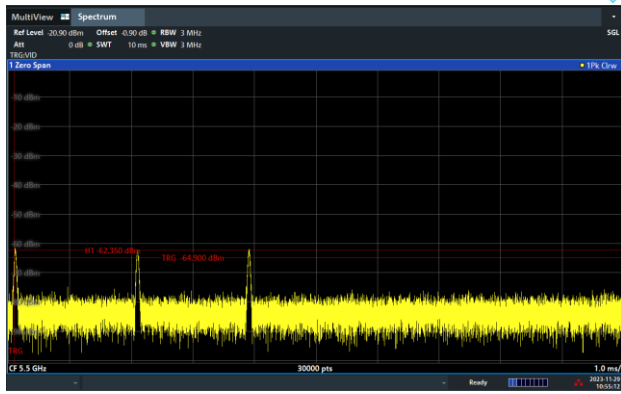


Single Burst of Radar Type 6

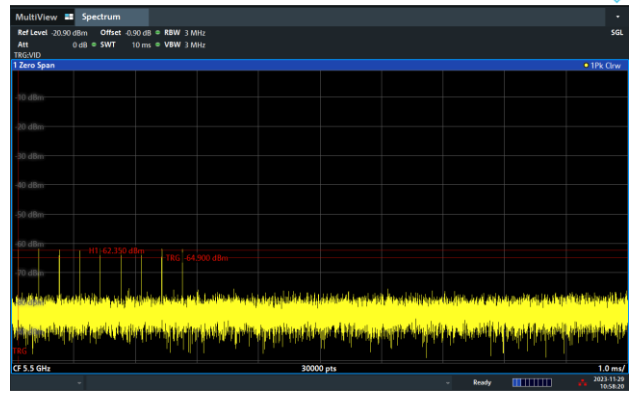




<40MHz / 5510MHz>

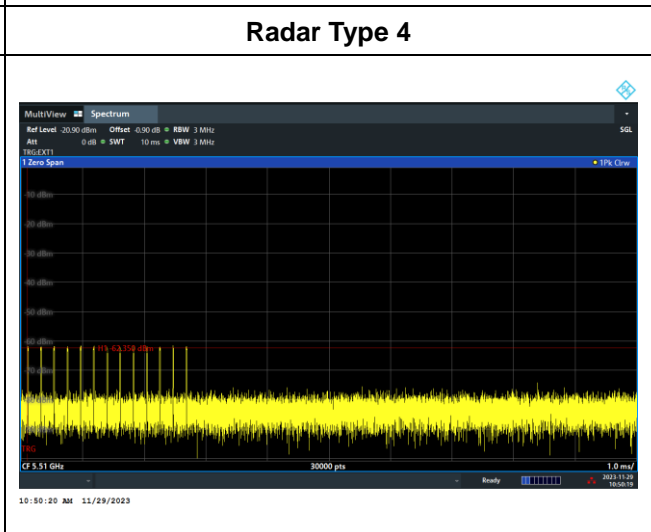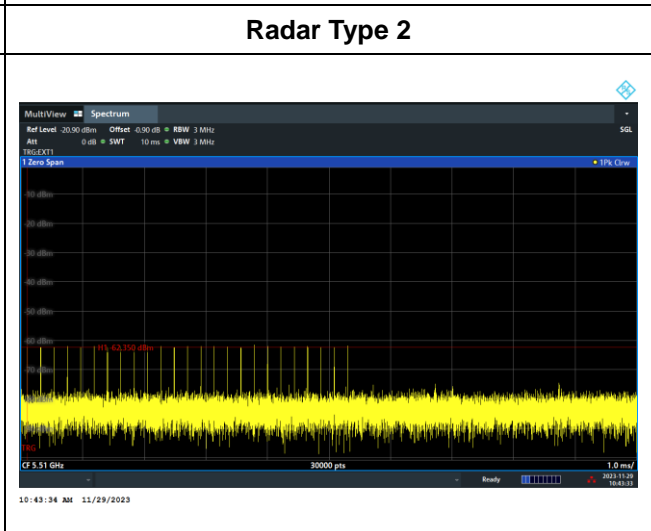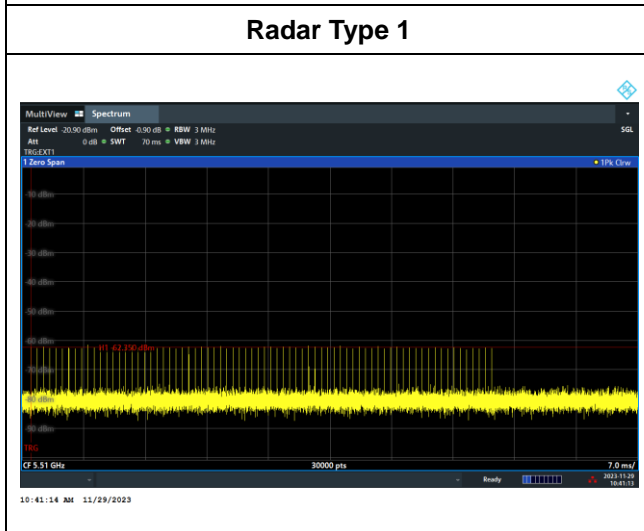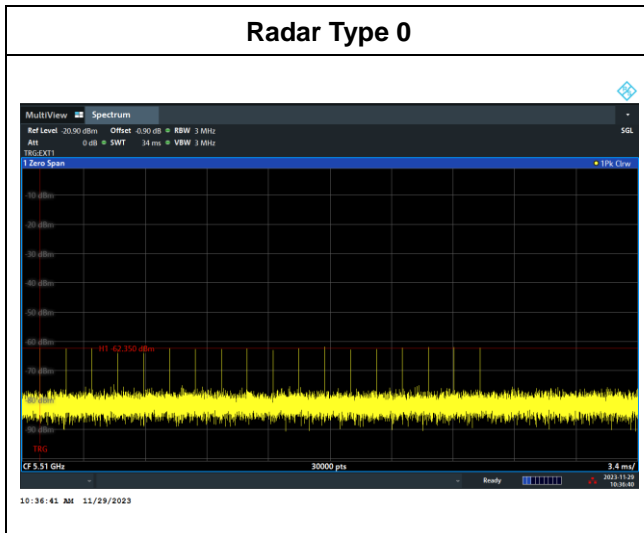




Single Burst of Radar Type 5

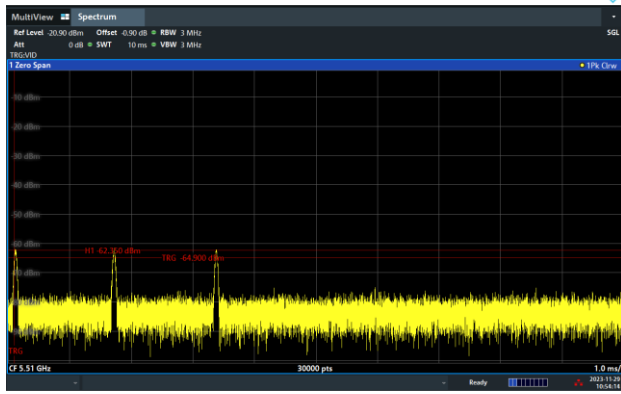


Single Burst of Radar Type 6

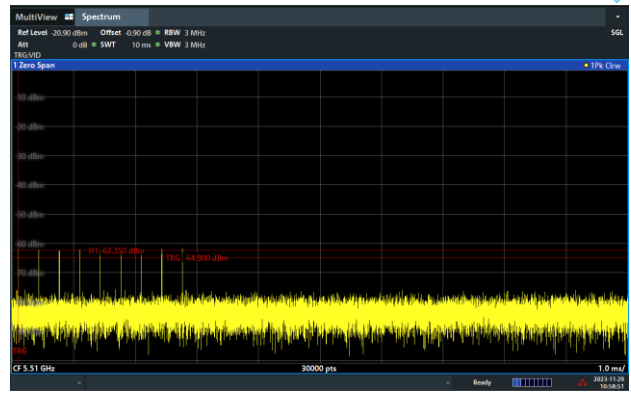




<80MHz / 5530MHz>


Radar Type 0

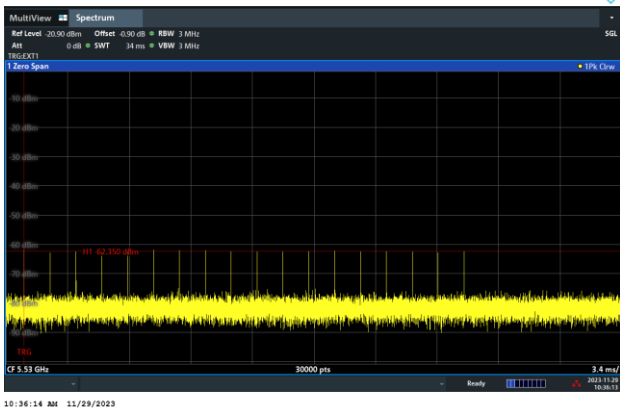


Radar Type 1

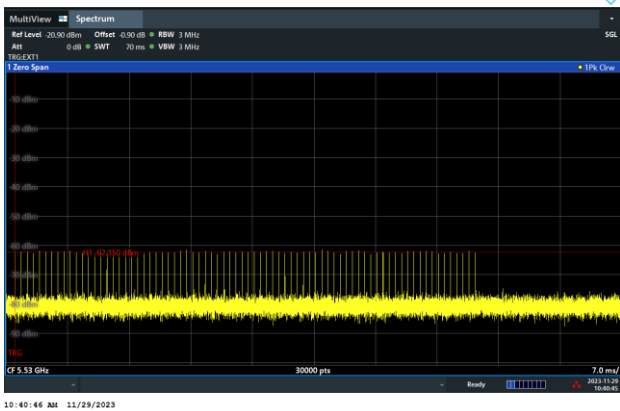


Radar Type 2

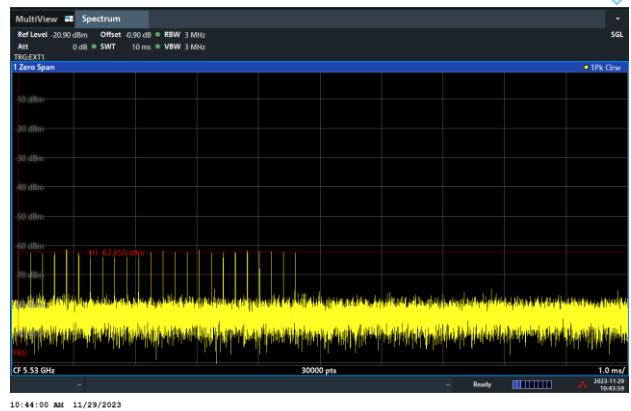

Radar Type 3

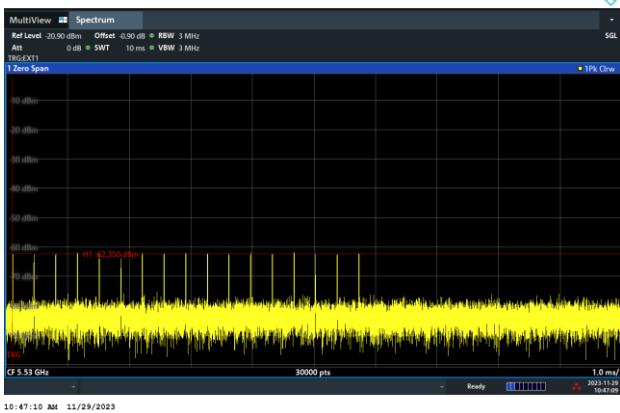


Radar Type 4

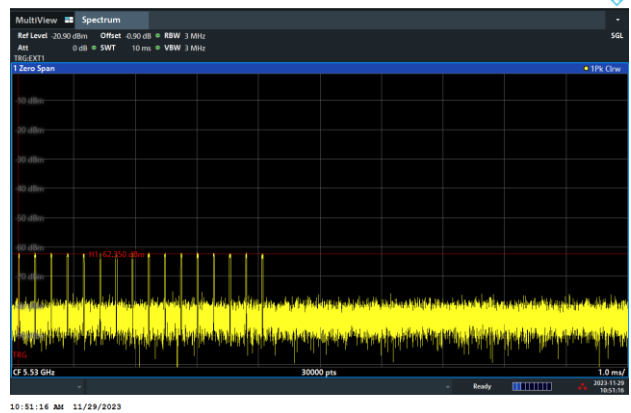




Single Burst of Radar Type 5

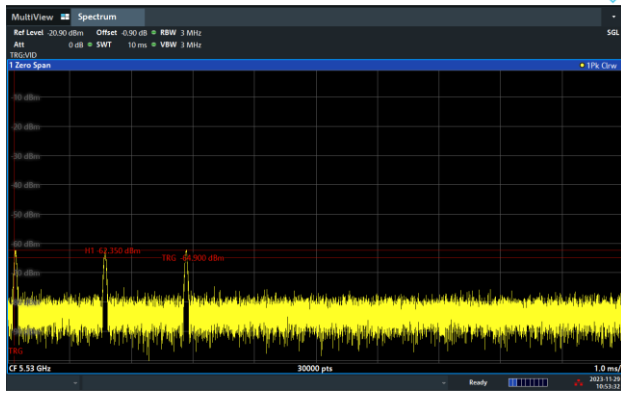


Single Burst of Radar Type 6

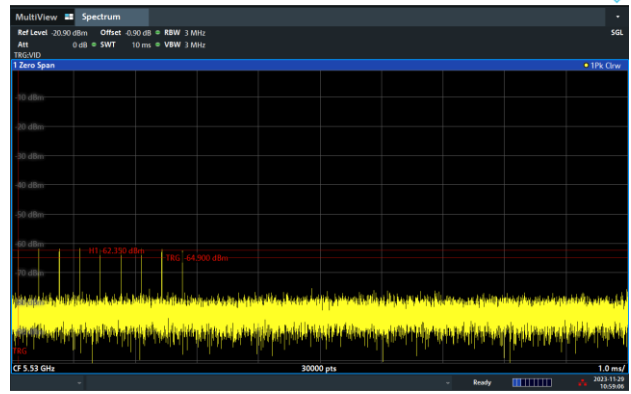




<160MHz / 5570MHz>


Radar Type 0

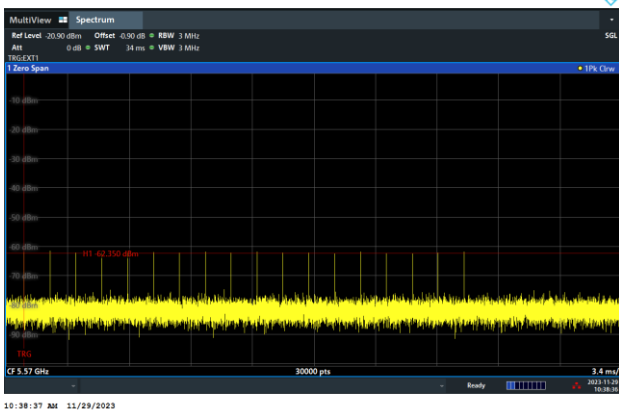


Radar Type 1

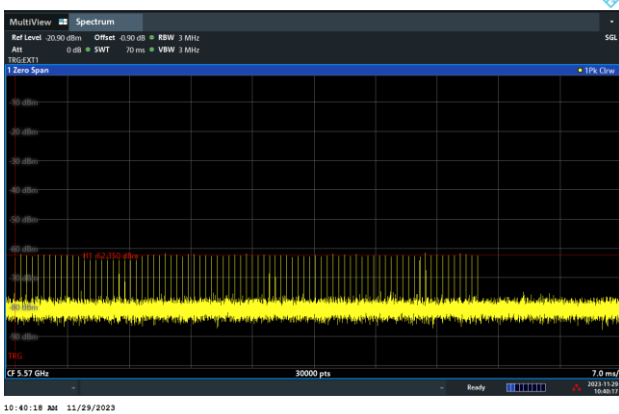


Radar Type 2

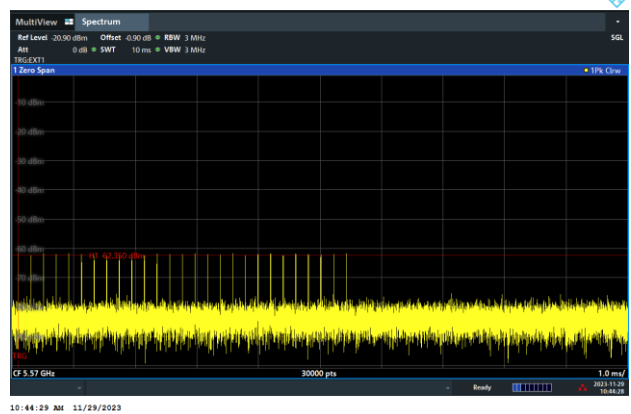

Radar Type 3

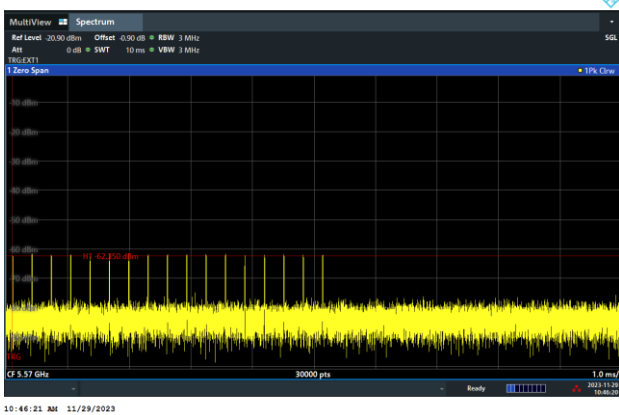


Radar Type 4

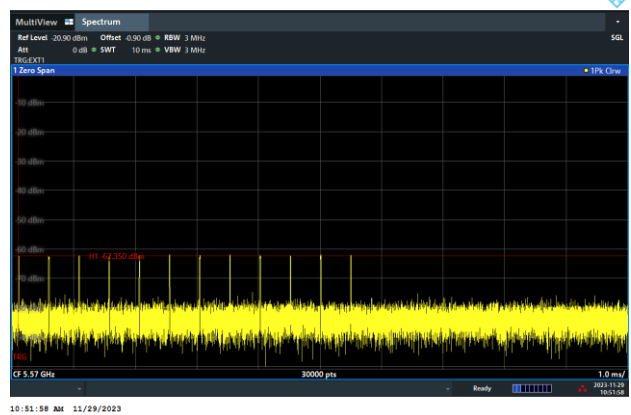




Single Burst of Radar Type 5

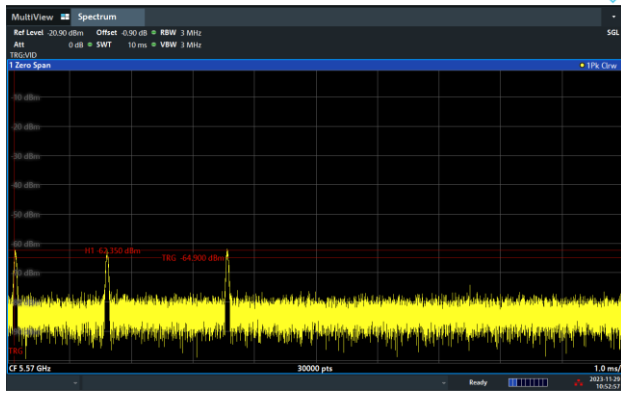

Single Burst of Radar Type 6

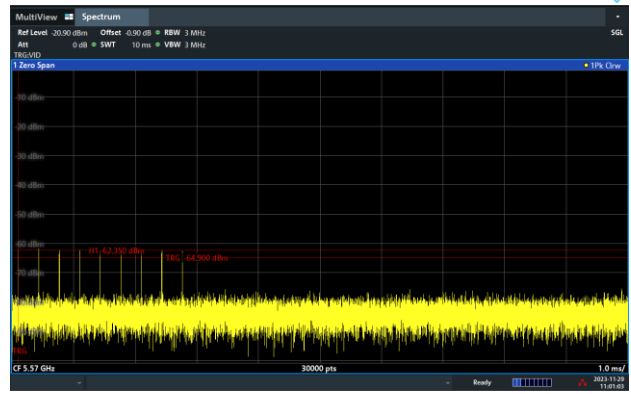

3.2 U-NII Detection Bandwidth

3.2.1 Limit of U-NII Detection Bandwidth


The U-NII Detection Bandwidth shall contain minimum 100% of the 99% power bandwidth. During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

3.2.2 Test Procedures

- (1) Adjust the equipment to produce a single burst of the Short Pulse Radar Type 0 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
- (2) Set the EUT up as a standalone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio of 0%/100% during this test.
- (3) Generate a single radar burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion.
- (4) Starting at the center frequency of the EUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in report clause 2.3. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.
- (5) Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in report clause 2.3. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance.
- (6) The U-NII Detection Bandwidth is calculated as follows:

$$U-NII\ Detection\ Bandwidth = F_H - F_L$$

3.2.3 Test Setup

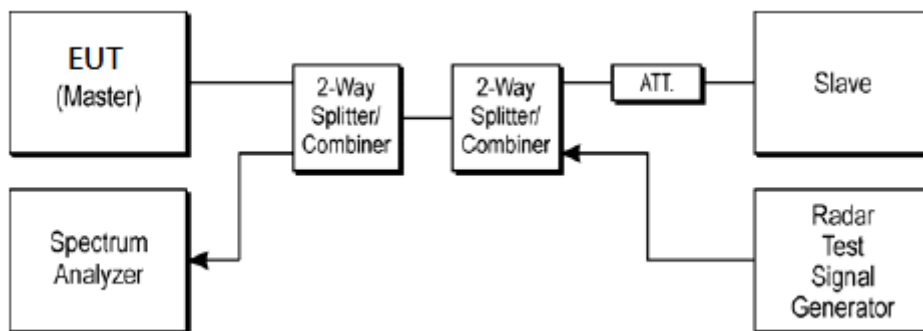

3.2.4 Test Deviation

There is no deviation with the original standard.



3.2.5 Result of U-NII Detection Bandwidth

<20MHz / 5500MHz>

Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5489	-11	N	N	N	N	N	N	N	N	N	N	0	
5490	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _L
5491	-9	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	90	
5492	-8	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5493	-7	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5494	-6	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	90	
5495	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5500	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5505	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5506	+6	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5507	+7	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5508	+8	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5509	+9	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5510	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _H
5511	+11	N	N	N	N	N	N	N	N	N	N	0	

Detection Bandwidth = F_H – F_L = **5510 – 5490 = 20** MHz
EUT 99% Bandwidth = **19.126** MHz (Refer to channel 100)



<40MHz / 5510MHz>

Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L	
		1	2	3	4	5	6	7	8	9	10			
5489	-21	N	N	N	N	N	N	N	N	N	N	N	0	
5490	-20	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	90	F _L
5491	-19	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5492	-18	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5493	-17	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5494	-16	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5495	-15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5500	-10	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	90	
5505	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5510	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5515	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5520	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5525	+15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5526	+16	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5527	+17	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	90	
5528	+18	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5529	+19	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	90	
5530	+20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _H
5531	+21	N	N	N	N	N	N	N	N	N	N	N	0	

Detection Bandwidth = F_H – F_L = 5530 – 5490 = 40 MHz
EUT 99% Bandwidth = 38.201 MHz (Refer to channel 102)



<80MHz / 5530MHz>

Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5489	-41	N	N	N	N	N	N	N	N	N	N	0	
5490	-40	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _L
5491	-39	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5492	-38	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5493	-37	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5494	-36	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5495	-35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5500	-30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5505	-25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5510	-20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5515	-15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5520	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5525	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5530	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5535	+5	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90	
5540	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5545	+15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5550	+20	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	90	
5555	+25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5560	+30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5565	+35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5566	+36	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5567	+37	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90	
5568	+38	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5569	+39	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	90	
5570	+40	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _H
5571	+41	N	N	N	N	N	N	N	N	N	N	0	

Detection Bandwidth = F_H – F_L = 5570 – 5490 = 80 MHz
EUT 99% Bandwidth = 77.388 MHz (Refer to channel 106)



<160MHz / 5570MHz>

Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5491	-79	Y	N	N	Y	N	Y	Y	N	N	N	40	
5492	-78	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _L
5493	-77	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5494	-76	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5495	-75	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5500	-70	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5505	-65	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5510	-60	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5515	-55	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5520	-50	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5525	-45	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	90	
5530	-40	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5535	-35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5491	-79	Y	N	N	Y	N	Y	Y	N	N	N	40	
5492	-78	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _L
5540	-30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5545	-25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5550	-20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5555	-15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5560	-10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5565	-5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5570	0	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5575	+5	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5580	+10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5585	+15	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5590	+20	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5595	+25	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5600	+30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5605	+35	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5610	+40	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	



Frequency (MHz)	Fc	Trial Number (Detection = V, No Detection = N)										Rate (%)	F _H /F _L
		1	2	3	4	5	6	7	8	9	10		
5615	+45	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5620	+50	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5625	+55	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5630	+60	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5635	+65	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5640	+70	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5645	+75	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5646	+76	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5647	+77	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5648	+78	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5649	+79	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	
5650	+80	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	F _H
5651	+81	N	N	N	N	N	N	N	N	N	N	0	

Detection Bandwidth = F_H – F_L = **5650 – 5492 = 158 MHz**
EUT 99% Bandwidth = **157.027 MHz** (Refer to channel 114)



3.3 Channel Availability Check

3.3.1 Limit of Channel Availability Check

The Initial Channel Availability Check Time tests that the EUT does not emit beacon, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for radar waveforms for **one minute** on the test Channel.

3.3.2 Test Procedures of Initial Channel Availability Check Time

This test does not use any radar waveforms and only needs to be performed one time.

- (1) The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the EUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
- (2) The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

3.3.3 Radar Burst at the Beginning of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time. This is illustrated in Figure 15.

- (1) The Radar Waveform generator and EUT are connected using the applicable test setup and the power of the EUT is switched off.
- (2) The EUT is powered on at T_0 . T_1 denotes the instant when the EUT has completed its power-up sequence (T_{power_up}). The Channel Availability Check Time commences on Chr at instant T_1 and will end no sooner than $T_1 + T_{ch_avail_check}$.
- (3) A single Burst of one of the Short Pulse Radar Types 1-4 will commence within a 6 second window starting at T_1 . An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (4) Visual indication or measured results on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for EUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- (5) Verify that during the 2.5 minute measurement window no EUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

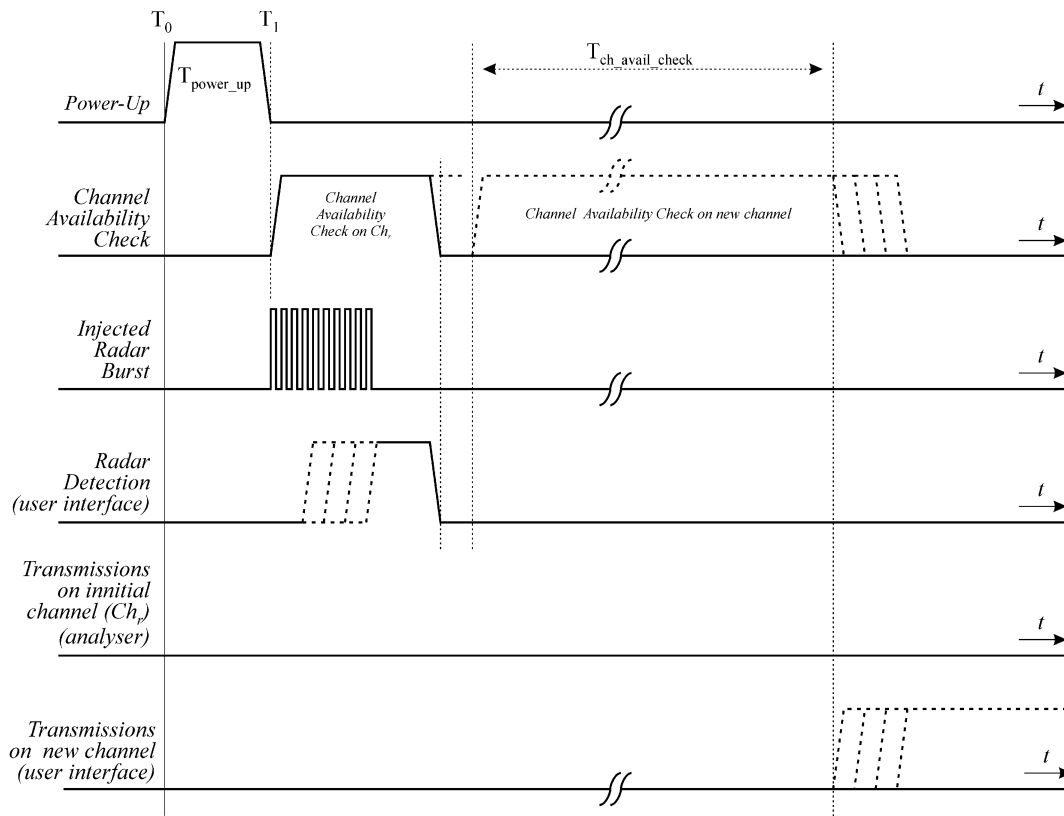


Figure 15: Example of timing for radar testing at the beginning of the Channel Availability Check Time

3.3.4 Radar Burst at the End of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1dB occurs at the end of the Channel Availability Check Time. This is illustrated in Figure 16.

- (1) The Radar Waveform generator and EUT are connected using the applicable test setup and the power of the EUT is switched off.
- (2) The EUT is powered on at T_0 . T_1 denotes the instant when the EUT has completed its power-up sequence (T_{power_up}). The Channel Availability Check Time commences on Chr at instant T_1 and will end no sooner than $T_1 + T_{ch_avail_check}$.
- (3) A single Burst of one of the Short Pulse Radar Types 1-4 will commence within a 6 second window starting at $T_1 + 54$ seconds. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (4) Visual indication or measured results on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for EUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- (5) Verify that during the 2.5 minute measurement window no EUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.


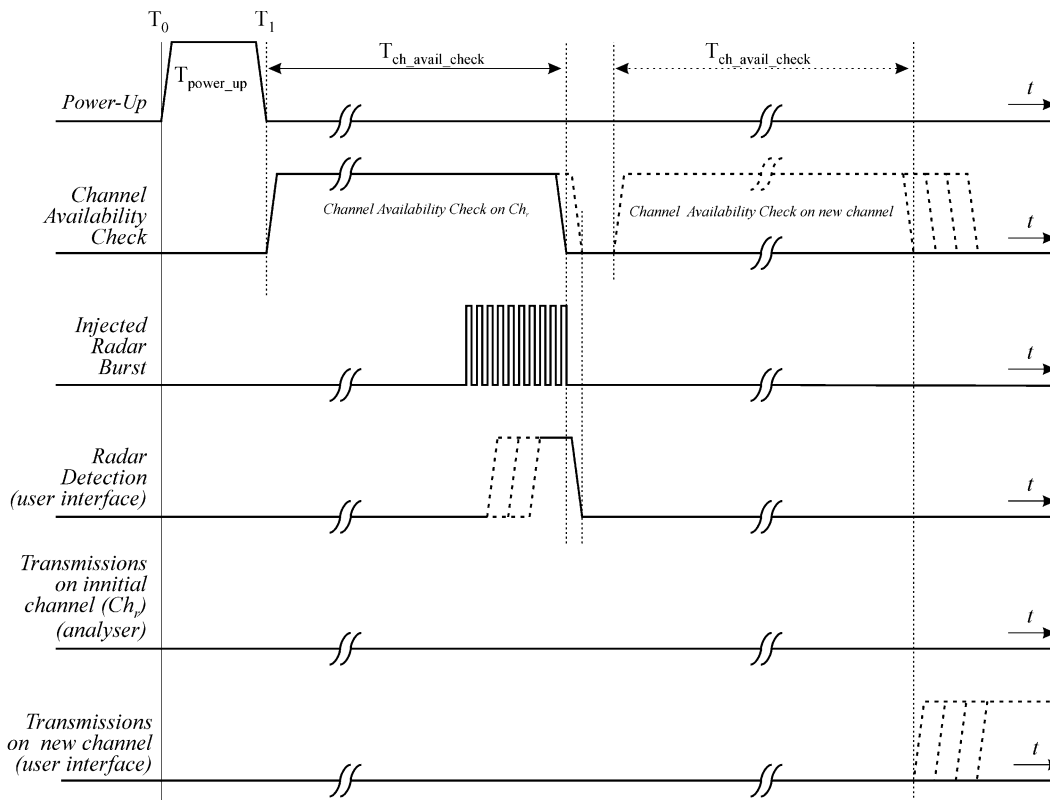


Figure 16: Example of timing for radar testing towards the end of the Channel Availability Check Time

3.3.5 Test Setup

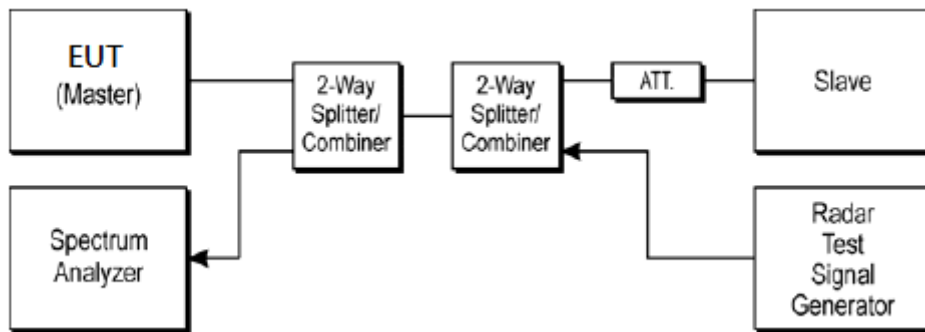


3.3.6 Test Deviation

There is no deviation with the original standard.



3.3.7 Result of Channel Availability Check Time

<160MHz / 5570MHz>

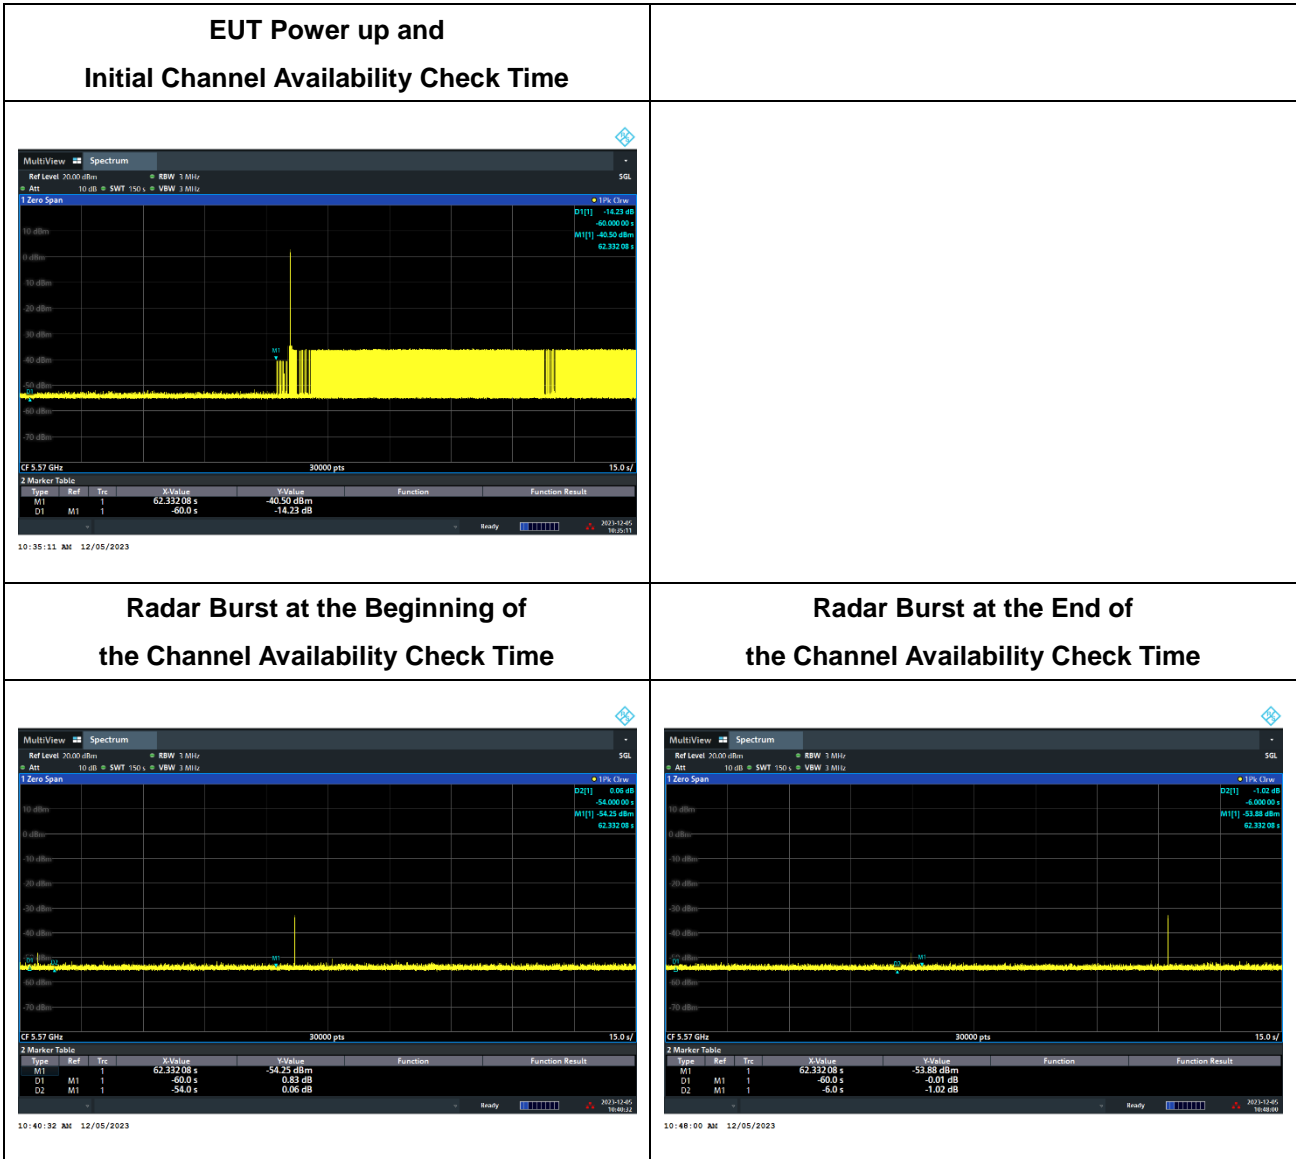

Marker 1 (Delta2): 60 seconds before End of Channel Availability Check

Marker 2: End of Channel Availability Check

Marker 3: 54 seconds or 6 seconds before End of Channel Availability Check



3.4 In-Service Monitoring: Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

3.4.1 Limit of In-Service Monitoring


The EUT has In-Service Monitoring function to continuously monitor the radar signals, If radar is detected, it must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current Channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

3.4.2 Test Procedures


- (1) One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
- (2) In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- (3) The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
- (4) Timing plots are reported with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time).
- (5) At time T0 the Radar Waveform generator sends a Burst of pulses for one of the Short Pulse Radar Types 1-4 at DFS Detection Threshold levels on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs.

- (7) When operating as a Master Device, monitor the EUT for more than 30 minutes following instant T2 to verify that the EUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.

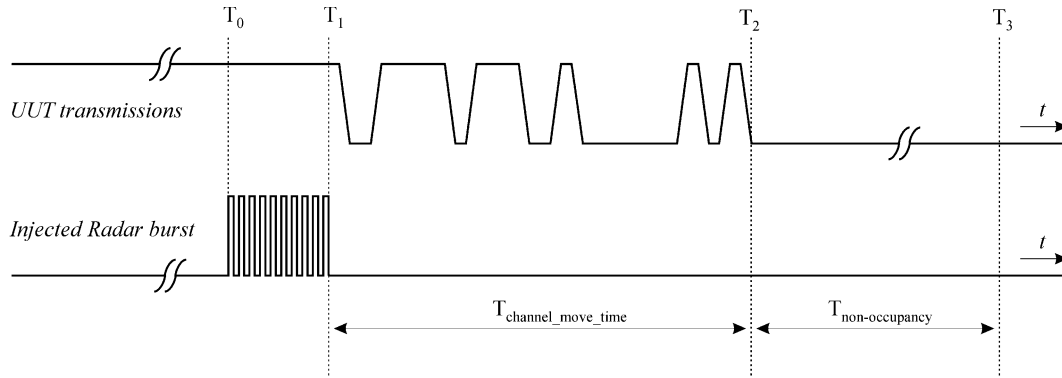

- (8) One 12 seconds plot is reported for the Short Pulse Radar Type 0.
- (9) Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.4ms) = S (12000ms) / B (30000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.4 ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

3.4.3 Test Setup

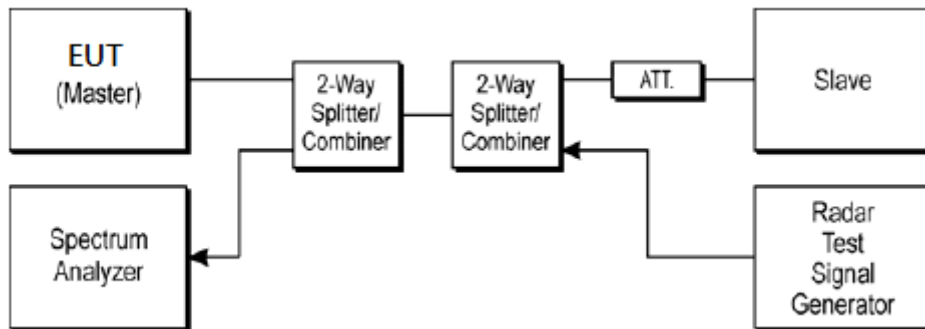

3.4.4 Test Deviation

There is no deviation with the original standard.



3.4.5 Result of Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test

Test Mode :	Master	Temperature :	22.3~24.5°C
Test Engineer :	Rebecca Li / Kai Liao	Relative Humidity :	44.3~53.9%

BW / Channel	Test Item	Test Result	Limit	Pass/Fail
<160MHz / 5570MHz>	Channel Move Time	0.452415 s	< 10s	Pass
	Channel Closing Transmission Time	200ms + 2.4 ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass


Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.



3.4.6 Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Plots


<160MHz / 5570MHz> In-Service Monitoring

Channel Move Time & Channel Closing Transmission Time

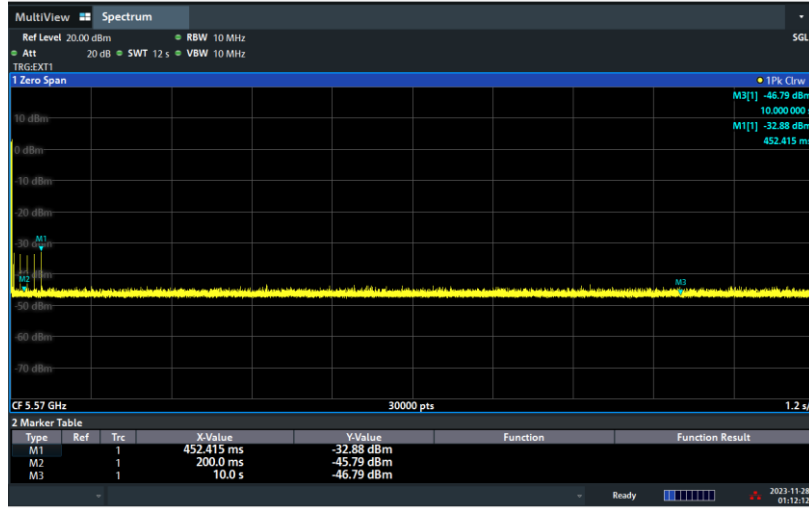

01:12:13 AM 11/28/2023

Non-Occupancy Period

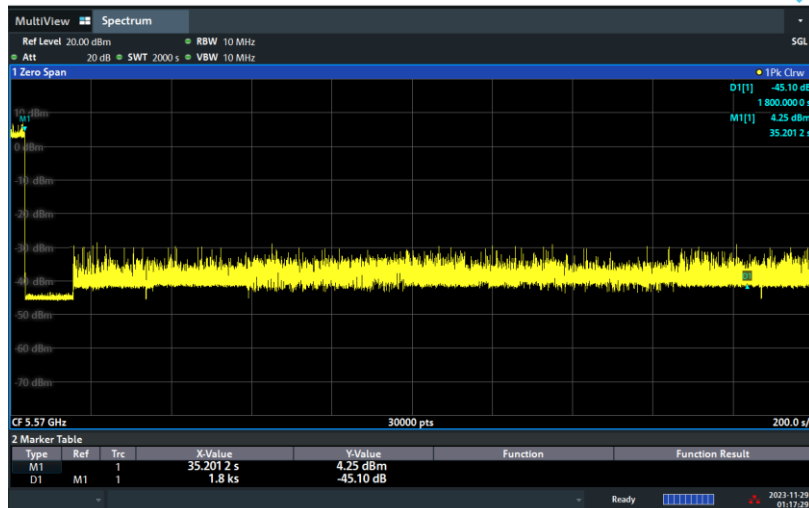

01:17:29 AM 11/29/2023


Note:

Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)



Channel Closing Transmission Time (200 + 2.4 ms) = 200 + Number (6) X Dwell (0.4 ms) < 260ms



3.4.7 Long Pulsed Radar Type Channel Move Time Test Plots (22second)

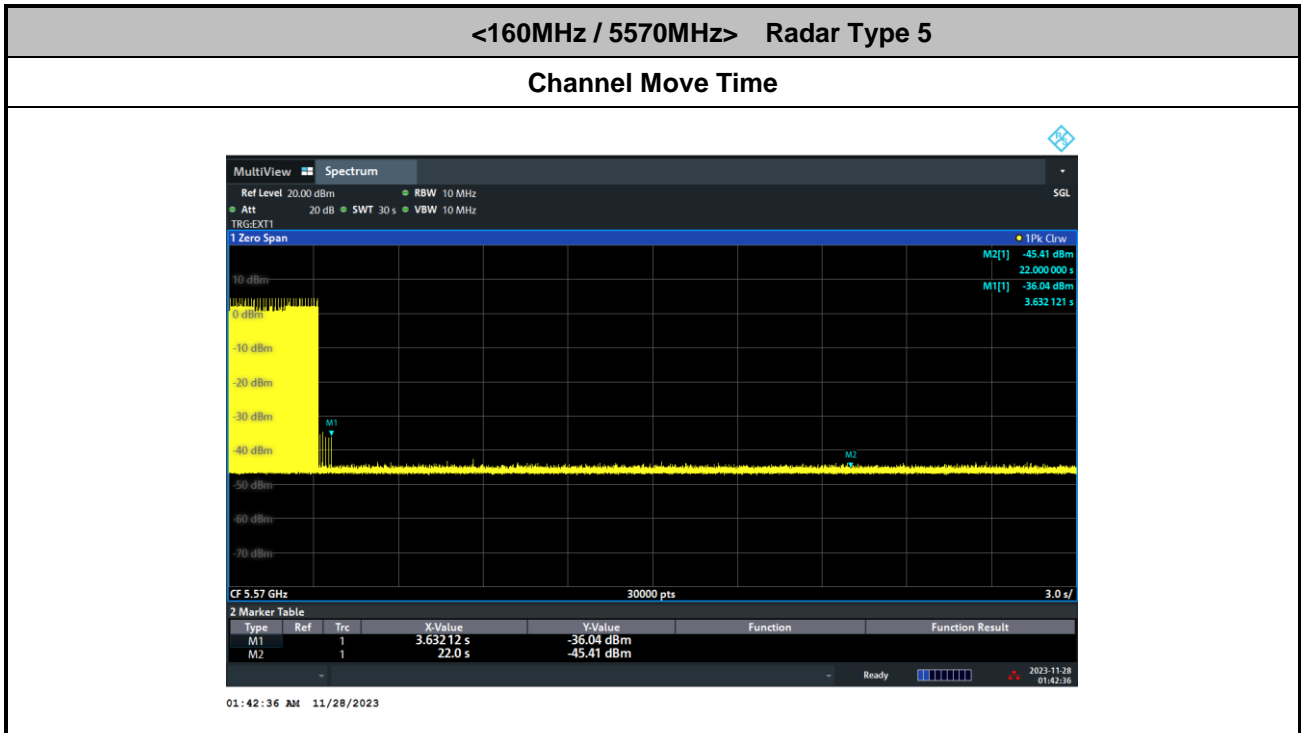

3.4.8 Data Traffic Channel Loading and Noise Floor Plots

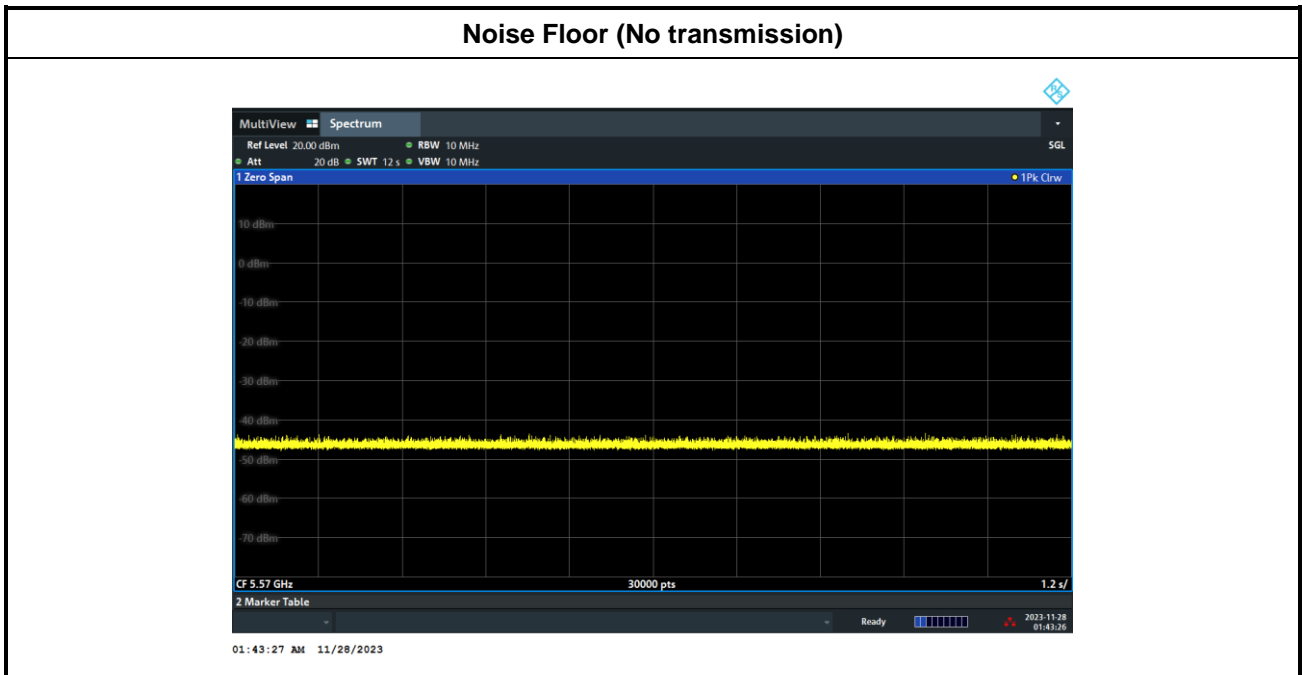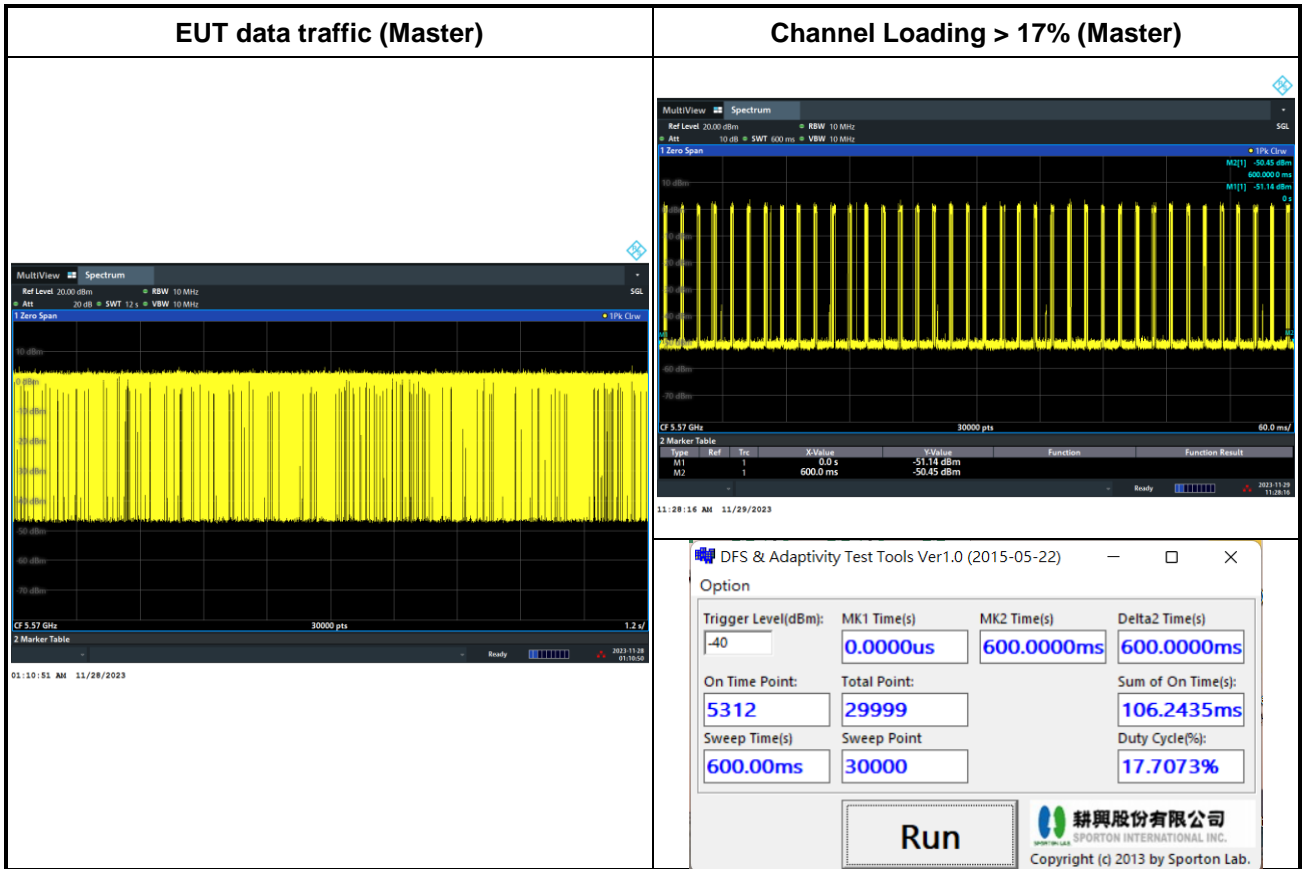



3.5 Statistical Performance Check

3.5.1 Limit of Statistical Performance Check

Short Pulse Radar Test

Once the performance requirements check is complete, statistical data will be gathered, to determine the ability of the device to detect the radar test waveforms (Short Pulse Radar Types 1-4) found in **Table 5**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trials. The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Percentage of Successful Detection Radar Waveform } N = P_d N$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

The minimum number of trails, minimum percentage of successful detection and the aggregate minimum percentage of successful detection are found in **Table 5**.

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120



A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 1 through 4. For Short Pulse Radar Type 0, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Types 1 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			



Long Pulse Radar Test

Statistical data will be gathered to determine the ability of the device to detect the Long Pulse Radar Type 5 found in **Table 6**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trials.

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Three subsets of trials will be performed with a minimum of ten trials per subset.

The subset of trials differs in where the Long Pulse Type 5 Signal is tuned in frequency:

- a) The Channel center frequency (subset case 1).
- b) Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth (subset case 2).
- c) Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth (subset case 3).



For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel.

For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2.


The center frequency of the signal generator for each trial is calculated by: $FL + (0.4 * Chirp\ Width\ [in\ MHz])$

For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3.

The center frequency of the signal generator for each trial is calculated by: $FH - (0.4 * Chirp\ Width\ [in\ MHz])$

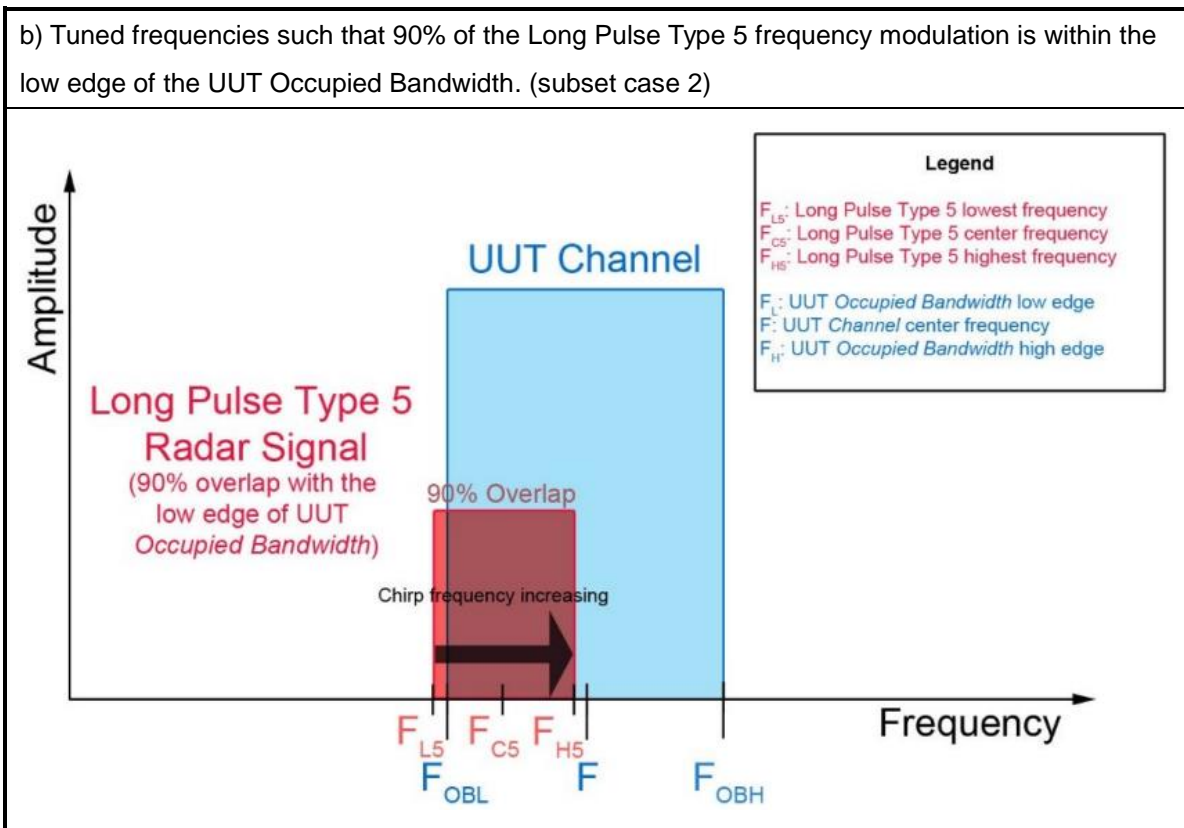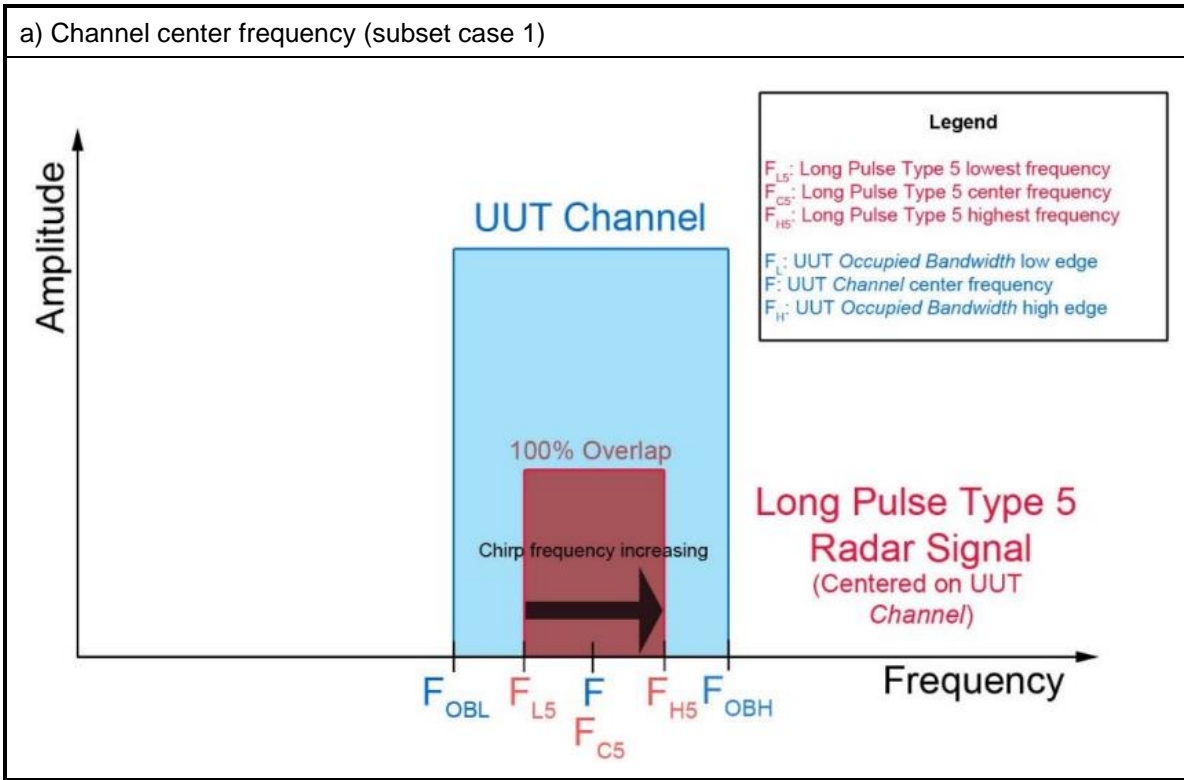

c) Tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth. (subset case 3)

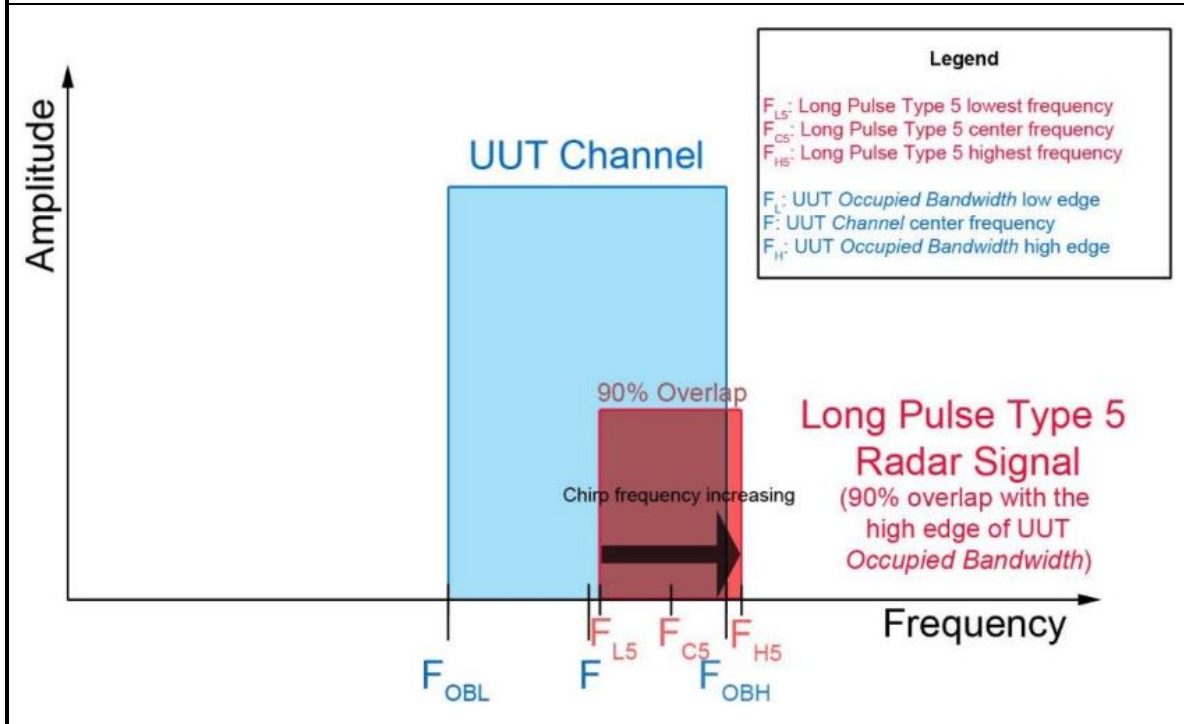

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100$$



Frequency Hopping Radar Test

Statistical data will be gathered to determine the ability of the device to detect the Frequency Hopping radar test signal (radar type 6) found in **Table 7**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The probability of successful detection is calculated by:

$$\frac{TotalWaveformDetections}{TotalWaveformTrials} \times 100$$

Table 7 – Frequency Hopping Radar Test Waveform


Radars Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

3.5.2 Test Procedures

- (1) One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands.
- (2) In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- (3) The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
- (4) At time T_0 the Radar Waveform generator sends a Burst of pulses for each of the Radar Types 1-6 at DFS Detection Threshold levels on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- (5) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 1-4 and 6 to ensure detection occurs.
- (6) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.

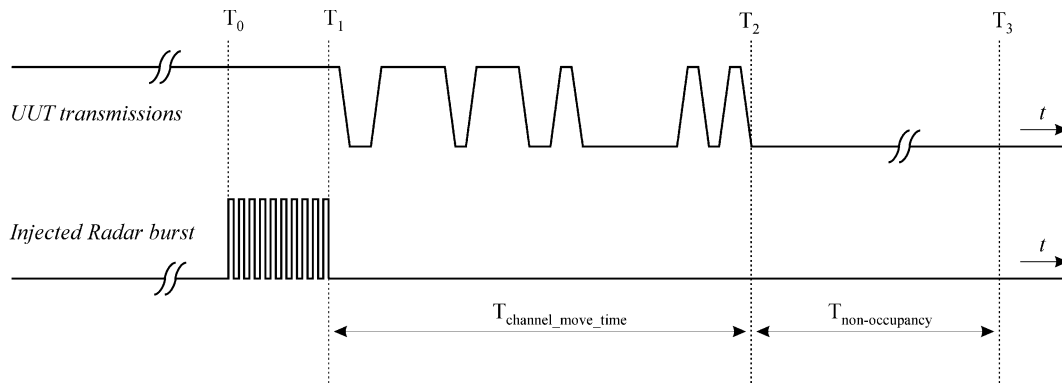

3.5.3 Test Setup

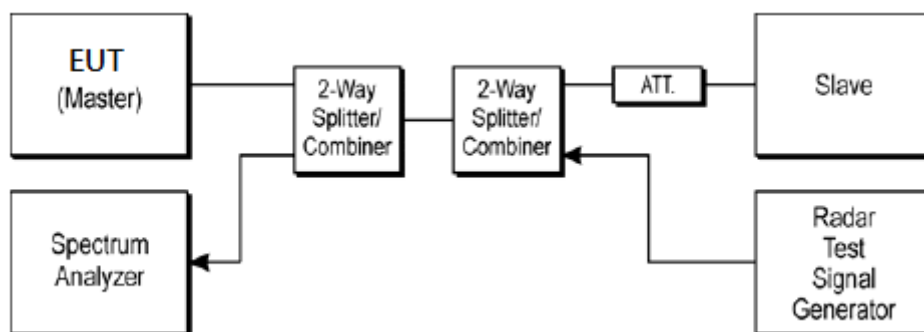

3.5.4 Test Deviation

There is no deviation with the original standard.



3.5.5 Result of Statistical Performance Check

<20MHz /5500MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	N	Y	Y
6	Y	Y	N	N	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	N	Y	N	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	N	Y	Y	Y
20	Y	Y	Y	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	N	Y	Y	Y
24	Y	N	Y	N	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	N	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	28/30	27/30	25/30	30/30	30/30
Probability (%)	100%	93.33%	90%	83.33%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)	91.67% (>=80%)					



<40MHz /5510MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	N	Y	Y	Y	Y
11	Y	Y	Y	N	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	N	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	N	Y	Y	Y	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	N	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	N	N	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	27/30	28/30	28/30	30/30	30/30
Probability (%)	100%	90%	93.33%	93.33%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)	94.17% (>=80%)					



<80MHz/ 5530MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	N	Y	Y
8	Y	Y	Y	Y	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	N	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	Y	Y	N	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	Y	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	Y	N	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	N	Y
26	Y	Y	Y	Y	Y	Y
27	Y	Y	Y	Y	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	Y	Y	Y	Y
30	Y	Y	Y	Y	Y	Y
Trial of Detection	30/30	30/30	30/30	27/30	28/30	30/30
Probability (%)	100%	100%	100%	90%	93.33%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)				97.5% (>=80%)		



<160MHz/ 5570MHz>

(Detection = Y, No Detection = N)						
Trial Number	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	Y	Y	Y	Y	Y	Y
2	Y	Y	Y	Y	Y	Y
3	Y	Y	Y	Y	Y	Y
4	Y	Y	Y	Y	Y	Y
5	Y	Y	Y	Y	Y	Y
6	Y	Y	Y	Y	Y	Y
7	Y	Y	Y	Y	Y	Y
8	Y	Y	Y	N	Y	Y
9	Y	Y	Y	Y	Y	Y
10	Y	Y	Y	Y	Y	Y
11	Y	Y	Y	Y	Y	Y
12	Y	Y	Y	Y	Y	Y
13	Y	Y	Y	Y	Y	Y
14	Y	Y	Y	Y	Y	Y
15	Y	Y	N	Y	Y	Y
16	Y	Y	Y	Y	Y	Y
17	Y	Y	Y	Y	Y	Y
18	Y	Y	N	Y	Y	Y
19	Y	Y	Y	Y	Y	Y
20	Y	Y	N	Y	Y	Y
21	Y	Y	Y	Y	Y	Y
22	Y	Y	Y	Y	Y	Y
23	Y	Y	Y	Y	Y	Y
24	Y	Y	Y	Y	Y	Y
25	Y	Y	Y	Y	Y	Y
26	Y	Y	Y	N	Y	Y
27	Y	Y	Y	N	Y	Y
28	Y	Y	Y	Y	Y	Y
29	Y	Y	N	N	Y	Y
30	Y	Y	N	Y	Y	Y
Trial of Detection	30/30	30/30	25/30	26/30	30/30	30/30
Probability (%)	100%	100%	83.33%	86.67%	100%	100%
Limit (%)	>= 60%	>= 60%	>= 60%	>= 60%	>= 80%	>= 70%
Average Probability of Radar Type 1~4 (%)			92.5% (>=80%)			



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Generator	Keysight	N5182B	MY57280013	9kHz~6GHz	Mar. 10, 2023	Nov. 28, 2023~ Dec. 05, 2023	Mar. 09, 2024	DFS (DF02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101549	10Hz~13.6GHz	Jan. 31, 2023	Nov. 28, 2023~ Dec. 05, 2023	Jan. 30, 2024	DFS (DF02-HY)
Power Divider	Woken	2Way Divider	DCMB1KW7 A2	0.5GHz-18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
Power Divider	Woken	3Way SMA Power Divder Rated to 20W	STI08-0010(# 2)	2GHz-8GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
Power Divider	Woken	0120A040518 01O	DCMB1CW3 A7	0.5-18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	MTJ Cooperstion	SBF405-105F LEX	MTJ-30cm-02	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	MTJ Cooperstion	SBF405-105F LEX	MTJ-30cm-03	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	MTJ Cooperstion	SBF405-105F LEX	MTJ-30cm-04	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	EST	SLF405_100c m	#7	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	EC	SS405	SS405-100c m-01	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	EC	SS405	SS405-100c m-02	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	EC	SS405	SS405-100c m-04	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	EC	SS405	SS405-100c m-06	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	Woken	S05	S05-60cm-01	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)
RF Cable	MVE	SPF141	MVE-150cm- 01	30 kHz~18GHz	Calibration from System	Nov. 28, 2023~ Dec. 05, 2023	Calibration from System	DFS (DF02-HY)

Channel 100 Bandwidth 20MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 100 Bandwidth 20MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	326.16	3066	Yes
2	8	1519.76	658	Yes
3	16	1222.49	818	Yes
4	7	1567.40	638	Yes
5	2	1858.74	538	Yes
6	1	1930.50	518	Yes
7	3	1792.11	558	Yes
8	10	1432.66	698	Yes
9	6	1618.12	618	Yes
10	5	1672.24	598	Yes
11	4	1730.10	578	Yes
12	11	1392.76	718	Yes
13	14	1285.35	778	Yes
14	12	1355.01	738	Yes
15	17	1193.32	838	Yes
16		1084.60	922	Yes
17		512.82	1950	Yes
18		804.51	1243	Yes
19		415.97	2404	Yes
20		1636.66	611	Yes
21		582.07	1718	Yes
22		888.10	1126	Yes
23		557.72	1793	Yes
24		382.70	2613	Yes
25		583.77	1713	Yes
26		1169.59	855	Yes
27		404.53	2472	Yes
28		552.49	1810	Yes
29		385.51	2594	Yes
30		1416.43	706	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	25	2.60	216	Yes
2	24	1.80	189	Yes
3	24	1.80	160	Yes
4	23	1.30	202	Yes
5	25	2.30	217	Yes
6	25	2.40	182	Yes
7	23	1.30	167	Yes
8	25	2.40	191	Yes
9	24	2.10	186	No
10	24	1.90	200	Yes
11	29	5.00	178	Yes
12	27	3.70	151	Yes
13	24	1.60	196	Yes
14	23	1.30	224	Yes
15	26	3.10	175	Yes
16	25	2.40	154	Yes
17	28	3.90	170	Yes
18	27	3.40	205	Yes
19	24	1.90	185	Yes
20	28	4.00	152	Yes
21	29	4.50	176	Yes
22	26	2.90	230	Yes
23	25	2.40	204	Yes
24	24	1.70	187	No
25	26	3.20	220	Yes
26	23	1.00	228	Yes
27	27	3.40	163	Yes
28	26	3.00	226	Yes
29	23	1.30	208	Yes
30	29	5.00	229	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.60	315	Yes
2	16	6.80	310	Yes
3	16	6.80	284	Yes
4	16	6.30	331	Yes
5	16	7.30	477	Yes
6	17	7.40	352	No
7	16	6.30	379	Yes
8	17	7.40	215	Yes
9	16	7.10	239	Yes
10	16	6.90	353	Yes
11	18	10.00	264	Yes
12	18	8.70	411	Yes
13	16	6.60	277	Yes
14	16	6.30	491	Yes
15	17	8.10	407	Yes
16	17	7.40	243	Yes
17	18	8.90	312	Yes
18	17	8.40	483	Yes
19	16	6.90	414	No
20	18	9.00	327	Yes
21	18	9.50	428	Yes
22	17	7.90	348	Yes
23	17	7.40	344	No
24	16	6.70	456	Yes
25	17	8.20	248	Yes
26	16	6.00	474	Yes
27	17	8.40	209	Yes
28	17	8.00	263	Yes
29	16	6.30	405	Yes
30	18	10.00	295	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 100 Bandwidth 20MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.60	315	Yes
2	13	12.90	310	Yes
3	13	12.90	284	Yes
4	12	11.60	331	Yes
5	13	13.90	477	No
6	13	14.30	352	No
7	12	11.80	379	Yes
8	13	14.10	215	Yes
9	13	13.50	239	No
10	13	13.00	353	Yes
11	16	19.80	264	Yes
12	15	17.10	411	Yes
13	12	12.40	277	Yes
14	12	11.80	491	Yes
15	14	15.60	407	Yes
16	13	14.10	243	Yes
17	15	17.50	312	Yes
18	14	16.30	483	Yes
19	13	13.10	414	Yes
20	15	17.80	327	Yes
21	16	18.90	428	Yes
22	14	15.30	348	Yes
23	13	14.20	344	Yes
24	12	12.60	456	No
25	14	15.90	248	Yes
26	12	11.10	474	Yes
27	15	16.40	209	Yes
28	14	15.60	263	Yes
29	12	11.70	405	No
30	16	20.00	295	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5500			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	70	11	1168	-	591413
2	1	60.8	11	-	-	815813
3	1	60.7	11	-	-	117850
4	1	53.6	11	-	-	341492
5	1	66.2	11	-	-	565163
6	2	68.2	11	1935	-	786444
7	1	54.4	11	-	-	90332
8	2	67.3	11	1554	-	313436
9	1	64	11	-	-	537230
10	1	61.4	11	-	-	760859
11	3	98.9	11	1805	1263	62617
12	3	83.6	11	1313	1101	285592
13	1	57.7	11	-	-	509584
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5500			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	54.5	8	-	-	953964
2	2	75.8	8	1980	-	45794
3	2	67.4	8	1438	-	336076
4	3	86.1	8	1954	1547	625382
5	2	79.7	8	1007	-	917476
6	1	61.9	8	-	-	10058
7	3	87.6	8	1319	1445	300050
8	3	93.9	8	1662	1644	589724
9	2	73.7	8	1518	-	881233
10	2	68	8	1513	-	1171109
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			3			Detection (Yes/No) Yes
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5500			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	59	8	-	-	265018
2	2	77	8	1735	-	554842
3	1	51	8	-	-	846327
4	2	80.1	8	1307	-	1136121
5	2	75.4	8	1351	-	228960
6	1	54.3	8	-	-	519693
7	3	99.9	8	1223	1069	808595
8	2	76.8	8	1820	-	1099015
9	1	55.1	8	-	-	193329
10	2	74.2	8	1398	-	483257
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			4			Detection (Yes/No) Yes
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5500			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	3	87.1	6	1345	1551	966586
2	2	72.9	6	1699	-	1330599
3	3	95.3	6	1925	1252	196541
4	2	73.5	6	1893	-	559692
5	2	81.8	6	1856	-	922693
6	3	94.7	6	1432	1838	1284218
7	2	80.8	6	1829	-	151993
8	3	96.2	6	1680	1900	514474
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	51	10	-	-	585711
2	3	97.4	10	1288	1025	826028
3	3	92.4	10	1320	1880	71348
4	1	65.1	10	-	-	313845
5	2	78.9	10	1246	-	555080
6	2	77.3	10	1426	-	796971
7	3	97.6	10	1378	1400	41641
8	1	54.5	10	-	-	284044
9	1	63.6	10	-	-	526307
10	2	71.4	10	1630	-	767239
11	2	75.7	10	1750	-	11892
12	1	51.5	10	-	-	253954
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5500			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	53.2	10	-	-	496177
2	1	65.5	10	-	-	738185
3	3	96.4	10	1340	1616	977571
4	3	92.9	10	1256	1447	223540
5	1	51.6	10	-	-	466647
6	2	76.7	10	1664	-	707623
7	1	65.1	10	-	-	950890
8	3	88.2	10	1372	1013	193953
9	2	79.1	10	1118	-	436189
10	1	63	10	-	-	678580
11	1	64.2	10	-	-	920480
12	3	84.6	10	1396	1266	164125
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5500			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93.8	6	1806	1159	541409
2	1	59.4	6	-	-	865828
3	2	70.6	6	1484	-	1187649
4	2	81.6	6	1701	-	179453
5	2	80.5	6	1475	-	502280
6	3	94	6	1579	1965	823872
7	1	54.2	6	-	-	1148749
8	3	85	6	1783	1111	139626
9	2	81.2	6	1108	-	462605
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5500			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	91.5	10	1922	1801	587255
2	3	92.8	10	1511	1403	829166
3	2	76.4	10	1885	-	74941
4	2	75.6	10	1826	-	316695
5	3	94	10	1344	1260	558132
6	3	98.2	10	1206	1216	800023
7	2	73.8	10	1493	-	45215
8	2	82.5	10	1883	-	286937
9	2	70.8	10	1409	-	528863
10	3	90.7	10	1751	1337	769213
11	2	78.4	10	1784	-	15413
12	1	51.1	10	-	-	257563
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5500			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	53.6	9	-	-	545233
2	2	70.9	9	1613	-	808569
3	2	71.6	9	1541	-	1072660
4	2	76.6	9	1229	-	248335
5	1	52.4	9	-	-	512546
6	2	71.9	9	1164	-	775912
7	1	55	9	-	-	1041053
8	2	79.5	9	1989	-	215574
9	3	92.7	9	1812	1244	478629
10	2	67.1	9	1089	-	743994
11	3	88.1	9	1626	1039	1005975
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5500			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	83.1	8	1774	-	201531
2	1	57.7	8	-	-	492635
3	2	71.4	8	1012	-	782203
4	2	69.4	8	1090	-	1072800
5	1	56.6	8	-	-	166056
6	1	65.9	8	-	-	456650
7	2	74.1	8	1264	-	746627
8	2	69.7	8	1691	-	1036189
9	2	67.1	8	1667	-	130005
10	3	90.7	8	1677	1232	420002
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5498.437			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	70.3	20	1376	-	354386
2	1	61.8	20	-	-	500862
3	2	72.7	20	1764	-	47018
4	2	69.9	20	1923	-	191637
5	2	67.2	20	1973	-	336358
6	1	57.6	20	-	-	482923
7	2	78.6	20	1406	-	29194
8	3	91.4	20	1776	1230	173541
9	1	55.6	20	-	-	319370
10	1	58.3	20	-	-	464716
11	2	72.3	20	1357	-	11357
12	3	85.9	20	1061	1549	155749
13	3	83.5	20	1832	1046	300341
14	3	90.2	20	1328	1060	445227
15	3	88.5	20	1651	1314	588958
16	3	99.1	20	1503	1945	137737
17	1	55	20	-	-	283921
18	2	78	20	1947	-	427475
19	2	72	20	1523	-	572765
20	3	99.3	20	1154	1574	120152

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5498.437			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	55.5	15	-	-	332531
2	3	88.5	15	1956	1309	511809
3	2	74.4	15	1293	-	694009
4	1	54.7	15	-	-	128649
5	3	93.3	15	1898	1038	308943
6	2	67.8	15	1607	-	490388
7	2	72.6	15	1969	-	671354
8	2	78.7	15	1611	-	106039
9	2	67.1	15	1986	-	287237
10	1	66.6	15	-	-	469082
11	3	96.7	15	1765	1152	648673
12	2	71	15	1370	-	83832
13	1	61.2	15	-	-	265398
14	1	60.5	15	-	-	446759
15	2	83.3	15	1059	-	627749
16	1	59.1	15	-	-	61561
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5493.237			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	98.9	7	1543	1524	388317
2	1	56.6	7	-	-	680109
3	3	85.3	7	1296	1679	968396
4	1	64.2	7	-	-	62839
5	2	76.4	7	1861	-	352925
6	3	88.1	7	1598	1014	642858
7	3	87.1	7	1736	1955	931906
8	1	58.7	7	-	-	27005
9	1	65.7	7	-	-	317562
10	3	97.2	7	1040	1612	607197
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5492.837			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	74.3	6	1142	-	998467
2	2	81.3	6	1265	-	1321305
3	2	80.9	6	1780	-	312720
4	1	57.6	6	-	-	636461
5	1	60.9	6	-	-	959228
6	3	96.1	6	1729	1939	1278663
7	3	97.7	6	1849	1754	272666
8	2	67.9	6	1361	-	595704
9	3	85.1	6	1411	1180	918003
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5495.637			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	81.9	13	1753	-	796772
2	3	87.4	13	1999	1184	149550
3	2	68	13	1085	-	357212
4	2	76.7	13	1125	-	564618
5	3	99.5	13	1379	1948	769731
6	3	85.1	13	1402	1479	124210
7	3	100	13	1290	1446	331101
8	2	74.2	13	1458	-	538947
9	3	89	13	1720	1326	744095
10	1	61.6	13	-	-	98967
11	1	51.3	13	-	-	306626
12	2	74.6	13	1502	-	513218
13	2	72.9	13	1463	-	720136
14	1	56.9	13	-	-	73416
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5494.437			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	79.4	10	1732	-	327257
2	1	50.1	10	-	-	569945
3	3	98.5	10	1670	1593	809812
4	3	92.8	10	1466	1538	55714
5	1	57.7	10	-	-	298006
6	2	72.8	10	1073	-	539775
7	2	67.4	10	1429	-	781014
8	1	51.4	10	-	-	26037
9	1	65.6	10	-	-	268162
10	3	89	10	1029	1787	508731
11	3	96.1	10	1062	1656	750611
12	3	93.5	10	1757	1077	991485
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5496.837			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	91.4	16	1714	1158	167423
2	3	97.8	16	1393	1685	337374
3	1	59.4	16	-	-	509557
4	1	55.7	16	-	-	680361
5	1	50.5	16	-	-	147042
6	2	73.3	16	1495	-	317474
7	3	93.4	16	1210	1010	487570
8	2	75.4	16	1425	-	658296
9	1	51.3	16	-	-	126090
10	2	71.7	16	1949	-	296182
11	2	80.9	16	1810	-	466448
12	2	80	16	1133	-	637449
13	3	85.9	16	1852	1407	104577
14	2	79.2	16	1300	-	275462
15	2	76.5	16	1434	-	445950
16	1	63.9	16	-	-	617465
17	3	98.1	16	1831	1091	83628
18						
19						
20						

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5496.037			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	97.2	14	1530	1181	287987
2	1	64.4	14	-	-	482736
3	2	72.6	14	1153	-	675574
4	1	51.3	14	-	-	71370
5	2	74.3	14	1747	-	264389
6	1	51.5	14	-	-	458617
7	1	57.5	14	-	-	652378
8	1	62.4	14	-	-	47503
9	1	53.3	14	-	-	241079
10	3	90	14	1095	1427	433631
11	3	95.2	14	1367	1599	625860
12	2	67.7	14	1968	-	23577
13	2	80.4	14	1339	-	217000
14	2	71.8	14	1321	-	410148
15	2	79.1	14	1092	-	604072
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5493.637			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	80.6	8	1298	-	1087909
2	1	55.9	8	-	-	263813
3	3	93.8	8	1279	1156	527146
4	1	52.1	8	-	-	792543
5	1	64.7	8	-	-	1056425
6	2	83.3	8	1568	-	230987
7	1	61	8	-	-	495515
8	2	78	8	1931	-	758452
9	2	81.3	8	1123	-	1023016
10	3	97.6	8	1681	1348	198285
11	1	55.5	8	-	-	462996
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5497.237			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	57.6	17	-	-	470435
2	2	69.3	17	1649	-	639160
3	2	68.5	17	1497	-	107218
4	1	56.9	17	-	-	278324
5	2	78.5	17	1520	-	448542
6	3	96.3	17	1262	1456	618070
7	1	53.5	17	-	-	86434
8	1	53.3	17	-	-	257266
9	2	68.5	17	1844	-	426743
10	2	74.5	17	1951	-	597350
11	2	73.5	17	1270	-	65283
12	3	92.2	17	1208	1966	235062
13	2	67	17	1868	-	406105
14	3	96.3	17	1974	1053	575649
15	1	51.9	17	-	-	44415
16	3	93.3	17	1327	1705	214445
17	3	97.3	17	1758	1177	384548
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5501.963			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	83.4	19	1052	1391	496099
2	3	98.2	19	1847	1346	20780
3	1	57.6	19	-	-	173811
4	2	70.9	19	1167	-	326065
5	3	100	19	1567	1857	476679
6	1	51.7	19	-	-	2065
7	3	99.4	19	1374	1572	154140
8	2	79.9	19	1315	-	307044
9	3	85.5	19	1178	1960	458379
10	2	74.4	19	1412	-	611469
11	3	99.2	19	1128	1867	135472
12	1	64.7	19	-	-	289035
13	3	86.1	19	1555	1334	439859
14	3	86.5	19	1163	1437	591786
15	3	91.3	19	1836	1084	116621
16	1	53.8	19	-	-	270205
17	2	68.8	19	1219	-	422357
18	3	93.9	19	1131	1115	573306
19	3	88.3	19	1552	1840	97847
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5504.763			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93.9	12	1204	1782	339878
2	3	96.4	12	1578	1015	547314
3	1	61.4	12	-	-	755917
4	3	98.9	12	1149	1183	107845
5	1	64.2	12	-	-	315606
6	2	77	12	1285	-	522176
7	1	53.3	12	-	-	730312
8	1	54.5	12	-	-	82519
9	1	57	12	-	-	290023
10	1	63.8	12	-	-	497654
11	2	76.7	12	1360	-	703865
12	1	55.9	12	-	-	56982
13	1	62.8	12	-	-	264447
14	3	90.1	12	1436	1051	470857
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5505.563			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	63.7	10	-	-	793233
2	3	94.6	10	1127	1369	36551
3	2	83.1	10	1869	-	278227
4	3	89.9	10	1294	1907	519384
5	3	84.6	10	1719	1766	760232
6	1	57.7	10	-	-	6804
7	2	67.5	10	1322	-	248619
8	2	69.1	10	1760	-	490509
9	2	77	10	1718	-	731896
10	3	93.1	10	1483	1771	972069
11	2	71.9	10	1384	-	218919
12	1	54.3	10	-	-	461440
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5506.763			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	88.7	7	1055	1507	842905
2	2	82.5	7	1048	-	1134506
3	3	88.1	7	1347	1788	226564
4	2	82.3	7	1635	-	517333
5	3	88.3	7	1283	1901	806606
6	3	98.2	7	1713	1940	1095662
7	1	52.3	7	-	-	191416
8	1	63.7	7	-	-	482032
9	3	99.4	7	1636	1031	771016
10	1	50.9	7	-	-	1063184
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5504.363			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	72	13	1620	-	103450
2	3	99.4	13	1387	1715	296292
3	3	93.5	13	1967	1638	488879
4	3	94	13	1355	1934	682169
5	3	96.7	13	1482	1350	79588
6	3	97.3	13	1281	1341	272479
7	3	92.4	13	1658	1198	465376
8	1	66.1	13	-	-	661130
9	1	58.7	13	-	-	56004
10	2	68.4	13	1569	-	249034
11	3	86.4	13	1464	1139	441888
12	2	74.7	13	1359	-	635539
13	2	72.3	13	1107	-	32081
14	3	92	13	1892	1606	224896
15	1	58.1	13	-	-	419311
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5507.563			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	63.9	5	-	-	1150601
2	3	84.3	5	1424	1056	15486
3	3	86.2	5	1772	1414	378079
4	2	70.7	5	1209	-	741620
5	2	74.8	5	1858	-	1104351
6	2	69.3	5	1725	-	1467311
7	2	68.3	5	1854	-	333734
8	2	76.9	5	1903	-	696872
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5503.963			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	59.8	14	-	-	565165
2	3	88.4	14	1397	1110	756902
3	2	70.8	14	1748	-	153795
4	1	66.4	14	-	-	347896
5	2	74.7	14	1421	-	540370
6	2	75.5	14	1099	-	734511
7	2	78.5	14	1687	-	130152
8	1	53.6	14	-	-	323893
9	3	99.2	14	1528	1674	515495
10	3	90.7	14	1700	1917	707883
11	1	62.8	14	-	-	106455
12	2	72.5	14	1550	-	299598
13	3	83.8	14	1179	1240	492448
14	3	96.4	14	1711	1371	684430
15	3	90.7	14	1430	1243	82379
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5504.363			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	61.1	13	-	-	296168
2	2	70.3	13	1978	-	502507
3	2	76.8	13	1301	-	710055
4	1	60.9	13	-	-	63000
5	3	84.3	13	1519	1708	269469
6	1	53.4	13	-	-	478012
7	2	68	13	1841	-	683858
8	1	64	13	-	-	37430
9	1	60.1	13	-	-	244823
10	3	96.2	13	1895	1514	450821
11	2	74.2	13	1532	-	658984
12	2	74.4	13	1003	-	11863
13	1	63.9	13	-	-	219483
14	1	66.1	13	-	-	426736
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 100 Bandwidth 20MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5507.163			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93	6	1498	1647	985299
2	2	74.6	6	1807	-	1308771
3	2	81.6	6	1011	-	301471
4	1	53.6	6	-	-	624525
5	2	72.4	6	1190	-	946953
6	3	83.7	6	1536	1358	1267588
7	1	55.5	6	-	-	261911
8	2	75.8	6	1197	-	584235
9	2	80.8	6	1207	-	907188
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5501.563			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	67.6	20	1150	-	551983
2	3	90.7	20	1837	1212	99383
3	2	80.3	20	1985	-	243974
4	1	64.8	20	-	-	390133
5	3	87.3	20	1876	1008	532632
6	3	84	20	1499	1247	81599
7	1	59.5	20	-	-	227049
8	2	69.4	20	1804	-	371356
9	2	74.4	20	1899	-	516054
10	2	67.5	20	1079	-	63902
11	3	93.6	20	1521	1825	208162
12	2	75.1	20	1558	-	353429
13	1	50.4	20	-	-	499902
14	3	98	20	1096	1211	46040
15	1	58.4	20	-	-	191391
16	3	84.1	20	1433	1082	334947
17	2	73.5	20	1401	-	480909
18	3	91.8	20	1022	1912	28156
19	2	74.4	20	1316	-	172963
20						

Channel 102 Bandwidth 40MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 102 Bandwidth 40MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	326.16	3066	Yes
2	8	1519.76	658	Yes
3	16	1222.49	818	Yes
4	7	1567.40	638	Yes
5	2	1858.74	538	Yes
6	1	1930.50	518	Yes
7	3	1792.11	558	Yes
8	10	1432.66	698	Yes
9	6	1618.12	618	Yes
10	5	1672.24	598	Yes
11	4	1730.10	578	Yes
12	11	1392.76	718	Yes
13	14	1285.35	778	Yes
14	12	1355.01	738	Yes
15	17	1193.32	838	Yes
16		1084.60	922	Yes
17		512.82	1950	Yes
18		804.51	1243	Yes
19		415.97	2404	Yes
20		1636.66	611	Yes
21		582.07	1718	Yes
22		888.10	1126	Yes
23		557.72	1793	Yes
24		382.70	2613	Yes
25		583.77	1713	Yes
26		1169.59	855	Yes
27		404.53	2472	Yes
28		552.49	1810	Yes
29		385.51	2594	Yes
30		1416.43	706	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 102 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	25	2.60	216	Yes
2	24	1.80	189	Yes
3	24	1.80	160	Yes
4	23	1.30	202	Yes
5	25	2.30	217	Yes
6	25	2.40	182	Yes
7	23	1.30	167	Yes
8	25	2.40	191	Yes
9	24	2.10	186	Yes
10	24	1.90	200	No
11	29	5.00	178	Yes
12	27	3.70	151	Yes
13	24	1.60	196	Yes
14	23	1.30	224	Yes
15	26	3.10	175	Yes
16	25	2.40	154	Yes
17	28	3.90	170	Yes
18	27	3.40	205	Yes
19	24	1.90	185	Yes
20	28	4.00	152	Yes
21	29	4.50	176	Yes
22	26	2.90	230	Yes
23	25	2.40	204	Yes
24	24	1.70	187	Yes
25	26	3.20	220	No
26	23	1.00	228	Yes
27	27	3.40	163	Yes
28	26	3.00	226	Yes
29	23	1.30	208	No
30	29	5.00	229	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 102 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.60	315	Yes
2	16	6.80	310	Yes
3	16	6.80	284	Yes
4	16	6.30	331	Yes
5	16	7.30	477	Yes
6	17	7.40	352	Yes
7	16	6.30	379	Yes
8	17	7.40	215	Yes
9	16	7.10	239	Yes
10	16	6.90	353	Yes
11	18	10.00	264	Yes
12	18	8.70	411	Yes
13	16	6.60	277	Yes
14	16	6.30	491	Yes
15	17	8.10	407	Yes
16	17	7.40	243	Yes
17	18	8.90	312	Yes
18	17	8.40	483	Yes
19	16	6.90	414	Yes
20	18	9.00	327	Yes
21	18	9.50	428	Yes
22	17	7.90	348	Yes
23	17	7.40	344	Yes
24	16	6.70	456	Yes
25	17	8.20	248	Yes
26	16	6.00	474	Yes
27	17	8.40	209	No
28	17	8.00	263	Yes
29	16	6.30	405	No
30	18	10.00	295	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 102 Bandwidth 40MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.60	315	Yes
2	13	12.90	310	Yes
3	13	12.90	284	Yes
4	12	11.60	331	Yes
5	13	13.90	477	Yes
6	13	14.30	352	Yes
7	12	11.80	379	Yes
8	13	14.10	215	Yes
9	13	13.50	239	Yes
10	13	13.00	353	Yes
11	16	19.80	264	No
12	15	17.10	411	Yes
13	12	12.40	277	Yes
14	12	11.80	491	Yes
15	14	15.60	407	Yes
16	13	14.10	243	Yes
17	15	17.50	312	Yes
18	14	16.30	483	Yes
19	13	13.10	414	Yes
20	15	17.80	327	No
21	16	18.90	428	Yes
22	14	15.30	348	Yes
23	13	14.20	344	Yes
24	12	12.60	456	Yes
25	14	15.90	248	Yes
26	12	11.10	474	Yes
27	15	16.40	209	Yes
28	14	15.60	263	Yes
29	12	11.70	405	Yes
30	16	20.00	295	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	70	11	1168	-	591413
2	1	60.8	11	-	-	815813
3	1	60.7	11	-	-	117850
4	1	53.6	11	-	-	341492
5	1	66.2	11	-	-	565163
6	2	68.2	11	1935	-	786444
7	1	54.4	11	-	-	90332
8	2	67.3	11	1554	-	313436
9	1	64	11	-	-	537230
10	1	61.4	11	-	-	760859
11	3	98.9	11	1805	1263	62617
12	3	83.6	11	1313	1101	285592
13	1	57.7	11	-	-	509584
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	54.5	8	-	-	953964
2	2	75.8	8	1980	-	45794
3	2	67.4	8	1438	-	336076
4	3	86.1	8	1954	1547	625382
5	2	79.7	8	1007	-	917476
6	1	61.9	8	-	-	10058
7	3	87.6	8	1319	1445	300050
8	3	93.9	8	1662	1644	589724
9	2	73.7	8	1518	-	881233
10	2	68	8	1513	-	1171109
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	59	8	-	-	265018
2	2	77	8	1735	-	554842
3	1	51	8	-	-	846327
4	2	80.1	8	1307	-	1136121
5	2	75.4	8	1351	-	228960
6	1	54.3	8	-	-	519693
7	3	99.9	8	1223	1069	808595
8	2	76.8	8	1820	-	1099015
9	1	55.1	8	-	-	193329
10	2	74.2	8	1398	-	483257
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	3	87.1	6	1345	1551	966586
2	2	72.9	6	1699	-	1330599
3	3	95.3	6	1925	1252	196541
4	2	73.5	6	1893	-	559692
5	2	81.8	6	1856	-	922693
6	3	94.7	6	1432	1838	1284218
7	2	80.8	6	1829	-	151993
8	3	96.2	6	1680	1900	514474
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5530			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	51	10	-	-	585711
2	3	97.4	10	1288	1025	826028
3	3	92.4	10	1320	1880	71348
4	1	65.1	10	-	-	313845
5	2	78.9	10	1246	-	555080
6	2	77.3	10	1426	-	796971
7	3	97.6	10	1378	1400	41641
8	1	54.5	10	-	-	284044
9	1	63.6	10	-	-	526307
10	2	71.4	10	1630	-	767239
11	2	75.7	10	1750	-	11892
12	1	51.5	10	-	-	253954
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5530			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	53.2	10	-	-	496177
2	1	65.5	10	-	-	738185
3	3	96.4	10	1340	1616	977571
4	3	92.9	10	1256	1447	223540
5	1	51.6	10	-	-	466647
6	2	76.7	10	1664	-	707623
7	1	65.1	10	-	-	950890
8	3	88.2	10	1372	1013	193953
9	2	79.1	10	1118	-	436189
10	1	63	10	-	-	678580
11	1	64.2	10	-	-	920480
12	3	84.6	10	1396	1266	164125
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93.8	6	1806	1159	541409
2	1	59.4	6	-	-	865828
3	2	70.6	6	1484	-	1187649
4	2	81.6	6	1701	-	179453
5	2	80.5	6	1475	-	502280
6	3	94	6	1579	1965	823872
7	1	54.2	6	-	-	1148749
8	3	85	6	1783	1111	139626
9	2	81.2	6	1108	-	462605
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	91.5	10	1922	1801	587255
2	3	92.8	10	1511	1403	829166
3	2	76.4	10	1885	-	74941
4	2	75.6	10	1826	-	316695
5	3	94	10	1344	1260	558132
6	3	98.2	10	1206	1216	800023
7	2	73.8	10	1493	-	45215
8	2	82.5	10	1883	-	286937
9	2	70.8	10	1409	-	528863
10	3	90.7	10	1751	1337	769213
11	2	78.4	10	1784	-	15413
12	1	51.1	10	-	-	257563
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	53.6	9	-	-	545233
2	2	70.9	9	1613	-	808569
3	2	71.6	9	1541	-	1072660
4	2	76.6	9	1229	-	248335
5	1	52.4	9	-	-	512546
6	2	71.9	9	1164	-	775912
7	1	55	9	-	-	1041053
8	2	79.5	9	1989	-	215574
9	3	92.7	9	1812	1244	478629
10	2	67.1	9	1089	-	743994
11	3	88.1	9	1626	1039	1005975
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	83.1	8	1774	-	201531
2	1	57.7	8	-	-	492635
3	2	71.4	8	1012	-	782203
4	2	69.4	8	1090	-	1072800
5	1	56.6	8	-	-	166056
6	1	65.9	8	-	-	456650
7	2	74.1	8	1264	-	746627
8	2	69.7	8	1691	-	1036189
9	2	67.1	8	1667	-	130005
10	3	90.7	8	1677	1232	420002
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5518.899341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	70.3	20	1376	-	354386
2	1	61.8	20	-	-	500862
3	2	72.7	20	1764	-	47018
4	2	69.9	20	1923	-	191637
5	2	67.2	20	1973	-	336358
6	1	57.6	20	-	-	482923
7	2	78.6	20	1406	-	29194
8	3	91.4	20	1776	1230	173541
9	1	55.6	20	-	-	319370
10	1	58.3	20	-	-	464716
11	2	72.3	20	1357	-	11357
12	3	85.9	20	1061	1549	155749
13	3	83.5	20	1832	1046	300341
14	3	90.2	20	1328	1060	445227
15	3	88.5	20	1651	1314	588958
16	3	99.1	20	1503	1945	137737
17	1	55	20	-	-	283921
18	2	78	20	1947	-	427475
19	2	72	20	1523	-	572765
20	3	99.3	20	1154	1574	120152

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5516.899341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	55.5	15	-	-	332531
2	3	88.5	15	1956	1309	511809
3	2	74.4	15	1293	-	694009
4	1	54.7	15	-	-	128649
5	3	93.3	15	1898	1038	308943
6	2	67.8	15	1607	-	490388
7	2	72.6	15	1969	-	671354
8	2	78.7	15	1611	-	106039
9	2	67.1	15	1986	-	287237
10	1	66.6	15	-	-	469082
11	3	96.7	15	1765	1152	648673
12	2	71	15	1370	-	83832
13	1	61.2	15	-	-	265398
14	1	60.5	15	-	-	446759
15	2	83.3	15	1059	-	627749
16	1	59.1	15	-	-	61561
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5513.699341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	98.9	7	1543	1524	388317
2	1	56.6	7	-	-	680109
3	3	85.3	7	1296	1679	968396
4	1	64.2	7	-	-	62839
5	2	76.4	7	1861	-	352925
6	3	88.1	7	1598	1014	642858
7	3	87.1	7	1736	1955	931906
8	1	58.7	7	-	-	27005
9	1	65.7	7	-	-	317562
10	3	97.2	7	1040	1612	607197
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5513.299341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	74.3	6	1142	-	998467
2	2	81.3	6	1265	-	1321305
3	2	80.9	6	1780	-	312720
4	1	57.6	6	-	-	636461
5	1	60.9	6	-	-	959228
6	3	96.1	6	1729	1939	1278663
7	3	97.7	6	1849	1754	272666
8	2	67.9	6	1361	-	595704
9	3	85.1	6	1411	1180	918003
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5516.099341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	81.9	13	1753	-	796772
2	3	87.4	13	1999	1184	149550
3	2	68	13	1085	-	357212
4	2	76.7	13	1125	-	564618
5	3	99.5	13	1379	1948	769731
6	3	85.1	13	1402	1479	124210
7	3	100	13	1290	1446	331101
8	2	74.2	13	1458	-	538947
9	3	89	13	1720	1326	744095
10	1	61.6	13	-	-	98967
11	1	51.3	13	-	-	306626
12	2	74.6	13	1502	-	513218
13	2	72.9	13	1463	-	720136
14	1	56.9	13	-	-	73416
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5514.899341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	79.4	10	1732	-	327257
2	1	50.1	10	-	-	569945
3	3	98.5	10	1670	1593	809812
4	3	92.8	10	1466	1538	55714
5	1	57.7	10	-	-	298006
6	2	72.8	10	1073	-	539775
7	2	67.4	10	1429	-	781014
8	1	51.4	10	-	-	26037
9	1	65.6	10	-	-	268162
10	3	89	10	1029	1787	508731
11	3	96.1	10	1062	1656	750611
12	3	93.5	10	1757	1077	991485
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5517.299341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	91.4	16	1714	1158	167423
2	3	97.8	16	1393	1685	337374
3	1	59.4	16	-	-	509557
4	1	55.7	16	-	-	680361
5	1	50.5	16	-	-	147042
6	2	73.3	16	1495	-	317474
7	3	93.4	16	1210	1010	487570
8	2	75.4	16	1425	-	658296
9	1	51.3	16	-	-	126090
10	2	71.7	16	1949	-	296182
11	2	80.9	16	1810	-	466448
12	2	80	16	1133	-	637449
13	3	85.9	16	1852	1407	104577
14	2	79.2	16	1300	-	275462
15	2	76.5	16	1434	-	445950
16	1	63.9	16	-	-	617465
17	3	98.1	16	1831	1091	83628
18						
19						
20						

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5516.499341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	97.2	14	1530	1181	287987
2	1	64.4	14	-	-	482736
3	2	72.6	14	1153	-	675574
4	1	51.3	14	-	-	71370
5	2	74.3	14	1747	-	264389
6	1	51.5	14	-	-	458617
7	1	57.5	14	-	-	652378
8	1	62.4	14	-	-	47503
9	1	53.3	14	-	-	241079
10	3	90	14	1095	1427	433631
11	3	95.2	14	1367	1599	625860
12	2	67.7	14	1968	-	23577
13	2	80.4	14	1339	-	217000
14	2	71.8	14	1321	-	410148
15	2	79.1	14	1092	-	604072
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5514.099341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	80.6	8	1298	-	1087909
2	1	55.9	8	-	-	263813
3	3	93.8	8	1279	1156	527146
4	1	52.1	8	-	-	792543
5	1	64.7	8	-	-	1056425
6	2	83.3	8	1568	-	230987
7	1	61	8	-	-	495515
8	2	78	8	1931	-	758452
9	2	81.3	8	1123	-	1023016
10	3	97.6	8	1681	1348	198285
11	1	55.5	8	-	-	462996
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5517.699341			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	57.6	17	-	-	470435
2	2	69.3	17	1649	-	639160
3	2	68.5	17	1497	-	107218
4	1	56.9	17	-	-	278324
5	2	78.5	17	1520	-	448542
6	3	96.3	17	1262	1456	618070
7	1	53.5	17	-	-	86434
8	1	53.3	17	-	-	257266
9	2	68.5	17	1844	-	426743
10	2	74.5	17	1951	-	597350
11	2	73.5	17	1270	-	65283
12	3	92.2	17	1208	1966	235062
13	2	67	17	1868	-	406105
14	3	96.3	17	1974	1053	575649
15	1	51.9	17	-	-	44415
16	3	93.3	17	1327	1705	214445
17	3	97.3	17	1758	1177	384548
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5541.500659			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	83.4	19	1052	1391	496099
2	3	98.2	19	1847	1346	20780
3	1	57.6	19	-	-	173811
4	2	70.9	19	1167	-	326065
5	3	100	19	1567	1857	476679
6	1	51.7	19	-	-	2065
7	3	99.4	19	1374	1572	154140
8	2	79.9	19	1315	-	307044
9	3	85.5	19	1178	1960	458379
10	2	74.4	19	1412	-	611469
11	3	99.2	19	1128	1867	135472
12	1	64.7	19	-	-	289035
13	3	86.1	19	1555	1334	439859
14	3	86.5	19	1163	1437	591786
15	3	91.3	19	1836	1084	116621
16	1	53.8	19	-	-	270205
17	2	68.8	19	1219	-	422357
18	3	93.9	19	1131	1115	573306
19	3	88.3	19	1552	1840	97847
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5544.300659			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93.9	12	1204	1782	339878
2	3	96.4	12	1578	1015	547314
3	1	61.4	12	-	-	755917
4	3	98.9	12	1149	1183	107845
5	1	64.2	12	-	-	315606
6	2	77	12	1285	-	522176
7	1	53.3	12	-	-	730312
8	1	54.5	12	-	-	82519
9	1	57	12	-	-	290023
10	1	63.8	12	-	-	497654
11	2	76.7	12	1360	-	703865
12	1	55.9	12	-	-	56982
13	1	62.8	12	-	-	264447
14	3	90.1	12	1436	1051	470857
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5545.100659			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	63.7	10	-	-	793233
2	3	94.6	10	1127	1369	36551
3	2	83.1	10	1869	-	278227
4	3	89.9	10	1294	1907	519384
5	3	84.6	10	1719	1766	760232
6	1	57.7	10	-	-	6804
7	2	67.5	10	1322	-	248619
8	2	69.1	10	1760	-	490509
9	2	77	10	1718	-	731896
10	3	93.1	10	1483	1771	972069
11	2	71.9	10	1384	-	218919
12	1	54.3	10	-	-	461440
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5546.300659			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	88.7	7	1055	1507	842905
2	2	82.5	7	1048	-	1134506
3	3	88.1	7	1347	1788	226564
4	2	82.3	7	1635	-	517333
5	3	88.3	7	1283	1901	806606
6	3	98.2	7	1713	1940	1095662
7	1	52.3	7	-	-	191416
8	1	63.7	7	-	-	482032
9	3	99.4	7	1636	1031	771016
10	1	50.9	7	-	-	1063184
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5543.900659			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	72	13	1620	-	103450
2	3	99.4	13	1387	1715	296292
3	3	93.5	13	1967	1638	488879
4	3	94	13	1355	1934	682169
5	3	96.7	13	1482	1350	79588
6	3	97.3	13	1281	1341	272479
7	3	92.4	13	1658	1198	465376
8	1	66.1	13	-	-	661130
9	1	58.7	13	-	-	56004
10	2	68.4	13	1569	-	249034
11	3	86.4	13	1464	1139	441888
12	2	74.7	13	1359	-	635539
13	2	72.3	13	1107	-	32081
14	3	92	13	1892	1606	224896
15	1	58.1	13	-	-	419311
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5547.100659			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	63.9	5	-	-	1150601
2	3	84.3	5	1424	1056	15486
3	3	86.2	5	1772	1414	378079
4	2	70.7	5	1209	-	741620
5	2	74.8	5	1858	-	1104351
6	2	69.3	5	1725	-	1467311
7	2	68.3	5	1854	-	333734
8	2	76.9	5	1903	-	696872
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5543.500659			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	59.8	14	-	-	565165
2	3	88.4	14	1397	1110	756902
3	2	70.8	14	1748	-	153795
4	1	66.4	14	-	-	347896
5	2	74.7	14	1421	-	540370
6	2	75.5	14	1099	-	734511
7	2	78.5	14	1687	-	130152
8	1	53.6	14	-	-	323893
9	3	99.2	14	1528	1674	515495
10	3	90.7	14	1700	1917	707883
11	1	62.8	14	-	-	106455
12	2	72.5	14	1550	-	299598
13	3	83.8	14	1179	1240	492448
14	3	96.4	14	1711	1371	684430
15	3	90.7	14	1430	1243	82379
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5543.900659			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	61.1	13	-	-	296168
2	2	70.3	13	1978	-	502507
3	2	76.8	13	1301	-	710055
4	1	60.9	13	-	-	63000
5	3	84.3	13	1519	1708	269469
6	1	53.4	13	-	-	478012
7	2	68	13	1841	-	683858
8	1	64	13	-	-	37430
9	1	60.1	13	-	-	244823
10	3	96.2	13	1895	1514	450821
11	2	74.2	13	1532	-	658984
12	2	74.4	13	1003	-	11863
13	1	63.9	13	-	-	219483
14	1	66.1	13	-	-	426736
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 102 Bandwidth 40MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5546.700659			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93	6	1498	1647	985299
2	2	74.6	6	1807	-	1308771
3	2	81.6	6	1011	-	301471
4	1	53.6	6	-	-	624525
5	2	72.4	6	1190	-	946953
6	3	83.7	6	1536	1358	1267588
7	1	55.5	6	-	-	261911
8	2	75.8	6	1197	-	584235
9	2	80.8	6	1207	-	907188
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5541.100659			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	67.6	20	1150	-	551983
2	3	90.7	20	1837	1212	99383
3	2	80.3	20	1985	-	243974
4	1	64.8	20	-	-	390133
5	3	87.3	20	1876	1008	532632
6	3	84	20	1499	1247	81599
7	1	59.5	20	-	-	227049
8	2	69.4	20	1804	-	371356
9	2	74.4	20	1899	-	516054
10	2	67.5	20	1079	-	63902
11	3	93.6	20	1521	1825	208162
12	2	75.1	20	1558	-	353429
13	1	50.4	20	-	-	499902
14	3	98	20	1096	1211	46040
15	1	58.4	20	-	-	191391
16	3	84.1	20	1433	1082	334947
17	2	73.5	20	1401	-	480909
18	3	91.8	20	1022	1912	28156
19	2	74.4	20	1316	-	172963
20						

Channel 106 Bandwidth 80MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 106 Bandwidth 80MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	326.16	3066	Yes
2	8	1519.76	658	Yes
3	16	1222.49	818	Yes
4	7	1567.40	638	Yes
5	2	1858.74	538	Yes
6	1	1930.50	518	Yes
7	3	1792.11	558	Yes
8	10	1432.66	698	Yes
9	6	1618.12	618	Yes
10	5	1672.24	598	Yes
11	4	1730.10	578	Yes
12	11	1392.76	718	Yes
13	14	1285.35	778	Yes
14	12	1355.01	738	Yes
15	17	1193.32	838	Yes
16		1084.60	922	Yes
17		512.82	1950	Yes
18		804.51	1243	Yes
19		415.97	2404	Yes
20		1636.66	611	Yes
21		582.07	1718	Yes
22		888.10	1126	Yes
23		557.72	1793	Yes
24		382.70	2613	Yes
25		583.77	1713	Yes
26		1169.59	855	Yes
27		404.53	2472	Yes
28		552.49	1810	Yes
29		385.51	2594	Yes
30		1416.43	706	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 106 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	25	2.60	216	Yes
2	24	1.80	189	Yes
3	24	1.80	160	Yes
4	23	1.30	202	Yes
5	25	2.30	217	Yes
6	25	2.40	182	Yes
7	23	1.30	167	Yes
8	25	2.40	191	Yes
9	24	2.10	186	Yes
10	24	1.90	200	Yes
11	29	5.00	178	Yes
12	27	3.70	151	Yes
13	24	1.60	196	Yes
14	23	1.30	224	Yes
15	26	3.10	175	Yes
16	25	2.40	154	Yes
17	28	3.90	170	Yes
18	27	3.40	205	Yes
19	24	1.90	185	Yes
20	28	4.00	152	Yes
21	29	4.50	176	Yes
22	26	2.90	230	Yes
23	25	2.40	204	Yes
24	24	1.70	187	Yes
25	26	3.20	220	Yes
26	23	1.00	228	Yes
27	27	3.40	163	Yes
28	26	3.00	226	Yes
29	23	1.30	208	Yes
30	29	5.00	229	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 106 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.60	315	Yes
2	16	6.80	310	Yes
3	16	6.80	284	Yes
4	16	6.30	331	Yes
5	16	7.30	477	Yes
6	17	7.40	352	Yes
7	16	6.30	379	Yes
8	17	7.40	215	Yes
9	16	7.10	239	Yes
10	16	6.90	353	Yes
11	18	10.00	264	Yes
12	18	8.70	411	Yes
13	16	6.60	277	Yes
14	16	6.30	491	Yes
15	17	8.10	407	Yes
16	17	7.40	243	Yes
17	18	8.90	312	Yes
18	17	8.40	483	Yes
19	16	6.90	414	Yes
20	18	9.00	327	Yes
21	18	9.50	428	Yes
22	17	7.90	348	Yes
23	17	7.40	344	Yes
24	16	6.70	456	Yes
25	17	8.20	248	Yes
26	16	6.00	474	Yes
27	17	8.40	209	Yes
28	17	8.00	263	Yes
29	16	6.30	405	Yes
30	18	10.00	295	Yes

DFS Radar Parameters
FCC Radar Type 4
Channel 106 Bandwidth 80MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.60	315	Yes
2	13	12.90	310	Yes
3	13	12.90	284	Yes
4	12	11.60	331	Yes
5	13	13.90	477	Yes
6	13	14.30	352	Yes
7	12	11.80	379	No
8	13	14.10	215	Yes
9	13	13.50	239	Yes
10	13	13.00	353	Yes
11	16	19.80	264	Yes
12	15	17.10	411	Yes
13	12	12.40	277	No
14	12	11.80	491	Yes
15	14	15.60	407	Yes
16	13	14.10	243	Yes
17	15	17.50	312	Yes
18	14	16.30	483	Yes
19	13	13.10	414	Yes
20	15	17.80	327	No
21	16	18.90	428	Yes
22	14	15.30	348	Yes
23	13	14.20	344	Yes
24	12	12.60	456	Yes
25	14	15.90	248	Yes
26	12	11.10	474	Yes
27	15	16.40	209	Yes
28	14	15.60	263	Yes
29	12	11.70	405	Yes
30	16	20.00	295	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	70	11	1168	-	591413
2	1	60.8	11	-	-	815813
3	1	60.7	11	-	-	117850
4	1	53.6	11	-	-	341492
5	1	66.2	11	-	-	565163
6	2	68.2	11	1935	-	786444
7	1	54.4	11	-	-	90332
8	2	67.3	11	1554	-	313436
9	1	64	11	-	-	537230
10	1	61.4	11	-	-	760859
11	3	98.9	11	1805	1263	62617
12	3	83.6	11	1313	1101	285592
13	1	57.7	11	-	-	509584
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	54.5	8	-	-	953964
2	2	75.8	8	1980	-	45794
3	2	67.4	8	1438	-	336076
4	3	86.1	8	1954	1547	625382
5	2	79.7	8	1007	-	917476
6	1	61.9	8	-	-	10058
7	3	87.6	8	1319	1445	300050
8	3	93.9	8	1662	1644	589724
9	2	73.7	8	1518	-	881233
10	2	68	8	1513	-	1171109
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			3			Detection (Yes/No) Yes
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	59	8	-	-	265018
2	2	77	8	1735	-	554842
3	1	51	8	-	-	846327
4	2	80.1	8	1307	-	1136121
5	2	75.4	8	1351	-	228960
6	1	54.3	8	-	-	519693
7	3	99.9	8	1223	1069	808595
8	2	76.8	8	1820	-	1099015
9	1	55.1	8	-	-	193329
10	2	74.2	8	1398	-	483257
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			4			Detection (Yes/No) Yes
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	3	87.1	6	1345	1551	966586
2	2	72.9	6	1699	-	1330599
3	3	95.3	6	1925	1252	196541
4	2	73.5	6	1893	-	559692
5	2	81.8	6	1856	-	922693
6	3	94.7	6	1432	1838	1284218
7	2	80.8	6	1829	-	151993
8	3	96.2	6	1680	1900	514474
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5530			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	51	10	-	-	585711
2	3	97.4	10	1288	1025	826028
3	3	92.4	10	1320	1880	71348
4	1	65.1	10	-	-	313845
5	2	78.9	10	1246	-	555080
6	2	77.3	10	1426	-	796971
7	3	97.6	10	1378	1400	41641
8	1	54.5	10	-	-	284044
9	1	63.6	10	-	-	526307
10	2	71.4	10	1630	-	767239
11	2	75.7	10	1750	-	11892
12	1	51.5	10	-	-	253954
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5530			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	53.2	10	-	-	496177
2	1	65.5	10	-	-	738185
3	3	96.4	10	1340	1616	977571
4	3	92.9	10	1256	1447	223540
5	1	51.6	10	-	-	466647
6	2	76.7	10	1664	-	707623
7	1	65.1	10	-	-	950890
8	3	88.2	10	1372	1013	193953
9	2	79.1	10	1118	-	436189
10	1	63	10	-	-	678580
11	1	64.2	10	-	-	920480
12	3	84.6	10	1396	1266	164125
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93.8	6	1806	1159	541409
2	1	59.4	6	-	-	865828
3	2	70.6	6	1484	-	1187649
4	2	81.6	6	1701	-	179453
5	2	80.5	6	1475	-	502280
6	3	94	6	1579	1965	823872
7	1	54.2	6	-	-	1148749
8	3	85	6	1783	1111	139626
9	2	81.2	6	1108	-	462605
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	91.5	10	1922	1801	587255
2	3	92.8	10	1511	1403	829166
3	2	76.4	10	1885	-	74941
4	2	75.6	10	1826	-	316695
5	3	94	10	1344	1260	558132
6	3	98.2	10	1206	1216	800023
7	2	73.8	10	1493	-	45215
8	2	82.5	10	1883	-	286937
9	2	70.8	10	1409	-	528863
10	3	90.7	10	1751	1337	769213
11	2	78.4	10	1784	-	15413
12	1	51.1	10	-	-	257563
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	53.6	9	-	-	545233
2	2	70.9	9	1613	-	808569
3	2	71.6	9	1541	-	1072660
4	2	76.6	9	1229	-	248335
5	1	52.4	9	-	-	512546
6	2	71.9	9	1164	-	775912
7	1	55	9	-	-	1041053
8	2	79.5	9	1989	-	215574
9	3	92.7	9	1812	1244	478629
10	2	67.1	9	1089	-	743994
11	3	88.1	9	1626	1039	1005975
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5530			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	83.1	8	1774	-	201531
2	1	57.7	8	-	-	492635
3	2	71.4	8	1012	-	782203
4	2	69.4	8	1090	-	1072800
5	1	56.6	8	-	-	166056
6	1	65.9	8	-	-	456650
7	2	74.1	8	1264	-	746627
8	2	69.7	8	1691	-	1036189
9	2	67.1	8	1667	-	130005
10	3	90.7	8	1677	1232	420002
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5498.69961			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	70.3	20	1376	-	354386
2	1	61.8	20	-	-	500862
3	2	72.7	20	1764	-	47018
4	2	69.9	20	1923	-	191637
5	2	67.2	20	1973	-	336358
6	1	57.6	20	-	-	482923
7	2	78.6	20	1406	-	29194
8	3	91.4	20	1776	1230	173541
9	1	55.6	20	-	-	319370
10	1	58.3	20	-	-	464716
11	2	72.3	20	1357	-	11357
12	3	85.9	20	1061	1549	155749
13	3	83.5	20	1832	1046	300341
14	3	90.2	20	1328	1060	445227
15	3	88.5	20	1651	1314	588958
16	3	99.1	20	1503	1945	137737
17	1	55	20	-	-	283921
18	2	78	20	1947	-	427475
19	2	72	20	1523	-	572765
20	3	99.3	20	1154	1574	120152

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5496.69961			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	55.5	15	-	-	332531
2	3	88.5	15	1956	1309	511809
3	2	74.4	15	1293	-	694009
4	1	54.7	15	-	-	128649
5	3	93.3	15	1898	1038	308943
6	2	67.8	15	1607	-	490388
7	2	72.6	15	1969	-	671354
8	2	78.7	15	1611	-	106039
9	2	67.1	15	1986	-	287237
10	1	66.6	15	-	-	469082
11	3	96.7	15	1765	1152	648673
12	2	71	15	1370	-	83832
13	1	61.2	15	-	-	265398
14	1	60.5	15	-	-	446759
15	2	83.3	15	1059	-	627749
16	1	59.1	15	-	-	61561
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5493.49961			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	98.9	7	1543	1524	388317
2	1	56.6	7	-	-	680109
3	3	85.3	7	1296	1679	968396
4	1	64.2	7	-	-	62839
5	2	76.4	7	1861	-	352925
6	3	88.1	7	1598	1014	642858
7	3	87.1	7	1736	1955	931906
8	1	58.7	7	-	-	27005
9	1	65.7	7	-	-	317562
10	3	97.2	7	1040	1612	607197
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5493.09961			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	74.3	6	1142	-	998467
2	2	81.3	6	1265	-	1321305
3	2	80.9	6	1780	-	312720
4	1	57.6	6	-	-	636461
5	1	60.9	6	-	-	959228
6	3	96.1	6	1729	1939	1278663
7	3	97.7	6	1849	1754	272666
8	2	67.9	6	1361	-	595704
9	3	85.1	6	1411	1180	918003
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5495.89961			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	81.9	13	1753	-	796772
2	3	87.4	13	1999	1184	149550
3	2	68	13	1085	-	357212
4	2	76.7	13	1125	-	564618
5	3	99.5	13	1379	1948	769731
6	3	85.1	13	1402	1479	124210
7	3	100	13	1290	1446	331101
8	2	74.2	13	1458	-	538947
9	3	89	13	1720	1326	744095
10	1	61.6	13	-	-	98967
11	1	51.3	13	-	-	306626
12	2	74.6	13	1502	-	513218
13	2	72.9	13	1463	-	720136
14	1	56.9	13	-	-	73416
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5494.69961			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	79.4	10	1732	-	327257
2	1	50.1	10	-	-	569945
3	3	98.5	10	1670	1593	809812
4	3	92.8	10	1466	1538	55714
5	1	57.7	10	-	-	298006
6	2	72.8	10	1073	-	539775
7	2	67.4	10	1429	-	781014
8	1	51.4	10	-	-	26037
9	1	65.6	10	-	-	268162
10	3	89	10	1029	1787	508731
11	3	96.1	10	1062	1656	750611
12	3	93.5	10	1757	1077	991485
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5497.09961			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	91.4	16	1714	1158	167423
2	3	97.8	16	1393	1685	337374
3	1	59.4	16	-	-	509557
4	1	55.7	16	-	-	680361
5	1	50.5	16	-	-	147042
6	2	73.3	16	1495	-	317474
7	3	93.4	16	1210	1010	487570
8	2	75.4	16	1425	-	658296
9	1	51.3	16	-	-	126090
10	2	71.7	16	1949	-	296182
11	2	80.9	16	1810	-	466448
12	2	80	16	1133	-	637449
13	3	85.9	16	1852	1407	104577
14	2	79.2	16	1300	-	275462
15	2	76.5	16	1434	-	445950
16	1	63.9	16	-	-	617465
17	3	98.1	16	1831	1091	83628
18						
19						
20						

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5496.29961			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	97.2	14	1530	1181	287987
2	1	64.4	14	-	-	482736
3	2	72.6	14	1153	-	675574
4	1	51.3	14	-	-	71370
5	2	74.3	14	1747	-	264389
6	1	51.5	14	-	-	458617
7	1	57.5	14	-	-	652378
8	1	62.4	14	-	-	47503
9	1	53.3	14	-	-	241079
10	3	90	14	1095	1427	433631
11	3	95.2	14	1367	1599	625860
12	2	67.7	14	1968	-	23577
13	2	80.4	14	1339	-	217000
14	2	71.8	14	1321	-	410148
15	2	79.1	14	1092	-	604072
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5493.89961			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	80.6	8	1298	-	1087909
2	1	55.9	8	-	-	263813
3	3	93.8	8	1279	1156	527146
4	1	52.1	8	-	-	792543
5	1	64.7	8	-	-	1056425
6	2	83.3	8	1568	-	230987
7	1	61	8	-	-	495515
8	2	78	8	1931	-	758452
9	2	81.3	8	1123	-	1023016
10	3	97.6	8	1681	1348	198285
11	1	55.5	8	-	-	462996
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5497.49961			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	57.6	17	-	-	470435
2	2	69.3	17	1649	-	639160
3	2	68.5	17	1497	-	107218
4	1	56.9	17	-	-	278324
5	2	78.5	17	1520	-	448542
6	3	96.3	17	1262	1456	618070
7	1	53.5	17	-	-	86434
8	1	53.3	17	-	-	257266
9	2	68.5	17	1844	-	426743
10	2	74.5	17	1951	-	597350
11	2	73.5	17	1270	-	65283
12	3	92.2	17	1208	1966	235062
13	2	67	17	1868	-	406105
14	3	96.3	17	1974	1053	575649
15	1	51.9	17	-	-	44415
16	3	93.3	17	1327	1705	214445
17	3	97.3	17	1758	1177	384548
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5561.700391			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	83.4	19	1052	1391	496099
2	3	98.2	19	1847	1346	20780
3	1	57.6	19	-	-	173811
4	2	70.9	19	1167	-	326065
5	3	100	19	1567	1857	476679
6	1	51.7	19	-	-	2065
7	3	99.4	19	1374	1572	154140
8	2	79.9	19	1315	-	307044
9	3	85.5	19	1178	1960	458379
10	2	74.4	19	1412	-	611469
11	3	99.2	19	1128	1867	135472
12	1	64.7	19	-	-	289035
13	3	86.1	19	1555	1334	439859
14	3	86.5	19	1163	1437	591786
15	3	91.3	19	1836	1084	116621
16	1	53.8	19	-	-	270205
17	2	68.8	19	1219	-	422357
18	3	93.9	19	1131	1115	573306
19	3	88.3	19	1552	1840	97847
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5564.500391			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93.9	12	1204	1782	339878
2	3	96.4	12	1578	1015	547314
3	1	61.4	12	-	-	755917
4	3	98.9	12	1149	1183	107845
5	1	64.2	12	-	-	315606
6	2	77	12	1285	-	522176
7	1	53.3	12	-	-	730312
8	1	54.5	12	-	-	82519
9	1	57	12	-	-	290023
10	1	63.8	12	-	-	497654
11	2	76.7	12	1360	-	703865
12	1	55.9	12	-	-	56982
13	1	62.8	12	-	-	264447
14	3	90.1	12	1436	1051	470857
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5565.300391			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	63.7	10	-	-	793233
2	3	94.6	10	1127	1369	36551
3	2	83.1	10	1869	-	278227
4	3	89.9	10	1294	1907	519384
5	3	84.6	10	1719	1766	760232
6	1	57.7	10	-	-	6804
7	2	67.5	10	1322	-	248619
8	2	69.1	10	1760	-	490509
9	2	77	10	1718	-	731896
10	3	93.1	10	1483	1771	972069
11	2	71.9	10	1384	-	218919
12	1	54.3	10	-	-	461440
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5566.500391			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	88.7	7	1055	1507	842905
2	2	82.5	7	1048	-	1134506
3	3	88.1	7	1347	1788	226564
4	2	82.3	7	1635	-	517333
5	3	88.3	7	1283	1901	806606
6	3	98.2	7	1713	1940	1095662
7	1	52.3	7	-	-	191416
8	1	63.7	7	-	-	482032
9	3	99.4	7	1636	1031	771016
10	1	50.9	7	-	-	1063184
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5564.100391			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	72	13	1620	-	103450
2	3	99.4	13	1387	1715	296292
3	3	93.5	13	1967	1638	488879
4	3	94	13	1355	1934	682169
5	3	96.7	13	1482	1350	79588
6	3	97.3	13	1281	1341	272479
7	3	92.4	13	1658	1198	465376
8	1	66.1	13	-	-	661130
9	1	58.7	13	-	-	56004
10	2	68.4	13	1569	-	249034
11	3	86.4	13	1464	1139	441888
12	2	74.7	13	1359	-	635539
13	2	72.3	13	1107	-	32081
14	3	92	13	1892	1606	224896
15	1	58.1	13	-	-	419311
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5567.300391			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	63.9	5	-	-	1150601
2	3	84.3	5	1424	1056	15486
3	3	86.2	5	1772	1414	378079
4	2	70.7	5	1209	-	741620
5	2	74.8	5	1858	-	1104351
6	2	69.3	5	1725	-	1467311
7	2	68.3	5	1854	-	333734
8	2	76.9	5	1903	-	696872
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5563.700391			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	59.8	14	-	-	565165
2	3	88.4	14	1397	1110	756902
3	2	70.8	14	1748	-	153795
4	1	66.4	14	-	-	347896
5	2	74.7	14	1421	-	540370
6	2	75.5	14	1099	-	734511
7	2	78.5	14	1687	-	130152
8	1	53.6	14	-	-	323893
9	3	99.2	14	1528	1674	515495
10	3	90.7	14	1700	1917	707883
11	1	62.8	14	-	-	106455
12	2	72.5	14	1550	-	299598
13	3	83.8	14	1179	1240	492448
14	3	96.4	14	1711	1371	684430
15	3	90.7	14	1430	1243	82379
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5564.100391			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	61.1	13	-	-	296168
2	2	70.3	13	1978	-	502507
3	2	76.8	13	1301	-	710055
4	1	60.9	13	-	-	63000
5	3	84.3	13	1519	1708	269469
6	1	53.4	13	-	-	478012
7	2	68	13	1841	-	683858
8	1	64	13	-	-	37430
9	1	60.1	13	-	-	244823
10	3	96.2	13	1895	1514	450821
11	2	74.2	13	1532	-	658984
12	2	74.4	13	1003	-	11863
13	1	63.9	13	-	-	219483
14	1	66.1	13	-	-	426736
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 106 Bandwidth 80MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5566.900391			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93	6	1498	1647	985299
2	2	74.6	6	1807	-	1308771
3	2	81.6	6	1011	-	301471
4	1	53.6	6	-	-	624525
5	2	72.4	6	1190	-	946953
6	3	83.7	6	1536	1358	1267588
7	1	55.5	6	-	-	261911
8	2	75.8	6	1197	-	584235
9	2	80.8	6	1207	-	907188
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5561.300391			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	67.6	20	1150	-	551983
2	3	90.7	20	1837	1212	99383
3	2	80.3	20	1985	-	243974
4	1	64.8	20	-	-	390133
5	3	87.3	20	1876	1008	532632
6	3	84	20	1499	1247	81599
7	1	59.5	20	-	-	227049
8	2	69.4	20	1804	-	371356
9	2	74.4	20	1899	-	516054
10	2	67.5	20	1079	-	63902
11	3	93.6	20	1521	1825	208162
12	2	75.1	20	1558	-	353429
13	1	50.4	20	-	-	499902
14	3	98	20	1096	1211	46040
15	1	58.4	20	-	-	191391
16	3	84.1	20	1433	1082	334947
17	2	73.5	20	1401	-	480909
18	3	91.8	20	1022	1912	28156
19	2	74.4	20	1316	-	172963
20						

Channel 114 Bandwidth 160MHz

DFS Radar Parameters
FCC Radar Type 1
Channel 114 Bandwidth 160MHz

Trial #	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	12	326.16	3066	Yes
2	8	1519.76	658	Yes
3	16	1222.49	818	Yes
4	7	1567.40	638	Yes
5	2	1858.74	538	Yes
6	1	1930.50	518	Yes
7	3	1792.11	558	Yes
8	10	1432.66	698	Yes
9	6	1618.12	618	Yes
10	5	1672.24	598	Yes
11	4	1730.10	578	Yes
12	11	1392.76	718	Yes
13	14	1285.35	778	Yes
14	12	1355.01	738	Yes
15	17	1193.32	838	Yes
16		1084.60	922	Yes
17		512.82	1950	Yes
18		804.51	1243	Yes
19		415.97	2404	Yes
20		1636.66	611	Yes
21		582.07	1718	Yes
22		888.10	1126	Yes
23		557.72	1793	Yes
24		382.70	2613	Yes
25		583.77	1713	Yes
26		1169.59	855	Yes
27		404.53	2472	Yes
28		552.49	1810	Yes
29		385.51	2594	Yes
30		1416.43	706	Yes

DFS Radar Parameters
FCC Radar Type 2
Channel 114 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	25	2.60	216	Yes
2	24	1.80	189	Yes
3	24	1.80	160	Yes
4	23	1.30	202	Yes
5	25	2.30	217	Yes
6	25	2.40	182	Yes
7	23	1.30	167	Yes
8	25	2.40	191	Yes
9	24	2.10	186	Yes
10	24	1.90	200	Yes
11	29	5.00	178	Yes
12	27	3.70	151	Yes
13	24	1.60	196	Yes
14	23	1.30	224	Yes
15	26	3.10	175	Yes
16	25	2.40	154	Yes
17	28	3.90	170	Yes
18	27	3.40	205	Yes
19	24	1.90	185	Yes
20	28	4.00	152	Yes
21	29	4.50	176	Yes
22	26	2.90	230	Yes
23	25	2.40	204	Yes
24	24	1.70	187	Yes
25	26	3.20	220	Yes
26	23	1.00	228	Yes
27	27	3.40	163	Yes
28	26	3.00	226	Yes
29	23	1.30	208	Yes
30	29	5.00	229	Yes

DFS Radar Parameters
FCC Radar Type 3
Channel 114 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	17	7.60	315	Yes
2	16	6.80	310	Yes
3	16	6.80	284	Yes
4	16	6.30	331	Yes
5	16	7.30	477	Yes
6	17	7.40	352	Yes
7	16	6.30	379	Yes
8	17	7.40	215	Yes
9	16	7.10	239	Yes
10	16	6.90	353	Yes
11	18	10.00	264	Yes
12	18	8.70	411	Yes
13	16	6.60	277	Yes
14	16	6.30	491	Yes
15	17	8.10	407	No
16	17	7.40	243	Yes
17	18	8.90	312	Yes
18	17	8.40	483	No
19	16	6.90	414	Yes
20	18	9.00	327	No
21	18	9.50	428	Yes
22	17	7.90	348	Yes
23	17	7.40	344	Yes
24	16	6.70	456	Yes
25	17	8.20	248	Yes
26	16	6.00	474	Yes
27	17	8.40	209	Yes
28	17	8.00	263	Yes
29	16	6.30	405	No
30	18	10.00	295	No

DFS Radar Parameters
FCC Radar Type 4
Channel 114 Bandwidth 160MHz

Trial #	Number Pulses per Burst	Pulse Width (Microseconds)	Pulse Repetition Interval (Microseconds)	Detection (Yes / No)
1	14	14.60	315	Yes
2	13	12.90	310	Yes
3	13	12.90	284	Yes
4	12	11.60	331	Yes
5	13	13.90	477	Yes
6	13	14.30	352	Yes
7	12	11.80	379	Yes
8	13	14.10	215	No
9	13	13.50	239	Yes
10	13	13.00	353	Yes
11	16	19.80	264	Yes
12	15	17.10	411	Yes
13	12	12.40	277	Yes
14	12	11.80	491	Yes
15	14	15.60	407	Yes
16	13	14.10	243	Yes
17	15	17.50	312	Yes
18	14	16.30	483	Yes
19	13	13.10	414	Yes
20	15	17.80	327	Yes
21	16	18.90	428	Yes
22	14	15.30	348	Yes
23	13	14.20	344	Yes
24	12	12.60	456	Yes
25	14	15.90	248	Yes
26	12	11.10	474	No
27	15	16.40	209	No
28	14	15.60	263	Yes
29	12	11.70	405	No
30	16	20.00	295	Yes

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			1			Detection (Yes/No)
Number of Bursts in Trial:			13			
Chirp Center Frequency:			5570			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	70	11	1168	-	591413
2	1	60.8	11	-	-	815813
3	1	60.7	11	-	-	117850
4	1	53.6	11	-	-	341492
5	1	66.2	11	-	-	565163
6	2	68.2	11	1935	-	786444
7	1	54.4	11	-	-	90332
8	2	67.3	11	1554	-	313436
9	1	64	11	-	-	537230
10	1	61.4	11	-	-	760859
11	3	98.9	11	1805	1263	62617
12	3	83.6	11	1313	1101	285592
13	1	57.7	11	-	-	509584
14						
15						
16						
17						
18						
19						
20						

Trial Number:			2			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5570			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	54.5	8	-	-	953964
2	2	75.8	8	1980	-	45794
3	2	67.4	8	1438	-	336076
4	3	86.1	8	1954	1547	625382
5	2	79.7	8	1007	-	917476
6	1	61.9	8	-	-	10058
7	3	87.6	8	1319	1445	300050
8	3	93.9	8	1662	1644	589724
9	2	73.7	8	1518	-	881233
10	2	68	8	1513	-	1171109
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			3			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5570			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	59	8	-	-	265018
2	2	77	8	1735	-	554842
3	1	51	8	-	-	846327
4	2	80.1	8	1307	-	1136121
5	2	75.4	8	1351	-	228960
6	1	54.3	8	-	-	519693
7	3	99.9	8	1223	1069	808595
8	2	76.8	8	1820	-	1099015
9	1	55.1	8	-	-	193329
10	2	74.2	8	1398	-	483257
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			4			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5570			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	3	87.1	6	1345	1551	966586
2	2	72.9	6	1699	-	1330599
3	3	95.3	6	1925	1252	196541
4	2	73.5	6	1893	-	559692
5	2	81.8	6	1856	-	922693
6	3	94.7	6	1432	1838	1284218
7	2	80.8	6	1829	-	151993
8	3	96.2	6	1680	1900	514474
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			5			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	51	10	-	-	585711
2	3	97.4	10	1288	1025	826028
3	3	92.4	10	1320	1880	71348
4	1	65.1	10	-	-	313845
5	2	78.9	10	1246	-	555080
6	2	77.3	10	1426	-	796971
7	3	97.6	10	1378	1400	41641
8	1	54.5	10	-	-	284044
9	1	63.6	10	-	-	526307
10	2	71.4	10	1630	-	767239
11	2	75.7	10	1750	-	11892
12	1	51.5	10	-	-	253954
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			6			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5570			Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (usec)	Pulse 2-to-3 Spacing (usec)	Starting Location Within Interval (usec)
1	1	53.2	10	-	-	496177
2	1	65.5	10	-	-	738185
3	3	96.4	10	1340	1616	977571
4	3	92.9	10	1256	1447	223540
5	1	51.6	10	-	-	466647
6	2	76.7	10	1664	-	707623
7	1	65.1	10	-	-	950890
8	3	88.2	10	1372	1013	193953
9	2	79.1	10	1118	-	436189
10	1	63	10	-	-	678580
11	1	64.2	10	-	-	920480
12	3	84.6	10	1396	1266	164125
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			7			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5570			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93.8	6	1806	1159	541409
2	1	59.4	6	-	-	865828
3	2	70.6	6	1484	-	1187649
4	2	81.6	6	1701	-	179453
5	2	80.5	6	1475	-	502280
6	3	94	6	1579	1965	823872
7	1	54.2	6	-	-	1148749
8	3	85	6	1783	1111	139626
9	2	81.2	6	1108	-	462605
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			8			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5570			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	91.5	10	1922	1801	587255
2	3	92.8	10	1511	1403	829166
3	2	76.4	10	1885	-	74941
4	2	75.6	10	1826	-	316695
5	3	94	10	1344	1260	558132
6	3	98.2	10	1206	1216	800023
7	2	73.8	10	1493	-	45215
8	2	82.5	10	1883	-	286937
9	2	70.8	10	1409	-	528863
10	3	90.7	10	1751	1337	769213
11	2	78.4	10	1784	-	15413
12	1	51.1	10	-	-	257563
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			9			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5570			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	53.6	9	-	-	545233
2	2	70.9	9	1613	-	808569
3	2	71.6	9	1541	-	1072660
4	2	76.6	9	1229	-	248335
5	1	52.4	9	-	-	512546
6	2	71.9	9	1164	-	775912
7	1	55	9	-	-	1041053
8	2	79.5	9	1989	-	215574
9	3	92.7	9	1812	1244	478629
10	2	67.1	9	1089	-	743994
11	3	88.1	9	1626	1039	1005975
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			10			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5570			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	83.1	8	1774	-	201531
2	1	57.7	8	-	-	492635
3	2	71.4	8	1012	-	782203
4	2	69.4	8	1090	-	1072800
5	1	56.6	8	-	-	166056
6	1	65.9	8	-	-	456650
7	2	74.1	8	1264	-	746627
8	2	69.7	8	1691	-	1036189
9	2	67.1	8	1667	-	130005
10	3	90.7	8	1677	1232	420002
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			11			Detection (Yes/No)
Number of Bursts in Trial:			20			
Chirp Center Frequency:			5499.4865			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	70.3	20	1376	-	354386
2	1	61.8	20	-	-	500862
3	2	72.7	20	1764	-	47018
4	2	69.9	20	1923	-	191637
5	2	67.2	20	1973	-	336358
6	1	57.6	20	-	-	482923
7	2	78.6	20	1406	-	29194
8	3	91.4	20	1776	1230	173541
9	1	55.6	20	-	-	319370
10	1	58.3	20	-	-	464716
11	2	72.3	20	1357	-	11357
12	3	85.9	20	1061	1549	155749
13	3	83.5	20	1832	1046	300341
14	3	90.2	20	1328	1060	445227
15	3	88.5	20	1651	1314	588958
16	3	99.1	20	1503	1945	137737
17	1	55	20	-	-	283921
18	2	78	20	1947	-	427475
19	2	72	20	1523	-	572765
20	3	99.3	20	1154	1574	120152

Trial Number:			12			Detection (Yes/No)
Number of Bursts in Trial:			16			
Chirp Center Frequency:			5497.4865			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	55.5	15	-	-	332531
2	3	88.5	15	1956	1309	511809
3	2	74.4	15	1293	-	694009
4	1	54.7	15	-	-	128649
5	3	93.3	15	1898	1038	308943
6	2	67.8	15	1607	-	490388
7	2	72.6	15	1969	-	671354
8	2	78.7	15	1611	-	106039
9	2	67.1	15	1986	-	287237
10	1	66.6	15	-	-	469082
11	3	96.7	15	1765	1152	648673
12	2	71	15	1370	-	83832
13	1	61.2	15	-	-	265398
14	1	60.5	15	-	-	446759
15	2	83.3	15	1059	-	627749
16	1	59.1	15	-	-	61561
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			13			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5494.2865			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	98.9	7	1543	1524	388317
2	1	56.6	7	-	-	680109
3	3	85.3	7	1296	1679	968396
4	1	64.2	7	-	-	62839
5	2	76.4	7	1861	-	352925
6	3	88.1	7	1598	1014	642858
7	3	87.1	7	1736	1955	931906
8	1	58.7	7	-	-	27005
9	1	65.7	7	-	-	317562
10	3	97.2	7	1040	1612	607197
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			14			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5493.8865			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	74.3	6	1142	-	998467
2	2	81.3	6	1265	-	1321305
3	2	80.9	6	1780	-	312720
4	1	57.6	6	-	-	636461
5	1	60.9	6	-	-	959228
6	3	96.1	6	1729	1939	1278663
7	3	97.7	6	1849	1754	272666
8	2	67.9	6	1361	-	595704
9	3	85.1	6	1411	1180	918003
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			15			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5496.6865			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	81.9	13	1753	-	796772
2	3	87.4	13	1999	1184	149550
3	2	68	13	1085	-	357212
4	2	76.7	13	1125	-	564618
5	3	99.5	13	1379	1948	769731
6	3	85.1	13	1402	1479	124210
7	3	100	13	1290	1446	331101
8	2	74.2	13	1458	-	538947
9	3	89	13	1720	1326	744095
10	1	61.6	13	-	-	98967
11	1	51.3	13	-	-	306626
12	2	74.6	13	1502	-	513218
13	2	72.9	13	1463	-	720136
14	1	56.9	13	-	-	73416
15						
16						
17						
18						
19						
20						

Trial Number:			16			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5495.4865			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	79.4	10	1732	-	327257
2	1	50.1	10	-	-	569945
3	3	98.5	10	1670	1593	809812
4	3	92.8	10	1466	1538	55714
5	1	57.7	10	-	-	298006
6	2	72.8	10	1073	-	539775
7	2	67.4	10	1429	-	781014
8	1	51.4	10	-	-	26037
9	1	65.6	10	-	-	268162
10	3	89	10	1029	1787	508731
11	3	96.1	10	1062	1656	750611
12	3	93.5	10	1757	1077	991485
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			17			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5497.8865			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	91.4	16	1714	1158	167423
2	3	97.8	16	1393	1685	337374
3	1	59.4	16	-	-	509557
4	1	55.7	16	-	-	680361
5	1	50.5	16	-	-	147042
6	2	73.3	16	1495	-	317474
7	3	93.4	16	1210	1010	487570
8	2	75.4	16	1425	-	658296
9	1	51.3	16	-	-	126090
10	2	71.7	16	1949	-	296182
11	2	80.9	16	1810	-	466448
12	2	80	16	1133	-	637449
13	3	85.9	16	1852	1407	104577
14	2	79.2	16	1300	-	275462
15	2	76.5	16	1434	-	445950
16	1	63.9	16	-	-	617465
17	3	98.1	16	1831	1091	83628
18						
19						
20						

Trial Number:			18			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5497.0865			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	97.2	14	1530	1181	287987
2	1	64.4	14	-	-	482736
3	2	72.6	14	1153	-	675574
4	1	51.3	14	-	-	71370
5	2	74.3	14	1747	-	264389
6	1	51.5	14	-	-	458617
7	1	57.5	14	-	-	652378
8	1	62.4	14	-	-	47503
9	1	53.3	14	-	-	241079
10	3	90	14	1095	1427	433631
11	3	95.2	14	1367	1599	625860
12	2	67.7	14	1968	-	23577
13	2	80.4	14	1339	-	217000
14	2	71.8	14	1321	-	410148
15	2	79.1	14	1092	-	604072
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			19			Detection (Yes/No)
Number of Bursts in Trial:			11			
Chirp Center Frequency:			5494.6865			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	80.6	8	1298	-	1087909
2	1	55.9	8	-	-	263813
3	3	93.8	8	1279	1156	527146
4	1	52.1	8	-	-	792543
5	1	64.7	8	-	-	1056425
6	2	83.3	8	1568	-	230987
7	1	61	8	-	-	495515
8	2	78	8	1931	-	758452
9	2	81.3	8	1123	-	1023016
10	3	97.6	8	1681	1348	198285
11	1	55.5	8	-	-	462996
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			20			Detection (Yes/No)
Number of Bursts in Trial:			17			
Chirp Center Frequency:			5498.2865			
						Yes
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	57.6	17	-	-	470435
2	2	69.3	17	1649	-	639160
3	2	68.5	17	1497	-	107218
4	1	56.9	17	-	-	278324
5	2	78.5	17	1520	-	448542
6	3	96.3	17	1262	1456	618070
7	1	53.5	17	-	-	86434
8	1	53.3	17	-	-	257266
9	2	68.5	17	1844	-	426743
10	2	74.5	17	1951	-	597350
11	2	73.5	17	1270	-	65283
12	3	92.2	17	1208	1966	235062
13	2	67	17	1868	-	406105
14	3	96.3	17	1974	1053	575649
15	1	51.9	17	-	-	44415
16	3	93.3	17	1327	1705	214445
17	3	97.3	17	1758	1177	384548
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			21			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5640.9135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	83.4	19	1052	1391	496099
2	3	98.2	19	1847	1346	20780
3	1	57.6	19	-	-	173811
4	2	70.9	19	1167	-	326065
5	3	100	19	1567	1857	476679
6	1	51.7	19	-	-	2065
7	3	99.4	19	1374	1572	154140
8	2	79.9	19	1315	-	307044
9	3	85.5	19	1178	1960	458379
10	2	74.4	19	1412	-	611469
11	3	99.2	19	1128	1867	135472
12	1	64.7	19	-	-	289035
13	3	86.1	19	1555	1334	439859
14	3	86.5	19	1163	1437	591786
15	3	91.3	19	1836	1084	116621
16	1	53.8	19	-	-	270205
17	2	68.8	19	1219	-	422357
18	3	93.9	19	1131	1115	573306
19	3	88.3	19	1552	1840	97847
20						

Trial Number:			22			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5643.7135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93.9	12	1204	1782	339878
2	3	96.4	12	1578	1015	547314
3	1	61.4	12	-	-	755917
4	3	98.9	12	1149	1183	107845
5	1	64.2	12	-	-	315606
6	2	77	12	1285	-	522176
7	1	53.3	12	-	-	730312
8	1	54.5	12	-	-	82519
9	1	57	12	-	-	290023
10	1	63.8	12	-	-	497654
11	2	76.7	12	1360	-	703865
12	1	55.9	12	-	-	56982
13	1	62.8	12	-	-	264447
14	3	90.1	12	1436	1051	470857
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			23			Detection (Yes/No)
Number of Bursts in Trial:			12			
Chirp Center Frequency:			5644.5135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	63.7	10	-	-	793233
2	3	94.6	10	1127	1369	36551
3	2	83.1	10	1869	-	278227
4	3	89.9	10	1294	1907	519384
5	3	84.6	10	1719	1766	760232
6	1	57.7	10	-	-	6804
7	2	67.5	10	1322	-	248619
8	2	69.1	10	1760	-	490509
9	2	77	10	1718	-	731896
10	3	93.1	10	1483	1771	972069
11	2	71.9	10	1384	-	218919
12	1	54.3	10	-	-	461440
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			24			Detection (Yes/No)
Number of Bursts in Trial:			10			
Chirp Center Frequency:			5645.7135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	88.7	7	1055	1507	842905
2	2	82.5	7	1048	-	1134506
3	3	88.1	7	1347	1788	226564
4	2	82.3	7	1635	-	517333
5	3	88.3	7	1283	1901	806606
6	3	98.2	7	1713	1940	1095662
7	1	52.3	7	-	-	191416
8	1	63.7	7	-	-	482032
9	3	99.4	7	1636	1031	771016
10	1	50.9	7	-	-	1063184
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			25			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5643.3135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	72	13	1620	-	103450
2	3	99.4	13	1387	1715	296292
3	3	93.5	13	1967	1638	488879
4	3	94	13	1355	1934	682169
5	3	96.7	13	1482	1350	79588
6	3	97.3	13	1281	1341	272479
7	3	92.4	13	1658	1198	465376
8	1	66.1	13	-	-	661130
9	1	58.7	13	-	-	56004
10	2	68.4	13	1569	-	249034
11	3	86.4	13	1464	1139	441888
12	2	74.7	13	1359	-	635539
13	2	72.3	13	1107	-	32081
14	3	92	13	1892	1606	224896
15	1	58.1	13	-	-	419311
16						
17						
18						
19						
20						

Trial Number:			26			Detection (Yes/No)
Number of Bursts in Trial:			8			
Chirp Center Frequency:			5646.5135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	63.9	5	-	-	1150601
2	3	84.3	5	1424	1056	15486
3	3	86.2	5	1772	1414	378079
4	2	70.7	5	1209	-	741620
5	2	74.8	5	1858	-	1104351
6	2	69.3	5	1725	-	1467311
7	2	68.3	5	1854	-	333734
8	2	76.9	5	1903	-	696872
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			27			Detection (Yes/No)
Number of Bursts in Trial:			15			
Chirp Center Frequency:			5642.9135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	59.8	14	-	-	565165
2	3	88.4	14	1397	1110	756902
3	2	70.8	14	1748	-	153795
4	1	66.4	14	-	-	347896
5	2	74.7	14	1421	-	540370
6	2	75.5	14	1099	-	734511
7	2	78.5	14	1687	-	130152
8	1	53.6	14	-	-	323893
9	3	99.2	14	1528	1674	515495
10	3	90.7	14	1700	1917	707883
11	1	62.8	14	-	-	106455
12	2	72.5	14	1550	-	299598
13	3	83.8	14	1179	1240	492448
14	3	96.4	14	1711	1371	684430
15	3	90.7	14	1430	1243	82379
16						
17						
18						
19						
20						

Trial Number:			28			Detection (Yes/No)
Number of Bursts in Trial:			14			
Chirp Center Frequency:			5643.3135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	1	61.1	13	-	-	296168
2	2	70.3	13	1978	-	502507
3	2	76.8	13	1301	-	710055
4	1	60.9	13	-	-	63000
5	3	84.3	13	1519	1708	269469
6	1	53.4	13	-	-	478012
7	2	68	13	1841	-	683858
8	1	64	13	-	-	37430
9	1	60.1	13	-	-	244823
10	3	96.2	13	1895	1514	450821
11	2	74.2	13	1532	-	658984
12	2	74.4	13	1003	-	11863
13	1	63.9	13	-	-	219483
14	1	66.1	13	-	-	426736
15						
16						
17						
18						
19						
20						

DFS Radar Parameters
FCC Radar Type 5
Channel 114 Bandwidth 160MHz

Trial Number:			29			Detection (Yes/No)
Number of Bursts in Trial:			9			
Chirp Center Frequency:			5646.1135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	3	93	6	1498	1647	985299
2	2	74.6	6	1807	-	1308771
3	2	81.6	6	1011	-	301471
4	1	53.6	6	-	-	624525
5	2	72.4	6	1190	-	946953
6	3	83.7	6	1536	1358	1267588
7	1	55.5	6	-	-	261911
8	2	75.8	6	1197	-	584235
9	2	80.8	6	1207	-	907188
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

Trial Number:			30			Detection (Yes/No)
Number of Bursts in Trial:			19			
Chirp Center Frequency:			5640.5135			
Burst	Number of Pulses	Pulse Width (Microseconds)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 Spacing (µsec)	Starting Location Within Interval (µsec)
1	2	67.6	20	1150	-	551983
2	3	90.7	20	1837	1212	99383
3	2	80.3	20	1985	-	243974
4	1	64.8	20	-	-	390133
5	3	87.3	20	1876	1008	532632
6	3	84	20	1499	1247	81599
7	1	59.5	20	-	-	227049
8	2	69.4	20	1804	-	371356
9	2	74.4	20	1899	-	516054
10	2	67.5	20	1079	-	63902
11	3	93.6	20	1521	1825	208162
12	2	75.1	20	1558	-	353429
13	1	50.4	20	-	-	499902
14	3	98	20	1096	1211	46040
15	1	58.4	20	-	-	191391
16	3	84.1	20	1433	1082	334947
17	2	73.5	20	1401	-	480909
18	3	91.8	20	1022	1912	28156
19	2	74.4	20	1316	-	172963
20						