

SAVE THESE INSTRUCTIONS

SET UP AND INSTALLATION



Before installation, make sure the surface you intend to mount the product on is free of moisture, oil, grease, dust and dirt to ensure proper adhesion. Test painted surfaces. Adhesive tape may damage surface when removing.

SPECIFICATIONS


Battery type: AA *3 per unit

Rating: max 1.8W, 4.5V / DC, 2.4 GHz


PARTS



FUNCTIONS

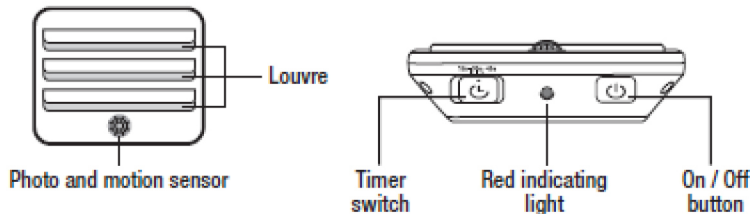

OPERATING SENSING RANGE



PIR sensor detection distance: 3-5m

Detection angle: 100°

Sensor Range: 20° 5m, 40° 3m

Motion Sensor Night Light

LED automatically turns on when sensor detects motion and there is a lack of ambient light; automatically turns off when motion stops or there is sufficient ambient light.

Adjustable Timer

LED automatically turns off if no motion is detected by motion sensor for 15 / 30 / 45 seconds based on timer switch position

Red Indicating Light

When the red light blinks the units are linked.

Distance between 2 units maximum
8 m / 26.2 ft

Units are in linkable mode when the linking indicating light is blinking.

All linked units will turn on within 0.5 second when one of the units detects motion in low ambient environment

This device complies with Part 15 of the FCC Rules and Industry standard. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

SAVE THESE INSTRUCTIONS

SET UP AND INSTALLATION

Before installation, make sure the surface you intend to mount the product on is free of moisture, oil, grease, dust and dirt to ensure proper adhesion. Test painted surfaces. Adhesive tape may damage surface when removing.


INSTALLATION

There are 3 ways to mount the unit.

A. Double-sided foam adhesive tape: Mark the desired area where you want to install. Remove one side of the tape and secure to the back of the LED light unit. Then remove the other side of the tape and secure to where you want to install.

B. Drywall surface mounting anchor screw: Place the mounting plate over the desired mounting location and mark the center of the holes to be drilled. (FIG. 0). Drill two pilot holes 0.45 - 0.50cm / 0.18 - 0.20 in diameter into the surface (FIG. 0). Insert the anchors (FIG. 0). Place the mounting plate over the holes and screw in the mounting screws 2 cm / 0.79 in (FIG. 0) to secure.

C. Wood surface mounting screw: Place the mounting plate over the desired mounting location and mark the center of the holes to be drilled. Then place the mounting plate over the marks and screw in the mounting screws 1.2 cm / 0.47 in to secure (FIG. 0).

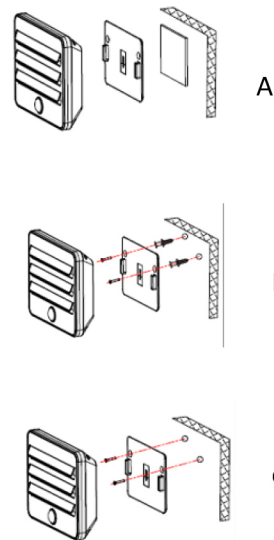

SETUP

There are 2 ways to operate the units:

A. Stand-alone unit: Set the timer switch to your desired duration of the lights to be turned on. (FIG. 1) Insert 3 batteries in each unit. Press the On / Off button once, the light will turn on. If there is sufficient ambient light or no motion is detected, the light will turn off when the preset time is elapsed.

B. Link with other units

Set the timer switch to your desired duration of the light to be turned on. Press the ON/OFF button twice. The red indicator light will turn on and the flash indicating the units are linked. Repeat for all other units. All linked units will turn on within 0.5 seconds when one of the units detects motion.

PAIRING new units (All units within the package are paired at the time of purchase)

1. Take any one unit as your principal unit. Insert 2 batteries first. When inserting the 3rd battery, press and hold ON/OFF button. The red indicator light will flash indicating the unit is ready to be paired.
2. Pairing with the principal unit. Insert all 3 batteries. Press and hold ON/OFF Button. The unit light will flash 2 times in 3 seconds. Pairing is complete. Release the ON/OFF button.
3. Repeat (2) for the next unit/s to be paired.

Pairing Time Limit (3 minutes): The Indicator light of the principal unit will turn off after 3 minutes. After 3 minutes, you will need to re-start the entire pairing procedure.

LOW BATTERY SIGNAL

When batteries are running low, the unit light, when detects motion, will flash for 10 seconds signalling low batteries and replacements are need.

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.