


Appendix D. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	62%
Test Engineer	Jacky Ho	Configurations	2.4G + 3G TX / Mode 4

Horizontal

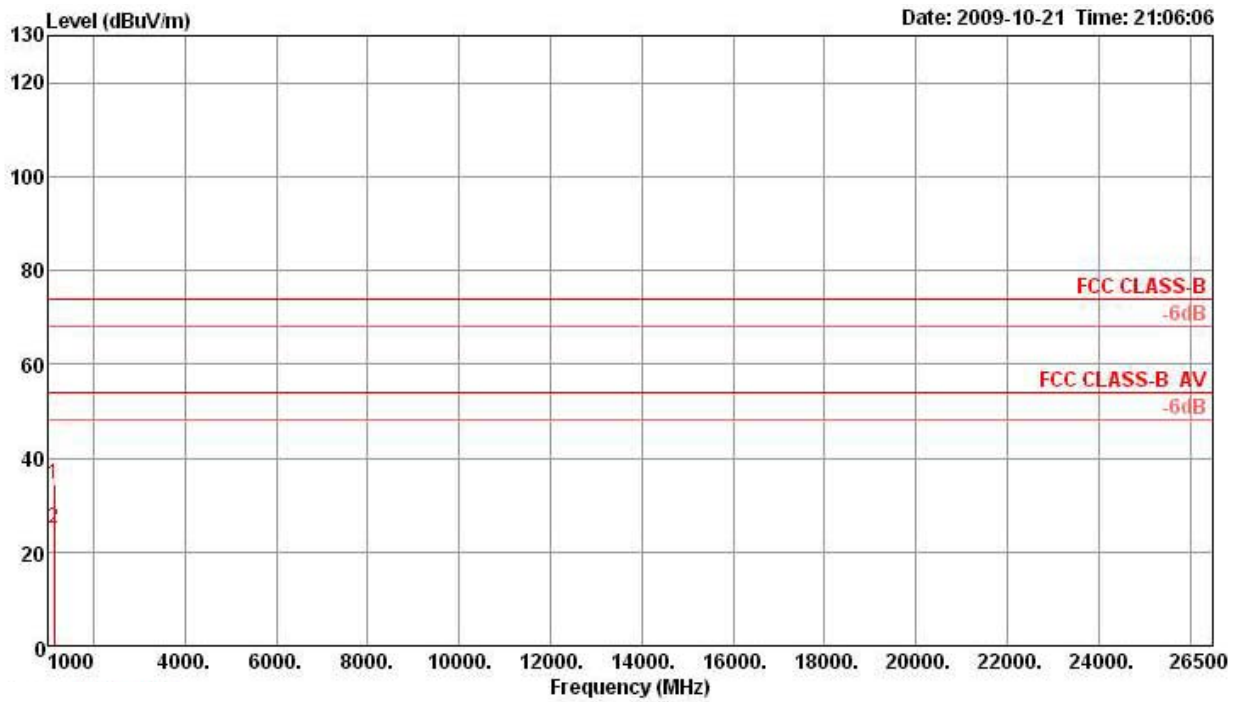

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	1144.00	34.25	74.00	-39.75	41.43	2.80	34.46	24.48	270	100	Peak	HORIZONTAL
2 a	1144.00	24.97	54.00	-29.03	32.15	2.80	34.46	24.48	270	100	Average	HORIZONTAL

Vertical

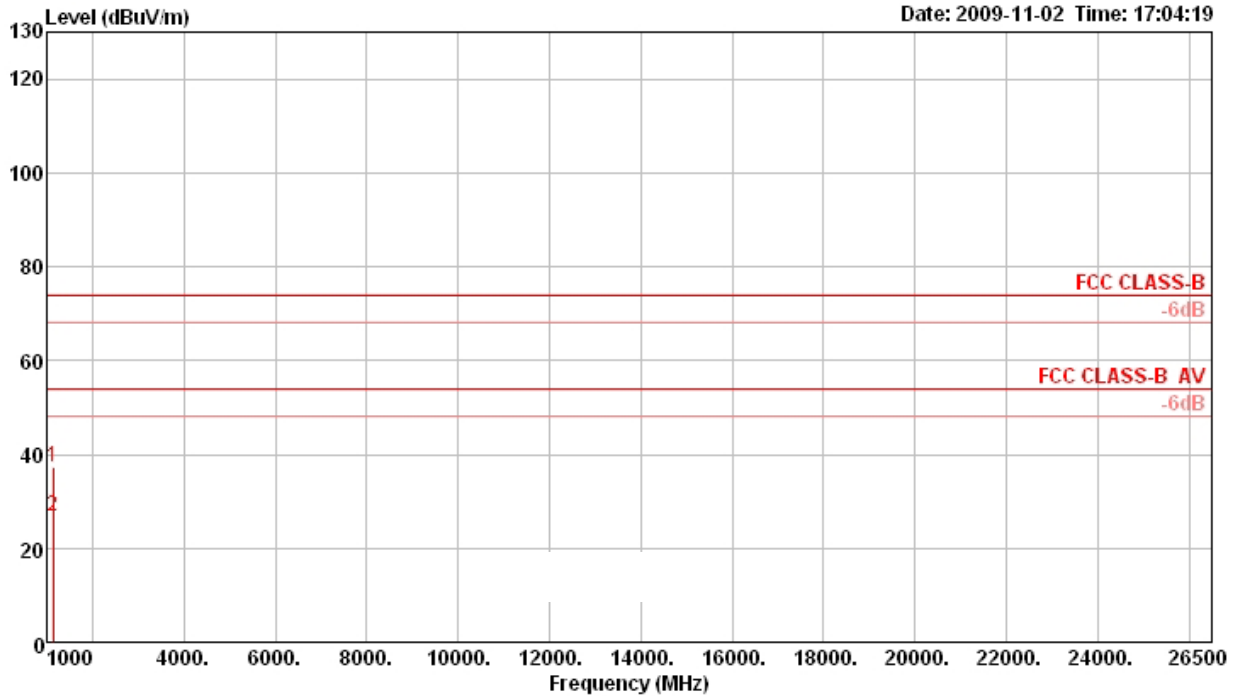

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	1144.00	37.27	74.00	-36.73	44.45	2.80	34.46	24.48	187	100	Peak	VERTICAL
2 a	1144.00	26.73	54.00	-27.27	33.91	2.80	34.46	24.48	187	100	Average	VERTICAL