



WONDERFUL VOICE

深圳市美妙之音科技有限公司
SHENZHEN WONDERFUL VOICE TECHNOLOGY CO., LTD.

Add: Rm1601, Pengji Business building, No.50
Bagua 1st Rd., Futian District, Shenzhen, China.

深圳市福田区八卦一路50号鹏基商务时空1601室

Tel: 86-755-22305161 22305913

Fax: 86-755-22305076



WONDERFUL VOICE

To create the most wonderful sound

创造最美妙的声音

Perfect share mini™

产品说明书
PRODUCT MANUAL



It's a mini wireless speaker which is born to exceed the
highest industry standard in the beginning of the design.

从设计初始就为超越业界最高标准而生的微型无线音箱

请仔细阅读并妥善保管包装盒中随附
的产品操作说明，重要安全指示和保修说明。
有关 Perfect share mini™ 的其他信息，
请访问 www.wvdsp.com

电池/电源使用

- A. 连接上适合您所在地区的适配器。
- B. 将电源上的直流电源线插入音响上的直流连接器中。
- C. 充电完成后，请拔掉适配器。
- D. 将电源插入通电的交流电（电源）插座中，连接成功后，充电指示灯红色灯长亮。

设备充电

建议充电时间为5小时，以完全充满电池。电池充电时仍可使用音响。
正常使用时，音响电池电量最长可持续12小时。
注意：电池性能随播放内容和音量而变化。

保护模式

设备在30分钟后没有检测到音频信号输入，将自动关机以保护电池，您需要重新启动设备才能使用。

电池更换

当出现以下情况时需更换电池

电池状态指示灯在充电10小时后仍然保持  红色指示灯闪烁。

电池工作时间明显缩短。

只能使用 Wonderful Voice 授权的更换电池，请联系您所在国家/地区的Wonderful Voice 公司或者代理商。




控制按钮



状态指示灯





可指示电池剩余电量

	绿色表示电池容量为60%-100%
	黄色表示电池容量为20%-60%
	红色表示电池容量为0%-20%

电池电量少于20%之后会进入  红灯闪烁状态，请尽快为电池充电。

表示充电状态



	绿灯常(长)亮表示充电已经完成
	红灯长亮表示正在充电

(静音按钮) 指示灯闪烁以表示声音静音

	按下可使音响静音 / 取消静音
---	-----------------

按下选择蓝牙音源

(蓝牙按钮--指示灯) 指示在选择蓝牙音源后音响的状态

	蓝色闪烁 发现模式 (优先配对已配对设备) 准备设备以配对音响, 或如果已经配对, 请重新连接
	白色长亮 已连接 (有连接成功提示音) 音响连接到配对设备

AUX (AUX按钮 AUX button)AUX 是选择的来源

AUX	按压可选择 AUX 源
-----	-------------



Perfect Share Mini为您配置了NFC快速配对系统, 您只需打开手机的NFC选项, 将Perfect Share Mini设置为蓝牙状态, 接触控制面板的位置, NFC系统即可为您快速连接蓝牙正常播放, 无需再次搜索蓝牙配对。

设备技术指标：

适配器额定值

输入：100 – 240V ， 50/60Hz， 500mA

输出：15VDC， 1000mA

额定输入功率

输入：15VDC， 1000mA

整机重量：0.84kg

尺寸：7.9"L x 2.6"W x 2.1"H

(53mm x 200mm x 67mm)

使用时的温度范围：

0–40℃ (32–131 ℉)

PRODUCT MANUAL

Please read this operation guide, cautions and guarantee guide carefully and save it for future reference.

Other information about

Perfect share mini™ speaker,

Please visit www.wvdsp.com.

Battery/Adapter introduction

- A. Pull out the pins of the adapter
- B. Attach the AC power adapter for your region
- C. Connect the cord to the speaker
- D. Please pull out the adapter when the charging is finished.

Plug the adapter to a live AC outlet, the charging indicator light will be on when the adapter connected with AC outlet successfully.

Charging for the battery

A fully charged battery provides approximately fifteen hours with normal volume.

Caution: The rate of battery discharge varies with the type of the song and volume setting.

Battery protection mode

When the speaker can not detect any audio signal, it will be power off to protect the battery, you need to reactive the speaker when you want to use it.

Replacing the battery


You may need to replace the battery when these happen on the below:

You can not fully charge the battery more than 10 hours.

The working time is much shorter than before.

If you want to replace the battery, pls contact Wonderful Voice Customer Service or Wonderful Voice agent in your region.

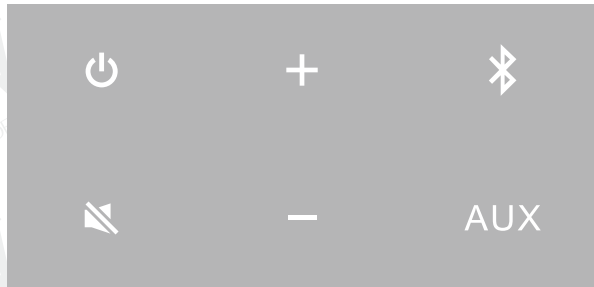

Control buttons



Status indicators



Can show the capacity of the battery

	Green shows the capacity of the battery is 60%-100%
	Yellow shows the capacity of the battery is 20%-60%



Red shows the capacity of the battery is 0%-20%

When the capacity of the battery is less than 20%, the red light will be blinking, pls charge it quickly.



Shows charging status



Green light on shows the charging is finished



Red light on shows the battery is charging





Sound Off button indicator light blinking shows sound is off



Press it can let the sound off or cancel the sound off.

Press for bluetooth input

(Bluetooth indicator light) indicates the status of the speaker when you choose the bluetooth input

	Blue light blinking Ready to pair (preferential pairing for the paired device), if already paired, please re-connect it.
	White light on Paired (emit a tone show successfully connected), the speaker paired with the device.

AUX AUX button

AUX	Press to choose AUX input
-----	---------------------------



NFC

Perfect Share Mini equip with NFC pairing system, you only need to open the NFC option on your cellphone, and press the Bluetooth button of the

speaker to open the Bluetooth option, the NFC system will connect your cellphone with the speaker quickly, no need to search and pair the Bluetooth again.

Technical Information:

Power supply rating

Input: 100 - 240VAC 50/60Hz, 500mA

Output: 15VDC , 1000mA

Input power rating

Input: 15VDC , 1000mA

Weight: 0.84kg

Size: 7.9"L x 2.6"W x 2.1"H

(53mm x 200mm x 67mm)

Using temperature:

0- 40°C (32-131°F)

Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a

residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

measures :

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.