


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	Normal

Horizontal

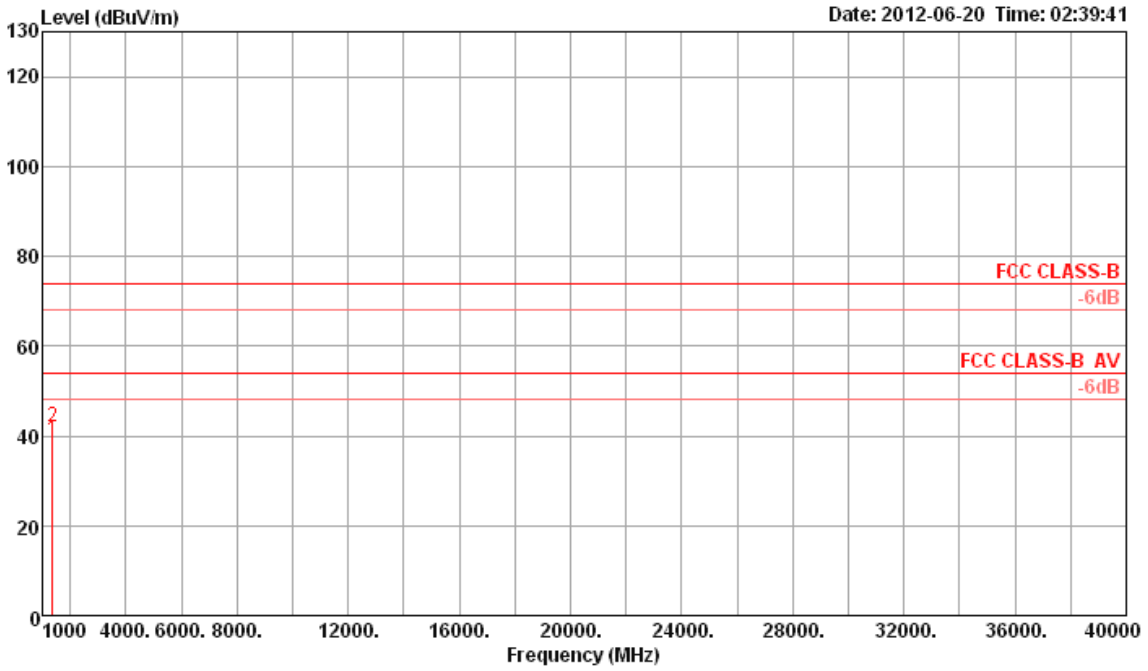

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	1362.42	38.94	54.00	-15.06	48.02	1.63	25.06	35.77	Average	100	224	HORIZONTAL
2	1362.85	41.84	74.00	-32.16	50.92	1.63	25.06	35.77	Peak	100	224	HORIZONTAL

Vertical

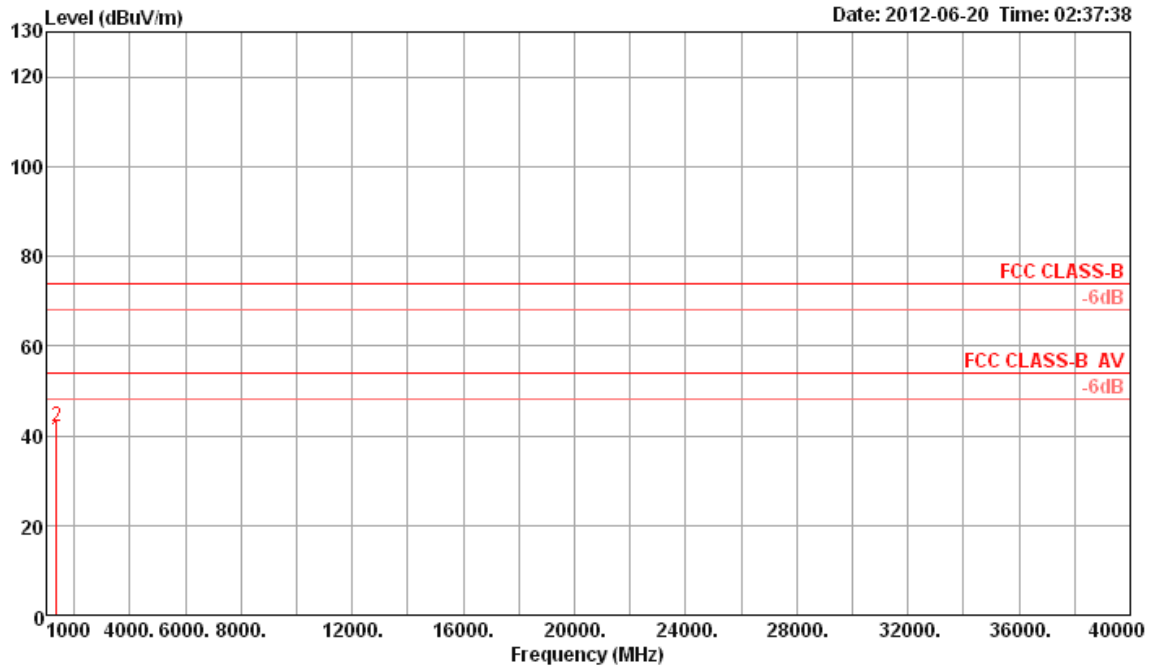

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1362.26	39.09	54.00	-14.91	48.17	1.63	25.06	35.77	Average	105	141 VERTICAL
2	1363.46	42.16	74.00	-31.84	51.24	1.63	25.06	35.77	Peak	105	141 VERTICAL