# FCC Test Report

Report No.: AGC01892170412FE03

FCC ID	:	2AFDGTT-BH02A
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Stereo Headphones
BRAND NAME	:	TAOTRONICS
MODEL NAME	:	See Page 4
CLIENT	:	SUNVALLEYTEK INTERNATIONAL, INC.
DATE OF ISSUE	:	Jun.26, 2017
STANDARD(S) TEST PROCEDURE(S)	:	FCC Part 15 Subpart C Section 15.249
<b>REPORT VERSION</b>	:	V1.0



# CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun.26, 2017	Valid	Original Report

# **Report Revise Record**

# TABLE OF CONTENTS

1 VERIFICATION OF CONFORMITY	4
2 GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3 MEASUREMENT UNCERTAINTY	6
4 DESCRIPTION OF TEST MODES	6
5 SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6 TEST FACILITY	9
7 TEST METHOD	
8 TEST EQUIPMENT LIST	9
9 RADIATED EMISSION	11
9.1TEST LIMIT	11
9.2. MEASUREMENT PROCEDURE	
9.3. TEST SETUP	14
9.4. TEST RESULT	16
10 BAND EDGE EMISSION	31
10.1. MEASUREMENT PROCEDURE	
10.2 TEST SETUP	31
10.3 RADIATED TEST RESULT	32
11 20DB BANDWIDTH	
11.1. MEASUREMENT PROCEDURE	36
11.2. TEST SET-UP	36
11.3. LIMITS AND MEASUREMENT RESULTS	36
12 FCC LINE CONDUCTED EMISSION TEST	43
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	43
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	43
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	44
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	45
APPENDIX B: PHOTOGRAPHS OF EUT	47

Applicant	SUNVALLEYTEK INTERNATIONAL, INC.
Address	46724 Lakeview Blvd, Fremont, CA 94538
Manufacturer	Shenzhen NearbyExpress Technology Development Company Limited
Address	333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China
Product Designation	Wireless Stereo Headphones
Brand Name	TAOTRONICS
Test Model	TT-BH024
Series Model	TT-BH025, TT-BH026, TT-BH027
Difference description	All the same except for the appearance shape.
Date of test	Apr.28, 2017 to May 04, 2017
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

# **1. VERIFICATION OF CONFORMITY**

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Time Uwang **Tested By** Time Huang(Huang Nanhui) May 04, 2017 Forverstoien **Reviewed By** Forrest Lei(Lei Yonggang) Jun.26, 2017 Solya Than pproved By Solger Zhang(Zhang Hongyi) Jun.26, 2017 Authorized Officer

# **2. GENERAL INFORMATION**

# 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	0.40dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.1
Modulation	GFSK ,π /4-DQPSK, 8DPSK for BR/EDR
Number of channels	79 for BR/EDR
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Ceramic Antenna
Antenna Gain	2.9dBi
Power Supply	DC 3.7V by battery
Note: 1. The USB port only be u	sed for charging and can't be used to transfer data with PC.
2. The EUT didn't support	BLE.
3. The BT function of EUT	didn't work when charging.

3. The BT function of EUT didn't work when charging.

# 2.2. TABLE OF CARRIER FREQUENCYS

**BR/EDR** channel List

Frequency Band	Channel Number	Frequency
	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
2400~2483.5MHz	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

# **3. MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions, radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

# 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link
NI (	

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. The EUT used fully-charged battery when tested.

BlueTest3         Test Mode         FAUSE         RADIO STATUS FULL         INFANDATIONS FULL         TESTART         RESTART2	Test Mode       Test Arguments         FANSE       LD Freq. (MHz)       2402         RADIO STATUS       Full       Fower (Ext, Int)       55       50       Execute         TRDATA:       TRDATA:       Fower (Ext, Int)       55       50       Execute         RADIO STATUS       Fower (Ext, Int)       55       50       Execute         TRDATA:       Fower (Ext, Int)       55       50       Execute         TRATA:       RXSTARTI       RXSTARTI       Cold Reset         RXSTART:       RXSTART:       For file       Display:       © Standard       Bit Error         Vlogfile.txt       0       0000 0000 0000       0000 0000       0000       Radio Test TRDATA       Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000       Radio Test TRDATA       Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000       Radio Test TRDATA       sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000       Radio Test TRDATA       sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000       Radio Test TRDATA       senteersful       sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000       Radio Test TRDATA       senteersful       sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000       Radio Test TRDATA       senteersful       senteersful       sent Command Varid 5004, parameters: 0004 0989 37	Test Mode       Test Arguments         PAUSE       ID Freq. (MHz)       2402         RADIO STATUS       FULL       Power (Ext, Int)       55         TXDATA1       TXDATA2       TXDATA3         TXDATA3       TXDATA4       Power (Ext, Int)       55         NXTART1       RXSTART1       RXSTART2         RXDATA1       Image: Comparison of the standard       Display : Comparison of the standard	Close Execute Cold Reset
FAUSE RADIO STATUS RADIO STATUS FULL       Close         RADIO STATUS FULL TXSTART       Fower (Ext, Int)       55       50         FUNATA TXDATA3 TXDATA4 EXSTART1 RXSTART2 RXSTART1 RXSTART2 RXDATA1       Cold Reset         Test Results       Warm Reset         Test Results       Warm Reset         Opening USB SPI (600732).       Browse for file       Display : Standard         Display : Standard       Bit Error         Morgfile.txt       Display : Standard       Bit Error         Opening USB SPI (600732).       Display : Standard       Bit Error         Transport active.       000000000000000000000000000000000000	FAUSE RADIO STATUS RADIO STATUS FULL       Close         RADIO STATUS FULL TXSTART       Fower (Ext, Int)       55       50         FUNATA TXDATA3 TXDATA4 EXSTART1 RXSTART2 RXSTART1 RXSTART2 RXDATA1       Cold Reset         Test Results       Warm Reset         Test Results       Warm Reset         Opening USB SPI (600732).       Browse for file       Display : Standard         Display : Standard       Bit Error         Morgfile.txt       Display : Standard       Bit Error         Opening USB SPI (600732).       Display : Standard       Bit Error         Transport active.       000000000000000000000000000000000000	PAUSE RADIO STATUS RADIO STATUS FULL       Image: Constraint of the standard o	Execute Cold Reset
BADIO STATUS       LD Freq. (MHz)       2402         RADIO STATUS FULL       Power (Ext, Int)       55       50         INDATAI       INDATAI       Cold Reset         INDATAI       INDATAI       Cold Reset         INDATAI       Warm Reset       Warm Reset         Test Results       Index for file       Display : (• Standard         Save to file       Browse for file       Display : (• Standard         Opening USB SFI (600732).       Fransport active.       648.         Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000       0000         Radio Test CFG FKT successful       004 0962 FF32 0000 0000 0000         Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000       Sadio Test TIDATAI	BADIO STATUS       LD Freq. (MHz)       2402         RADIO STATUS FULL       Power (Ext, Int)       55       50         INDATAI       INDATAI       Cold Reset         INDATAI       INDATAI       Cold Reset         INDATAI       Warm Reset       Warm Reset         Test Results       Index for file       Display : (• Standard         Save to file       Browse for file       Display : (• Standard         Opening USB SFI (600732).       Fransport active.       648.         Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000       0000         Radio Test CFG FKT successful       004 0962 FF32 0000 0000 0000         Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000       Sadio Test TIDATAI successful         Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000       Sadio Test TIDATAI	RADIO STATUS RADIO STATUS FULL TXSTART TXDATA1 TXDATA2 TXDATA2 TXDATA3 TXDATA4 RXSTART1 RXSTART2 RXDATA1 TSTAR	Execute Cold Reset
IASLAN       Execute         IXDATA1       IXDATA2         IXDATA3       IXDATA3         IXDATA3       IXDATA3         IXDATA4       IXDATA3         IXDATA5       IXDATA4         IXSTAR11       IXSTAT2         RXSTAR12       IXSTAT2         RXDATA1       IXSTAT2         ITest Results       Image:	IASLAN       Execute         IXDATA1       IXDATA2         IXDATA3       IXDATA3         IXDATA3       IXDATA3         IXDATA4       IXDATA3         IXDATA5       IXDATA4         IXSTAR11       IXSTAT2         RXSTAR12       IXSTAT2         RXDATA1       IXSTAT2         ITest Results       Image:	TXDATAI TXDATAI TXDATA2 TXDATA3 TXDATA4 RXSTART1 RXSTART2 RXDATA1 Test Results Save to file Browse for file Display : © Standard C 1	Cold Reset
TXDATA3 TXDATA4 RXSTART1 RXSTART2 RXDATA1 Test Results Test Results Test Results Test Results	TXDATA3 TXDATA4 RXSTART1 RXSTART2 RXDATA1 Test Results Test Results Test Results Test Results	TXDATA3 TXDATA4 RXSTART1 RXSTART2 RXDATA1	
RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display:         Save to file         Browse for file         Display:         Standard         Opening USB SPI (600732).         Transport active.         dal. Ofardware ID 0x332) firmware version 8848.         Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000         Radio Test CFG FKT successful         Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000	RXSTART2         RXDATA1         Image: Save to file         Browse for file         Display:         Save to file         Browse for file         Display:         Standard         Opening USB SPI (600732).         Transport active.         dal. Ofardware ID 0x332) firmware version 8848.         Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000         Radio Test CFG FKT successful         Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000         Radio Test TXDATAI successful         Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000	RXSTART2         RXDATA1         Test Results         Save to file         Browse for file         Display : © Standard	Warm Reset
Test Results         Save to file       Browse for file       Display : Standard       Bit Error         .\logfile.txt	Test Results         Save to file       Browse for file       Display : Standard       Bit Error         .\logfile.txt	Save to file Browse for file Display : 🕞 Standard C D	
Save to file       Browse for file       Display : Standard       Bit Error         .\logfile.txt	Save to file       Browse for file       Display : Standard       Bit Error         .\logfile.txt	Save to file Browse for file Display : © Standard © D	
Opening USB SPI (600732). Transport active. dal (Hardware ID 0x332) firmware version 8648. Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000 Radio Test CFG PKT successful Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0969 3232 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000	Opening USB SPI (600732). Transport active. dal (Hardware ID 0x332) firmware version 8648. Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000 Radio Test CFG PKT successful Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0969 3232 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000	bispiay . (• Standard ()	
Opening USB SPI (600732). Transport active. dal (Hardware ID 0x332) firmware version 8648. Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000 Radio Test CFG PKT successful Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000	Opening USB SPI (600732). Transport active. dal (Hardware ID 0x332) firmware version 8648. Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000 Radio Test CFG PKT successful Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATAI successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000	. \logfile. txt	lit Error
Opening USB SPI (600732). Transport active. dal (Hardware ID 0x332) firmware version 8648. Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000 Radio Test CFG FKT successful Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful	Opening USB SPI (600732). Transport active. dal (Hardware ID 0x332) firmware version 8648. Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000 Radio Test CFG FKT successful Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful		
		Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000 Radio Test TXDATA1 successful	

# **5. SYSTEM TEST CONFIGURATION**

**5.1. CONFIGURATION OF EUT SYSTEM** 

Configure 1: (Normal hopping)

EUT

## Configure 2: (Control continuous TX)



### 5.2. EQUIPMENT USED IN EUT SYSTEM

ltem	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Wireless Stereo Headphones	TAOTRONICS	TT-BH024	EUT
2	Battery	EVE	591121	Accessory
3	PC	SONY	E1412AYCW	A.E
4	PC Adapter	SONY	VGP-AC19V36	A.E
5	Control box	CSR	USB_SPI_TOOLS	A.E
6	USB Cable	N/A	1m unshielded	A.E

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	Bandwidth	Compliant

Note: N/A means it's not applicable to this item.

## 6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

# 7.TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

# 8. TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

	Radiat	ed Emission Tes	st Site		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017
Radiation Cable 1	МХТ	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	МХТ	RS1	R006	June 6, 2016	June 5, 2017

	,	/			
	Radiat	ed Emission Tes	st Site		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2016	June 5, 2017
Radiation Cable 1	МХТ	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	МХТ	RS1	R006	June 6, 2016	June 5, 2017

### FOR RADIATED EMISSION TEST (1GHz ABOVE)

# 9. RADIATED EMISSION

#### 9.1TEST LIMIT

# Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics			
	(millivolts/meter)	(microvolts/meter)			
900-928MHz	50	500			
2400-2483.5MHz	50	500			
5725-5875MHz	50	500			
24.0-24.25GHz	250	2500			

#### Standard FCC 15.209

Frequency	Distance	Field Strer	ngths Limit
(MHz)	Meters	μ V/m	dB(µV)/m
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m (Peal	<) 54.0 dB(μV)/m (Average)
Remark: (1) Emission le	evel dBµ V = 20 log Emissio	n level µ V/m	
(2) The smalle	r limit shall apply at the cros	s point between two frequen	cy bands.
(3) Distance is	the distance in meters betw	een the measuring instrume	nt, antenna and the closest

point of any part of the device or system.

### 9.2. MEASUREMENT PROCEDURE


- The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 1.5MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


The following table is the setting of spectrum analyzer and receiver.


#### 9.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

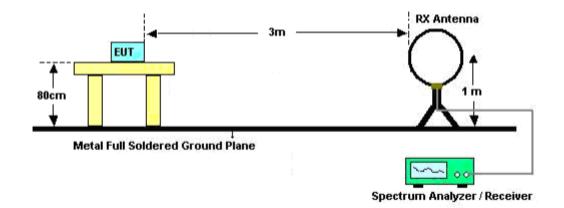

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

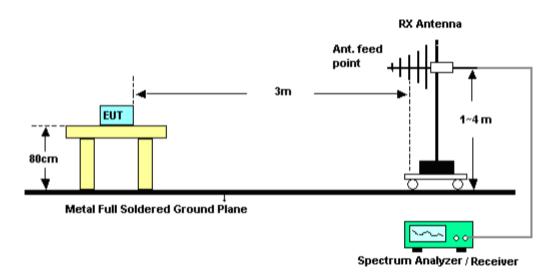

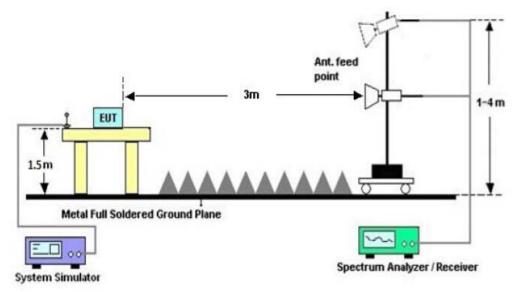

RADIATED EMISSION TEST SETUP ABOVE 1000MHz


# 9.4. TEST RESULT (Worst modulation:GFSK) FOR BR/EDR

#### **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHz**


RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

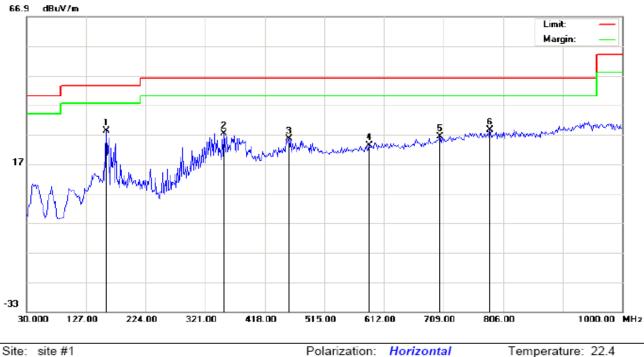

Site: site #1 Limit: FCC Class B 3M Radiation EUT: Wireless Stereo Headphones M/N: TT-BH024 Mode: Low Channal TX Note:

Power: Distance: Temperature: 22.4 Humidity: 52.5 %

Antenna Table Reading Factor Measurement Limit Over Freq. Mk Height Degree No. Detector Comment MHz dBu∨ dB/m dBuV/m dBu∀/m dB degree cm 17.88 28.37 1 159.3333 10.49 43.50 -15.13 peak 351.7167 8.48 18.75 27.23 2 46.00 -18.77 peak 456.8000 20.66 25.59 3 4.93 46.00 -20.41 peak -22.72 587.7500 -0.14 23.42 23.28 4 46.00 peak 5 702.5333 1.08 25.26 26.34 46.00 -19.66 peak 6 784.9833 1.44 27.11 28.55 46.00 -17.45 peak

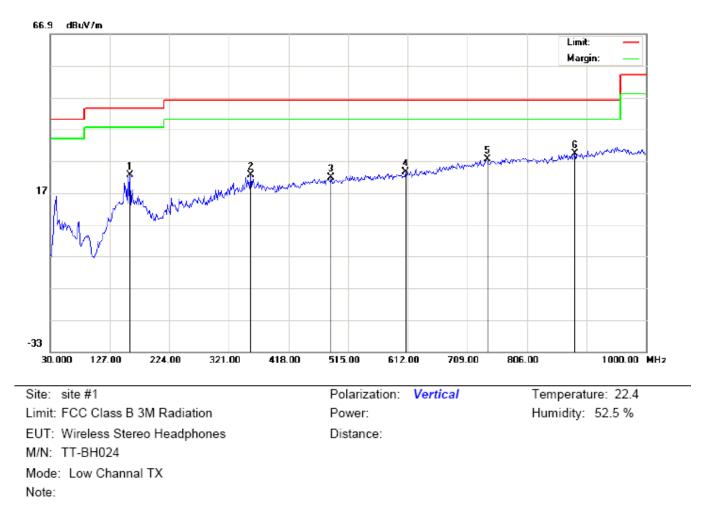


#### RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∨	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		159.3333	7.14	15.33	22.47	43.50	-21.03	peak			
2		356.5667	3.68	18.78	22.46	46.00	-23.54	peak			
3		487.5167	0.72	21.00	21.72	46.00	-24.28	peak			
4		608.7667	0.54	22.93	23.47	46.00	-22.53	peak			
5		741.3333	1.13	26.38	27.51	46.00	-18.49	peak			
6	*	883.6000	1.16	28.18	29.34	46.00	-16.66	peak			

#### **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

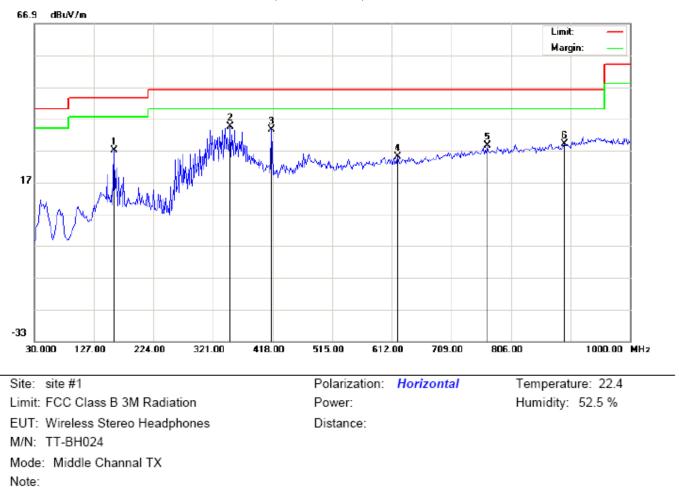

#### RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		159.3333	16.44	10.49	26.93	43.50	-16.57	peak			
2	*	348.4833	15.81	18.64	34.45	46.00	-11.55	peak			
3		416.3833	13.86	19.57	33.43	46.00	-12.57	peak			
4		621.7000	1.30	23.78	25.08	46.00	-20.92	peak			
5		767.2000	1.74	26.87	28.61	46.00	-17.39	peak			
6		893.3000	0.55	28.44	28.99	46.00	-17.01	peak			

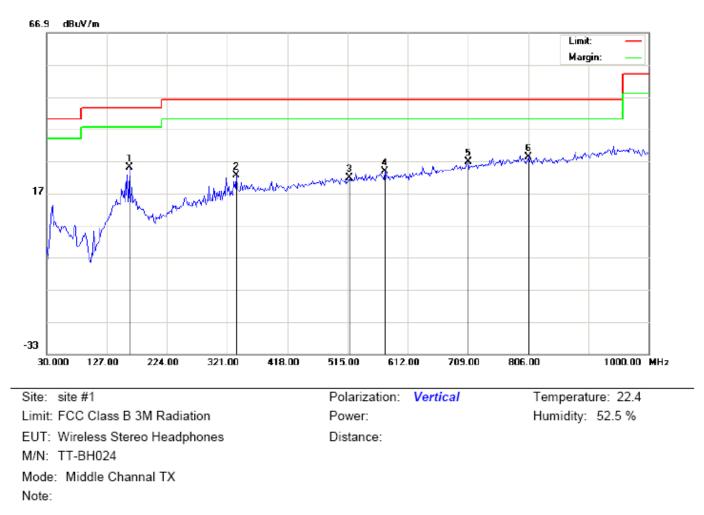


## RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		164.1833	9.84	15.07	24.91	43.50	-18.59	peak			
2		335.5500	4.73	17.78	22.51	46.00	-23.49	peak			
3		518.2333	0.10	21.62	21.72	46.00	-24.28	peak			
4		574.8167	1.15	22.60	23.75	46.00	-22.25	peak			
5		709.0000	1.34	25.45	26.79	46.00	-19.21	peak			
6	*	806.0000	0.94	27.32	28.26	46.00	-17.74	peak			


## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

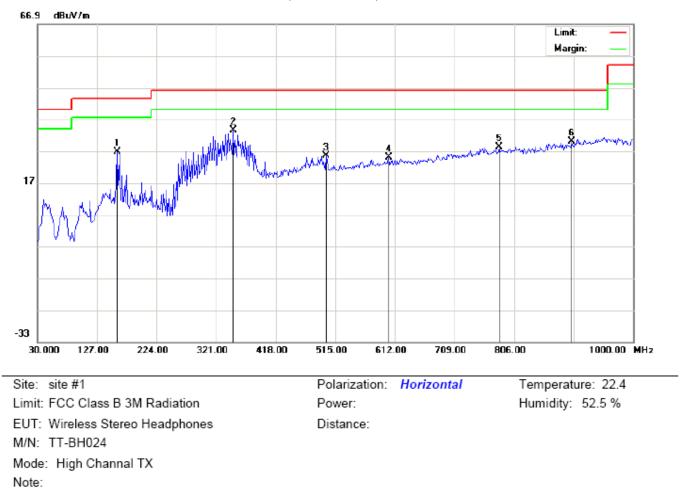

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		159.3333	16.29	10.49	26.78	43.50	-16.72	peak			
2	*	348.4833	14.84	18.64	33.48	46.00	-12.52	peak			
3		500.4500	4.31	21.14	25.45	46.00	-20.55	peak			
4		602.3000	1.39	23.74	25.13	46.00	-20.87	peak			
5		781.7500	1.21	27.07	28.28	46.00	-17.72	peak			
6		899.7667	1.45	28.60	30.05	46.00	-15.95	peak			

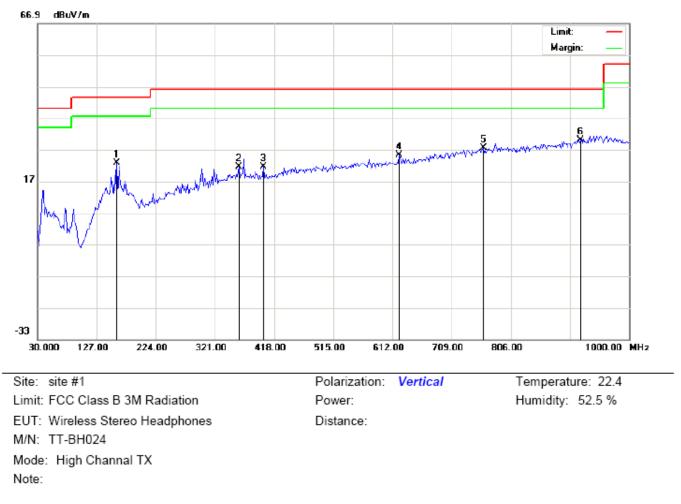

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∨/m	dBuV/m	dB		cm	degree	
1		159.3333	7.53	15.33	22.86	43.50	-20.64	peak			
2		359.8000	2.64	18.80	21.44	46.00	-24.56	peak			
3		400.2167	2.57	19.08	21.65	46.00	-24.35	peak			
4		623.3167	1.95	23.25	25.20	46.00	-20.80	peak			
5		760.7333	0.82	26.78	27.60	46.00	-18.40	peak			
6	*	920.7833	0.87	29.19	30.06	46.00	-15.94	peak			

# **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

#### **RADIATED EMISSION ABOVE 1GHz**


#### (Worst modulation: GFSK)

#### FOR BR/EDR



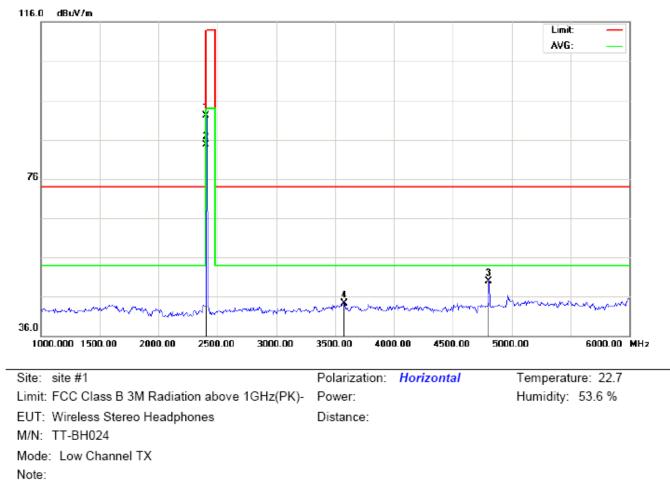


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBu∀	dB/m	dBuV/m	dBu∨/m	dB		cm	degree	
1		2402.000	81.71	10.32	92.03	114.00	-21.97	peak			
2	*	2402.000	74.34	10.32	84.66	94.00	-9.34	AVG	100	137	
3		4804.000	42.24	7.69	49.93	74.00	-24.07	peak			
4		3575.000	31.79	12.57	44.36	74.00	-29.64	peak			

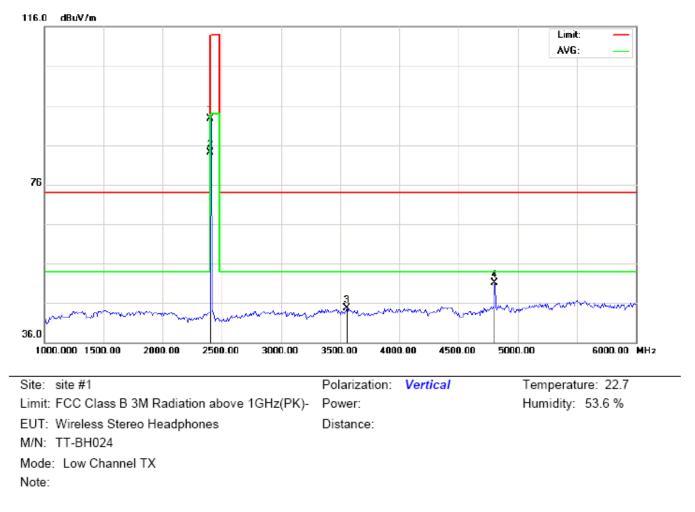


#### RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∨/m	dB		cm	degree	
1		2402.000	82.32	10.32	92.64	114.00	-21.36	peak			
2	*	2402.000	73.83	10.32	84.15	94.00	-9.85	AVG	100	306	
3		3558.333	32.18	12.47	44.65	74.00	-29.35	peak			
4		4804.000	43.38	7.69	51.07	74.00	-22.93	peak			

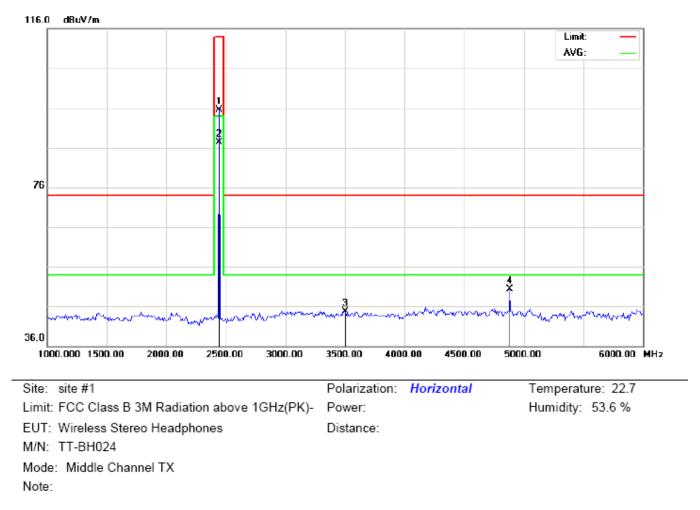


#### RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBu∨	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		2441.000	85.24	10.36	95.60	114.00	-18.40	peak			
2	*	2441.000	77.03	10.36	87.39	94.00	-6.61	AVG	100	169	
3		3500.000	32.58	12.11	44.69	74.00	-29.31	peak			
4		4882.000	42.38	7.89	50.27	74.00	-23.73	peak			

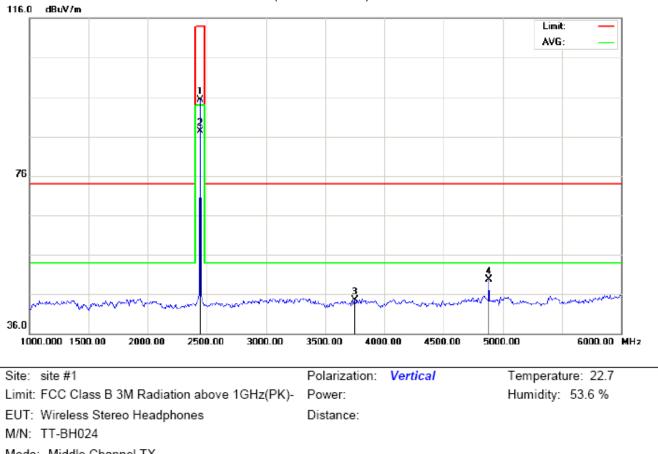


Mode: Middle Channel TX Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∨/m	dB		cm	degree	
1		2441.000	84.99	10.36	95.35	114.00	-18.65	peak			
2	*	2441.000	76.96	10.36	87.32	94.00	-6.68	AVG	100	284	
3		3750.000	30.81	13.65	44.46	74.00	-29.54	peak			
4		4882.000	41.81	7.89	49.70	74.00	-24.30	peak			

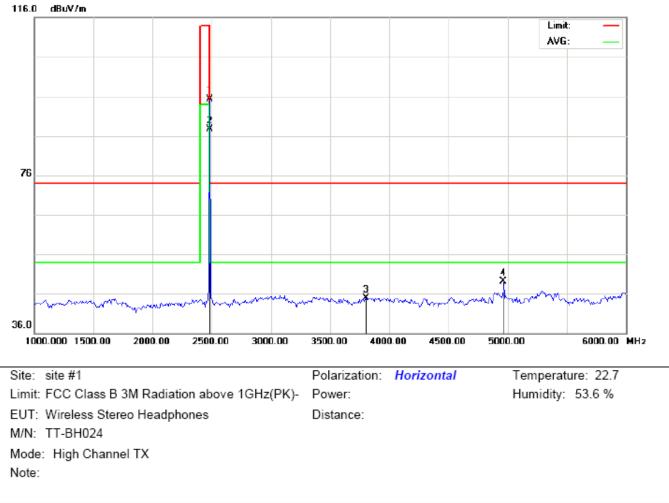

#### RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∨	dB/m	dBu∀/m	dBu∨/m	dB		cm	degree	
1		2480.000	84.97	10.41	95.38	114.00	-18.62	peak			
2	*	2480.000	77.24	10.41	87.65	94.00	-6.35	AVG	100	322	
3		3800.000	31.01	13.96	44.97	74.00	-29.03	peak			
4		4960.000	41.01	8.09	49.10	74.00	-24.90	peak			

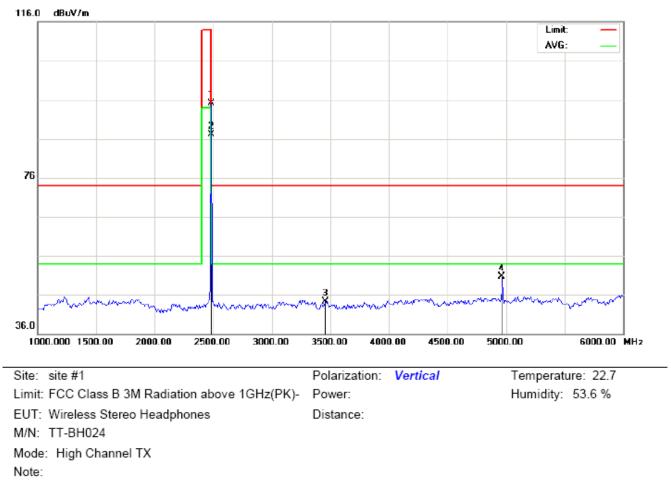

#### RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	84.69	10.41	95.10	114.00	-18.90	peak			
2	*	2480.000	76.71	10.41	87.12	94.00	-6.88	AVG	100	251	
3		3458.333	32.28	12.07	44.35	74.00	-29.65	peak			
4		4960.000	42.66	8.09	50.75	74.00	-23.25	peak			

#### **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

# Field strength of the fundamental signal

# 1Mbps Result:

## Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.71	10.32	92.03	114	-21.97	Horizontal
2402	82.32	10.32	92.64	114	-21.36	Vertical
2441	85.24	10.36	95.60	114	-18.40	Horizontal
2441	84.99	10.36	95.35	114	-18.65	Vertical
2480	84.97	10.41	95.38	114	-18.62	Horizontal
2480	84.69	10.41	95.10	114	-18.90	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	74.34	10.32	84.66	94	-9.34	Horizontal
2402	73.83	10.32	84.15	94	-9.85	Vertical
2441	77.03	10.36	87.39	94	-6.61	Horizontal
2441	76.96	10.36	87.32	94	-6.68	Vertical
2480	77.24	10.41	87.65	94	-6.35	Horizontal
2480	76.71	10.41	87.12	94	-6.88	Vertical

## 2Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	82.06	10.32	92.38	114	-21.62	Horizontal
2402	81.95	10.32	92.27	114	-21.73	Vertical
2441	84.93	10.36	95.29	114	-18.71	Horizontal
2441	84.79	10.36	95.15	114	-18.85	Vertical
2480	84.78	10.41	95.19	114	-18.81	Horizontal
2480	84.62	10.41	95.03	114	-18.97	Vertical

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.70	10.32	84.02	94	-9.98	Horizontal
2402	73.65	10.32	83.97	94	-10.03	Vertical
2441	76.92	10.36	87.28	94	-6.72	Horizontal
2441	76.85	10.36	87.21	94	-6.79	Vertical
2480	77.13	10.41	87.54	94	-6.46	Horizontal
2480	77.05	10.41	87.46	94	-6.54	Vertical

## 3Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.92	10.32	92.24	114	-21.76	Horizontal
2402	81.79	10.32	92.11	114	-21.89	Vertical
2441	84.67	10.36	95.03	114	-18.97	Horizontal
2441	84.50	10.36	94.86	114	-19.14	Vertical
2480	84.48	10.41	94.89	114	-19.11	Horizontal
2480	84.34	10.41	94.75	114	-19.25	Vertical

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.54	10.32	83.86	94	-10.14	Horizontal
2402	73.32	10.32	83.64	94	-10.36	Vertical
2441	76.70	10.36	87.06	94	-6.94	Horizontal
2441	76.49	10.36	86.85	94	-7.15	Vertical
2480	76.97	10.41	87.38	94	-6.62	Horizontal
2480	76.78	10.41	87.19	94	-6.81	Vertical

# **10. BAND EDGE EMISSION**

# **10.1. MEASUREMENT PROCEDURE**


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setup 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

### **10.2 TEST SETUP**

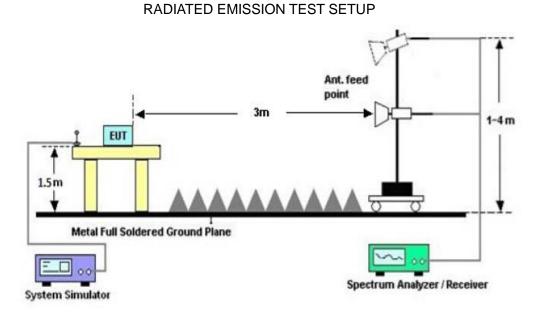


#### **10.3 RADIATED TEST RESULT**


## (Worst modulation: GFSK)

#### FOR BR/EDR

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

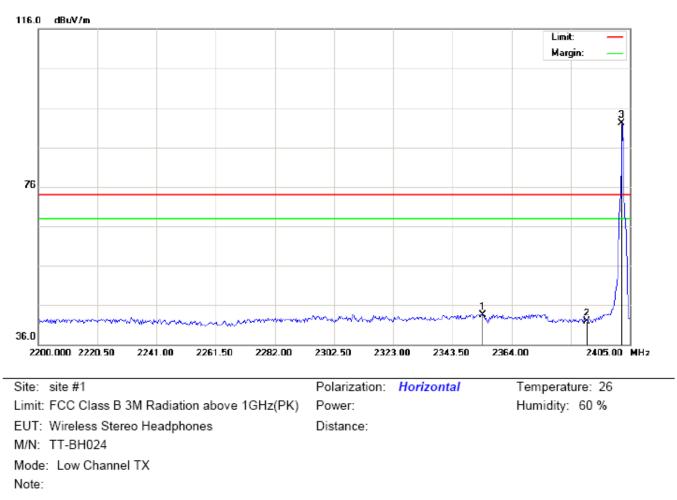

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∨	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1		2354.091	33.30	10.27	43.57	74.00	-30.43	peak			
2		2390.000	31.50	10.31	41.81	74.00	-32.19	peak			
3	*	2402.000	81.72	10.32	92.04	74.00	18.04	peak			

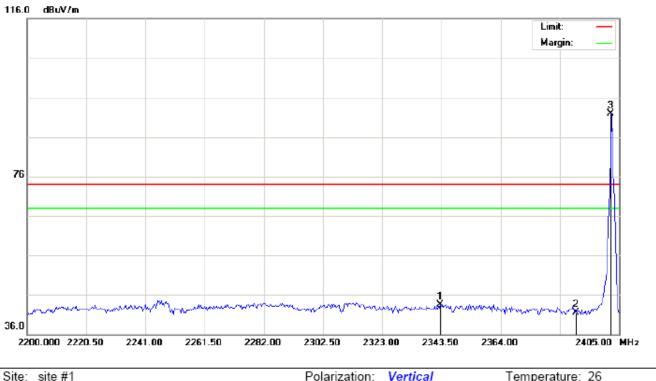

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical


 Site:
 site #1
 Polarization:
 Vertical
 Temperature:
 26

 Limit:
 FCC Class B 3M Radiation above 1GHz(PK)
 Power:
 Humidity:
 60 %

 EUT:
 Wireless Stereo Headphones
 Distance:
 M/N:
 TT-BH024


 Mode:
 Low Channel TX
 Note:
 Vertical
 Vertical

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2343.158	33.33	10.26	43.59	74.00	-30.41	peak			
2		2390.000	31.21	10.31	41.52	74.00	-32.48	peak			
3	*	2402.000	81.59	10.32	91.91	74.00	17.91	peak			

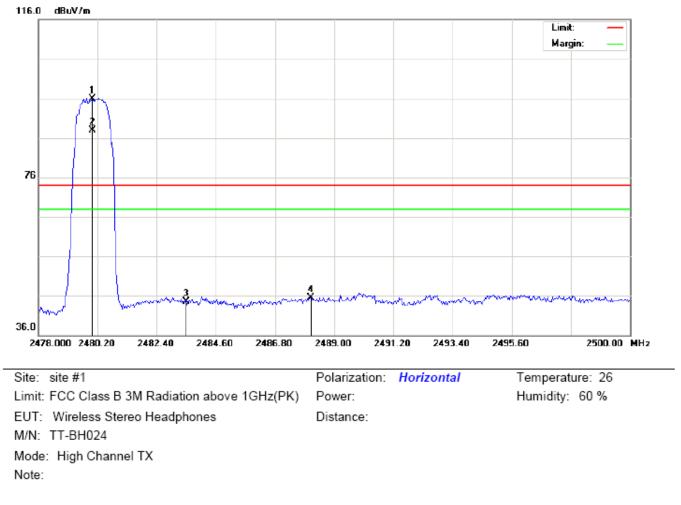

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	85.55	10.41	95.96	74.00	21.96	peak			
2	Х	2480.000	77.44	10.41	87.85	74.00	13.85	AVG	100	127	
3		2483.500	34.19	10.41	44.60	74.00	-29.40	peak			
4		2488.120	35.05	10.42	45.47	74.00	-28.53	peak			

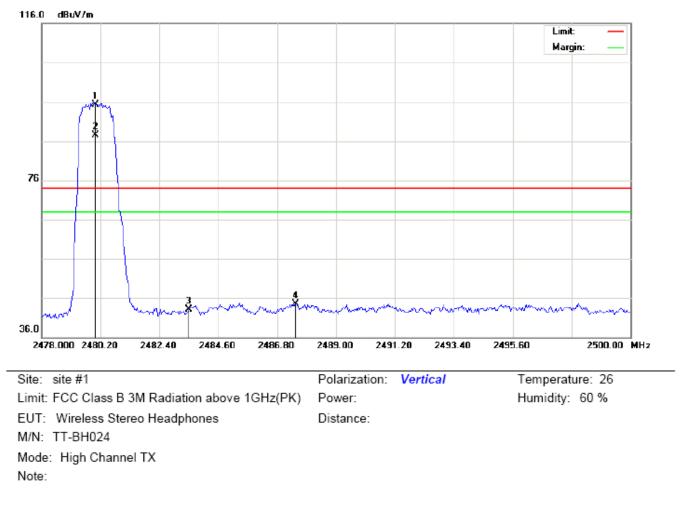

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	84.82	10.41	95.23	74.00	21.23	peak			
2	Х	2480.000	77.05	10.41	87.46	74.00	13.46	AVG	100	234	
3		2483.500	32.76	10.41	43.17	74.00	-30.83	peak			
4		2487.497	34.11	10.42	44.53	74.00	-29.47	peak			

#### **RESULT: PASS**

**Note**: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

# 11. 20DB BANDWIDTH

## **11.1. MEASUREMENT PROCEDURE**

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel
- RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

## 11.2. TEST SET-UP

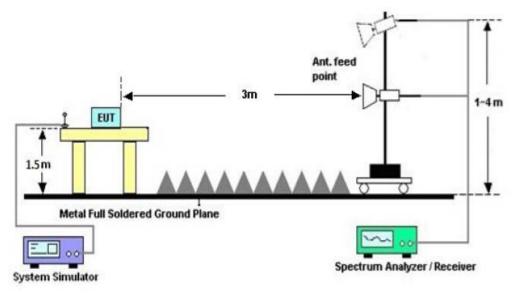

#### **11.3. LIMITS AND MEASUREMENT RESULTS**


#### FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Decult								
		99%OBW (MHz)	-20dB BW(MHz)	Result						
	Low Channel	0.940	1.112	PASS						
N/A	Middle Channel	0.934	1.104	PASS						
	High Channel	0.910	1.074	PASS						



### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

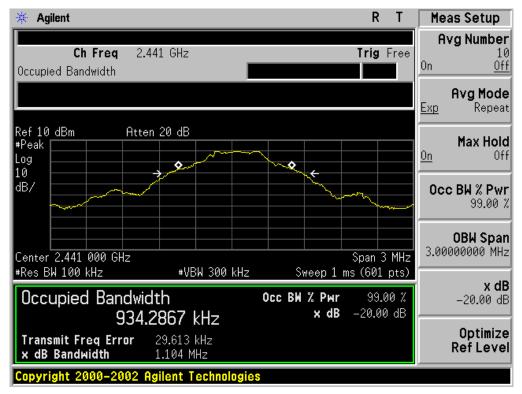





TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT						
	Measurement Result					
Applicable Limits	Test Data (MHz)			Decult		
		99%OBW (MHz)	-20dB BW(MHz)	Result		
N/A	Low Channel	1.204	1.367	PASS		
	Middle Channel	1.224	1.371	PASS		
	High Channel	1.224	1.370	PASS		


### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

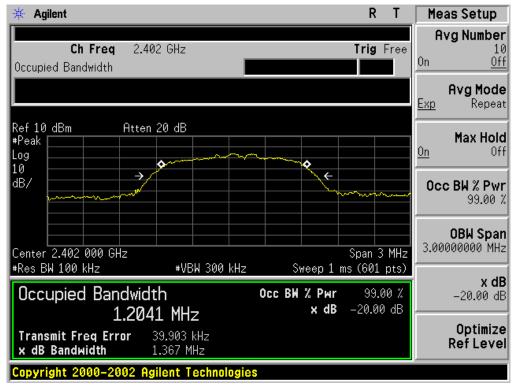

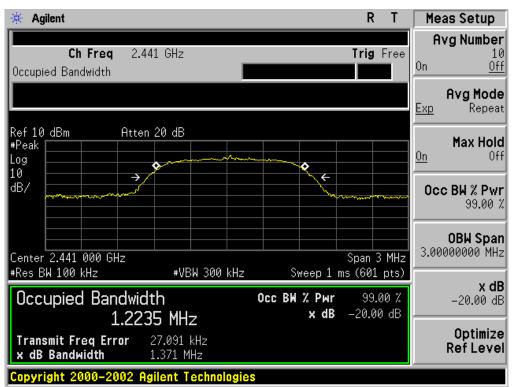


## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL


### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

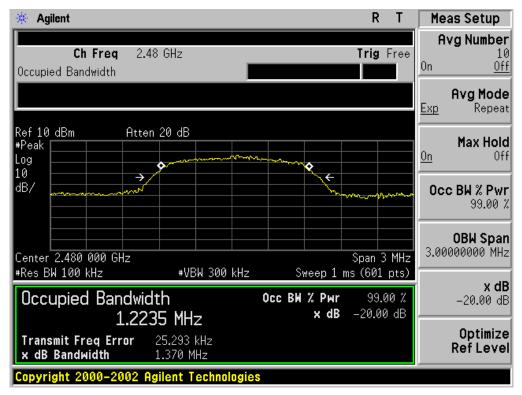

BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT						
	Measurement Result					
Applicable Limits	Test Data (MHz)			Decult		
		99%OBW (MHz)	-20dB BW(MHz)	Result		
N/A	Low Channel	1.202	1.368	PASS		
	Middle Channel	1.195	1.335	PASS		
	High Channel	1.200	1.355	PASS		


#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

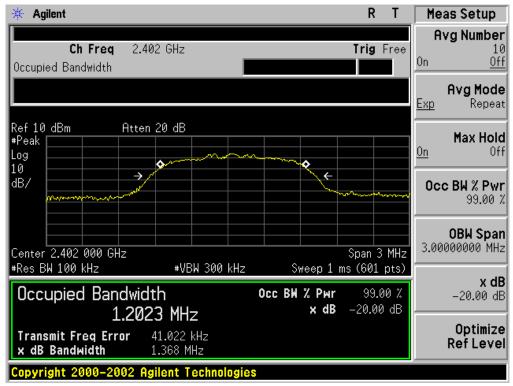

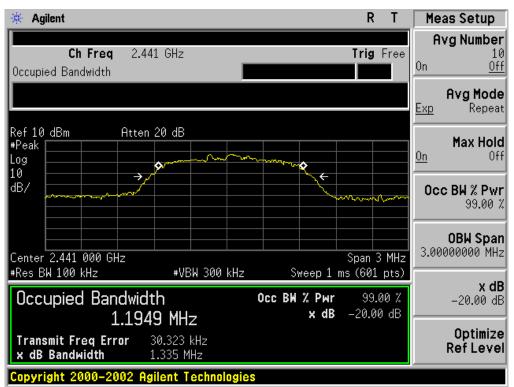

## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

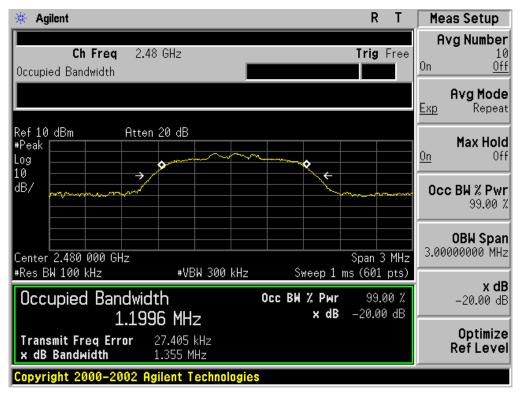

# **12. FCC LINE CONDUCTED EMISSION TEST**

## 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Frequency	Maximum RF Line Voltage			
Frequency	Q.P.( dBuV)	Average( dBuV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

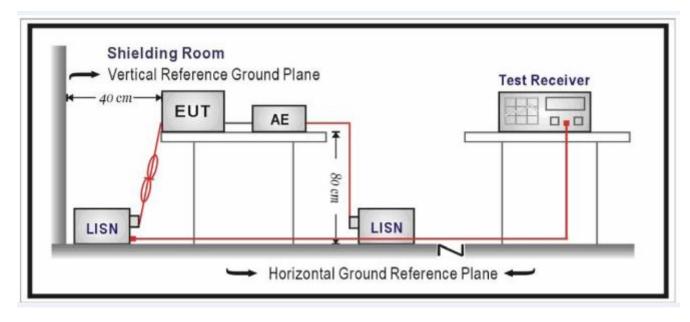

## 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

## 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST


N/A

Note: The BT function of EUT didn't work when charging.

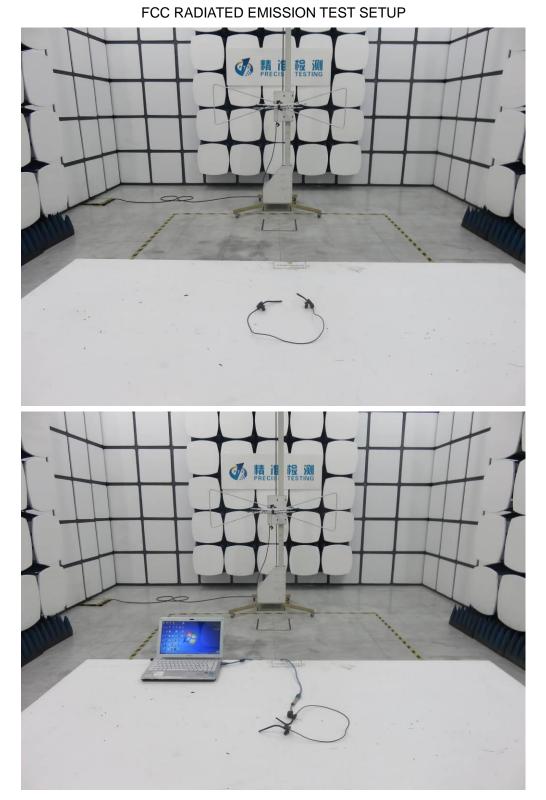

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Report No.: AGC01892170412FE03 Page 46 of 52

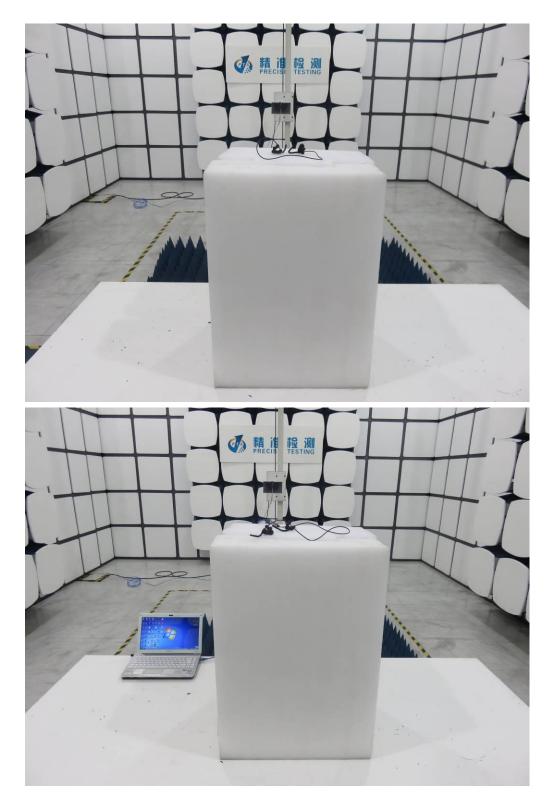



## APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT

BOTTOM VIEW OF EUT



#### Report No.: AGC01892170412FE03 Page 48 of 52



#### FRONT VIEW OF EUT

BACK VIEW OF EUT





**RIGHT VIEW OF EUT** 




LEFT VIEW OF EUT




VIEW OF EUT (Port)

OPEN VIEW OF EUT

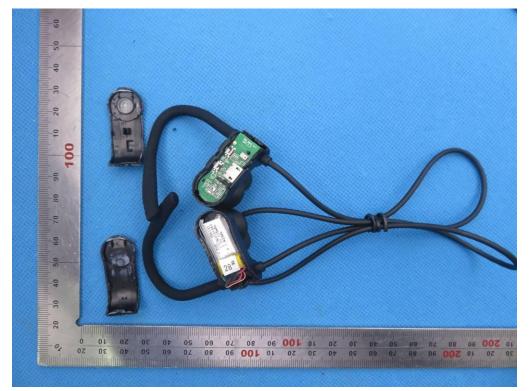



## Report No.: AGC01892170412FE03 Page 50 of 52

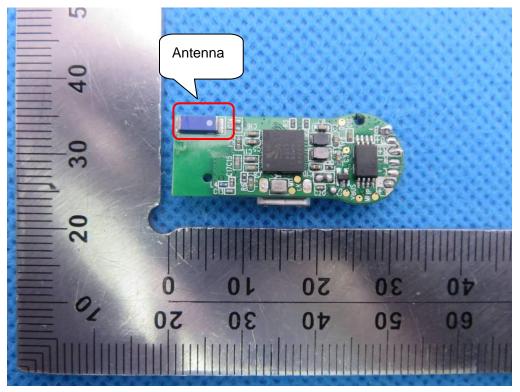

INTERNAL VIEW OF EUT-1

INTERNAL VIEW OF EUT-2

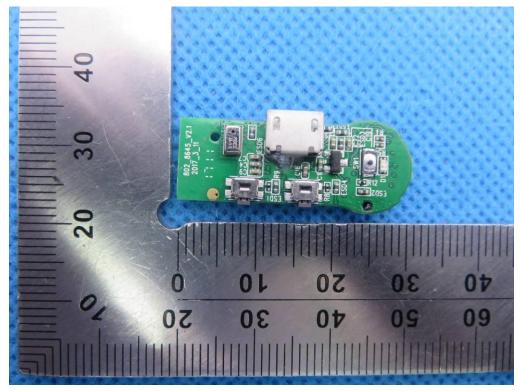

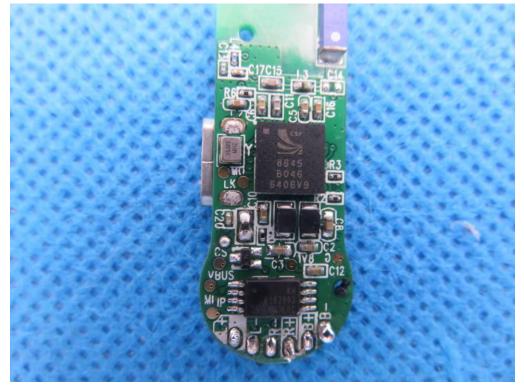

**INTERNAL VIEW OF EUT-3** 

----END OF REPORT----