



WT32-S2-WROVER Datasheet

Wireless-Tag

V1.0.0

Sept 16, 2021

Wireless-Tag Technology Co., Ltd



About this document

This document provides users with the technical specifications for WT32-S2-WROVER.

Document updates

Please visit Wireless-Tag's official website to download the latest version of the document.

Revision history

Please go to the document revision history page to view the revisions of the document.

Disclaimer and copyright notice

Information in this paper, including URL references, is subject to change without prior notice.

This document is provided "as is" with no warranties whatsoever, including any warranty of merchantability, non-infringement, fitness for any particular purpose, or any warranty otherwise arising out of any proposal, specification or sample. All liability, including liability for infringement of any patent rights, relating to use of information in this document is disclaimed. No licenses, either express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

All trade names, trademarks and registered trademarks mentioned in this document are property of their respective owners, and are hereby acknowledged.

Copyright © 2020 Wireless-Tag Technology Co., Ltd. All rights reserved.

Statement

Due to product version upgrade or other reasons, the contents of this manual may be changed. Wireless-Tag Technology Co., Ltd reserves the right to modify the contents of this manual without any notice or prompt. This manual is only used as a guide. Wireless-Tag Technology Co., Ltd makes every effort to provide accurate information in this manual, but it does not guarantee that the contents of the manual are completely free of errors. All statements, information and suggestions in this manual do not constitute any express or implied guarantee.



Revision History

No.	Version	Changes	Change (+/-) Descriptions	Author	Date
1	V1.0.0	C	First release	Fiona	Sept 16, 2021

*Changes: C——create, A——add, M——modify, D——delete

Wireless-Tag



Contents

1	Module Overview.....	1
1.1	Features.....	1
1.2	Description.....	1
1.3	Applications	2
2	Block Diagram.....	3
3	Pin Definitions.....	4
3.1	Pin Layout.....	4
3.2	Pin description.....	4
3.3	Strapping Pins.....	5
4	Electrical Characteristics.....	7
4.1	Absolute Maximum Ratings.....	7
4.2	Recommended Operating Conditions.....	7
4.3	Current Consumption Characteristics.....	7
5	Application Note.....	9
5.1	Module Dimensions.....	9
5.2	Reflow Profile.....	9
5.3	Peripheral Schematic.....	10
6	Product Trial.....	11

Wireless-Tag



1 Module Overview

1.1 Features

MCU

- ESP32-S2 chip embedded, 32-bit LX7 single-core microprocessor, up to 240MHz
 - SRAM 320KB
 - RTC SRAM 16KB
 - ROM 128KB

WIFI

- IEEE 802.11b/g/n protocol
- Data rate up to 150 Mbps
- Frame aggregation (TX/RX A-MPDU, TX/RX A-MSDU)
- 0.4 μ s guard interval
- Center frequency range of operating channel: 2400~2483.5 MHz

Hardware

- Module interface: GPIO, SPI, LCD interface, UART, I2C, I2S, Camera interface, IR, pulse counter, LED PWM, TWAITM (compatible with ISO 11898-1), USB 1.1 OTG, ADC, DAC, touch sensor, temperature sensor
- 40MHz crystal oscillator
- 4 MB SPI flash
- 8 MB PSRAM
- Operating voltage/Power supply: 3.0~3.6 V
- Operating ambient temperature: -40~85°C
- Package size: (18 × 31 × 3.3) mm

1.2 Description

WT32-S2-WROVER is a universal Wi-Fi MCU module with powerful functions and rich peripheral interfaces, which can be used in scenarios such as wearable electronic devices and smart homes.

WT32-S2-WROVER adopts IPEX onboard antenna, equipped with 4 MB SPI flash and 8 MB SPI PSRAM.

WT32-S2-WROVER uses ESP32-S2 chip. The ESP32-S2 chip is equipped with an Xtensa® 32-bit LX7 single-core processor with a working frequency of up to 240 MHz. The user can turn




off the power of the CPU and use the low-power coprocessor to monitor the status changes of peripherals or whether certain analog quantities exceed the threshold. ESP32-S2 also integrates a wealth of peripherals, including SPI, I2S, UART, I2C, LED PWM, TWAI™, LCD interface, Camera interface, ADC, DAC, touch sensor, temperature sensor and up to 43 GPIOs, as well as a full-speed USB 1.1 On-The-Go (OTG) interface.

1.3 Applications

- Generic low-power IoT sensor hub
- Generic low-power IoT data logger
- Camera video streaming
- OTT TV box/set-top box equipment
- USB device
- Voice recognition
- Image recognition
- Mesh network
- Home automation
- Smart home control panel
- Smart buildings
- Industrial Automation
- Smart agriculture
- Audio equipment
- Health/Medical/Nursing
- Wi-Fi toys
- Wearable electronic products
- Retail & Catering
- Smart POS application
- Smart door lock

2 Block Diagram


Figure 1 Block Diagram

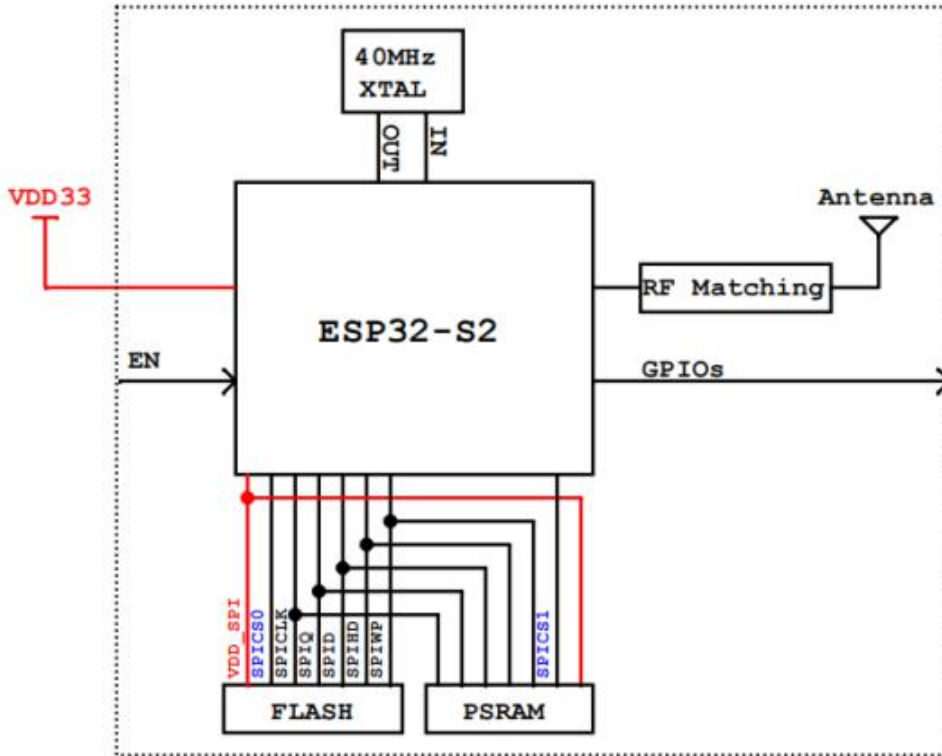

3 Pin Definitions

3.1 Pin Layout

Figure 2 Pin Layout

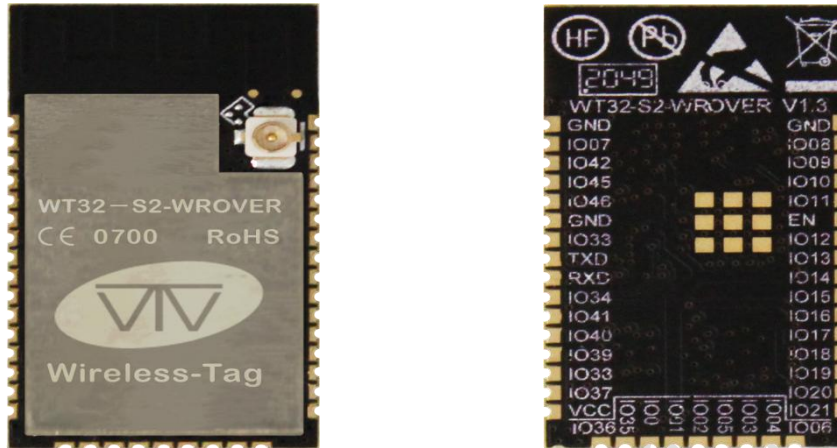

3.2 Pin description

Table 1 Pin Definitions and Descriptions

Pin	Name	Description
1	GND	Ground
2	IO07	RTC_GPIO7, GPIO7, TOUCH7, ADC1_CH6
3	IO42	MTMS, GPIO42
4	IO45	GPIO45
5	IO46	GPIO46
6	GND	Ground
7	IO33	SPIIO4, GPIO33, FSPIHD
8	TXD	U0TXD, GPIO43, CLK_OUT1
9	RXD	U0RXD, GPIO44, CLK_OUT2
10	IO34	SPIIO5, GPIO34, FSPICS0
11	IO41	MTDI, GPIO41, CLK_OUT1
12	IO40	MTDO, GPIO40, CLK_OUT2
13	IO39	MTCK, GPIO39, CLK_OUT3
14	IO38	GPIO38, FSPIWP
15	IO37	SPIDQS, GPIO37, FSPIQ
16	VCC	Power supply
17	IO36	SPIIO7, GPIO36, FSPICLK
18	IO35	SPIIO6, GPIO35, FSPID



Pin	Name	Description
19	IO0	RTC_GPIO0, GPIO0
20	IO01	RTC_GPIO1, GPIO1, TOUCH1, ADC1_CH0
21	IO02	RTC_GPIO2, GPIO2, TOUCH2, ADC1_CH1
22	IO05	RTC_GPIO5, GPIO5, TOUCH5, ADC1_CH4
23	IO03	RTC_GPIO3, GPIO3, TOUCH3, ADC1_CH2
24	IO04	RTC_GPIO4, GPIO4, TOUCH4, ADC1_CH3
25	IO06	RTC_GPIO6, GPIO6, TOUCH6, ADC1_CH5
26	IO21	RTC_GPIO21, GPIO21
27	IO20	RTC_GPIO20, GPIO20, U1CTS, ADC2_CH9, CLK_OUT1, USB_D+
28	IO19	RTC_GPIO19, GPIO19, U1RTS, ADC2_CH8, CLK_OUT2, USB_D-
29	IO18	RTC_GPIO18, GPIO18, U1RXD, ADC2_CH7, DAC_2, CLK_OUT3
30	IO17	RTC_GPIO17, GPIO17, U1TXD, ADC2_CH6, DAC_1
31	IO16	RTC_GPIO16, GPIO16, U0CTS, ADC2_CH5, XTAL_32K_N
32	IO15	RTC_GPIO15, GPIO15, U0RTS, ADC2_CH4, XTAL_32K_P
33	IO14	RTC_GPIO14, GPIO14, TOUCH14, ADC2_CH3, FSPiWP, FSPiDQS
34	IO13	RTC_GPIO13, GPIO13, TOUCH13, ADC2_CH2, FSPiQ, FSPiO7
35	IO12	RTC_GPIO12, GPIO12, TOUCH12, ADC2_CH1, FSPiCLK, FSPiO6
36	EN	Chip Enable pin: High level: on, enables the chip. Low level: off, the chip powers off, low current. Note: Do not leave the EN pin floating.
37	IO11	RTC_GPIO11, GPIO11, TOUCH11, ADC2_CH0, FSPiD, FSPiO5
38	IO10	RTC_GPIO10, GPIO10, TOUCH10, ADC1_CH9, FSPiCS0, FSPiO4
39	IO09	RTC_GPIO9, GPIO9, TOUCH9, ADC1_CH8, FSPiHD
40	IO08	RTC_GPIO8, GPIO8, TOUCH8, ADC1_CH7
41	GND	Ground

3.3 Strapping Pins

ESP32-S2 series has three strapping pins.

- GPIO0 = IO0
- GPIO45 = IO45
- GPIO46 = IO46

Software can read the strapping values of these pins in “GPIO_STRAPPING” register.

During the chip’s system reset(power-on-reset, RTC watchdog reset, brownout reset, analog super watchdog reset, crystal clock glitch detection reset), the latches of the strapping pins sample the voltage level as strapping bits of “0” or “1”, and hold these bits until the chip is powered down or shut down.



IO0, IO45, IO46 are connected to internal pull-up/pull-down by default. If these pins are not connected externally or the connected external circuit is in a high impedance state, the internal weak pull-up/pull-down will determine the default value of the input level of these pins.

To change the value of strapping, users can apply external pull-down/pull-up resistors, or use the GPIO of the host MCU to control the strapping pin level of ESP32-S2 during power-on reset.

After reset, the strapping pins work as normal-function pins.

Refer to Table 2 for a detailed boot-mode configuration of the strapping pins.

Table 2 Strapping Pins

VDD_SPI voltage ¹			
Pin	Default	3.3 V	1.8 V
IO45 ²	drop down	0	1
Bootling Mode ¹			
Pin	Default	SPI Boot	Download Boot
IO0	pull up	1	0
IO46	Drop down	N/A	0
Enabling/Disabling ROM Code Print During Bootling ^{3 4}			
Pin	Default	Print normally	No printing after power-on
IO46	Drop down	See the description in Article 4 for details	See the description in Article 4 for details

Note:

1. The firmware can change the setting of "VDD_SPI voltage" after bootling through the configuration register.
2. GPIO 46 = 1 and GPIO0 = 0 cannot be used.
3. Since the operating voltage of the module's flash is 3.3 V by default (VDD_SPI output), the internal IO45 pull-up resistor R1 of the module is not loaded by default. At the same time, please pay attention to ensure that the external circuit will not pull IO45 high when the module is powered on when using IO45.
4. The ROM Code power-on printing defaults to the TXD0 pin, which can be switched to the DAC_1 (IO17) pin under the control of the eFuse bit.
5. The UART_PRINT_CONTROL of eFuse is:
 - When it is 0, it will print normally after power-on, and it is not controlled by IO46.
 - When 1, IO46 is 0: normal printing when power on; IO46 is 1: no printing when power on.
 - At 2, IO46 is 0: no printing when power on; IO46 is 1: normal printing when power on.
 - At 3, there is no printing after power on, and it is not controlled by IO46.



4 Electrical Characteristics

4.1 Absolute Maximum Ratings

Table 3 Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
VDD33	Power supply voltage	-0.3	3.6	V
TSTORE	Storage temperature	-40	85	°C

4.2 Recommended Operating Conditions

Table 4 Recommended Operating Conditions

Symbol	Parameter	Min	Typ	Max	Unit
VDD33	Power supply voltage	3.0	3.3	3.6	V
I_{VDD}	Current delivered by external power supply	0.5	—	—	A
T	Ambient temperature	-40	—	85	°C
Humidity	Humidity condition	—	85	—	%RH

4.3 Current Consumption Characteristics

With the use of advanced power-management technologies, the module can switch between different power modes. For details on different power modes, please refer to the tables below.

Table 5 Current Consumption Depending on RF Modes

Work mode	Description		Peak (mA)
Active(RF working)	TX	802.11b, 1Mbps, @19.5dBm	310
		802.11g, 54Mbps, @15dBm	220
		802.11n, HT20, MCS7, @13dBm	200
		802.11n, HT40, MCS7, @13dBm	160
	RX	802.11b/g/n, HT20	63
		802.11n, HT40	68

Note:

1. The current consumption measurements are taken with a 3.3 V supply at 25 °C of ambient temperature at the RF port. All transmitters' measurements are based on a 100% duty cycle.



2. The current consumption figures in RX mode are for cases when the peripherals are disabled and the CPU is idle.

Table 6 Current Consumption Depending on Work Modes

Work mode	Description	Typ	
Modem-sleep	CPU is working	240 MHz	22 mA
		160 MHz	17 mA
		Normal speed: 80 MHz	14 mA
Light-sleep	—	550 μ A	
Deep-sleep	ULP coprocessor is working	235 μ A	
	Ultra-low power sensor monitoring mode	22 μ A @1% duty	
	RTC timer + RTC memory	25 μ A	
	Only the RTC timer is working	20 μ A	
close	CHIP_PU pin is pulled low, the chip is in the off state	1 μ A	


Note:

- When measuring Modem-sleep power consumption data, the CPU is in working state and the cache is in idle state.
- In the scenario where Wi-Fi is turned on, the chip will switch between Active and Modem-sleep modes, and the power consumption will also change between the two modes.
- In Modem-sleep mode, the CPU frequency changes automatically, and the frequency depends on the CPU load and peripherals used.
- In Deep-sleep mode, only when the ULP coprocessor is in working state, GPIO and low-power I2C can be operated.
- When the system is in the ultra-low power sensor monitoring mode, the ULP coprocessor or sensor works periodically. The touch sensor works with a 1% duty cycle, and the system power consumption is typically 22 μ A.

5 Application Note


5.1 Module Dimensions

Figure 3 Module Dimensions

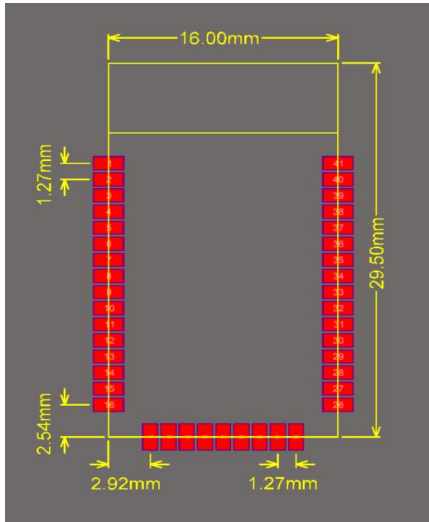

5.2 Reflow Profile


Figure 4 Reflow Profile

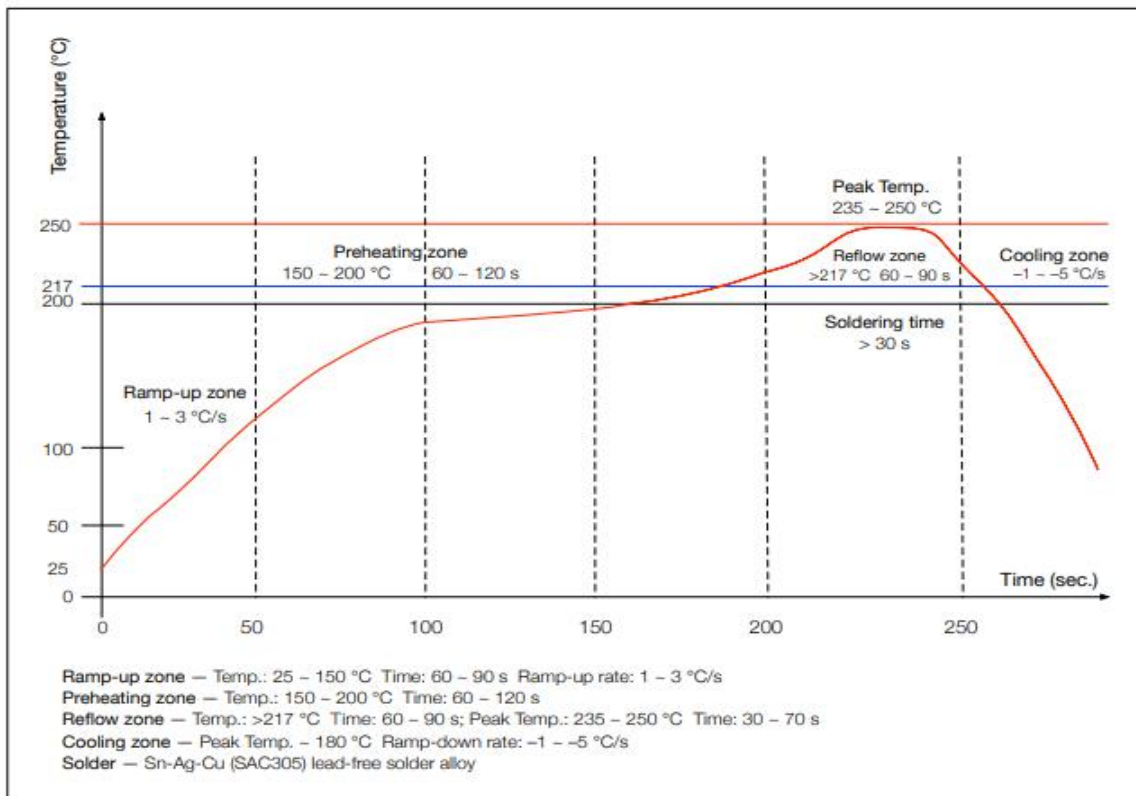

5.3 Peripheral Schematic

This is the typical application circuit of the module connected with peripheral components (for example, power supply, antenna, reset button, JTAG interface, and UART interface).

Figure 5 Module Schematics

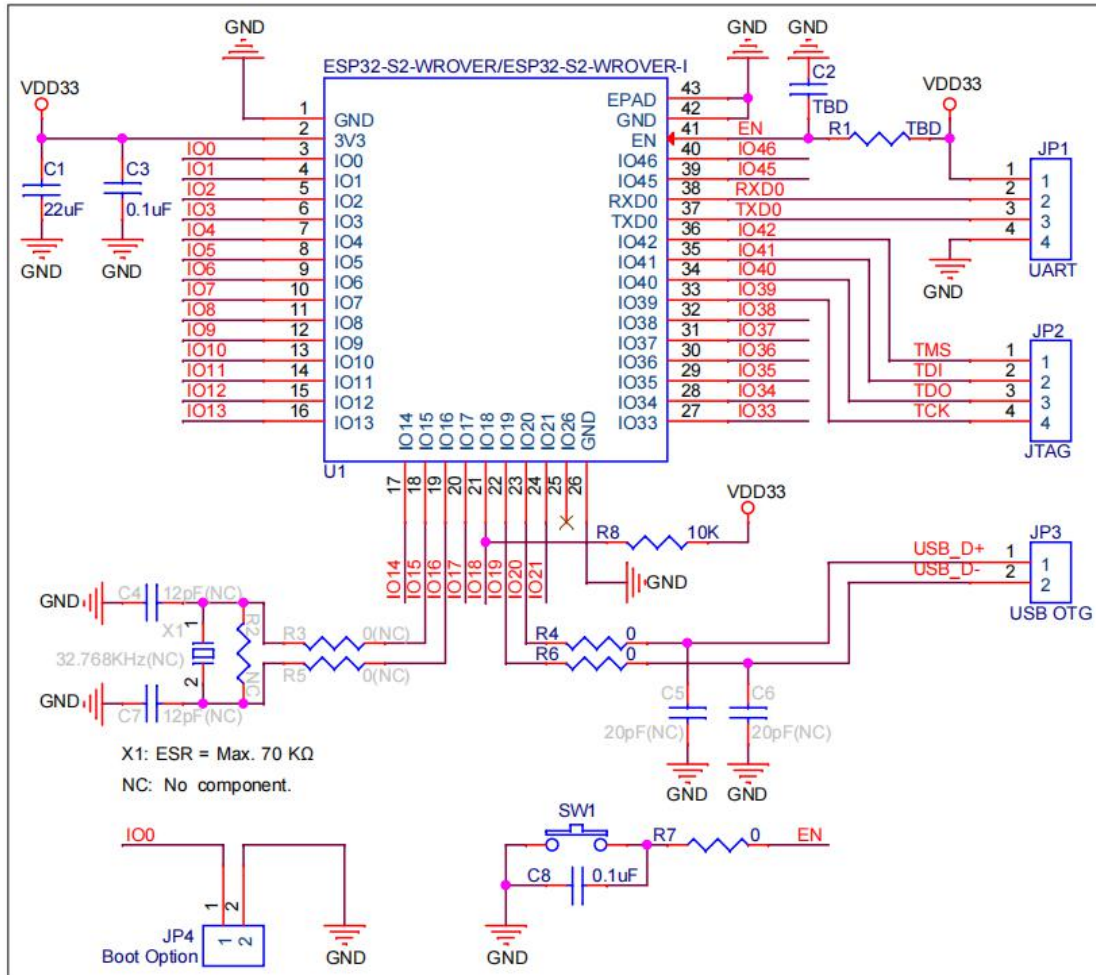



6 Product Trial

- Enquiry email: enquiry@wireless-tag.com
- Technical support email: technical@wireless-tag.com

Wireless-Tag



Federal Communication Commission Statement (FCC, U.S.)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

IMPORTANT NOTES

Co-location warning:

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

OEM integration instructions:

This device is intended only for OEM integrators under the following conditions:

The transmitter module may not be co-located with any other transmitter or antenna. The module shall be only used with the external antenna(s) that has been originally tested and certified with this module.

As long as the conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

Validity of using the module certification:

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host



equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

End product labeling:

The final end product must be labeled in a visible area with the following: “Contains Transmitter Module FCC ID: 2AFOS-WT32S2WROVER”.

Information that must be placed in the end user manual:

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

Integration instructions for host product manufactures according to KDB 996369 D03 OEM Manual v01**2.2 List of applicable FCC rules**

FCC Part 15 Subpart C 15.247 & 15.207 & 15.209

2.3 Specific operational use conditions

The module is a Bluetooth module with WiFi 2.4G function.

WiFi Specification:

Operation Frequency: 2412~2462MHz

Number of Channel: 11

Modulation: DSSS, OFDM

Type: PCB Antenna

Gain: 2 dBi

The module can be used for mobile or applications with a maximum 2dBi antenna. The host manufacturer installing this module into their product must ensure that the final composit product complies with the FCC requirements by a technical assessment or evaluation to the FCC rules, including the transmitter operation. The host manufacturer has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

2.4 Limited module procedures

Not applicable.

2.5 Trace antenna designs

Not applicable. The module has its own antenna, and doesn' t need a host' s printed board microstrip trace antenna etc.



2.6 RF exposure considerations

The module must be installed in the host equipment such that at least 20cm is maintained between the antenna and users' body; and if RF exposure statement or module layout is changed, then the host product manufacturer required to take responsibility of the module through a change in FCC ID or new application. The FCC ID of the module cannot be used on the final product. In these circumstances, the host manufacturer will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization

2.7 Antennas

Antenna Specification are as follows:

Type: PCB Antenna

Gain: 2 dBi

This device is intended only for host manufacturers under the following conditions: The transmitter module may not be co-located with any other transmitter or antenna; The module shall be only used with the internal antenna(s) that has been originally tested and certified with this module. The antenna must be either permanently attached or employ a 'unique' antenna coupler.

As long as the conditions above are met, further transmitter test will not be required. However, the host manufacturer is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.)

2.8 Label and compliance information

Host product manufacturers need to provide a physical or e-label stating "Contains Transmitter Module FCC ID: 2AFOS-WT32S2WROVER" with their finished product.

2.9 Information on test modes and additional testing requirements

WIFI

Operation Frequency: 2412~2462MHz

Number of Channel: 11

Modulation: DSSS, OFDM

Host manufacturer must perform test of radiated & conducted emission and spurious emission, etc according to the actual test modes for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product. Only when all the test results of test modes comply with FCC requirements, then the end product can be sold legally.

2.10 Additional testing, Part 15 Subpart B disclaimer

The modular transmitter is only FCC authorized for FCC Part 15 Subpart C 15.247 & 15.207 & 15.209 and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.



Manufacturer's Name: Wireless-Tag Technology Co., Ltd

Sample Description: WIFI Module

Trade Mark: wireless-tag

Model number: WT32-S2-WROVER

This device was tested for operations. To comply with RF exposure requirements, a minimum separation distance of 20cm must be maintained between the user's body and the product, including the antenna .

Accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.

This device in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. All essential radio test suites have been carried out. This restriction will be applied to all Member States of European Union.

1. The device complies with RF specifications when the device used at 20cm form your body

Declaration of Conformity

Hereby, Wireless-Tag Technology Co., Ltd declares that the product type WT32-S2-WROVER is in compliance with Directives 2014/53/EU.

www.wireless-tag.com



RF specification:

Function	Operation Frequency	Max RF Outputpower (dBm)	Limit (dBm)
2.4G WIFI	2412-2462MHz	18.70	20

WIFI Module
 Module: WT32-S2-WROVER
 Input : 3.3V  0.5A
 FCC ID: xxxxxxxxxxxxxx

Wireless-Tag Technology Co., Ltd
 801, Block A, Building 6, Shenzhen International Innovation Valley,
 Dashi Road, Xili Community, Xili Street, Nanshan District, Shenzhen.
 Importer: xxxxxxxx
 Address: xxxxxxxx