



Appendix A. Test Result of AC Power Line Conducted Emission

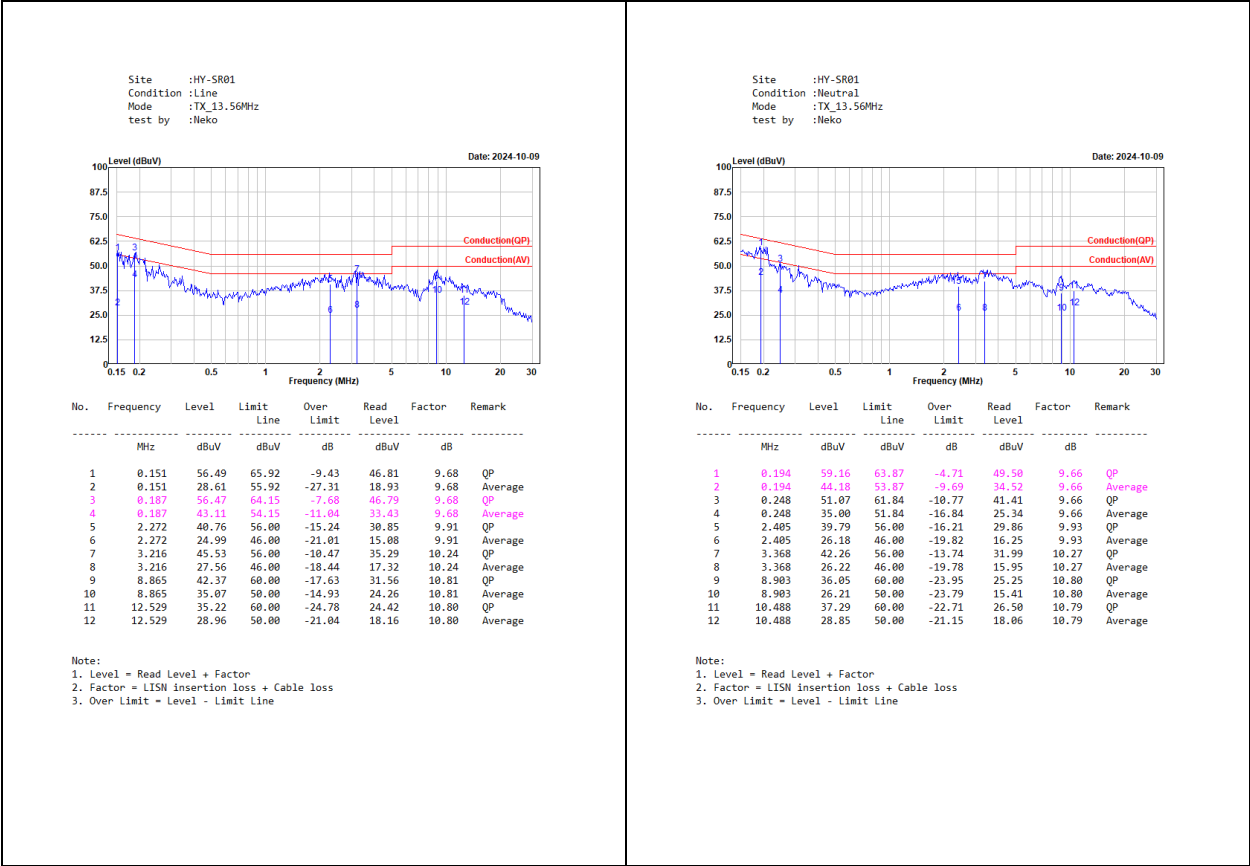

Appendix B. Test Result of Emission Bandwidth

Frequency (MHz)	Measurement Level (Hz)	Required Limit (MHz)	Result
13.56	25.67	--	--

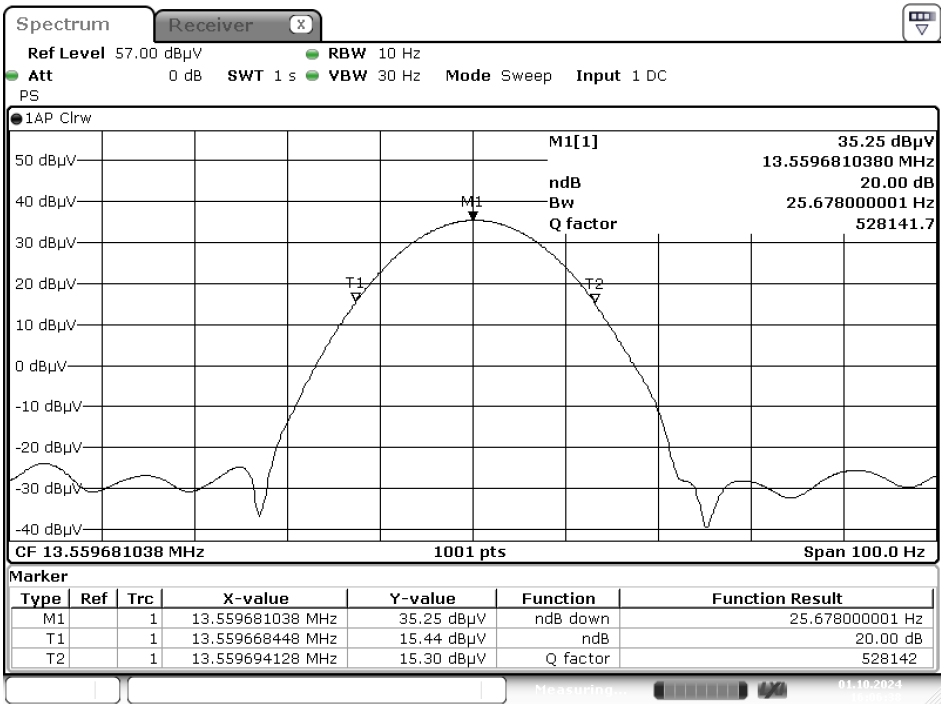


Date: 1.OCT.2024 16:06:38

Appendix C. Test Result of Frequency Stability


Temperature (°C)	Voltage (V)	Observe Time	Declared Frequency (MHz)	Read Frequency (MHz)	Tolerance (%)	Limit (%)
20	5	start	13.56	13.56111	0.008186	± 0.01 %
		2mins	13.56	13.56111	0.008186	
		5mins	13.56	13.56111	0.008186	
		10mins	13.56	13.56111	0.008186	
20	5.75	start	13.56	13.56095	0.007006	± 0.01 %
		2mins	13.56	13.56095	0.007006	
		5mins	13.56	13.56095	0.007006	
		10mins	13.56	13.56095	0.007006	
20	4.25	start	13.56	13.56066	0.004867	± 0.01 %
		2mins	13.56	13.56066	0.004867	
		5mins	13.56	13.56066	0.004867	
		10mins	13.56	13.56066	0.004867	
50	5	start	13.56	13.56102	0.007522	± 0.01 %
		2mins	13.56	13.56102	0.007522	
		5mins	13.56	13.56102	0.007522	
		10mins	13.56	13.56102	0.007522	
40	5	start	13.56	13.56102	0.007522	± 0.01 %
		2mins	13.56	13.56102	0.007522	
		5mins	13.56	13.56102	0.007522	
		10mins	13.56	13.56102	0.007522	
30	5	start	13.56	13.56033	0.002434	± 0.01 %
		2mins	13.56	13.56033	0.002434	
		5mins	13.56	13.56033	0.002434	
		10mins	13.56	13.56033	0.002434	

10	5	start	13.56	13.56033	0.002434	± 0.01 %
		2mins	13.56	13.56033	0.002434	
		5mins	13.56	13.56033	0.002434	
		10mins	13.56	13.56033	0.002434	
0	5	start	13.56	13.55989	-0.000811	± 0.01 %
		2mins	13.56	13.55989	-0.000811	
		5mins	13.56	13.55989	-0.000811	
		10mins	13.56	13.55989	-0.000811	
-10	5	start	13.56	13.55961	-0.002876	± 0.01 %
		2mins	13.56	13.55961	-0.002876	
		5mins	13.56	13.55961	-0.002876	
		10mins	13.56	13.55961	-0.002876	
-20	5	start	13.56	13.55992	-0.000590	± 0.01 %
		2mins	13.56	13.55992	-0.000590	
		5mins	13.56	13.55992	-0.000590	
		10mins	13.56	13.55992	-0.000590	

Appendix D. Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

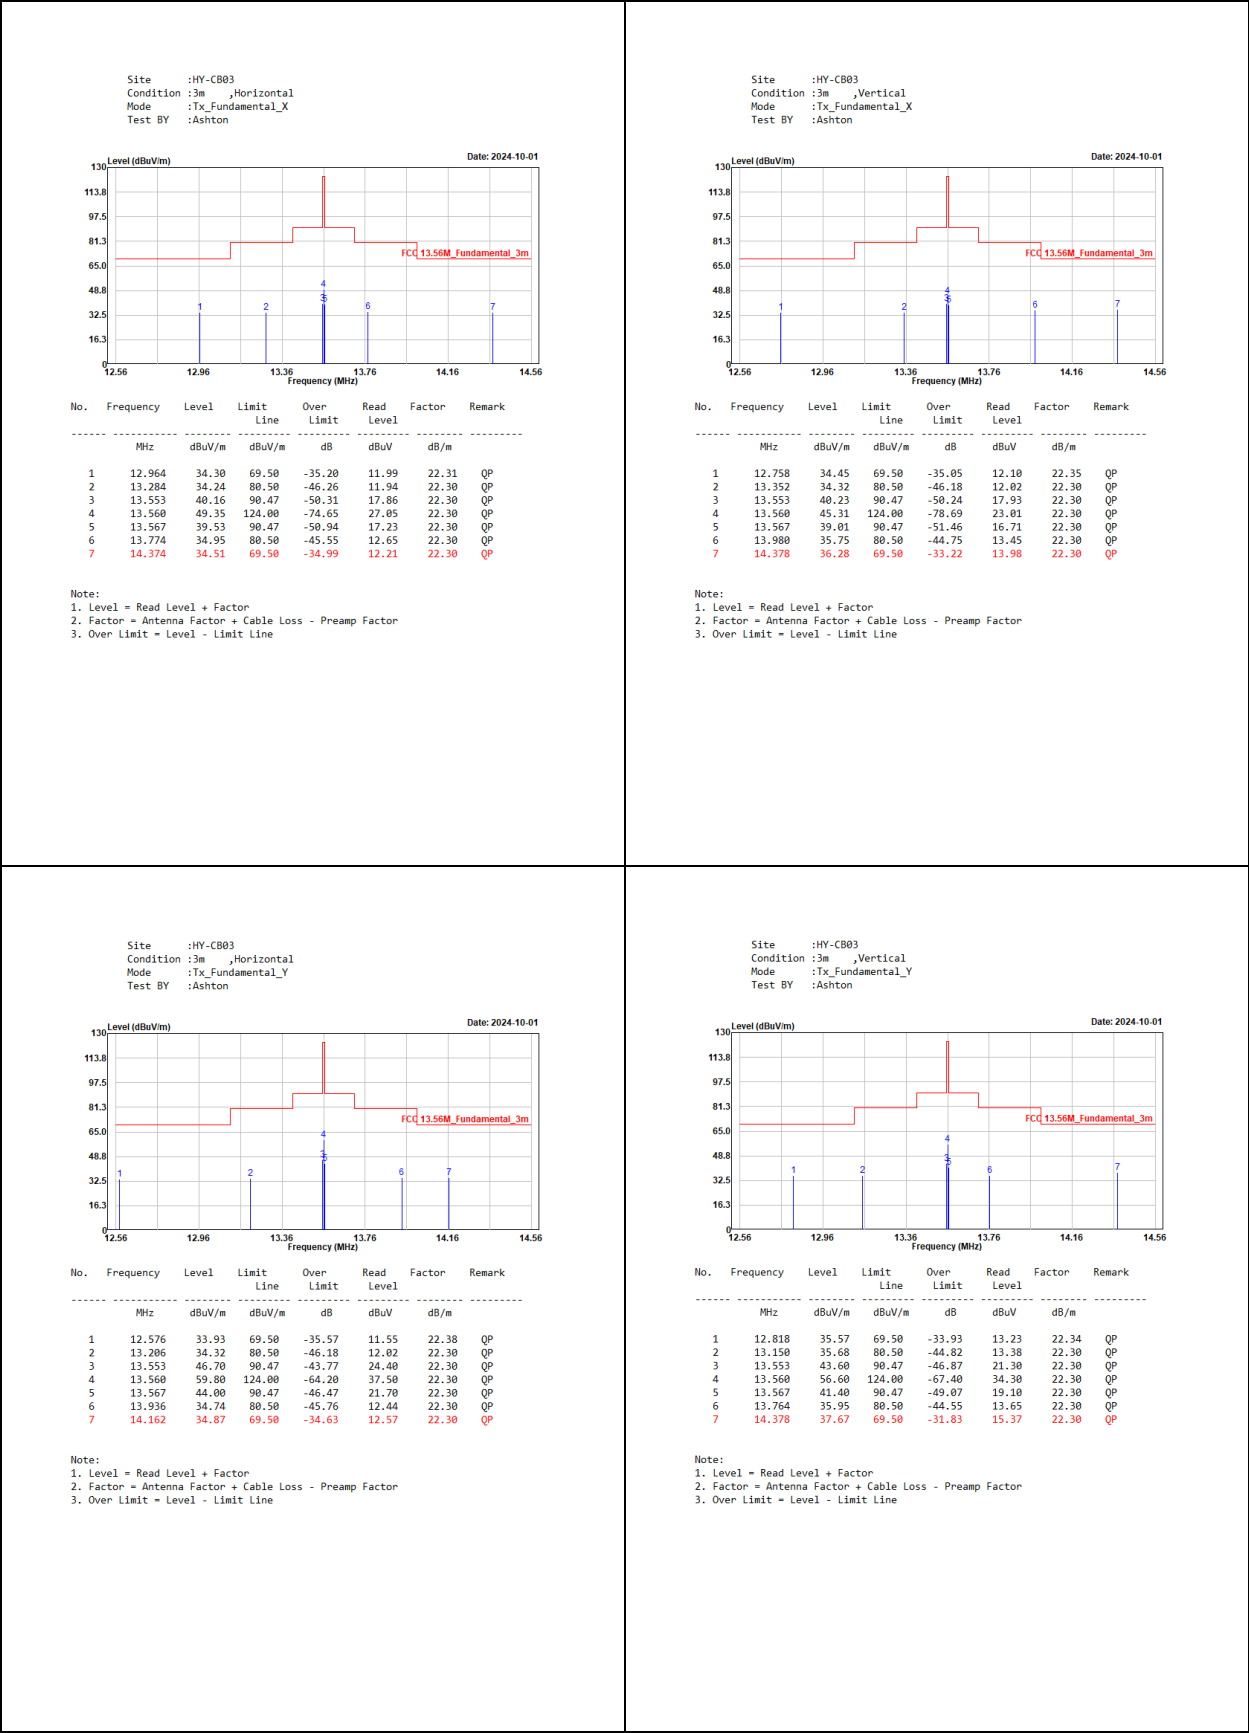


Site :HY-CB03
Condition :3m Horizontal
Mode :Tx_Fundamental_Z
Test BY :Bob

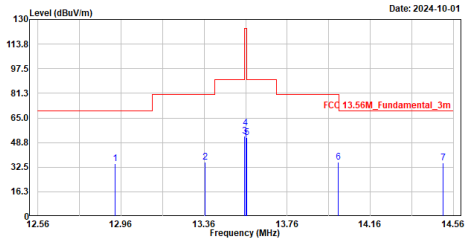

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	12.932	35.04	69.50	-34.46	12.73	22.31	QP
2	13.366	35.64	80.50	-44.86	13.34	22.30	QP
3	13.553	52.95	90.47	-37.52	30.65	22.30	QP
4	13.560	58.55	124.00	-65.45	36.25	22.30	QP
5	13.567	52.22	90.47	-38.25	29.92	22.30	QP
6	14.006	35.65	80.50	-44.85	13.35	22.30	QP
7	14.512	35.46	69.50	-34.04	13.16	22.30	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB03
Condition :3m Vertical
Mode :Tx_Fundamental_Z
Test BY :Bob

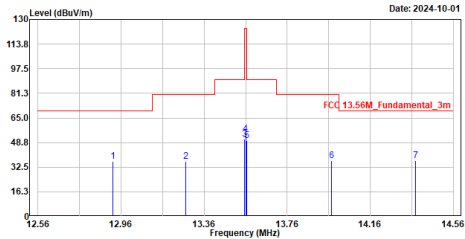

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	12.922	36.24	69.50	-33.26	13.92	22.32	QP
2	13.272	36.18	80.50	-44.32	13.88	22.30	QP
3	13.553	51.01	90.47	-39.46	28.71	22.30	QP
4	13.560	54.29	124.00	-69.71	31.99	22.30	QP
5	13.567	50.12	90.47	-40.35	27.82	22.30	QP
6	13.974	36.64	80.50	-43.86	14.34	22.30	QP
7	14.378	36.84	69.50	-32.66	14.54	22.30	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Appendix E. Test Result of Radiated Emission

