


L8 User's manual

(Door station Model No.8)

1. Door stations



Base + card reader




Assistant door panel 1x8


2. Technical specification

Camera:	1/3" CCD
Viewing angle:	92°
Lens:	F=3.6
Resolution:	420TV Lines
Min. Illumination:	0.01 Lux
Video Output:	1V _{p-p} /75Ω
Audio SNR:	≥25 dB
Audio Distortion:	≤7%
Assistant door panel:	Max. 16pcs
System Capacity:	Max. 132 apartments/building
Card and capacity:	≤50,000pcs; ID card(Format:EM, 125Kh); IC card (Format: mifare 1 S50/S70, mifare Ultra Light, mifare Light, 13.56MHz)
Standby Current:	≤116mA(direct-call)
Working Current:	≤450mA(direct-call)
Power supply:	DC12V(for audio); DC32V(for video)
Environment Temperature:	-40℃ ~ +45℃

3. Structure

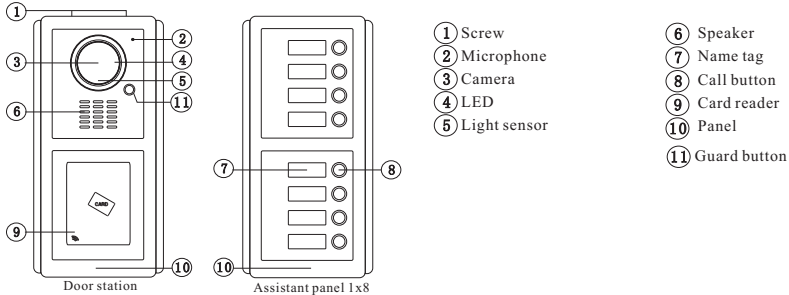

4. Installation




- a. Produce a rectangle groove as the installation size (104x214x50mm) on a suitable position and then fix the box in it with cements or screws(①).
- b. Take off the screws and then the frame(②).
- c. Put the rubber seal on the back of door panel(③).
- d. Put the door panel into the box and fix it with the screws(③) after connection.
- e. Put the frame on the door panel and fix it with the screws(②).

5. Operation


5.1 Call indoor phones

Push a call button on the door station.




5.2 Call the guard unit (if there is)

Push the guard button as the following figure.






5.3 Release door with registered card

Move the registered card over the card reader as the following figure.



6. Door station list

Product photos	Model names	Series model numbers	Sizes: L x W x D (mm)	Exclusive features
	Model No.8	JB-5000 L8-5002MGC(8)-8	240X120X58	With card reader or without.
		JB-5000 L8-5002MGLC-IP(8)-8		With card reader and 4 call buttons
		JB-5000 L8-5002 MLC-IP(8)-8		With 2~4 call buttons

XIMAN LEELEN TECHNOLOGY CO.,LTD.
65, SUNBAN SOUTH ROAD, JIMEI, XIAMEN, 361021 CHINA



This appliance shall not be disposed together with the normal waste. It must be recycled.

Attitude during operation below 2km.

FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.