RSE Co-location Result			
Operating Mode	1	**Polarization**	Horizontal
Operating Function	Normal Link		

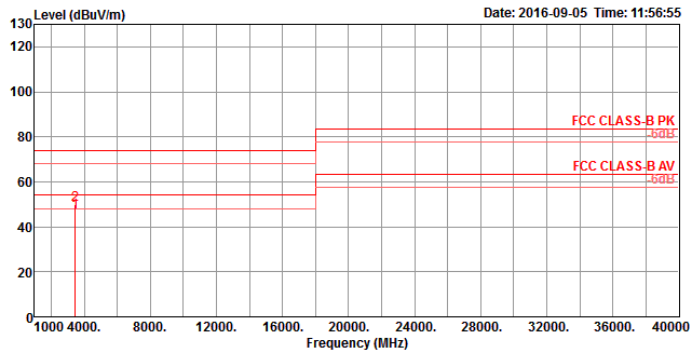

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3473.32	46.32	54.00	-7.68	43.46	6.63	28.70	32.47	114	189	Average	HORIZONTAL
2	3473.32	49.66	74.00	-24.34	46.80	6.63	28.70	32.47	114	189	Peak	HORIZONTAL

RSE Co-location Result			
Operating Mode	1	**Power Phase**	Vertical
Operating Function	Normal Link		

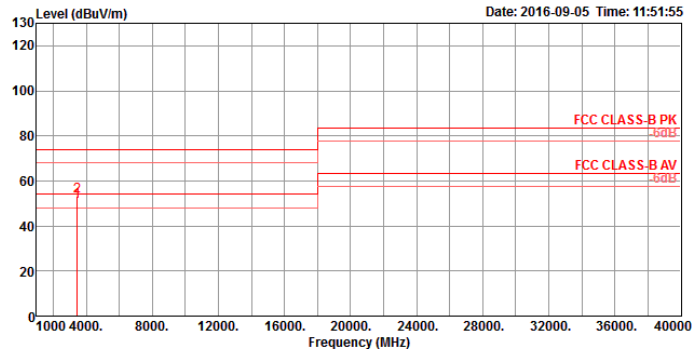

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3473.32	50.91	54.00	-3.09	48.05	6.63	28.70	32.47	292	335	Average	VERTICAL
2	3473.34	53.30	74.00	-20.70	50.44	6.63	28.70	32.47	292	335	Peak	VERTICAL