CMC Centro Misure Compatibilità S.r.l.
Via dell'Elettronica, 12/C
36016 Thiene (VI) – ITALY
Tel./Fax +39 0445 367702
www.cmclab.it - info@cmclab.it

LAB N° 0168

Independent Testing Laboratory
Accredited by ACCREDIA according to UNI CEI EN ISO/IEC 17025 cert. nr. 0168

TEST REPORT nr. R15182602

Federal Communication Commission (FCC)

Test item

Description ..... :	RADIOBAND RECEIVER USING OSE INTERFACE FROM RBAND TO CONTROL PANEL
Trademark ..... :	JCM TECHNOLOGIES
Model/Type ..... :	RB3 OSE916
FCC ID ..... :	U5Z-RB3OSE916

Test Specification

Standard ..... :	FCC Rules & Regulations, Title 47:2014 Part 15 paragraph(s): 203, 204, 207, 209 and 231

Client's name ..... :	JCM TECHNOLOGIES S.A.
Address ..... :	Bisbe Morgades, 46 (Baixos) – 08500 Vic – SPAIN
Manufacturer's name :	Same as client
Address ..... :	--

Report

Tested by ..... :	A. Bertezzolo – *Technician*
Approved by ..... :	R. Beghetto – *Laboratory Manager*
Date of issue ..... :	22.02.16
Contents ..... :	48 pages

Index

ANNEX 1: photographs of test setup

1. Summary

Standard:

FCC Rules & Regulations, Title 47:2014
Part 15 paragraph(s): 203, 204, 207, 209 and 231

Test specifications	*Environmental Phenomena*	*Tests sequence*	*Result*
Part 15.203	Antenna requirements	1	Complies
Part 15.207	Conducted emissions	2	Complies
Part 15.209	Radiated emissions	3	Complies
Part 15.209 and 15.231(b)	Fundamental and spurious emissions (≤ 1 GHz)	4	Complies
Part 15.209 and 15.231	Spurious emissions (> 1 GHz)	5	Complies
Part 15.231(c)	Occupied channel bandwidth	6	Complies
Part 15.231(a3)	Periodic operation characteristics	7	Complies

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification

2. Description of Equipment under test (EUT)

Power supply	:	12/24 Vdc
		Tests performed on 12 Vdc power supply
Serial Number	:	--
Type of equipment	:	☑ Transmitter Unit
		☑ Receiver Unit
Type of station	:	❑ Fixed station
		❑ Portable station
		☑ Mobile station
Nominal frequency	:	902,28 MHz
		915,63 MHz
		927,68 MHz
Duty cycle evaluation	:	2,2 ms
		Evaluation has been performed in agreement with FCC Part 15.35c. This transmission is intended as a train of pulses of 2,2 ms ON and 97,8 ms OFF on 100 ms evaluation. No other "ON" after the first 100 ms on a single transmission. See also graph G15182640
Delta (dB) for the performing of tests	:	20log (2,2 ms /100 ms) = -33,15 dB

G15182640

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182640
Test Spec	

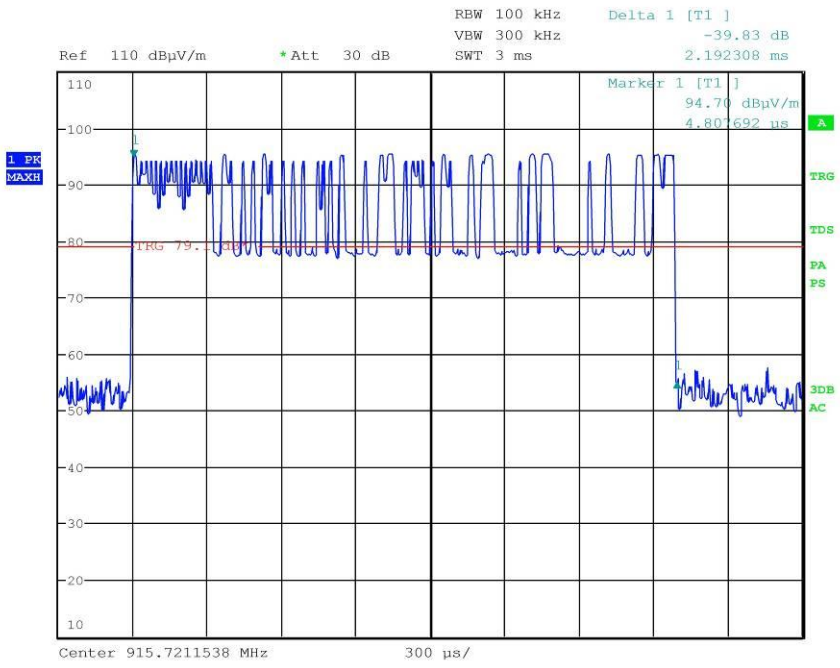

2.1 Test Site

Company	:	CMC Centro Misure Compatibilità S.r.l.
Address	:	Via dell'Elettronica, 12/C 36016 Thiene (VI) – ITALY
Test site facility's FCC registration number	:	271947

3. Testing and sampling

Date of receipt of test item	:	22.09.15
Testing start date	:	18.11.15
Testing end date	:	26.11.15
Samples tested nr.	:	1
Sampling procedure.	:	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion
Internal identification	:	adhesive label with the product number P151024

4. Operative conditions

EUT exercising	:	EUT in continuous transmission at the maximum power on each operating frequency.

5. Photograph(s) of EUT

5.1 Photograph(s) of EUT

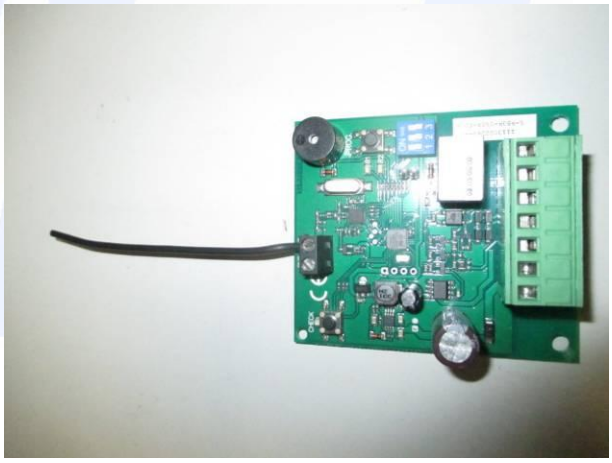

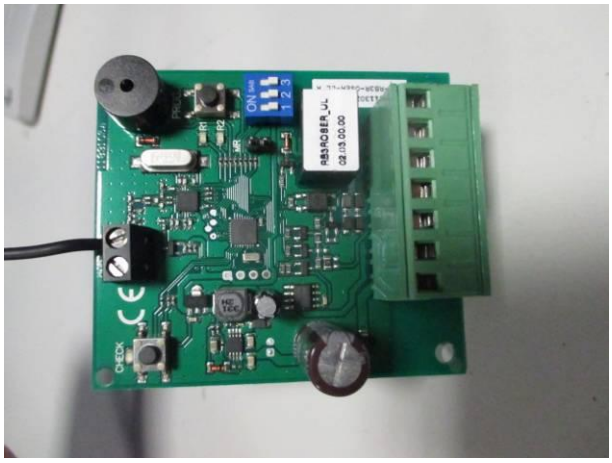

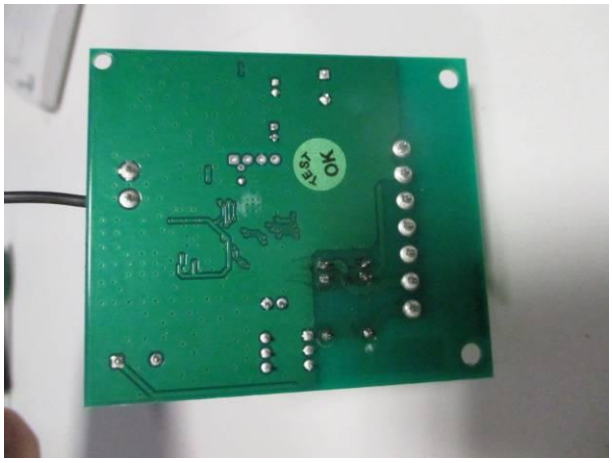

6. Equipment list

Id. number	*Manufacturer*	*Model*	*Description*	*Serial number*	*Last calibration*	*Due date calibration*
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '15	January '16
CMC S108	EMCO	3115	Horn Antenna	9811-5622	May '13	May '16
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	January '13	January '16
CMC S136	Schwarzbeck	VULB 9163	Broadband Antenna	9136-205	May '13	May '16
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '15	January '16
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '15	January '16
CMC S227	Rohde & Schwarz	ESR7	EMI Test Receiver 7GHz	101121	January '15	January '16

7. Measurement uncertainty

Test	Expanded Uncertainty	note
Conducted Emission		
(50Ω/50µH AMN) - (9 kHz – 150 kHz)	±3.6 dB	1
(50Ω/50µH AMN) - (150 kHz – 30 MHz)	±3.0 dB	1
(Voltage probe) - (150 kHz – 30 MHz)	±2.8 dB	1
(50Ω/5µH AMN) - (150 kHz – 108 MHz)	±2.6 dB	1
Discontinuous Conducted Emission		
Conducted Emission (50Ω/50µH AMN) - (150 kHz – 30 MHz)	±3.0 dB	1
Disturbance Power (30 MHz – 300 MHz)	±3.7 dB	1
Radiated Emission		
(0,150 MHz – 30 MHz)	±4.0 dB	1
(30 MHz – 1000 MHz)	±4.3 dB	1
(1 GHz – 6 GHz)	±4.5 dB	1
Electromagnetic field EMF	±10.5 %	1
Harmonic current emissions test	±1.8 %	1
Voltage fluctuation and flicker test	±2.6 %	1
Insertion loss test	±2.0 dB	1
Radiated electromagnetic disturbance test (loop antenna)	±2.1 dB	1
Radiated electromagnetic field immunity test	0.81 V/m at 3V/m	1
Pulse modulated radiated electromagnetic field immunity test	0.81 V/m at 3V/m	1
Injected currents immunity test	0.45 V at 3V	1
Bulk current	3.7 mA at 60 mA	1
Power frequency magnetic field immunity test	0.1 A/m at 10 A/m	1
Effective radiated power (F < 1GHz)	±4.3 dB	1
Effective radiated power (F > 1GHz)	±3.7 dB	1
Frequency error	< 1x10-7	1
Modulation bandwidth	< 1x10-7	1
Conducted RF power and spurious emission	±0.7 dB	1
Adjacent channel power	±1.2 dB	1
Blocking	±1.2 dB	1
Electrostatic discharge immunity test		2
Electrical fast transients / burst immunity test		2
Surge immunity test		2
Pulse magnetic field immunity test		2
Damped oscillatory magnetic field immunity test		2
Short interruption immunity test		2
Voltage transient emission test	±2.2 %	1
Transient immunity test		2
Rev_15_01 date 04/05/2015		

Note 1:
The expanded uncertainty reported according to EN55016-4-2:2011 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2.

8. Reference documents

Reference no.	*Description*
FCC Rules and Regulation Title 47 part 15:2014	--
ANSI C63.4:2009	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
Internal Procedure PM001 rev. 2.0 (Quality Manual)	Measure Procedure
Internal procedure INC_M rev. 8.2 (Quality Manual)	Measurement uncertainty calculation

9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector.

At the frequencies where the measures exceed the limit or within 6 dB from it, the test was repeated with quasi-peak detector and/or average detector.

10. Test case verdicts

Test case does not apply to the test object ..... : N.A.
Test item does meet the requirement ..... : Complies
Test item does not meet the requirement..... : Does not comply
Test not performed ..... : N.E.

11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC_M rev. 8.2.

Judgement of compliance:

Case 1	Case 2	Case 3	Case 4
			
The sample complies with the requirement. The measurement results is within the specification limit when the measurement uncertainty is taken into account.	The sample complies with the requirement. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	The sample does not comply with the requirement. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The sample does not comply with the requirement. The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.

11.1 Antenna requirements

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.203 and 15.204
- Internal procedure PM001
- See clause 4 of this test report
- Test date: 18 November 2015
- Technician: A. Bertezzolo

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

--
Measurement uncertainty: See clause 7 of this test report

Test specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded

Environmental conditions

Temperature (°C)	*Atmospheric pressure (kPa)*	*Relative humidity (%)*
22	101	45

Result

Antenna Type	*External R.F. power amplifier*	*Gain*	*Remarks*	*Results*
Wire connected to terminal	Not Present	--	--	Complies

Result: The requirements are met

11.2 Conducted emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.207
- Internal procedure PM001
- See clause 4 of this test report
- Test date: 26 November 2015
- Technician: A. Bertezzolo

Test configuration and test method

Test site:
Shielded chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S010, CMC S200, CMC S206
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Main port
Frequency range: 150 kHz – 30 MHz

Environmental conditions

Temperature (°C)	*Atmospheric pressure (kPa)*	*Relative humidity (%)*
21	98	46

Acceptance limits

Frequency range (MHz)	*dB(µV) Quasi-peak*	*dB(µV) Average*
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Setup

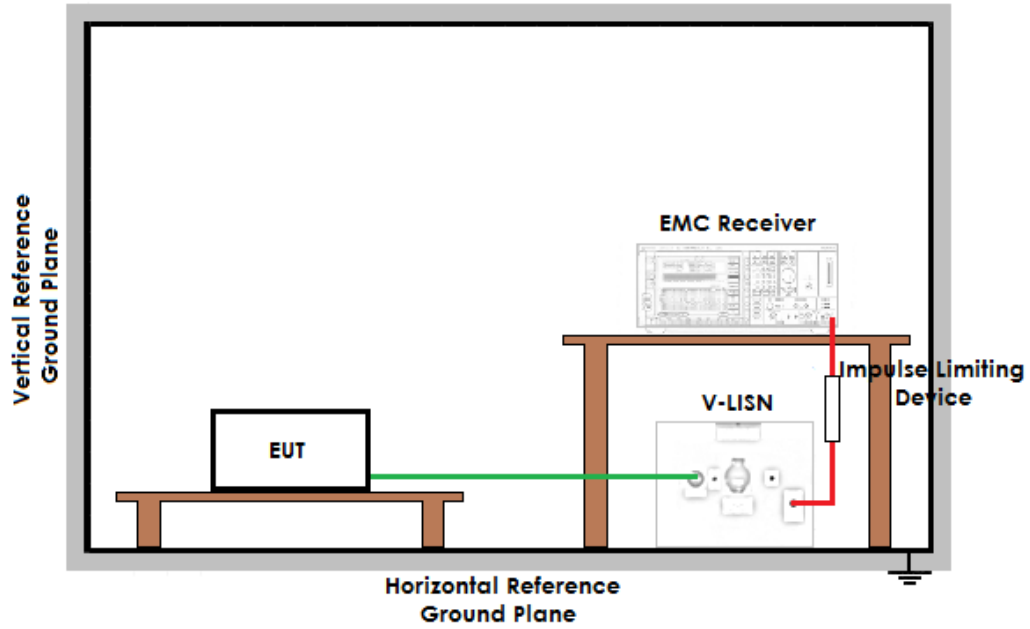

Result

Line	*Graphs*	*Remarks*	*Result*
+12 Vdc	G15182638	--	Complies
-12 Vdc	G15182639	--	Complies
Remarks: Worst case			

Graphs Legend
PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X

Graphs

G15182638

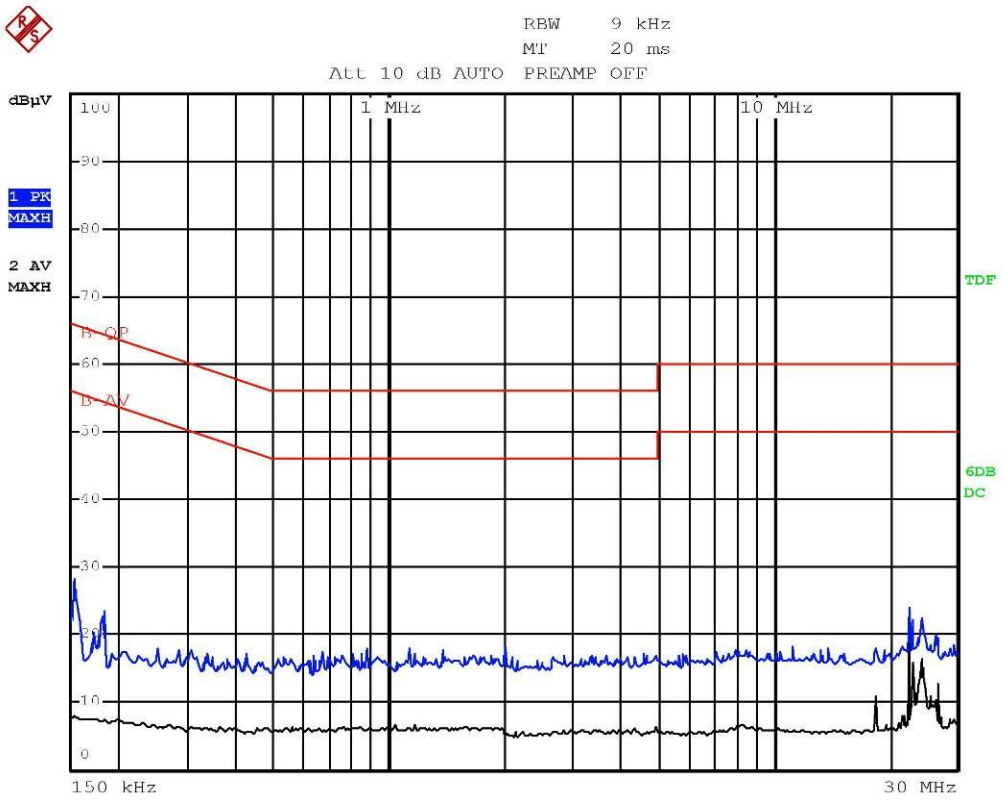

Bertezzolo 15182638

G15182639

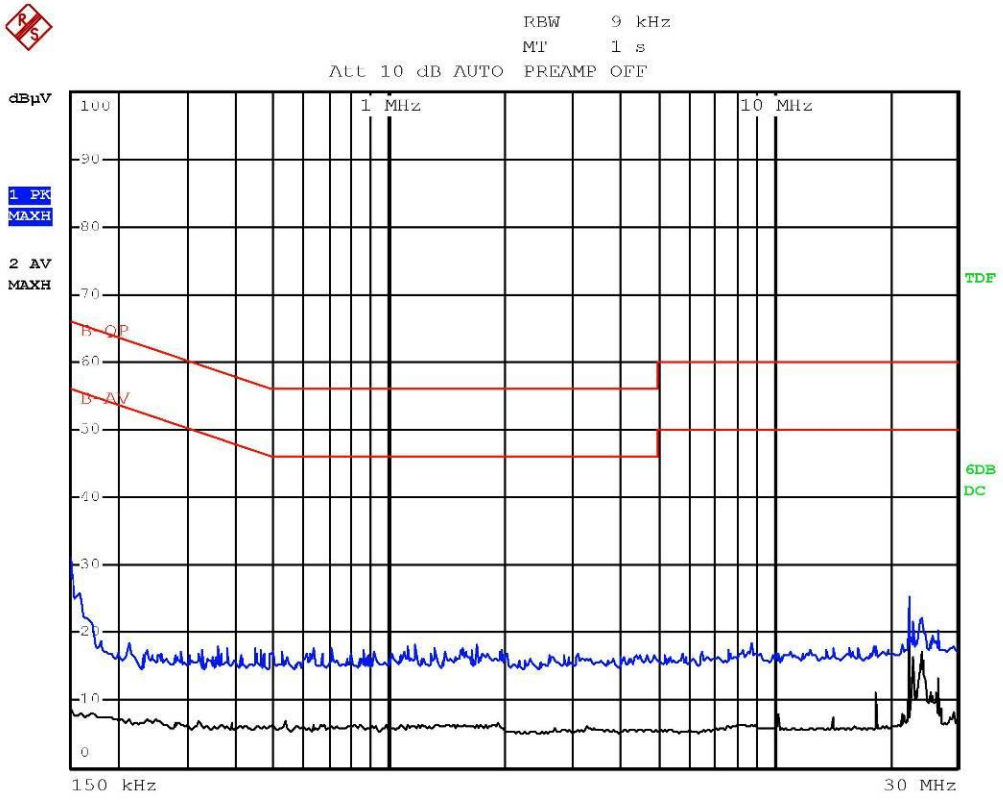

Bertezzolo 15182639

Result: The requirements are met

11.3 Radiated emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.209
- Internal procedure PM001
- See clause 4 of this test report
- Test date: 18 November 2015
- Technician: A. Bertezzolo

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S127, CMC S136, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Frequency range: 0,009 MHz – 1000 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 3 m

Environmental conditions

Temperature (°C)	*Atmospheric pressure (kPa)*	*Relative humidity (%)*
22	100	45

Acceptance limits

Frequency range (MHz)	*Limits [dB(µV/m)]*
0,009 to 0,490	128,51 to 93,80
0,490 to 1,705	73,80 to 62,97
1,705 to 30	69,54
30 to 88	40
88 to 216	43,52
216 to 960	46,02
Above 960	53,98
Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.	

Setup

Frequency ≤ 30 MHz

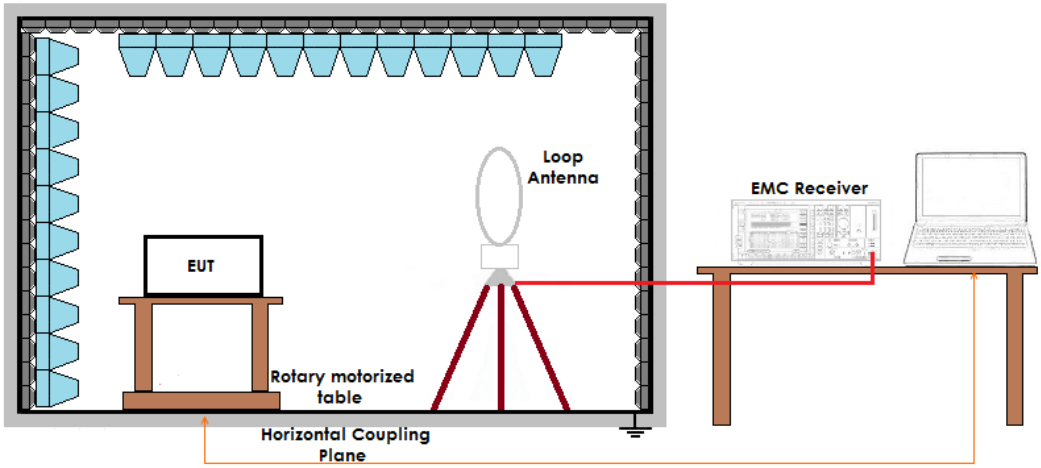

Frequency ≤ 1 GHz

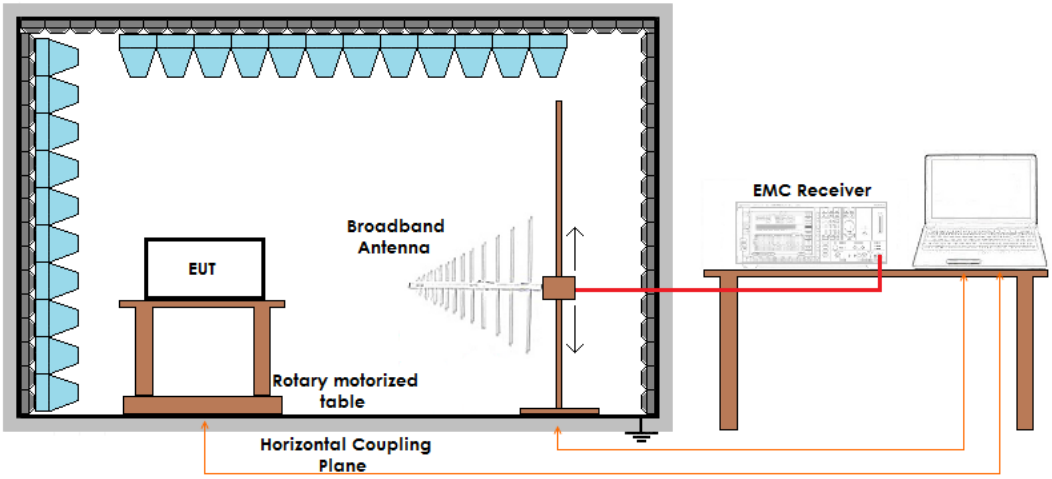

Frequency > 1 GHz

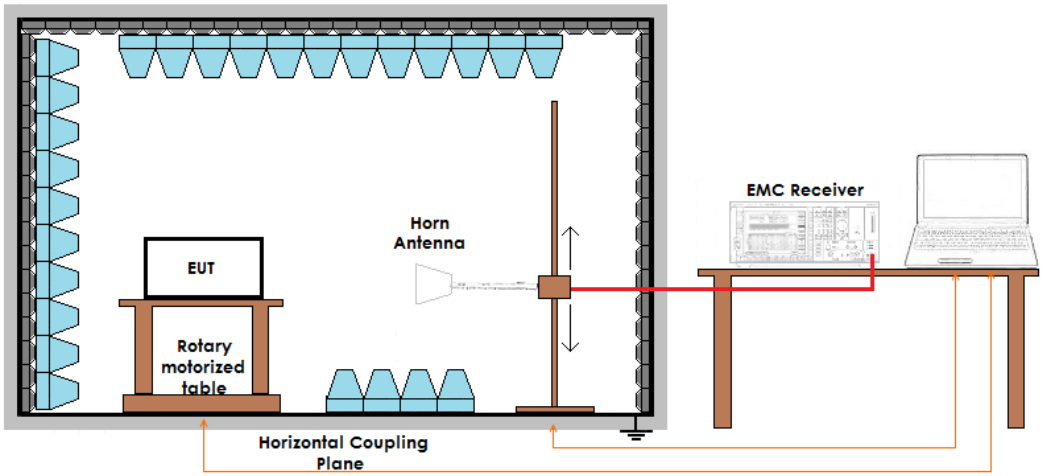

Result

Polarization	*Frequency Range (MHz)*	*Graphs*	*Remarks*	*Result*
Loop	0,009 – 30	G15182637	Worst case	Complies
V	30 – 1000	G15182604	902 MHz frequency	Complies
H	30 – 1000	G15182605	902 MHz frequency	Complies
V	30 – 1000	G15182609	915 MHz frequency	Complies
H	30 – 1000	G15182610	915 MHz frequency	Complies
V	30 – 1000	G15182614	927 MHz frequency	Complies
H	30 – 1000	G15182615	927 MHz frequency	Complies
V	1000 – 10000	G15182634	Worst case	Complies
H	1000 – 10000	G15182633	Worst case	Complies
Remarks:	EUT in transmission. Peaks above the limits are caused by the nominal transmitting frequency			

Graphs Legend
PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a x

Graphs

G15182604

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182604
Test Spec	

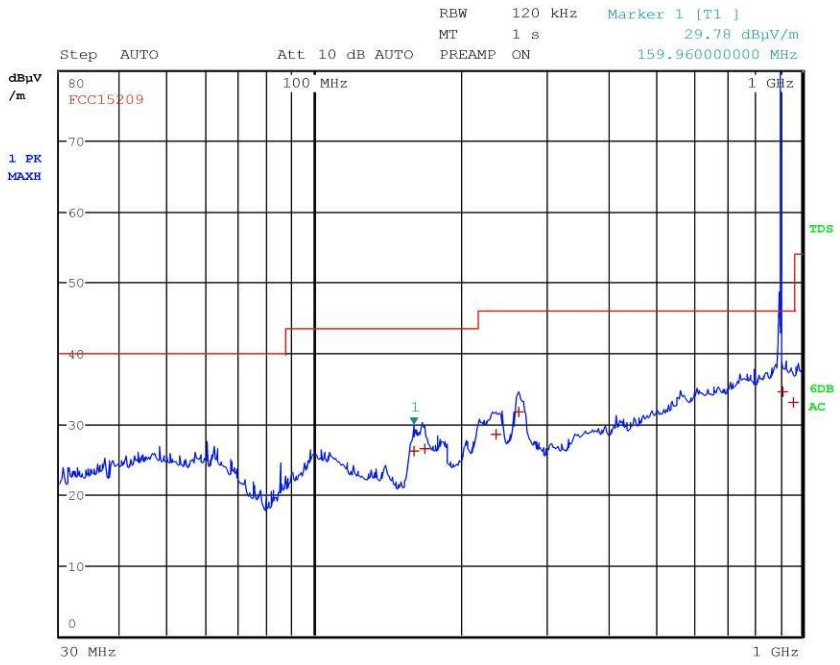

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 6

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	159.960000000 MHz	26.07	Quasi Peak	-17.45
1	168.600000000 MHz	26.46	Quasi Peak	-17.06
1	235.560000000 MHz	28.51	Quasi Peak	-17.51
1	262.000000000 MHz	31.62	Quasi Peak	-14.40
1	911.760000000 MHz	34.52	Quasi Peak	-11.50
1	962.520000000 MHz	33.01	Quasi Peak	-20.97

G15182605

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182605
Test Spec	

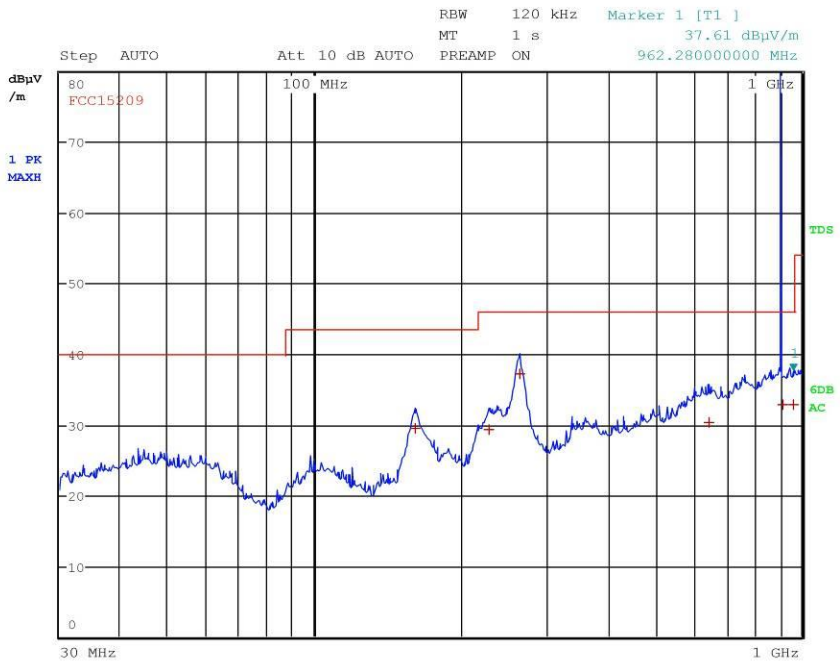

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 6

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	160.560000000 MHz	29.54	Quasi Peak	-13.98
1	228.600000000 MHz	29.29	Quasi Peak	-16.73
1	263.520000000 MHz	37.27	Quasi Peak	-8.75
1	645.440000000 MHz	30.29	Quasi Peak	-15.73
1	913.240000000 MHz	32.77	Quasi Peak	-13.25
1	962.280000000 MHz	32.82	Quasi Peak	-21.16

G15182609

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182609
Test Spec	

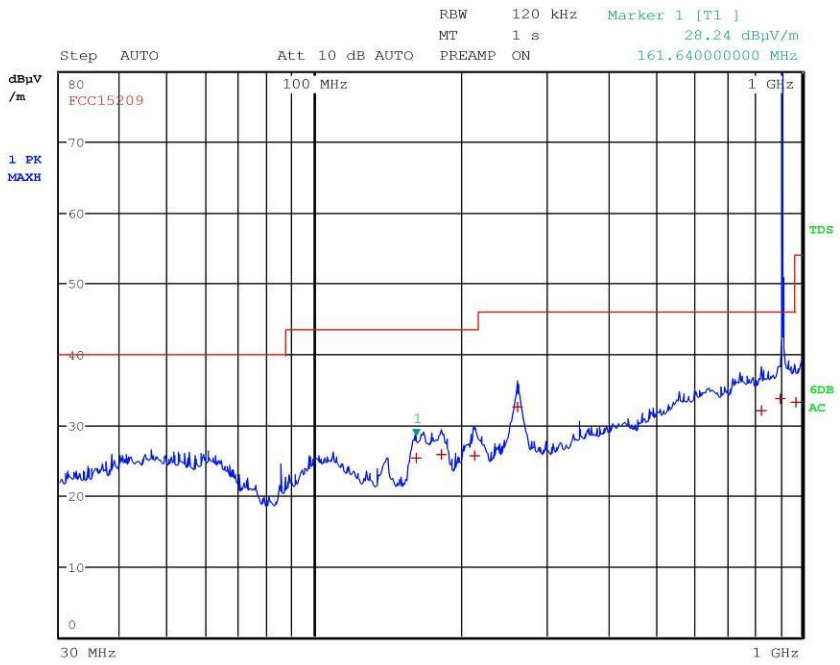

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 7

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	161.640000000 MHz	25.25	Quasi Peak	-18.27
1	182.280000000 MHz	25.85	Quasi Peak	-17.67
1	212.720000000 MHz	25.62	Quasi Peak	-17.90
1	260.760000000 MHz	32.49	Quasi Peak	-13.53
1	828.000000000 MHz	32.03	Quasi Peak	-13.99
1	905.600000000 MHz	33.70	Quasi Peak	-12.32
1	974.200000000 MHz	33.16	Quasi Peak	-20.82

G15182610

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182610
Test Spec	

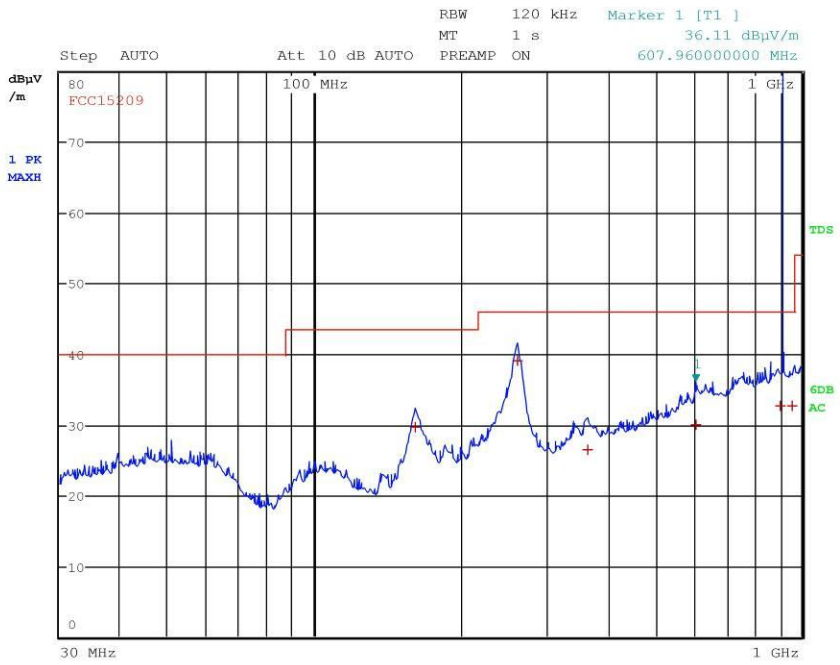

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 6

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	161.400000000 MHz	29.67	Quasi Peak	-13.85
1	260.360000000 MHz	39.08	Quasi Peak	-6.94
1	363.560000000 MHz	26.43	Quasi Peak	-19.59
1	607.960000000 MHz	30.00	Quasi Peak	-16.02
1	905.640000000 MHz	32.72	Quasi Peak	-13.30
1	955.760000000 MHz	32.75	Quasi Peak	-13.27

G15182614

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182614
Test Spec	

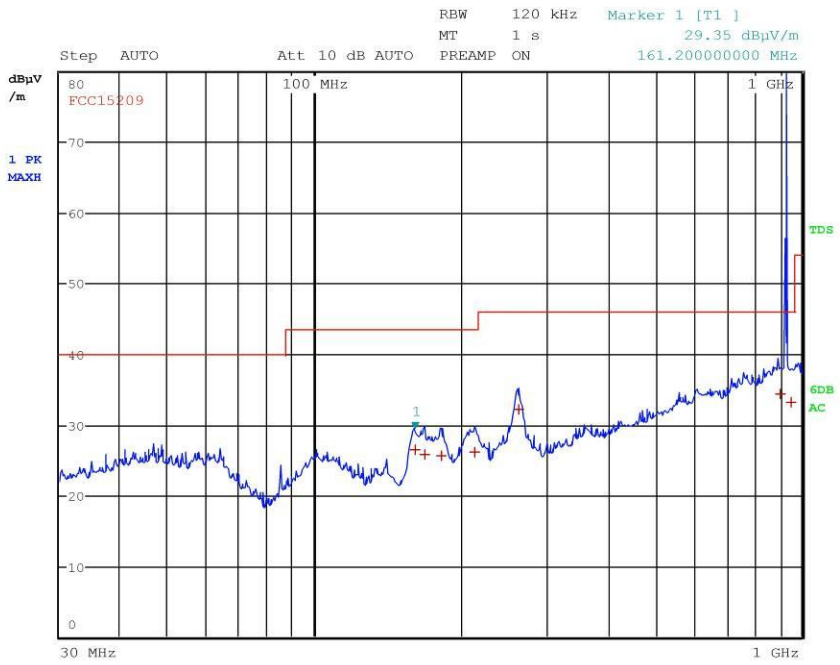

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 7

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	161.200000000 MHz	26.42	Quasi Peak	-17.10
1	168.800000000 MHz	25.83	Quasi Peak	-17.69
1	181.880000000 MHz	25.65	Quasi Peak	-17.87
1	213.400000000 MHz	26.21	Quasi Peak	-17.31
1	262.520000000 MHz	32.21	Quasi Peak	-13.81
1	901.640000000 MHz	34.41	Quasi Peak	-11.61
1	949.240000000 MHz	33.14	Quasi Peak	-12.88

G15182615

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182615
Test Spec	

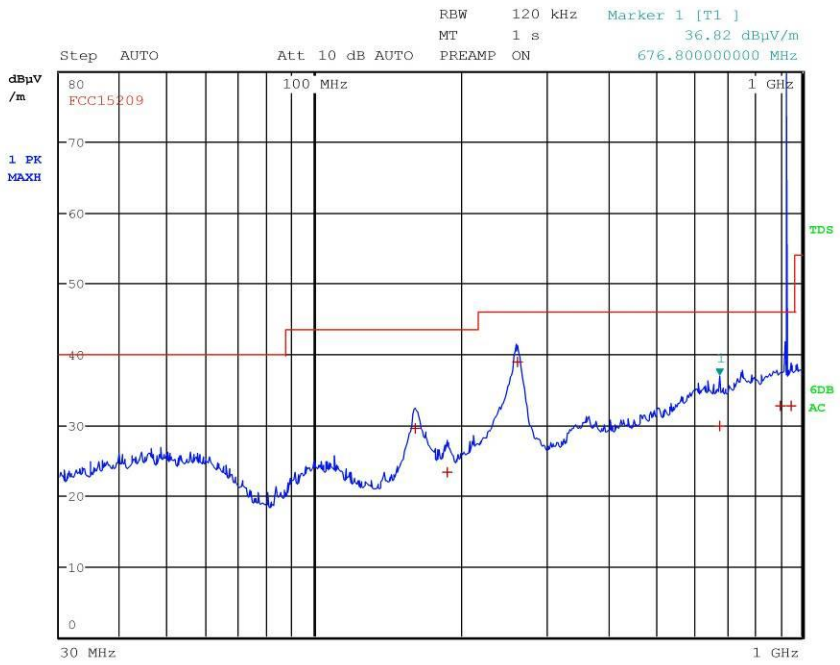

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 6

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	160.960000000 MHz	29.46	Quasi Peak	-14.06
1	187.600000000 MHz	23.23	Quasi Peak	-20.29
1	260.920000000 MHz	38.93	Quasi Peak	-7.09
1	676.800000000 MHz	29.83	Quasi Peak	-16.19
1	904.080000000 MHz	32.72	Quasi Peak	-13.30
1	948.680000000 MHz	32.71	Quasi Peak	-13.31

G15182633

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15182633
Test Spec
Horiz

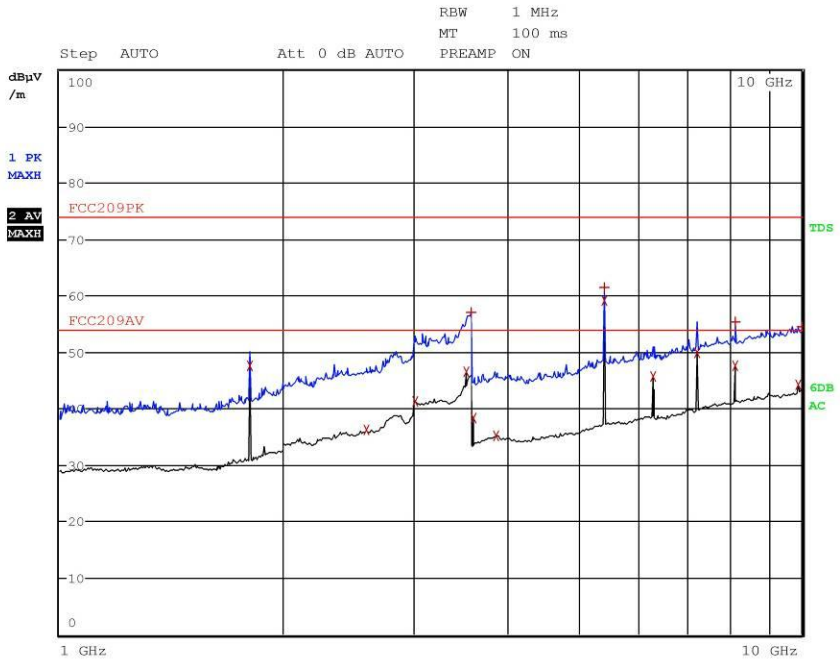

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15182633
Test Spec
Horiz

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 15

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
2	1.804400000 GHz	47.48	Average	-6.52
2	2.587600000 GHz	36.23	Average	-17.77
2	3.012800000 GHz	41.31	Average	-12.69
2	3.527600000 GHz	46.53	Average	-7.47
1	3.588800000 GHz	57.08	Max Peak	-16.92
2	3.609200000 GHz	38.34	Average	-15.66
2	3.874000000 GHz	35.29	Average	-18.71
2	5.413600000 GHz	59.13	Average	5.13
1	5.414000000 GHz	61.45	Max Peak	-12.55
2	6.316000000 GHz	45.67	Average	-8.33
2	7.218400000 GHz	49.88	Average	-4.12
2	8.120400000 GHz	47.49	Average	-6.51
1	8.120800000 GHz	55.42	Max Peak	-18.58
2	9.904000000 GHz	44.28	Average	-9.72
1	9.991200000 GHz	54.58	Max Peak	-19.42

G15182634

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15182634
Test Spec
Vert

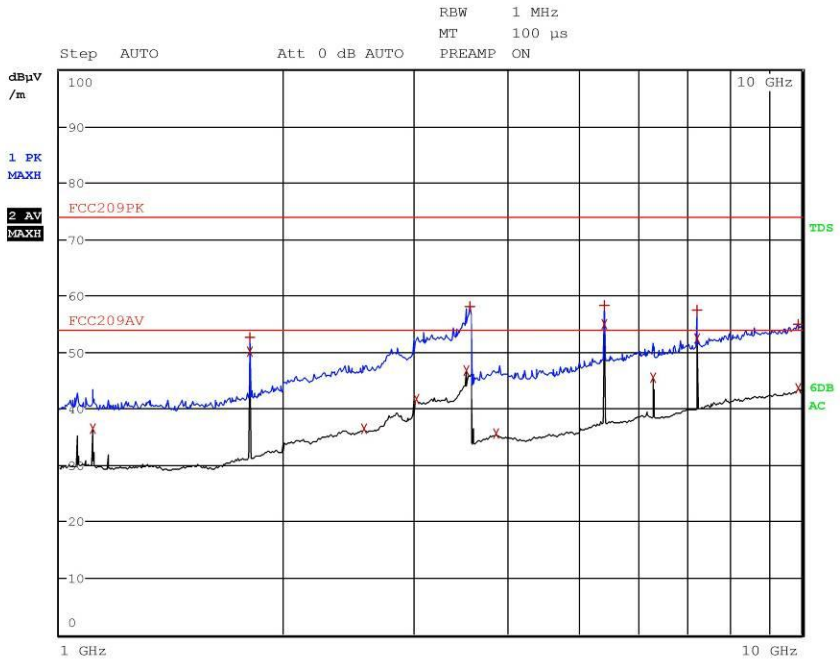

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15182634
Test Spec
Vert

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 15

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
2	1.110400000 GHz	36.53	Average	-17.47
2	1.804400000 GHz	50.18	Average	-3.82
1	1.804400000 GHz	52.67	Max Peak	-21.33
2	2.570000000 GHz	36.36	Average	-17.64
2	3.022400000 GHz	41.68	Average	-12.32
2	3.527600000 GHz	46.72	Average	-7.28
1	3.576400000 GHz	58.09	Max Peak	-15.91
2	3.876400000 GHz	35.71	Average	-18.29
1	5.413600000 GHz	58.28	Max Peak	-15.72
2	5.413600000 GHz	54.96	Average	0.96
2	6.316000000 GHz	45.46	Average	-8.54
2	7.218400000 GHz	52.51	Average	-1.49
1	7.218800000 GHz	57.38	Max Peak	-16.62
1	9.874800000 GHz	54.96	Max Peak	-19.04
2	9.906400000 GHz	43.51	Average	-10.49

G15182637

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15182637
Test Spec
Loop

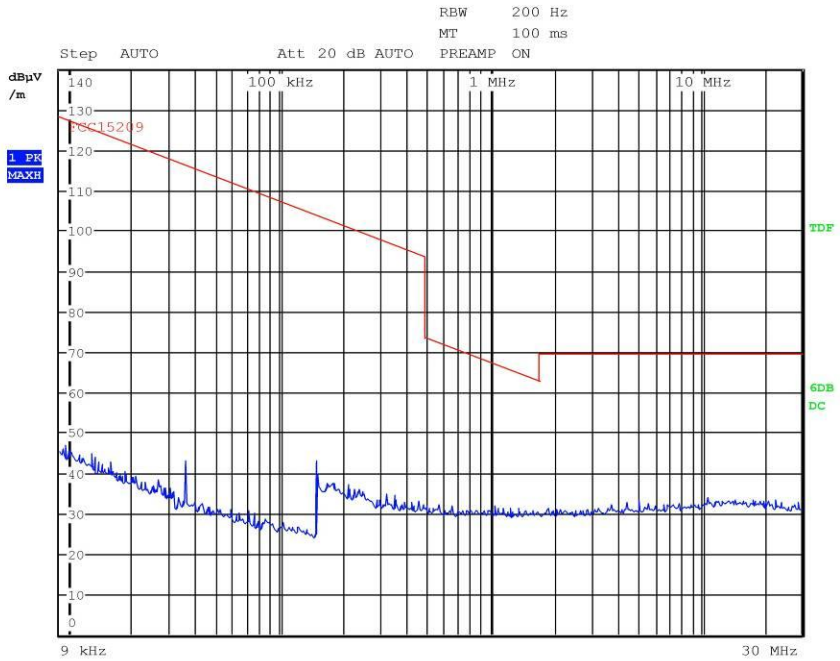

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0

Result: The requirements are met

11.4 Fundamental and Spurious Emission (≤ 1 GHz)

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.209 and Part 15.231(b)
- Internal procedure PM001
- See clause 4 of this test report
- Test date: 18 November 2015
- Technician: A. Bertezzolo

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S136, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 3 m
Detector CISPR quasi-peak

Environmental conditions

Temperature (°C)	*Atmospheric pressure (kPa)*	*Relative humidity (%)*
23	100	45

Acceptance limits

FCC Part 15.231 (b)		
Fundamental frequency (MHz)	*Field strength of fundamental [dB(µV/m)]*	*Field strength of spurious emissions [dB(µV/m)]*
40,66 to 40,70	67,04	47,04
70 to 130	61,94	41,94
130 to 174	61,94 to 71,48	41,94 to 51,48
174 to 260	71,48	51,48
260 to 470	71,48 to 81,94	51,48 to 61,94
Above 470	81,94	61,94

Setup

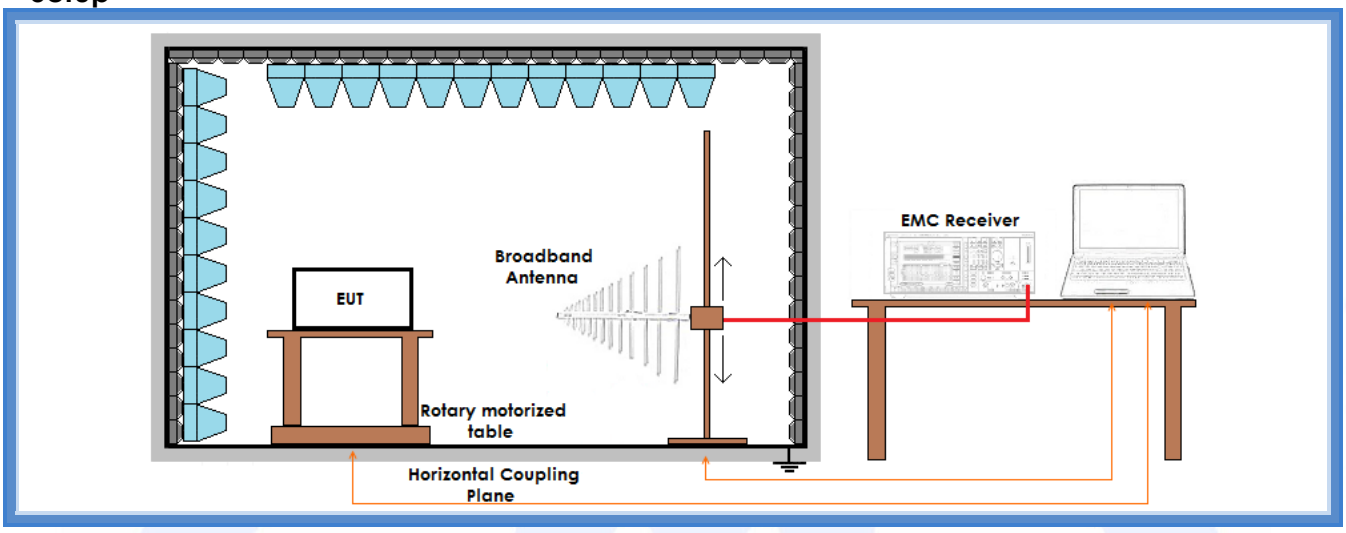

Result – Field strength of fundamental

Frequency (MHz)	*Graphs*	*Limits (dBµV/m)*	*Peak level (dBµV/m)*	*Duty cycle (dB)*	*Level (dBµV/m)*	*Results*
902,28	G15182601	81,94	99,65	-33,15	66,50	Complies
915,63	G15182606	81,94	99,31	-33,15	66,16	Complies
927,68	G15182611	81,94	99,27	-33,15	66,12	Complies

Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest value.

Duty cycle value has been obtained using the following formula:

Duty cycle = 20log (2,2 ms /100 ms) = -33,15 dB, see also the duty cycle evaluation of cl. 2 of this Test Report

Graphs

G15182601

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182601
Test Spec	

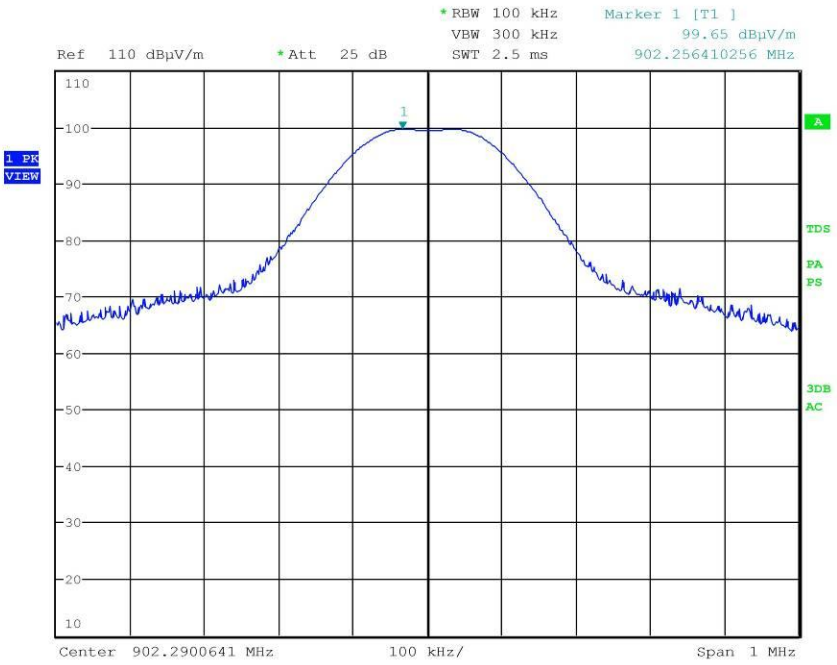

G15182606

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182606
Test Spec	

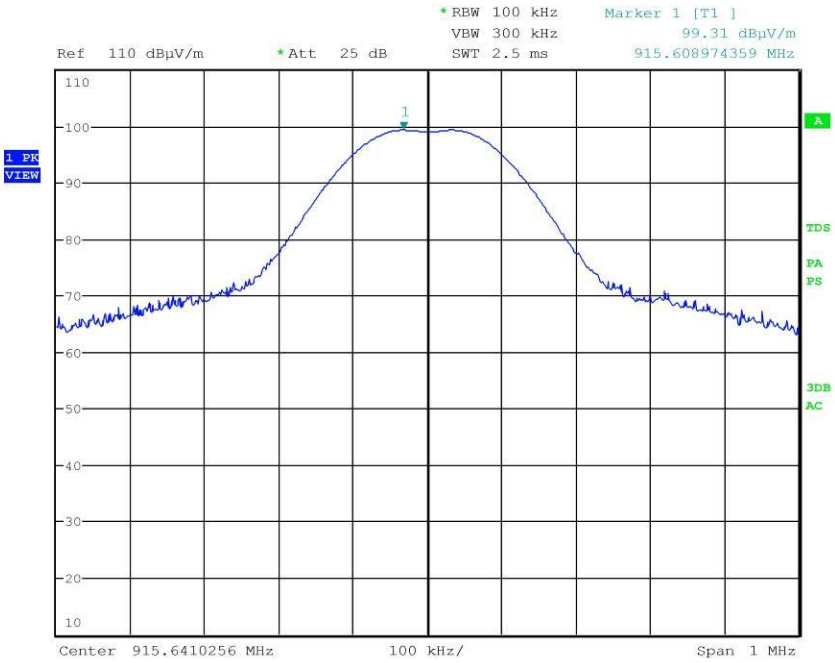

G15182611

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182611
Test Spec	

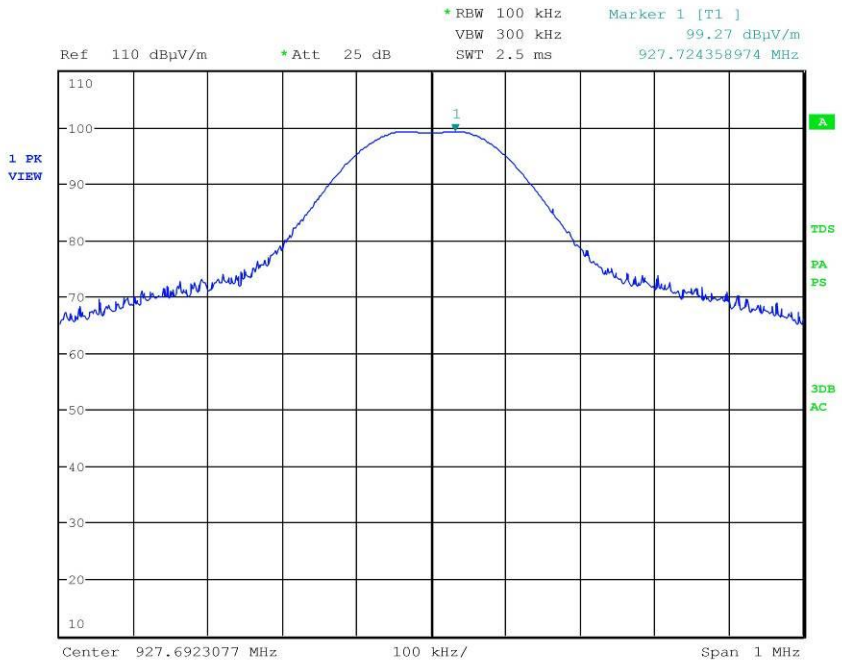

Result: The requirements are met

11.5 Spurious Emission (> 1 GHz)

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.209 and Part 15.231
- Internal procedure PM001
- See clause 4 of this test report
- Test date: 23 November 2015
- Technician: A. Bertezzolo

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 3 m
Detector AV + Peak

Environmental conditions

Temperature (°C)	*Atmospheric pressure (kPa)*	*Relative humidity (%)*
23	100	45

Acceptance limits

Frequency (MHz)	*AV limits [dB(µV/m)]*	*Peak limits [dB(µV/m)]*
> 1000	54	74

Setup

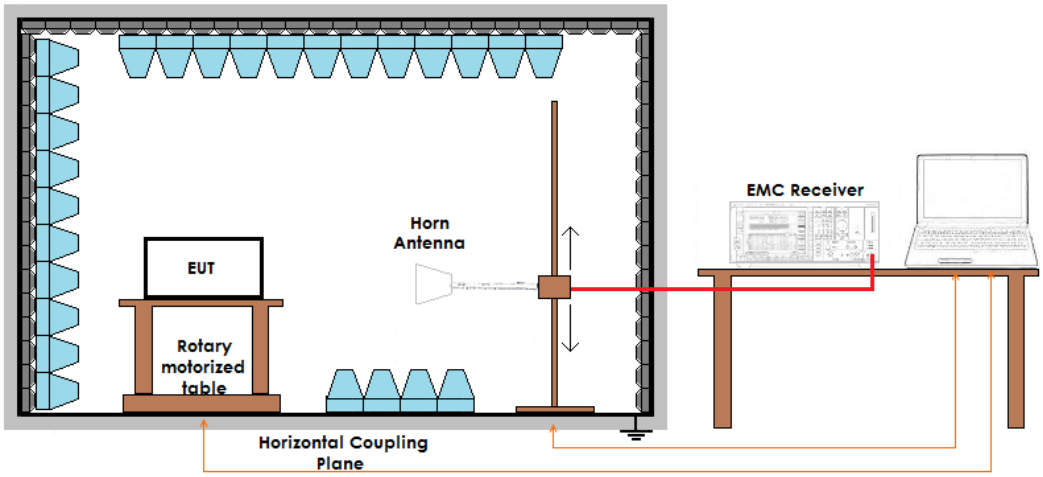

Result – AV detector

Frequency band (MHz)	*Frequency (MHz)*	*Limits (dBµV/m)*	*Measured Level (dBµV/m)*	*Duty cycle (dB)*	*Level (dBµV/m)*	*Results*
902,28	1804,4	61,94	53,80	-33,15	20,65	Complies
902,28	2706,6*	54,00	44,90	-33,15	11,75	Complies
902,28	5413,2*	54,00	59,40	-33,15	26,25	Complies
902,28	7217,6	61,94	54,70	-33,15	21,55	Complies
915,63	1831,2	61,94	54,80	-33,15	21,65	Complies
915,63	2476,8*	54,00	45,40	-33,15	12,25	Complies
915,63	5493,6	61,94	61,00	-33,15	27,85	Complies
915,63	7324,8*	54,00	51,10	-33,15	17,95	Complies
927,68	1855,2	61,94	55,00	-33,15	21,85	Complies
927,68	2782,8*	54,00	45,80	-33,15	12,65	Complies
927,68	5565,6	61,94	60,80	-33,15	27,65	Complies
927,68	7420,8*	54,00	50,30	-33,15	17,15	Complies

Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest value.

*: these frequencies are inside a restricted band

Duty cycle value has been obtained using the following formula:

Duty cycle = 20log (2,2 ms /100 ms) = -33,15 dB, see also the duty cycle evaluation of cl. 2 of this Test Report

Result – Peak detector

Frequency band (MHz)	*Frequency (MHz)*	*Limits (dBµV/m)*	*Measured Level (dBµV/m)*	*Duty cycle (dB)*	*Level (dBµV/m)*	*Results*
902,28	1804,4	74,00	55,20	-33,15	22,05	Complies
902,28	2706,6*	74,00	50,60	-33,15	17,45	Complies
902,28	5413,2*	74,00	61,80	-33,15	28,65	Complies
902,28	7217,6	74,00	61,70	-33,15	28,55	Complies
915,63	1831,2	74,00	55,90	-33,15	22,75	Complies
915,63	2476,8*	74,00	51,40	-33,15	18,25	Complies
915,63	5493,6	74,00	63,00	-33,15	29,85	Complies
915,63	7324,8*	74,00	57,60	-33,15	24,45	Complies
927,68	1855,2	74,00	56,30	-33,15	23,15	Complies
927,68	2782,8*	74,00	51,90	-33,15	18,75	Complies
927,68	5565,6	74,00	63,10	-33,15	29,95	Complies
927,68	7420,8*	74,00	57,10	-33,15	23,95	Complies

Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest value.

*: these frequencies are inside a restricted band

Duty cycle value has been obtained using the following formula:

Duty cycle = 20log (2,2 ms /100 ms) = -33,15 dB, see also the duty cycle evaluation of cl. 2 of this Test Report

Result: The requirements are met

11.6 Occupied channel bandwidth

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.231 (c)
- Internal procedure PM001
- See clause 4 of this test report
- Test date: 18 November 2015
- Technician: A. Bertezzolo

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S136, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

The bandwidth of the emission shall be no wider than 0,25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0,5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier

Environmental conditions

Temperature (°C)	*Atmospheric pressure (kPa)*	*Relative humidity (%)*
23	100	45

Acceptance limits

Limits	
Devices operating above 70 MHz and below 900 MHz	***Devices operating above 900 MHz***
0,25% of the center frequency	0,5% of the center frequency

Setup

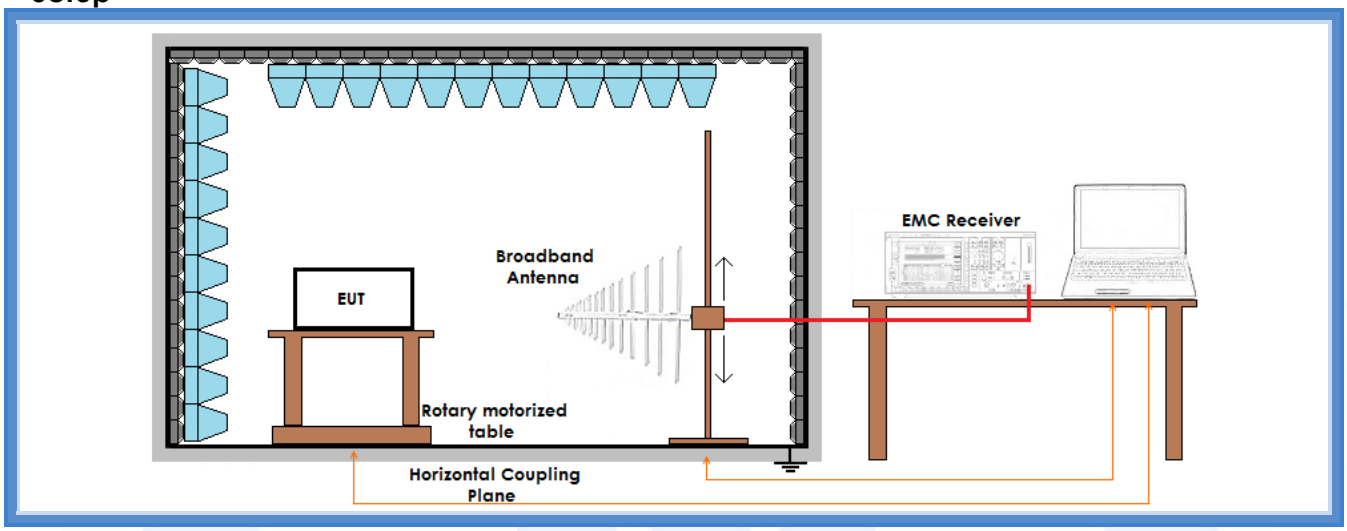

Result

Frequency (MHz)	*Limit (kHz)*	*20 dB bandwidth (kHz)*	*Graphs*	*Results*
902,28	4511,40	211,538	G15182602	Complies
915,63	4578,15	212,339	G15182607	Complies
927,68	4638,40	212,339	G15182612	Complies

Graphs

G15182602

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182602
Test Spec	

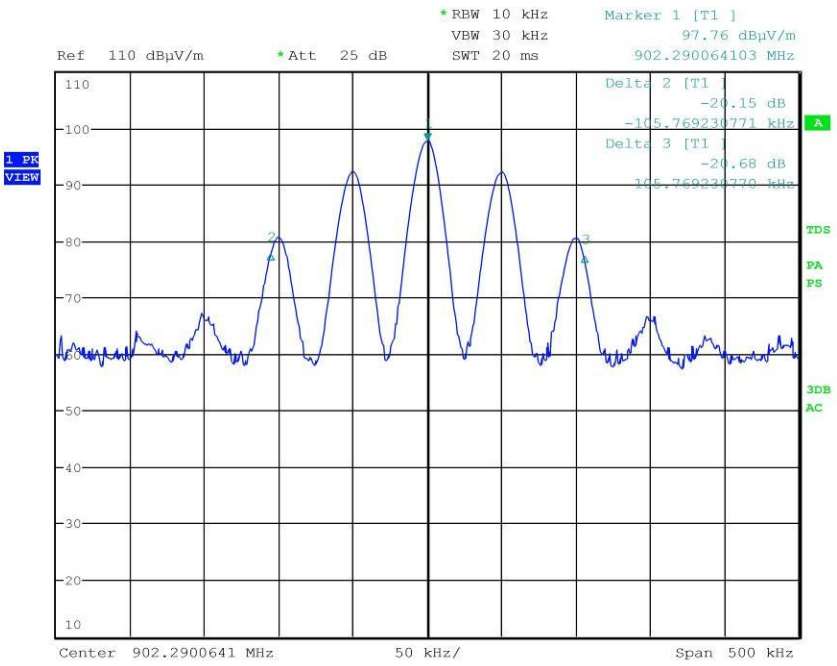

G15182607

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182607
Test Spec	

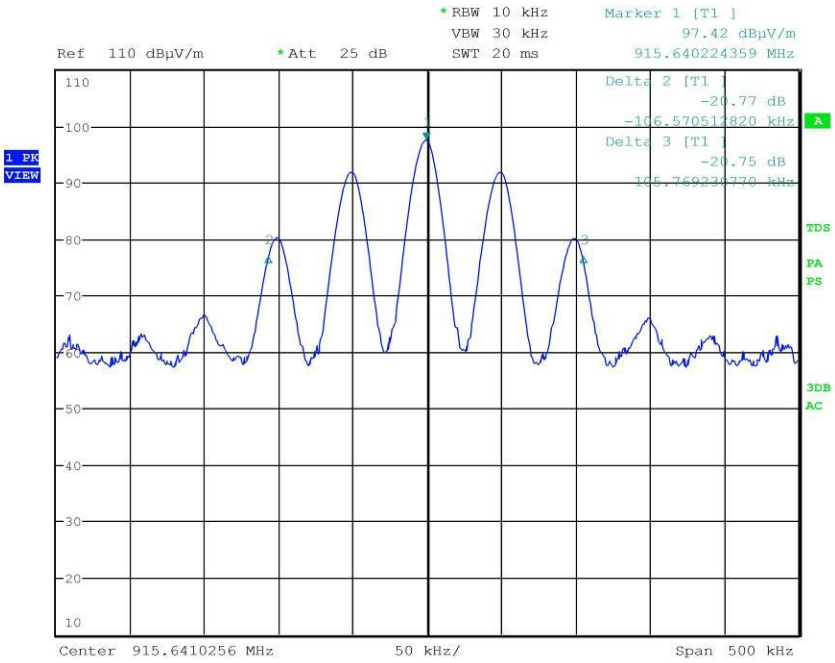

G15182612

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182612
Test Spec	

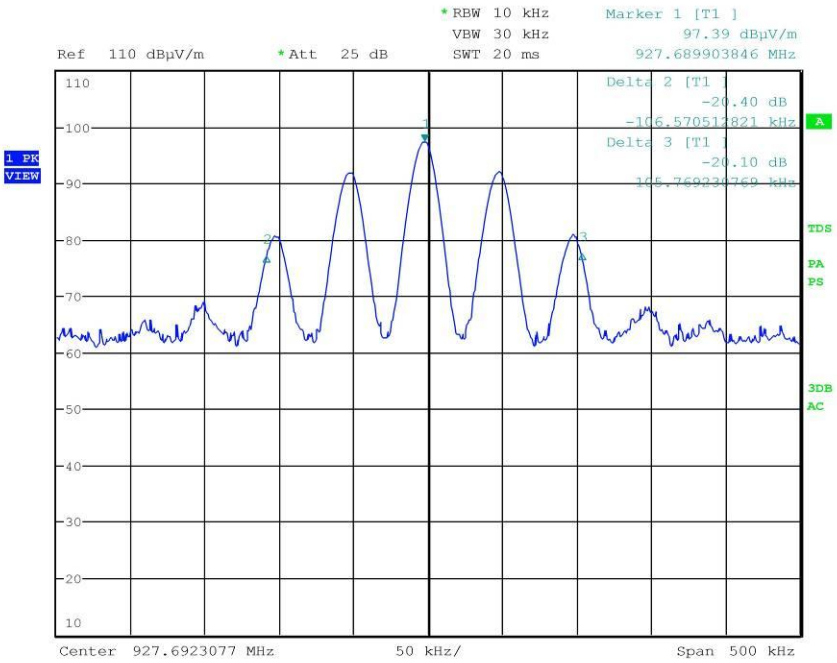

Result: The requirements are met

11.7 Periodic Operation Characteristics

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.231 (a)
- Internal procedure PM001
- See clause 4 of this test report
- Test date: 26 November 2015
- Technician: A. Bertezzolo

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

❑ Manually operated transmitter
☑ Transmitter activated automatically

Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

Environmental conditions

Temperature (°C)	*Atmospheric pressure (kPa)*	*Relative humidity (%)*
23	100	45

15.231(a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

Result: N.A.

15.231(a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation

Result: N.A.

15.231(a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour

Parameter	*Transmission time during 1 hour*	*Number of transmissions during 1 hour*	*Graphs*	*Results*
Automatic transmission	396 ms (maximum allowed 2 s)	5 (maximum allowed 180)	G15182640 and G15182641	Complies

15.231(a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result: N.A.

15.231(a5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data

Result: N.A.

Graphs

G15182640

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182640
Test Spec	

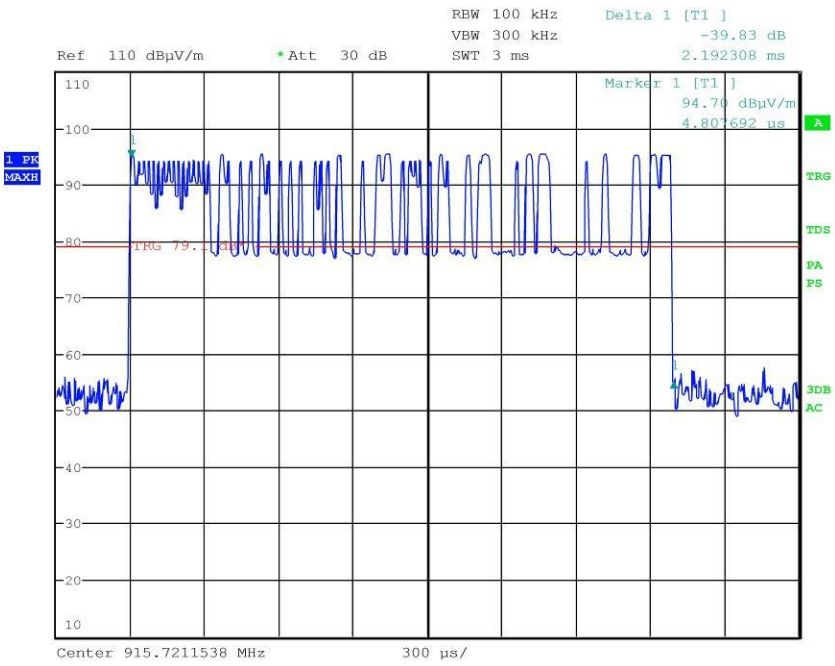

G15182641

Meas Type	Emission
Equipment under Test	
Manufacturer	
OP Condition	
Operator	Bertezzolo 15182641
Test Spec	

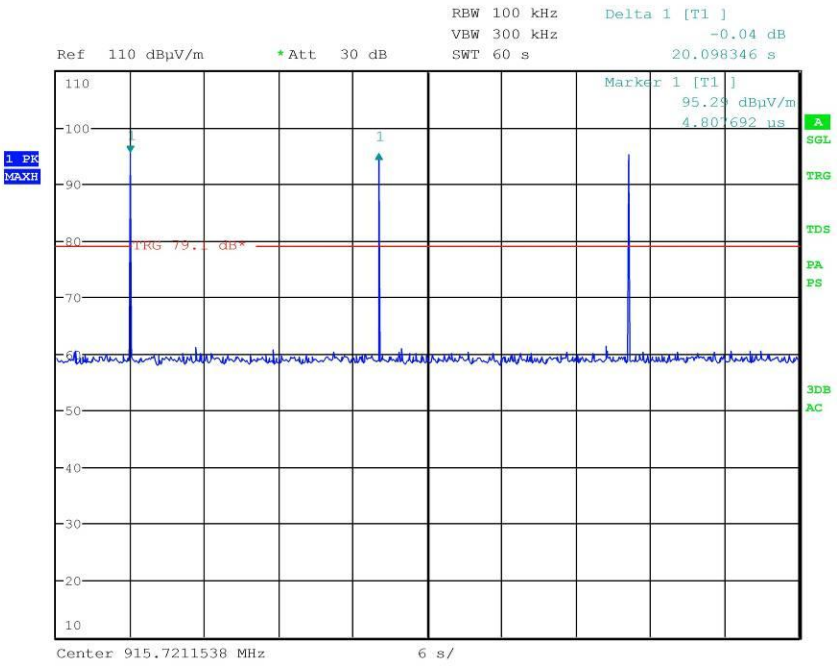

Result: The requirements are met

ANNEX 1 of document nr. R15182602

Tests setup photographs for Test Report nr. R15182601