

A close-up, angled view of a black, rectangular IoT button. The button has a white, rectangular label at the top. Below the label, there are three embossed icons: a square with a diagonal line, a square with a horizontal line, and a square with a vertical line. At the bottom of the button, there is a small, circular hole. The background is a light gray.

# teXXmo IoT Button

Preliminary User Manual  
V0.3

# Push - Wait - Release



< 1 sec

> 1 sec

> 5 sec

> 10 sec

# Release immediately ( $< 1 \text{ sec}$ )

protection against accidental push:

- (1) Button might flash any color
- (2) Button will take no action
- (3) Button will not show any further light pattern



# Release at blue light ( $> 1\text{sec}$ )



approx.  
2sec




approx.  
10sec



pre-defined message will be sent:

- (1) Button will blink with blue light until done
- (2) Button will search for closest beacon
- (3) Button will connect to WiFi
- (4) Button will send message
- (5) Button will show reaction...

# Release at red light (> 5sec)

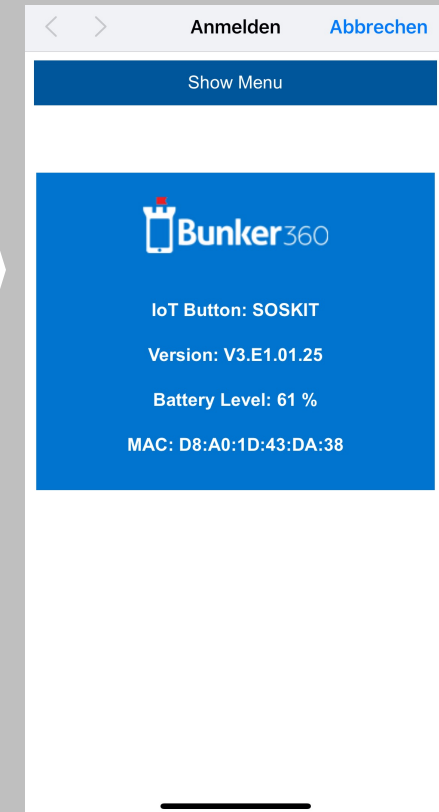

configuration mode will be entered:

- (1) Button will blink continuously red light
- (2) Button will appear as access point
- (3) Please connect to WiFi with SSID of „IoT\_Button\_“ followed by MAC address
- (4) Button will show config menu after 5-7sec in standard browser, if not... connect to „http://192.168.4.1“
- (5) Button will shut down and stop blinking after 2min, if no connection is established

# Configuration Mode (connection at 192.1678.4.1)

The screenshot shows the 'Show Menu' screen of the Bunker360 Configuration Mode. At the top, there are navigation arrows and buttons for 'Anmelden' and 'Abbrechen'. Below the 'Show Menu' button, the Bunker360 logo is displayed. The status information includes: 'IoT Button: SOSKIT', 'Version: V3.E1.01.25', 'Battery Level: 61 %', and 'MAC: D8:A0:1D:43:DA:38'.

you start here,  
click  
"Show Menu"

The screenshot shows the main menu of the Bunker360 Configuration Mode. It features the same header as the first screen. Below the 'Show Menu' button, there are three menu options: 'Configuration', 'WIFI', and 'Shutdown'. The Bunker360 logo and status information are also present at the bottom.

now choose  
from menu

The screenshot shows the 'GET 1 URL / Status' screen. It has the same header. Below the 'Show Menu' button, there is a text input field containing the URL 'https://www.iot-button.eu/bunker360\_playground/testDoku' and a numeric input field with the value '200'. A 'Save' button is located at the bottom.

enter/change  
URL for  
GET request  
(use "https")

The screenshot shows the 'WIFI' configuration screen. It has the same header. Below the 'Show Menu' button, there are two text input fields: one for 'SSID:' containing 'my\_wifi' and one for 'Password:' containing 'my\_password'. A 'Save' button is at the bottom.

enter/change  
WiFi name  
(SSID) and  
password

The screenshot shows the 'Shutdown' screen. It has the same header. Below the 'Show Menu' button, there is a large blue area with a 'Shutdown' button in the center.


shut down at  
the end to save  
battery



# Release at green light (> 10sec)



approx.  
5-7sec

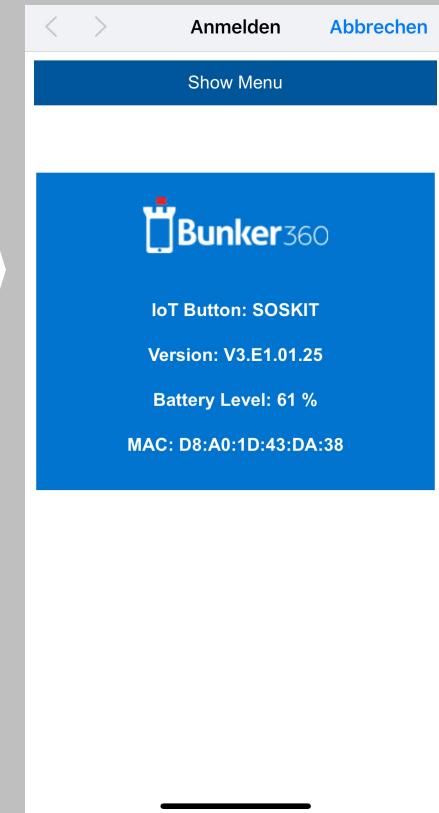

STA mode will be entered:

- (1) Button will blink continuously green light
- (2) Button will be device of pre-defined WiFi
- (3) Please connect „http://iotbutton“
- (4) Button will show config menu
- (5) Button will shut down and stop blinking after 2min, if no connection is established

# teXXmo IoT Button

## §.15.19

*This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:*

- (1) This device may not cause harmful interference, and*
- (2) this device must accept any interference received, including interference that may cause undesired operation.*

## §15.21

*Changes or modifications made to this equipment not expressly approved by bunker360 LLC, Miami, FL, USA may void the FCC authorization to operate this equipment.*

## §15.105

*Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:*

- Reorient or relocate the receiving antenna.*
- Increase the separation between the equipment and receiver.*
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- Consult the dealer or an experienced radio/TV technician for help.*



A close-up, angled shot of a black, rectangular IoT button. The button has a white, rounded rectangular label at the top. Below the label, there is a raised, embossed icon of a smartphone. The background is a soft, out-of-focus grey.

# teXXmo IoT Button

get in touch:  
[www.iot-button.eu](http://www.iot-button.eu)  
[info@iot-button.eu](mailto:info@iot-button.eu)