

EVEREST™ Network Solutions

INSTALLATION GUIDE

AP1004WRi Wireless Access Point



Tembo Systems Inc.

<http://www.tembosystems.com>

Model Number: AP24I612

Table of Contents

Chapter 1: Overview	1
Dependencies	1
AP1004WRi Package Contents	1
Additional Item	1
Item Identification	2
Related Documentation	2
Chapter 2: Installing AP1004WRi	3
Third-Party Mounting System Installation	3
Connecting AP 1004WRi	5
Chapter 3: Configuring AP1004WRi	6
Logging into BaseCamp	6
Configuring AP 1004WRi	6
Configuring AP1004WRi to Work with Discovery Protocol	8
Chapter 4: AP1004WRi Coverage	9
AP1004WRi Radiation Pattern	9
Regulatory Declarations	11
Appendix: Technical Specifications	16
Mechanical Specifications	16
Operational Requirements	16
Environmental Requirements	18

Safety Warnings

The AP1004WRi Wireless Access Point installation must be performed by certified technicians only and in compliance with all local/state/federal safety requirements. All warnings and information in this manual should be read and understood before proceeding with installation. Any noncompliance by the user voids the warranty of the product.



General Safety

You can be killed or injured if performing antenna installation near electrical power lines. Carefully read and follow all instructions in this guide. Ensure that there are no high voltage or electrical fields nearby.



Working Aloft Warning

When working on tower or roof, individuals must wear safety belts. Tools must be tied to the individual using them. Workers below must wear safety helmets.



Lightning Activity Warning

Make sure not to connect or disconnect cables during periods of lightning activity. A surge protective device should be installed to prevent potential damage from very high surges, for instance, the peak surges caused by lightning.



Explosive Device Proximity Warning

Do not operate network devices close to explosive merchandise or in explosive environments, for example, in the vicinity of a gas station.



Antenna Placement Warning

Do not install any antenna near overhead power lines or other electric light, or where the antenna can come into contact with such circuits.



Grounding Warning

Protect your AP1004WRi Wireless Access Point by installation of grounding lines. The ground connection must be complete before connecting power to the AP1004WRi Wireless Access Point enclosure. The requirement of grounding is to make sure the resistance is less than 5 ohm between the ground termination point to grounding tier.



Power Installation Warning

The installation of the power switch must be performed by a certified technician. The power switch is not supplied with the AP1004WRi Wireless Access Point. The power cord must be assembled by a certified technician, and the final assembly must comply with related requirements.



Solar Irradiation and High Temperature Protection

Pay attention to the level of sunlight, which can increase the working temperature of the AP1004WRi Wireless Access Point to higher than specifications allow.

Chapter 1 : Overview

This document provides information and procedures required to install and configure the AP1004WRi Wireless Access Point (model number AP14E612) into a WLAN installation and is intended for certified system installers, system administrators, and network operators.

The WLAN system is designed for high density deployments. It comprises of the following main components:

- AP1004WRi Wireless Access Point (AP)
- Access Controller (AC)
- BaseCamp™ Wireless Management System

Dependencies

The installation and configuration of AP1004WRi Wireless Access Point depends on the following components:

- Access Controller
- BaseCamp™ Wireless Management System
- DHCP Server

AP1004WRi Package Contents

The AP1004WRi package consists of the following item:

- One AP1004WRi Wireless Access Point



The installation technician is responsible for procuring wall/ceiling anchors, mounting screws, and safety systems, as required by the local/state/federal authorities governing the installation of the AP1004WRi Wireless Access Point.

Additional Item

The following additional item is to be purchased separately:

- Access Controller

The BaseCamp™ Wireless Management System is bundled along with the Access Controller.

Item Identification

The following figures show top and bottom view of the AP1004WRi Wireless Access Point.

Figure 1: AP1004WRi Wireless Access Point - Top View

Figure 2: AP1004WRi Wireless Access Point - Bottom View

Related Documentation

- [AP1004WRe Installation Guide](#)
- [AP1004NRe Installation Guide](#)
- [AP1002We Installation Guide](#)
- [AP1002Oi Installation Guide](#)
- [Access Controller Installation Guide](#)
- [BaseCamp™ Wireless LAN Management System User Guide](#)
- [BaseCamp™ Wireless LAN Management System Quick Start Guide](#)

Chapter 2 : Installing AP1004WRi

This section provides information required to install AP1004WRi Wireless Access Point.



- The AP1004WRi installation must be performed by certified technicians only and in compliance with all local/state/federal safety requirements and building codes.
- Proper grounding and surge protectors may be required in some installations.



The network coverage depends on the location and position of the AP1004WRi.


Third-Party Mounting System Installation




The installer or user assumes all liabilities unless the installation methods are explicitly stated in a warranty agreement between Tembo Systems, Inc. and the third-party installer.

AP1004WRi Wireless Access Point has two sets of mounting holes at the bottom of the chassis for attaching third-party mounting systems:

- The inner set of mounting holes are 75 mm apart in both the horizontal and vertical directions and are tapped with a M4 x 0.7 mm thread pattern to a depth of 10 mm.

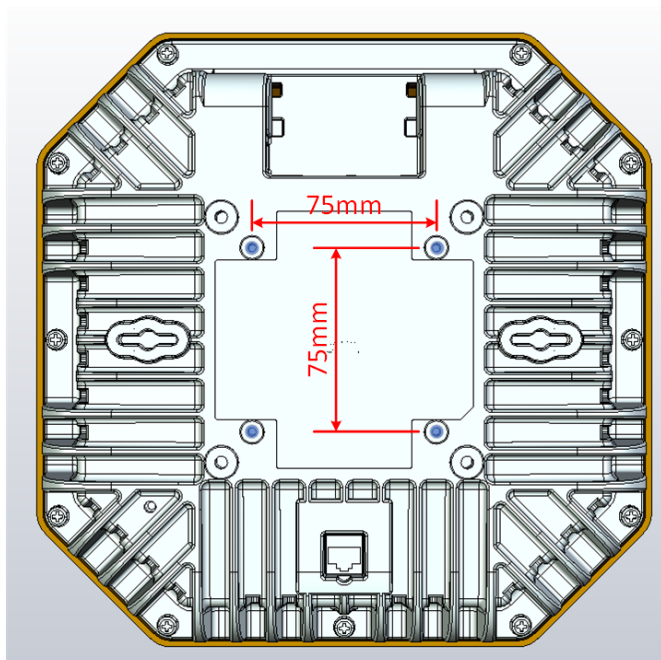

- The outer set of mounting holes are 100 mm apart in both the horizontal and vertical directions and are tapped with a M6 x 1.0 mm thread pattern to a depth of 10 mm.

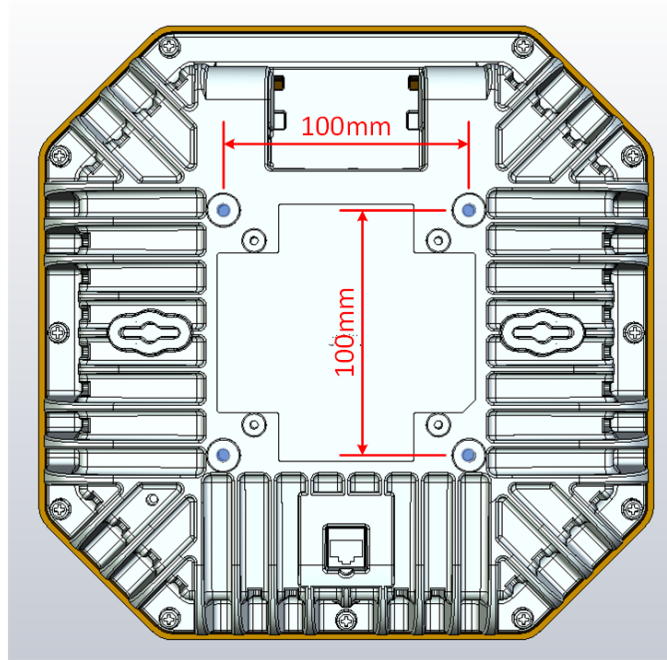

- Third-party systems must be capable of safely supporting the AP1004WRi Wireless Access Point.
- The exposed screw length (exclusive of mounting bracket thickness and any washers or locking devices) cannot exceed 10 mm so as to avoid any damage to the chassis.
- Apply a drop of Loctite 243 threadlocker adhesive on each shoulder screw before inserting into the chassis to prevent loosening, leakage, and corrosion.


Connecting AP 1004WRi

Perform this procedure to connect the AP1004WRi Wireless Access Point to the network.

1. For Access Points powered from a Network Switch with PoE+ capabilities, Attach the two cables directly to the Eth0 and ETH1 RJ45 receptacle on the back side of the AP1004WRi Wireless Access Point chassis.



Locate Ethernet Ports



Connect Primary Port



Connect Secondary Port

2. For Access Points powered from the optional AC/DC Adapter, Attach the Power Connector first, then attach the Ethernet cables to the Eth0 and ETH1 RJ45 receptacle.



Connect Power Adapter



Connect Primary Port



Connect Secondary Port

3. Connect the opposite ends of the Ethernet cables to a Ethernet Switch. If using Network power, Verify the network power source (PSE) is configured to supply PoE+ power (30 Watts/Port) and supports 2-Event Classification, or the AC/DC Adapter is plugged into a AC Source.

When injectors or mid-span are used, connect the access point to the “Data + Power” port and the Ethernet Switch to the “Data” port of the injector or midspan.



4. Verify the PoE+ source is providing power and the Ethernet switch port has established link with both the ports. Note: Eth1 is normally disabled in the access point, so while it will link, no packets will be transferred unless the access point is configured to support link aggregation.

Chapter 3 : Configuring AP1004WRi

This section provides information and procedures required to configure the AP1004WRi Wireless Access Point.

Logging into BaseCamp

Perform this procedure to log into BaseCamp.

1. Log into BaseCamp URL, <https://<AC IP address>> using the following credentials:

- Username: admin@admin.com
- Password: admin

Welcome to BaseCamp page is displayed.

Configuring AP 1004WRi

Perform this procedure to configure the AP1004WRi Wireless Access Point.

1. Configure the POE+ ports of the L2/L3 switch as access ports with untagged PVID.

The PoE+ source must identify itself as PoE+ capable using the 2-event classification method. For more information on configuring the AP1004WRi Wireless Access Points that are connected to POE+ sources that support a discovery protocol, see [Configuring AP1004WRi to Work With Discovery Protocol](#).


2. Connect the AP1004WRi Access Point to a POE+ source.

Once powered up, the AP1004WRi Access Point requests an IP address from the DHCP server. This process may take up to 90 seconds.

3. Verify if the AP1004WRi was assigned an IP address by doing one of the following:


- Review the DHCP logs on the DHCP server
- Log into BaseCamp to review the status in the **Access Points** page

Along with the IP address, the AP1004WRi receives the IP address of the Access Controller and establishes a connection with it.

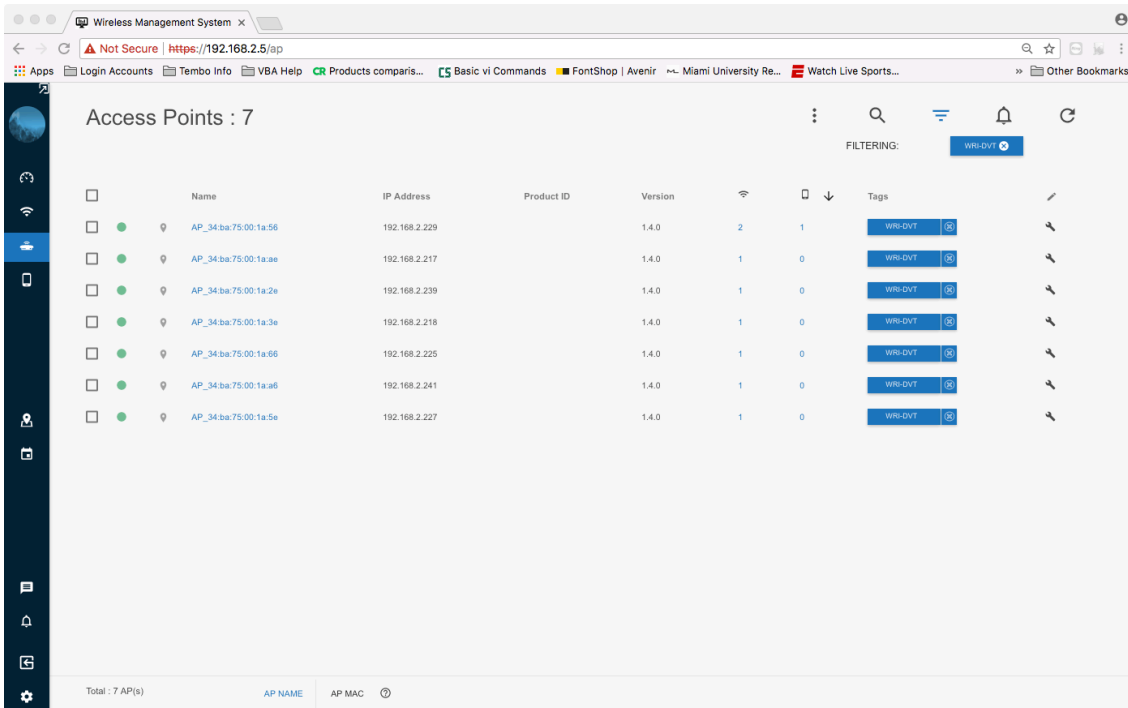


4. The AP1004WRi is manufactured with a generic country code. During the discovery phase of the AP1004WRi, the Access Controller verifies the country code of the AP1004WRi before allowing it to join the network.

- If the country code registered in the non-volatile memory of the AP1004WRi and the country code locked into the Access Controller software match, the AP1004WRi is allowed to join the network.
- If an AP1004WRi is detected with a generic country code, the Access Controller registers the AP1004WRi by overwriting the generic country code with the locked country code from the BaseCamp configuration. After updating the country code, the AP1004WRi is automatically rebooted allowing it to join the network.
- If the AP1004WRi is set with a different country code, the AP1004WRi is quarantined and not allowed to join the network.



The transmitters on the radio modules in the AP1004WRi are disabled when the country code is in generic state, or when the AP1004WRi is quarantined.

5. The only mode of operation for the AP1004WRi is **Indoor**. The BaseCamp GUI restricts reconfigure the mode of operation.

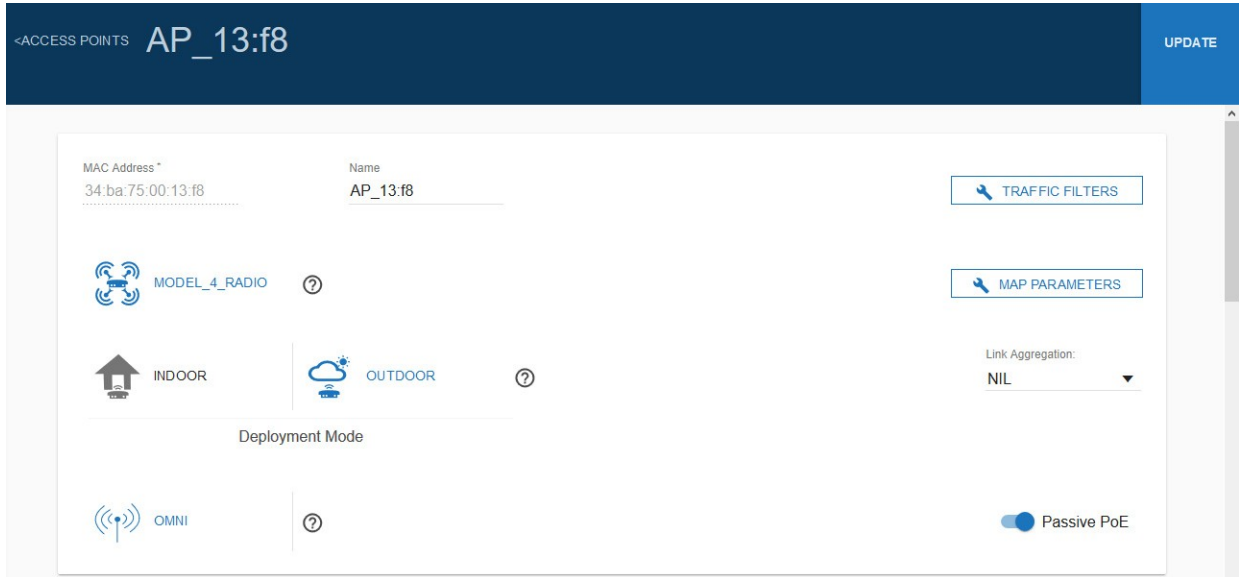

Configuring AP1004WRi to Work with Discovery Protocol

In some cases, a POE+ Ethernet switch requires a Discovery Protocol such as LLDP and CDP to request additional power above the 15.4 W PoE PSE limit. In such cases, the POE+ PSE source must be configured to override the Discovery Protocol and force the PoE+ PSE source to provide at least 22.5 W of PoE+ power.

Perform this procedure to configure the AP to work with Discovery Protocol.



Use extreme caution. This is a manual mode of operation. There is no action taken by the AP1004WRi, if PoE+ power is interrupted. Even a single port losing PoE+ power may result in an overload on the port.

1. In the BaseCamp **Access Point** menu, set the **Passive POE** selection to flag the AP1004WRi Wireless Access Point to ignore the POE+ status.

The AP1004WRi Wireless Access Point automatically reboots when the new **Passive POE** selection is saved. All the AP1004WRi hardware resources are available after rebooting the AP1004WRi.

Chapter 4 : AP1004WRi Coverage

This section provides information on deployment options for optimal coverage from the AP1004WRi Wireless Access Point.

AP1004WRi Radiation Pattern

The AP1004WRi has a patented, fully-integrated, software-adjustable antenna system with the following characteristics: band-optimized, tightly-controlled radiation patterns, polarization and pattern diversity, as well as beam angle and shape configurability. Band-optimized antennas enable optimal radiation in the entire 5 GHz spectrum; polarization and pattern diversity provide enhanced MIMO and MU-MIMO operation; beam angle and shape configurability enable direct energy to various spatial sectors for radio coverage zone control and interference management. These unique features provide system designers and integrators unparalleled flexibility in various deployment venues, maximizing network capacity with fewer AP's and faster install times

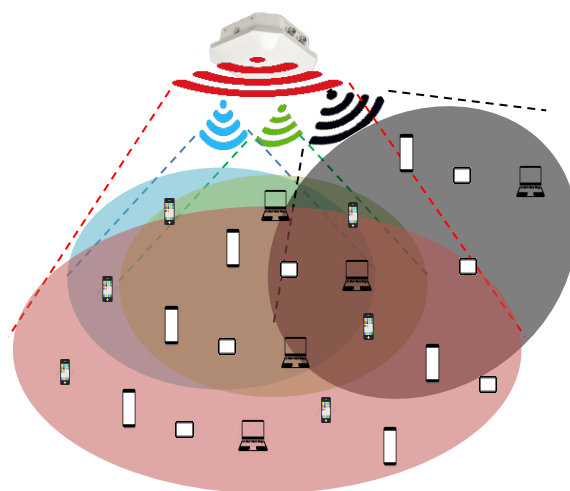


Figure 4a: AP1004WRi Radiation Patterns




The 1004WRi leverages the combined power of four radios, one 2.4 GHz (3x3:3) and three 5 GHz radios (4x4:4) with four spatial streams per radio, for a total of 15 parallel streams. In addition, dual 2.5 Gbps Ethernet ports provide up to 5 Gbps of wired backhaul. The 1004WRi also offers a BLE radio while the 2.4 GHz radio can be fully or partially repurposed for dual-band intrusion detection and spectrum monitoring. The 1004WRi features a patented design and system architecture enabling concurrent quad-radio operation without impacting the radio's performance for best-in-class aggregate PHY throughput of 5 Gbps. In addition, the patented design does not compromise RF performance and radio coverage, making the 1004WRi amenable to different deployment venues and scenarios.

Figure 4b: AP1004WRi Radiation Patterns

The following figure shows fixed and reconfigurable coverage options for AP1004WRi.

Figure 5: AP1004WRi Coverage Options

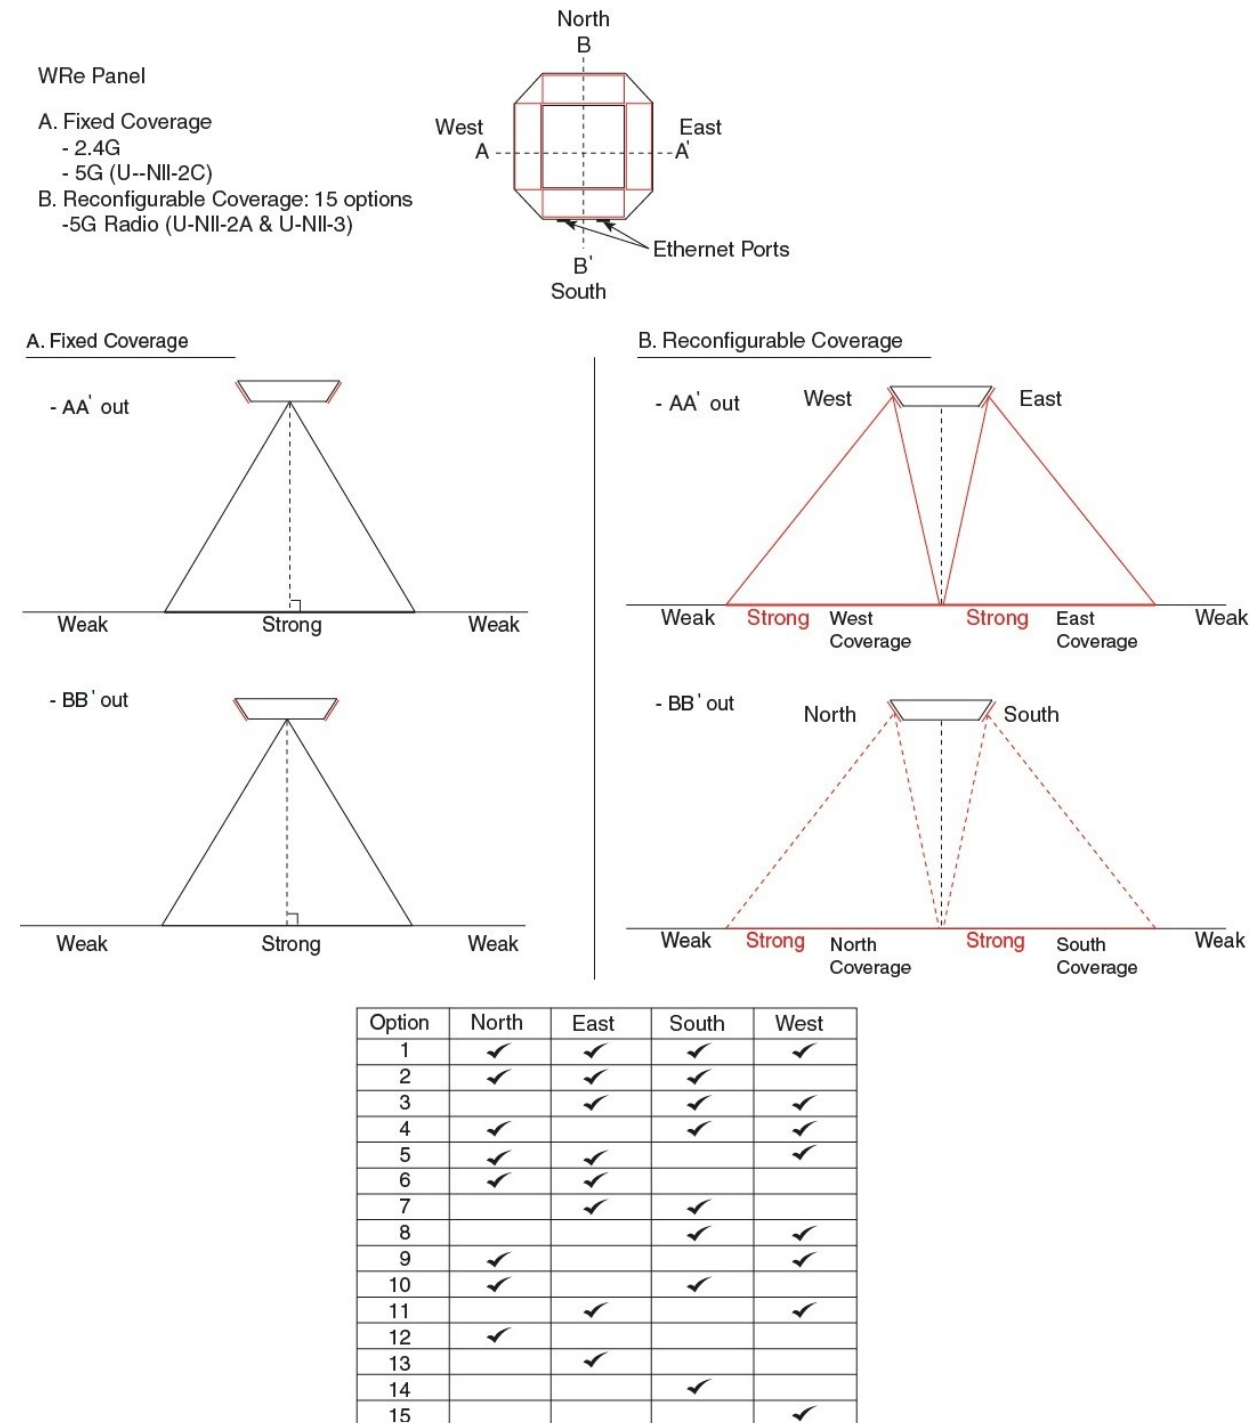

Regulatory Declarations

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

Important Note:

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Important Note:

Country Code selection feature to be disabled for products marketed to the US/Canada.

Important Note:

For 2.4 GHz 802.11bgn products available in the US/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

Important Note:

The 802.11bgn/Scanning WiFi Radio Module/FCCID:2AGMRTRM989DB and 802.11ac WiFi Radio Module/ FCCID:2AGMRTRM9995G are intended for OEM integrator only and are certified to be compliant when installed into, but not limited to, an end product with model name, AP1004WRi and model number, AP24I612.

The OEM integrator is still responsible for the FCC compliance requirement of the end product, which integrates these modules.

Important Note:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator & your body.

IC Statement:

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

These radio transmitters (802.11bgn/Scanning WiFi Radio Module/IC:21218-TRM989DB and 802.11ac WiFi Radio Module/IC:21218-TRM9995G) have been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (802.11bgn/Scanning WiFi Radio Module/IC:21218-TRM999DB and 802.11ac WiFi Radio Module/IC:21218-TRM9995G) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

PCA-000020-000-X; □

2.4G/5G-UNII2c Multi-Band Antenna Panel (Max Gain @2.4 GHz = -1.2 dBi) □
(Max Gain @5 GHz B3 = 4.90 dBi)

PCA-000032-000-X/PCA-000024-XXX-X;

5G-UNII1-2a/5G-UNII3 Antenna System through 5G-UNII1/2a Switch Matrix
(Max Net 5 GHz B1 Gain = 3.05 dBi)

5G-UNII1-2a/5G-UNII3 Antenna System through 5G-UNII1/2a Switch Matrix
(Max Net 5 GHz B2 Gain = 3.55 dBi)

PCA-000032-000-X/PCA-000025-XXX-X;

5G-UNII1-2a/5G-UNII3 Antenna System through 5G-UNII3 Switch Matrix
(Max Net 5 GHz B4 Gain = 0.00 dBi)

Dynamic Frequency Selection (DFS) for devices operating in the bands 5250-5350 MHz, 5470-5600 MHz and 5650-5725 MHz.

Sélection dynamique de fréquences (DFS) pour les dispositifs fonctionnant dans les bandes 5250-5350 MHz, 5470-5600 MHz et 5650-5725 MHz.

The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit.

le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limite de p.i.r.e.

The maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate.

le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725-5850 MHz) doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

Operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

La bande 5150-5250 MHz est réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

Users are advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

Les utilisateurs être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Important Note:

IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Important Note:

Modules 802.11bgn/Scanning WiFi Radio Module/IC:21218-TRM989DB and 802.11ac WiFi Radio Module/IC:21218-TRM9995G are intended for OEM integrator only and are certified to be compliant when installed into, but not limited to, an end product with model name, AP1004WRi and model number, AP14E612.

The OEM integrator is still responsible for the IC compliance requirement of the end product, which integrates these modules.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

Japan Statement:

5GHz band (W52 & W53): Indoor use only “

電波法により 5.15-5.35 GHz 帯は屋内使用に限ります”

(5GHz band 5.15-5.35 GHz, indoor use only.)

VCCI Statement:

この装置は、クラスB 情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。

取扱説明書に従って正しい取り扱いをして下さい。

VCCI-B

Appendix: Technical Specifications

This section provides technical specifications of the AP1004WRi Wireless Access Point.

Mechanical Specifications

The following table provides mechanical specifications of the AP1004WRi Wireless Access Point.

Table 1: Mechanical Specifications

Height	Width	Depth	Weight
261 mm (10.3 inch)	261 mm (10.3 inch)	84 mm (3.3 inch)	3.4 kg (7.5 lbs)

Operational Requirements

The following table provides operational requirements of the AP1004WRi Wireless Access Point.

Table 2: Operational Requirements

Condition	Input Power Requirement	Max Power Consumption
Max power Consumption	42.5-57 Vdc, 0.941 A, 40 W	40 W Max (~136.20 BTUs/hr)
Per Port Power (Max Available Input Power)	42.5-56 Vdc, 1.2 A, 51.0 W (4P-PoE+ source)	
	42.5-56 Vdc, 600 mA, 25.5 W (PoE+ source)	-
	37-56 Vdc, 355 mA, 12.95 W (PoE source)	-
Optional DC Input	12Vdc, 3333 mA, 40 W	
Operating Condition	Power Over Ethernet Limit¹	AP Limit Worst Case
802.3at x 1 port ¹ <small>Power Delivered over 2-Ethernet Pair</small>	42.5 Vdc @ 588 mA (25 W) 48.0 Vdc @ 521 mA (25 W) 56.0 Vdc @ 466 mA (25 W)	42.5 Vdc @ 588 mA x 1 (25 W Max)
802.3bt x 1 Port (Draft) <small>Power Delivered over 4-Ethernet Pair</small>	42.5 Vdc @ 941 mA (40 W) 48.0 Vdc @ 833 mA (40 W) 56.0 Vdc @ 714 mA (40 W)	42.5 Vdc @ 471 mA x 2 (~40 W Max)
802.3at x 2 ports <small>Power Delivered over 4-Ethernet Pair</small>	42.5 Vdc @ 471 mA (~20 W) 48.0 Vdc @ 833 mA (~20 W) 56.0 Vdc @ 714 mA (~20 W)	42.5 Vdc @ 471 mA x 2 (~40 W Max)
802.3bt x 2 port <small>Power Delivered over 8-Ethernet Pair</small>	42.5 Vdc @ 232 mA (~10 W) 48.0 Vdc @ 208 mA (~10 W) 56.0 Vdc @ 179 mA (~10 W)	42.5 Vdc @ 235 mA x 4 (~40W Max)

¹ Some frequency bands may not be operational in power limited operations.

Environmental Requirements

The following table provides environmental requirements of the AP1004WRi Wireless Access Point.

Table 3: Environmental Requirements

Condition	Requirement
Operating Temperature	0 °C to 45 °C (32 °F to 113°F)
Storage temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Humidity	5% to 95% non-condensing
Maximum elevation	<ul style="list-style-type: none">• Operating:<ul style="list-style-type: none">Sea level 45 °C (113 °F) □4,206 m (13,800 ft) at 35 °C (95 °F)• Non-operating:<ul style="list-style-type: none">12,500 m (40,000 ft) at -65 °C (-149 °F)
Mean Time Between Failures (MTBF)	143,913 hours

Statement of Conditions

In the interest of improving internal design, operation function, and/or reliability, Tembo Systems, Inc. reserves the right to make changes to products described in this document without notice. Tembo Systems, Inc. does not assume any liability that may occur due to the use or application of the product(s) described herein.

Document Number: DOC-000023-000
Revision: 01
Date: May 2018