

## Bluetooth



### Product Parameters:

Bluetooth Version: V3.0+EDR, Class II  
Support Profile: AVRCP1.0/1.3, A2DP1.0, HFP1.5, HSP1.0  
Working Distance Range: 10m  
Frequency Range : 2.402GHz-2.480GHz  
Battery Specifications: 3.7V, 300mAh, Built-in rechargeable lithium battery  
Charging Voltage : DC4.75 - 5.25V  
Charging Time: about 1.5 hours  
Talking/Music time: about 10 hours  
Standby Time: about 500 hrs

### Function:


#### Startup:

Press  for 3 seconds, voice prompts "Power On".

#### Shutdown:


Press  for 3 seconds, voice prompts "Power Off", the device off.

### Pairing Operation:

- 1) For the first time pairing: boot into the pairing mode, voice prompts "Pairing", please open the smart device's Bluetooth function, and select the device "BT001", no password required, after successful pairing, voice prompts "Connected".
- 2) Re-pairing: long press  for 1 second, the red and blue LED lights alternates rapidly, equipment re-enter the pairing state.
- 3) Follow-up pairing: Automatically pair the device after boot..


### Operating Instruction:

Answer the call: Short press .


Hang up the phone: Short press  after calling.

Redial the last outgoing number: Double-click .

When a call is being encountered new call:



Long press , you can hold on the current call and answer another incoming call (need to set the phone "call waiting").

Turn to cellular phone reception: Double-click  when calling.

Mute mode: Double-click the side .

Sound restoration: Double-click the side .

Play / Pause music: short press .

Volume: short press / long press the side  /  can adjust the volume.

Next song/Previous song: Double-click  / .

Restore factory settings: holding  for 10 seconds to restore the factory settings.

### Use the EDR function (Examples A and B, two mobile phones) :


- 1) Successful pairing phone A;
- 2) Close phone A's Bluetooth function;
- 3) Turn off the Bluetooth headset or re-enter pairing mode;
- 4) Successful pairing phone B;
- 5) Open phone A's Bluetooth function, connecting the Bluetooth headset.  
So far successfully setting connected two phones at the same time.

### LED Status:

Charge Status	Steady red LED, when fully charged, the blue LED lit
Boot prompt	When turned on, the red and blue LED chain lightning three times.
Power off prompt	When turned off, the red and blue LED chain lightning three times.
Pairing Status	Red and Blue LED lights alternates rapidly.
Standby Status	Blue LED double flash once every 5 seconds .
Successful Connected Status	The blue LED flashes once every 12 seconds

### Note:

If no pairing connection after the Bluetooth headset enters the pairing mode. Power-saving mode will automatically shut it down within three minutes. After restoring factory settings, it needs to re-establish the pairing with smart devices. Do not perform other operations when searching Bluetooth to prevent the program error. Please select the appropriate volume in use to prevent damage to your ears.

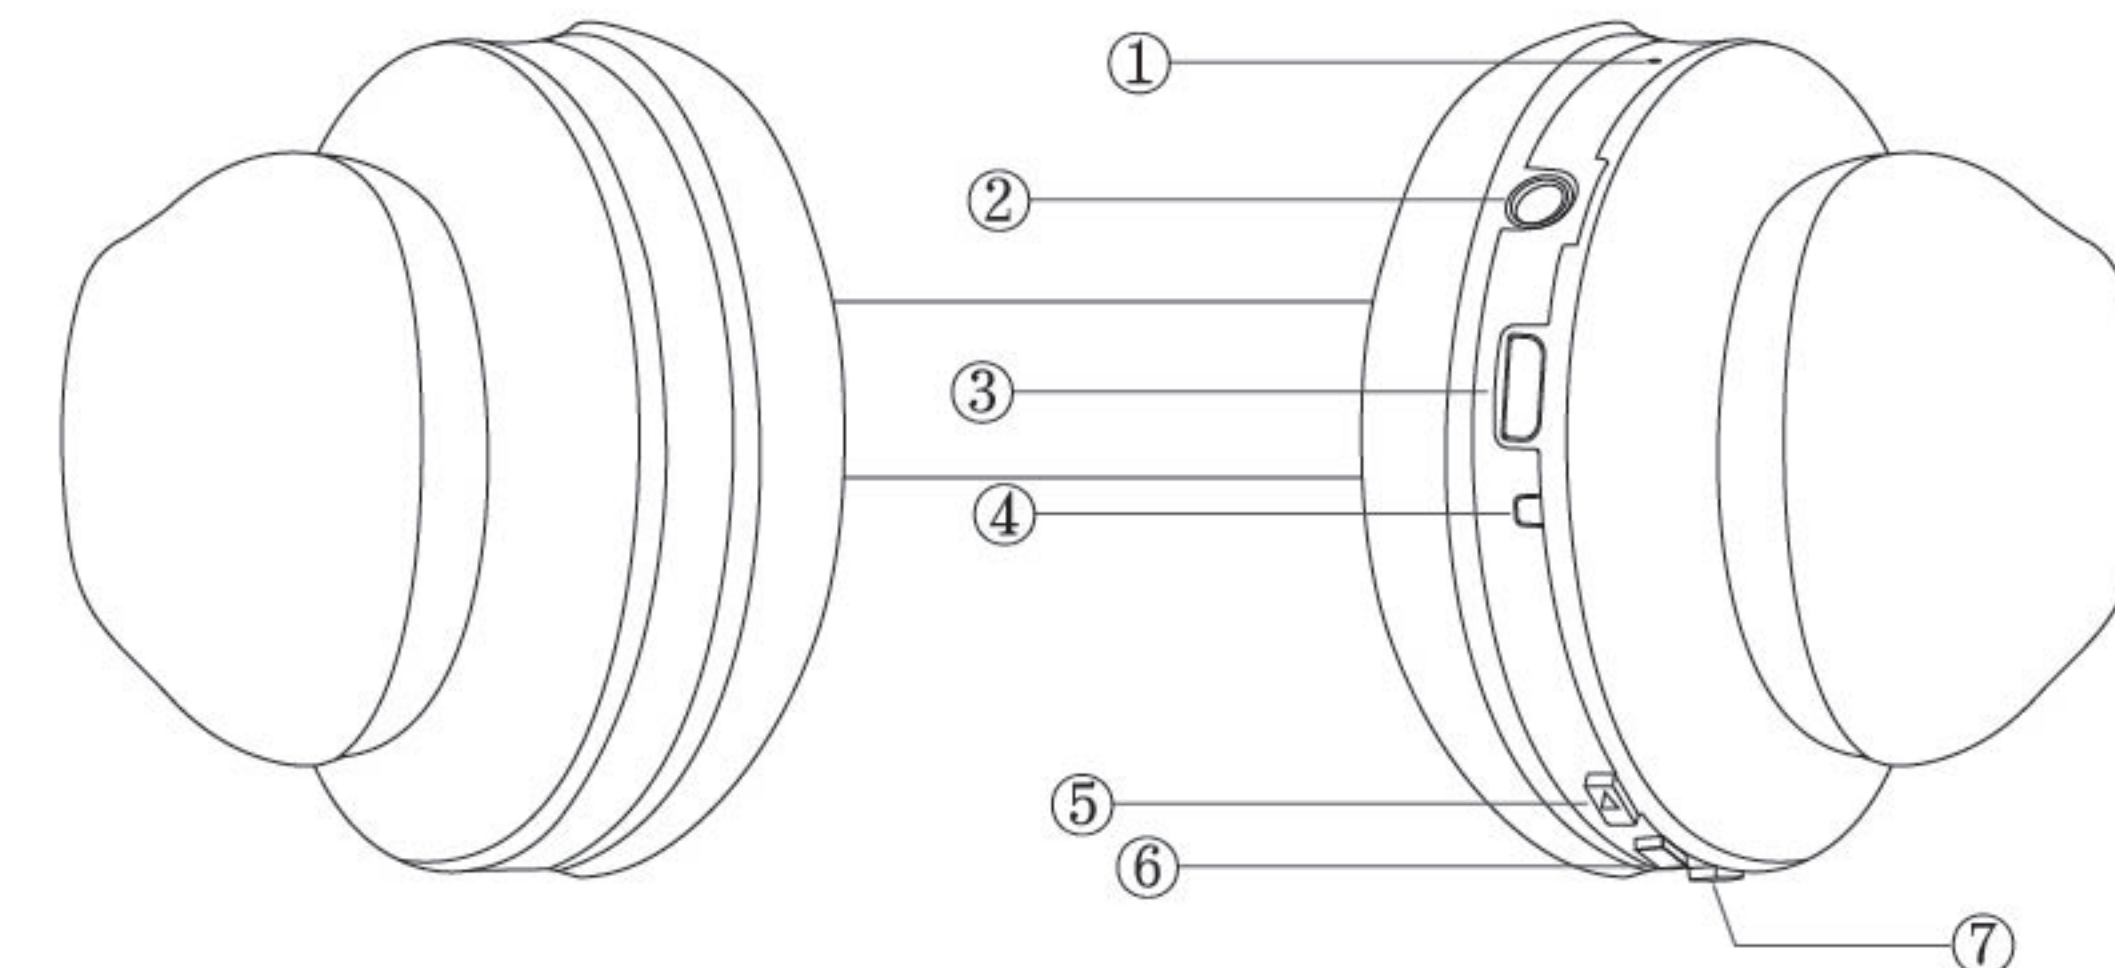

- ① ----- The Microphone
- ② ----- 3.5LINE-IN
- ③ ----- Micro-USB
- ④ ----- Red, Blue LED Lamp
- ⑤ ----- The Side Volume Button +
- ⑥ ----- The Side Volume Button -
- ⑦ ----- The Power Button

## User Manual



## **FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.