

**HARRIS CORPORATION  
EXPERIMENTAL LICENSE  
APPLICATION  
FILE NO. 0782-EX-PL-2014  
October 2014**

**DESCRIPTION OF EXPERIMENT**

Harris Corporation ("Harris") hereby requests an FCC experimental license to conduct testing on the transmission and reception of voice and data communications within the L-band frequency range of 1755 MHz to 1850 MHz at various distances and locations surrounding its Rochester, NY location. Stationary and mobile tests will be performed to transmit voice and data in both urban and rural settings. Tests will use up to a 5m ground mounted transmitter and mobile receivers to replicate in theater tactical communication operation. This testing will continue to support but will not solely be limited to US government contracts M67854-10-D-7000 and GS02T09CJA0510.

The testing will utilize the Harris AN/PRC 117G Wideband Tactical Radio for transmission, in conjunction with the following antennas:

*RF-3165* Multiband Dismount Antenna  
*RF-3187* Multiband Vehicular Antenna

Data sheets for these devices are attached hereto.

Because the equipment is technically incapable of providing station identification, Harris respectfully requests a waiver of the station identification provisions of Section 5.115 of the Commission's rules, 47 C.F.R. § 5.115.

All network traffic will be simulated traffic only, solely for evaluation purposes and not for the purpose of providing network data communications services to user stations. Harris believes that no harmful interference will occur as a result of the proposed testing and will use its best efforts to minimize any interference. Further, Harris will adhere to any coordination requirements the Commission requests.

Harris submits that a grant of this experimental license is necessary and in the public interest because it will facilitate developmental improvements to equipment currently used by US Military forces abroad.

Harris is currently conducting the experimental testing described herein pursuant to Special Temporary Authority ("STA") granted on May 01, 2014 (Call Sign: WH9XMG; File No. 0262-EX-ST-2014). An application to extend this STA was filed with the Commission on October 31, 2014 under FCC File No. 0986-EX-ST-2014.

The **stop buzzer contact** for this project is Neil Dempsey at Harris, tel: (585) 242-3407, mobile: (585) 451-9915, e-mail: ndempsey@harris.com


# Antenna Sketch for L-Band License Request

## Fixed and Mobile Stations

For the purpose of this experiment, a fixed station is defined as a stationary test van and a mobile station is defined as either a test van or a person on foot that is moving. Depending upon asset availability and testing parameters, stations will consist of a mix of vehicles persons on foot. Total quantity of stations will not exceed 10.

## Antennas to be used during testing

Antenna #1: RF-3165-AT122      Antenna #2: RF-3187

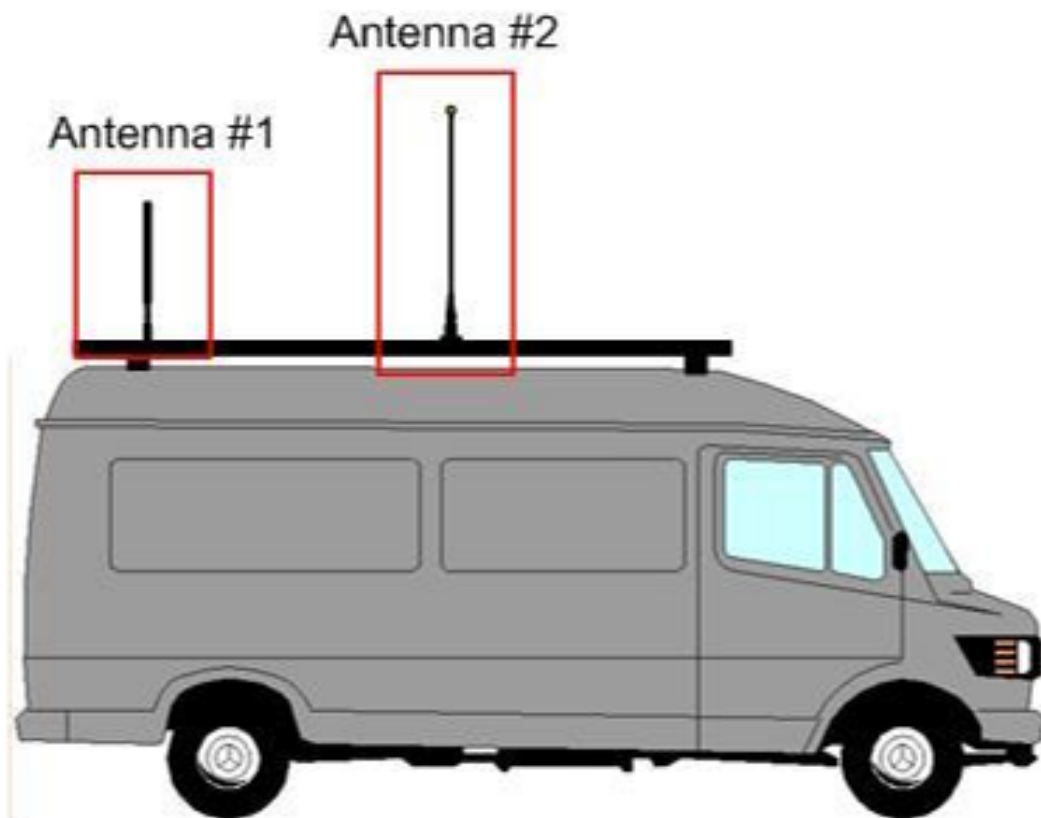

$\leq 50$  km



**AN/PRC-117G(V)1(C)**  
**TYPE-1 WIDEBAND MULTIBAND**  
**MULTIMISSION RADIO**  
**WITH INTERNAL SAASM GPS**



**NSA CERTIFIED**

*A revolutionary CNR-sized radio  
with US/NATO standardized  
waveforms and wideband  
data capabilities*

The Falcon III® AN/PRC-117G(V)1(C) manpack is a software defined tactical radio that provides breakthrough wideband data performance and interoperability with fielded waveforms. This single channel radio covers 30 MHz to 2 GHz and is 30% smaller and 35% lighter than currently fielded multiband manpack radios. The radio operates off a single standard battery, further reducing the weight of a dismounted radio yet maintaining peak transmit power of 10 watts VHF and 20 watts UHF.

The AN/PRC-117G features a JTEL-certified Software Communications Architecture (SCA) operating environment, providing the optimal transition to software-defined radio technology. The AN/PRC-117G provides SINCGARS, Havequick II, VHF/UHF AM and FM, DAMA, 181B Dedicated Channel TACSAT, High Performance Waveform (HPW), and the Harris Advanced Networking Wideband Waveform (ANW2). The ROVER L-Band receive waveform and APCO P25 are also available as options. Future planned software upgrades include IW, MUOS, SATURN, and SRW waveforms (subject to NSA approval).

AN/PRC-117G networking capabilities can be enhanced using the RF-7800B series of Broadband Area Global Network (BGAN) terminals. The RF-7800B BGAN terminals provide satellite-based wideband beyond-line-of-sight (BLOS) communications. When combined with the AN/PRC-117G, the system provides automatic and secure range extension, connection to out-of-range networks, and entry into the Internet or remote private networks.

Secured by the Harris Sierra™ II software programmable encryption module, the AN/PRC-117G is certified to carry up to US Top Secret voice and data traffic. The Sierra II, designed to maximize battery life in battery-powered radios, supports all JTRS COMSEC and TRANSEC requirements. The radio supports HAIPÉ® in-line encryption for secure network connectivity. Numerous legacy encryption modes are also supported, including KY-57/VINSON, ANDVT/KYV-5, KG-84C, and keyfill modes of DS-101 and DS-102.

The AN/PRC-117G stores multiple mission fill files, extending the time between reconfigurations. It also includes an embedded SAASM GPS receiver to display local position and provide automatic position reporting for situational awareness on the battlefield. Three separate antenna connections allow efficient and flexible use of antennas. The AN/PRC-117G(V)1(C) includes the R/T, manuals, H-250 handset, radio programming application, and programming cable.



# Specifications for the AN/PRC-117G(V)1(C)

<i>General</i>	
<b>RT Nomenclature</b>	RT-1949(P)(C)
<b>Frequency Range</b>	30 MHz-2 GHz Narrowband (NB): VHF Low: 30-90 MHz VHF High: 90-225 MHz UHF Low: 225-512 MHz SATCOM UHF Low: 243-270 MHz and 292-318 MHz Wideband (WB): UHF: 225 MHz-2 GHz
<b>Channel Spacing</b>	NB: 5 kHz, 6.25 kHz, 8.33 kHz, 12.5 kHz, 25 kHz SATCOM: 5 kHz, 25 kHz WB: 500 kHz, 1.2 MHz, 2.5 MHz, 5 MHz
<b>Net Presets</b>	100
<b>Data Interfaces</b>	Ethernet, RS-232/RS-422, USB Synchronous and Asynchronous
<b>Control Interfaces</b>	Ethernet, RS-232, RS-422, USB
<b>Management Tool</b>	Windows-based Radio Programming Application
<b>Software Environment</b>	JTEL Certified SCA 2.2
<b>Integrated GPS</b>	SAASM
<b>Frequency Stability</b>	0.5 ppm
<b>Frequency Tuning</b>	10 Hz from 30 MHz-512 MHz 100 Hz from 513 MHz-2 GHz
<b>Remote Control</b>	RS-232 ASCII based

<i>Modes and Waveforms</i>	
<b>Narrowband Waveforms</b>	AM/FM, VHF/UHF LOS SINGGARS Havequick I and II APCO 25 (optional)
<b>Wideband Waveforms</b>	ANW2 ROVER III L-Band Receive (optional)
<b>UHF SATCOM Waveforms</b>	MIL-STD-188-181B Dedicated Channel MIL-STD-188-182A, 183A DAMA HPW
<b>Voice and Data Modes</b>	Simplex or Half-duplex MIL-STD-188-113 CVSD STANAG 4198 LPC-10e STANAG 4591 MELPe
<b>Data Modes</b>	Synchronous Data (300, 600, 1200, 2400, 12k, 16k bps) SINGGARS ECCM (VHF Low band/1200, 2400, 4800, 9600) Wideband FSK Cipher Text Digital Data (16 Kbps; KY-57) Narrowband Cipher Text Digital Data (2.4 Kbps; ANDVT/KYV-5) KG-84C Havequick I/II ECCM (16 Kbps; KY-57 UHF band only)

<i>Security</i>	
<b>Encryption</b>	Sierra™ II Based Type-1
<b>Encryption Modes</b>	KY-57, KYV-5, KG-84, HAIPE®, AES
<b>Key Fill Device Compatibility</b>	ANCYZ-10 DTD, KOI-18, KYK-13, KYX-15, MX-18290, AN/PYQ-10, KIK-20
<b>Key Storage</b>	Up to 300
<b>Mission Fill Device Compatibility</b>	Windows-based Communications Planning Application

<i>Power</i>	
<b>Power Input</b>	19-34 VDC
<b>Power Consumption</b>	65 W max
<b>Battery Types</b>	BA-5590/U, BA-5390/U, BB-590/U, BB-390/U, BB-2590/U

<i>Physical and Environmental</i>	
<b>Size (no handles)</b>	7.4 W x 3.7 H x 8.8 D in. (without battery) 7.4 W x 3.7 H x 13.5 D in. (with battery)
<b>Weight</b>	8 lbs. (without battery) 12 lbs. (with battery)
<b>Shock/Vibration</b>	MIL-STD-810F for tracked vehicles, wheeled vehicles, shipboard
<b>Immersion</b>	1 meter
<b>Color</b>	CARC Green 383

<i>Transmitter</i>	
<b>Power Output</b>	NB: 10 W SATCOM: 20 W WB: 20 W peak/5 W average
<b>Antenna Outputs</b>	NB: 30 MHz-512 MHz SATCOM: 243 MHz-318 MHz WB: 225 MHz-2 GHz
<b>Harmonic Suppression</b>	Greater than 50 dBc

<i>Receiver</i>	
<b>Narrowband Sensitivity (for 10 dB SINAD)</b>	LOS FM 30-512 MHz: -118 dBm LOS AM 90-512 MHz: -110 dBm with 70% Modulation TACSAT FM 243-270 MHz: -120 dBm
<b>Adjacent Channel Rejection</b>	60 dB referenced to 10 dB SINAD (50 kHz channel) VHF: 60 dB (50 kHz off channel) UHF: 50 dB (50 kHz off channel)

<i>Accessories Included with AN/PRC-117G</i>	
<b>10075-1399</b>	H-250 Handset
<b>RF-6650M</b>	Communications Planning Application (CPA)
<b>12043-0750-A006</b>	USB Programming Cable
<b>Manuals</b>	Operation Manual, Reference Guide, SINGGARS Pocket Guide, ANW2 Pocket Guide

<i>Optional Accessories</i>	
<b>RF-300M-DK001</b>	Dismount Antenna Kit
<b>RF-300M-VK001</b>	Vehicular Antenna Kit
<b>RF-300M-UK001</b>	L-Band Rover Receiver Kit
<b>RF-7800M-V150</b>	50W Vehicular Amplifier Adapter
<b>RF-7800M-V120</b>	20W Vehicular Amplifier Adapter
<b>RF-3071-AT232</b>	GPS Antenna Kit (L1/L2 Band)
<b>12043-2710-A006</b>	PPP Data Cable
<b>12043-2730-A006</b>	Data and Remote Control Cable
<b>12043-2740</b>	Digital Retransmission Cable
<b>12043-2760-A006</b>	Ethernet Cable
<b>RF-5910-PS005</b>	Battery Eliminator
<b>RF-7800B-DU024</b>	BGAN Land Portable Antenna System
<b>RF-7800B-VU104</b>	BGAN Land Mobile Antenna System

"HAIPE" and the "HAIPE" design are trademarks of the National Security Agency, an agency of the United States Government and used with permission.



**RF Communications** | 1680 University Ave. | Rochester, NY USA 14610 | 585.244.5830 | [www.harris.com](http://www.harris.com)

Get quotes real-time at eHarris. Order parts online at: <https://premier.harris.com/rfcommsales>

The information contained herein has been reviewed in accordance with the International Traffic in Arms Regulations, 22 CFR 120-130, and the Export Administration Regulations, 15 CFR 730-774, and determined by the Harris Export Control Department to be rated EAR99. General Prohibitions still apply. Specifications are subject to change without notice. Copyright © 2009 Harris Corporation 07/09 DS-357G