



FCC PART 15B

TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Industrial Park, No 34-1, Shilong Rd., Shiyan Town, Bao'an District, Shenzhen, P.R. China 518108

FCC ID: V7TD301

Report Type: Original Report		Product Type: ADSL Router	
Test Engineer:	Leon C	Chen leon Chen	
Report Number:	R2DG1	3130813004-00A	
Report Date:	2013-0	09-17	
Reviewed By:	Ivan Ca RF Lea	wan (au	
Test Laboratory:	Bay Ar No.69 I Tangxi Tel: +8 Fax: +8	Area Compliance Laboratories Corp. (Dongguan) Pulongcun, Puxinhu Industrial Zone, kia, Dongguan, Guangdong, China 86-769-86858888 +86-769-86858891 baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk " \bigstar " (Rev.2). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 3 OBJECTIVE 3 RELATED SUBMITTAL(S)/GRANT(S) 3 TEST FACILITY 3 SYSTEM TEST CONFIGURATION 4 JUSTIFICATION 4 EUT EXERCISE SOFTWARE 4 EQUIPMENT MODIFICATION 4 SUPPORT EQUIPMENT LIST AND DETAILS 4 SUPPORT EQUIPMENT LIST AND DETAILS 4 BLOCK DIAGRAM OF TEST SETUP 5 SUMMARY OF TEST RESULTS 6 FCC §15.107 – AC LINE CONDUCTED EMISSIONS 7 MEASUREMENT UNCERTAINTY 7 EUT SETUP 7 EUT SET RECEIVER SETUP 7 EMI TEST RECEIVER SETUP 8 TEST PROCEDURE 7 CORRECTED AMPLITUDE & MARGIN CALCULATION 8 TEST EQUIPMENT LIST AND DETAILS 9 TEST SUMMARY 9 TEST DATA 9 FCC §15.109 - RADIATED EMISSIONS 12 MEASUREMENT UNCERTAINTY 12 EUT SETUP 12 EUT SETUP 12 EUT SETUP 12	GENERAL INFORMATION	
OBJECTIVE 3 RELATED SUBMITTAL(S)/GRANT(S) 3 TEST FACILITY 3 SYSTEM TEST CONFIGURATION 4 JUSTIFICATION 4 EUT EXERCISE SOFTWARE 4 EUT EXERCISE SOFTWARE 4 EUUPMENT MODIFICATIONS 4 SUPPORT EQUIPMENT LIST AND DETAILS 4 EXTERNAL CABLE 44 BLOCK DIAGRAM OF TEST SETUP 5 SUMMARY OF TEST RESULTS 6 FCC §15.107 – AC LINE CONDUCTED EMISSIONS 7 MEASUREMENT UNCERTAINTY 7 EUT SETUP 7 MEASUREMENT UNCERTAINTY 7 EUT SETUP 7 MEASUREMENT UNCERTAINTY 7 EUT SETUP 7 EUT SETUP 7 EUT SETUP 7 EUT SETUP 8 CORRECTED AMPLITUDE & MARGIN CALCULATION 8 TEST EQUIPMENT LIST AND DETAILS 9 TEST EQUIPMENT LIST AND DETAILS 9 TEST TOATA 9 FCC §15.109 - RADIATED EMISSIONS 12 MEASUREMENT UNCERTAINTY 12	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Test FACILITY 3 SYSTEM TEST CONFIGURATION 4 JUSTIFICATION 4 EUT EXERCISE SOFTWARE 4 EQUIPMENT MODIFICATIONS 4 SUPPORT EQUIPMENT LIST AND DETAILS 4 EXTERNAL CABLE 4 BLOCK DIAGRAM OF TEST SETUP 5 SUMMARY OF TEST RESULTS 6 FCC §15.107 - AC LINE CONDUCTED EMISSIONS 7 MEASUREMENT UNCERTAINTY 7 EUT SETUP 7 EMI TEST RECEIVER SETUP 7 EMI TEST RECEIVER SETUP 8 TEST PROCEDURE 8 CORRECTED AMPLITUDE & MARGIN CALCULATION 8 TEST RESULTS SUMMARY 9 TEST DATA 9 TEST DATA 9 FCC §15.109 - RADIATED EMISSIONS 12 MEASUREMENT UNCERTAINTY 12 EUT SETUP 13 TEST RECEIVER SETUP 13 TEST RECUER SETUP 13 CORRECTED AMPLITUDE & MARGIN CALCULATION 14 TEST EQUIPMENT LIST AND DETAILS 14 TEST PROCEDURE 13 CORRECTED AMPL		
SYSTEM TEST CONFIGURATION4JUSTIFICATION4EUT EXERCISE SOFTWARE4EQUIPMENT MODIFICATIONS4SUPPORT EQUIPMENT LIST AND DETAILS4EXTERNAL CABLE4BLOCK DIAGRAM OF TEST SETUP5SUMMARY OF TEST RESULTS6FCC §15.107 - AC LINE CONDUCTED EMISSIONS7MEASUREMENT UNCERTAINTY7EUT SETUP77EMI TEST RECEIVER SETUP70TEST PROCEDURE80CORRECTED AMPLITUDE & MARGIN CALCULATION80TEST RESULTS SUMMARY99TEST RESULTS SUMMARY99TEST RESULTS SUMMARY12MEASUREMENT UNCERTAINTY12EUT SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST DATA14TEST DATA14TEST DATA14TEST DATA14TEST DATA14TEST DATA14TEST DATA14TEST DATA	RELATED SUBMITTAL(S)/GRANT(S)	
JUSTIFICATION 4 EUT EXERCISE SOFTWARE 4 EQUIPMENT MODIFICATIONS 4 SUPPORT EQUIPMENT LIST AND DETAILS 4 EXTERNAL CABLE 4 BLOCK DIAGRAM OF TEST SETUP 5 SUMMARY OF TEST RESULTS 6 FCC §15.107 - AC LINE CONDUCTED EMISSIONS 7 MEASUREMENT UNCERTAINTY 7 EUT SETUP 7 EUT SETUP 7 EMI TEST RECEIVER SETUP. 7 EMI TEST RECEIVER SETUP. 7 EMI TEST RECEIVER SETUP. 8 TEST PROCEDURE 8 CORRECTED AMPLITUDE & MARGIN CALCULATION 8 TEST RESULTS SUMMARY 9 TEST RESULTS SUMMARY 9 TEST DATA 9 FCC §15.109 - RADIATED EMISSIONS 12 MEASUREMENT UNCERTAINTY 12 EUT SETUP 12 MEASUREMENT UNCERTAINTY 12 EUT SETUP 13 TEST PROCEDURE 13 TEST PROCEDURE 13 TEST PROCEDURE 13 TEST PROCEDURE 13 <	TEST FACILITY	
EUT EXERCISE SOFTWARE4EQUIPMENT MODIFICATIONS4SUPPORT EQUIPMENT LIST AND DETAILS4EXTERNAL CABLE4BLOCK DIAGRAM OF TEST SETUP5SUMMARY OF TEST RESULTS6FCC §15.107 - AC LINE CONDUCTED EMISSIONS7MEASUREMENT UNCERTAINTY7EUT SETUP7EWI TEST RECEIVER SETUP7EWI TEST RECEIVER SETUP7EWI TEST RECEIVER SETUP8CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS9TEST RESULTS SUMMARY9TEST DATA9FCC §15.109 - RADIATED EMISSIONS12MEASUREMENT UNCERTAINTY12EUT SETUP13TEST RECEIVER SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST SEQUIPMENT LIST AND DETAILS9TEST DATA9TEST DATA14TEST RESULTS SUMMARY14TEST RECEIVER SETUP13TEST RECEIVER SETUP14TEST RECEIVER SETUP14TEST RECEIVER SETUP14TEST RECEIVER SETUP14TEST RECEIVER SETUP14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST DATA14	SYSTEM TEST CONFIGURATION	4
EQUIPMENT MODIFICATIONS4SUPPORT EQUIPMENT LIST AND DETAILS4EXTERNAL CABLE4BLOCK DIAGRAM OF TEST SETUP5SUMMARY OF TEST RESULTS6FCC §15.107 - AC LINE CONDUCTED EMISSIONS7MEASUREMENT UNCERTAINTY7EUT SETUP7EMI TEST RECEIVER SETUP.7EMI TEST RECEIVER SETUP.7EMI TEST ROCEDURE8CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS.9TEST RESULTS SUMMARY9TEST DATA9FCC §15.109 - RADIATED EMISSIONS12MEASUREMENT UNCERTAINTY12EUT SETUP13TEST RECEIVER SETUP.13TEST RECEIVER SETUP.14TEST PROCEDURE13TEST RECEIVER SETUP.14TEST ROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS.14TEST EQUIPMENT LIST AND DETA	JUSTIFICATION	
EQUIPMENT MODIFICATIONS4SUPPORT EQUIPMENT LIST AND DETAILS4EXTERNAL CABLE4BLOCK DIAGRAM OF TEST SETUP5SUMMARY OF TEST RESULTS6FCC §15.107 - AC LINE CONDUCTED EMISSIONS7MEASUREMENT UNCERTAINTY7EUT SETUP7EMI TEST RECEIVER SETUP.7EMI TEST RECEIVER SETUP.7EMI TEST ROCEDURE8CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS.9TEST RESULTS SUMMARY9TEST DATA9FCC §15.109 - RADIATED EMISSIONS12MEASUREMENT UNCERTAINTY12EUT SETUP13TEST RECEIVER SETUP.13TEST RECEIVER SETUP.14TEST PROCEDURE13TEST RECEIVER SETUP.14TEST ROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS.14TEST EQUIPMENT LIST AND DETA	EUT Exercise Software	
External Čable		
BLOCK DIAGRAM OF TEST SETUP 5 SUMMARY OF TEST RESULTS 6 FCC §15.107 – AC LINE CONDUCTED EMISSIONS 7 MEASUREMENT UNCERTAINTY 7 EUT SETUP 7 EUT SETUP 7 EMI TEST RECEIVER SETUP 8 TEST PROCEDURE 8 CORRECTED AMPLITUDE & MARGIN CALCULATION 8 TEST RESULTS SUMMARY 9 TEST RESULTS SUMMARY 9 TEST DATA 9 FCC §15.109 - RADIATED EMISSIONS 12 MEASUREMENT UNCERTAINTY 12 EUT SETUP 12 MEASUREMENT UNCERTAINTY 12 EUT SETUP 12 MEASUREMENT UNCERTAINTY 12 EUT SETUP 12 EMI TEST RECEIVER SETUP 13 TEST PROCEDURE 13 CORRECTED AMPLITUDE & MARGIN CALCULATION 14 TEST RESULTS SUMMARY 14 TEST RESULTS SUMMARY 14 TEST PROCEDURE 14 TEST RESULTS SUMMARY 14 TEST RESULTS SUMMARY 14 TEST DATA 14 </td <td></td> <td></td>		
SUMMARY OF TEST RESULTS6FCC §15.107 – AC LINE CONDUCTED EMISSIONS7MEASUREMENT UNCERTAINTY7EUT SETUP7EMI TEST RECEIVER SETUP8TEST PROCEDURE8CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS9TEST RESULTS SUMMARY9TEST DATA9FCC §15.109 - RADIATED EMISSIONS12MEASUREMENT UNCERTAINTY12EUT SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST RECEIVER SETUP13TEST PROCEDURE13TEST PROCEDURE14TEST RECEIVER SETUP14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST DATA14		
FCC §15.107 - AC LINE CONDUCTED EMISSIONS7MEASUREMENT UNCERTAINTY7EUT SETUP7EMI TEST RECEIVER SETUP8TEST PROCEDURE8CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS9TEST DATA9FCC §15.109 - RADIATED EMISSIONS12MEASUREMENT UNCERTAINTY12EUT SETUP13TEST RECEIVER SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST RECEIVER SETUP13TEST RECEIVER SETUP14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST DATA14	BLOCK DIAGRAM OF TEST SETUP	5
MEASUREMENT UNCERTAINTY7EUT SETUP7EMI TEST RECEIVER SETUP8TEST PROCEDURE8CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS9TEST RESULTS SUMMARY9TEST DATA9FCC §15.109 - RADIATED EMISSIONSMEASUREMENT UNCERTAINTY12EUT SETUP12EUT SETUP12EUT SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST REQUIPMENT LIST AND DETAILS14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14	SUMMARY OF TEST RESULTS	6
MEASUREMENT UNCERTAINTY7EUT SETUP7EMI TEST RECEIVER SETUP8TEST PROCEDURE8CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS9TEST RESULTS SUMMARY9TEST DATA9FCC §15.109 - RADIATED EMISSIONSMEASUREMENT UNCERTAINTY12EUT SETUP12EUT SETUP12EUT SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST REQUIPMENT LIST AND DETAILS14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14	FCC §15.107 – AC LINE CONDUCTED EMISSIONS	7
EUT SETUP7EMI TEST RECEIVER SETUP8TEST PROCEDURE8CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS9TEST RESULTS SUMMARY9TEST DATA9FCC §15.109 - RADIATED EMISSIONSMEASUREMENT UNCERTAINTY12EUT SETUP12EUT SETUP12EMI TEST RECEIVER SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14TEST RESULTS SUMMARY14		
Test Procedure8Corrected Amplitude & Margin Calculation8Test Equipment List and Details9Test Results Summary9Test Data9FCC §15.109 - RADIATED EMISSIONS12Measurement Uncertainty12EUT Setup12EMI Test Receiver Setup13Test Procedure13Corrected Amplitude & Margin Calculation14Test Equipment List and Details14Test Results Summary14		
CORRECTED AMPLITUDE & MARGIN CALCULATION8TEST EQUIPMENT LIST AND DETAILS.9TEST RESULTS SUMMARY.9TEST DATA9FCC §15.109 - RADIATED EMISSIONS12MEASUREMENT UNCERTAINTY.12EUT SETUP.12EMI TEST RECEIVER SETUP.13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS.14TEST RESULTS SUMMARY.14TEST DATA14	EMI TEST RECEIVER SETUP	
TEST EQUIPMENT LIST AND DETAILS9TEST RESULTS SUMMARY.9TEST DATA.9FCC §15.109 - RADIATED EMISSIONS.12MEASUREMENT UNCERTAINTY.12EUT SETUP.12EMI TEST RECEIVER SETUP.13TEST PROCEDURE.13CORRECTED AMPLITUDE & MARGIN CALCULATION.14TEST RESULTS SUMMARY.14TEST RESULTS SUMMARY.14TEST DATA.14		
TEST RESULTS SUMMARY	CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA9FCC §15.109 - RADIATED EMISSIONS12MEASUREMENT UNCERTAINTY12EUT SETUP12EMI TEST RECEIVER SETUP12EMI TEST RECEIVER SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS14TEST RESULTS SUMMARY14TEST DATA14		
FCC §15.109 - RADIATED EMISSIONS12MEASUREMENT UNCERTAINTY12EUT SETUP12EMI TEST RECEIVER SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS14TEST RESULTS SUMMARY14TEST DATA14	TEST RESULTS SUMMARY	9
MEASUREMENT UNCERTAINTY12EUT SETUP12EMI TEST RECEIVER SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS14TEST RESULTS SUMMARY14TEST DATA14	TEST DATA	9
EUT SETUP12EMI TEST RECEIVER SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS14TEST RESULTS SUMMARY14TEST DATA14		
EUT SETUP12EMI TEST RECEIVER SETUP13TEST PROCEDURE13CORRECTED AMPLITUDE & MARGIN CALCULATION14TEST EQUIPMENT LIST AND DETAILS14TEST RESULTS SUMMARY14TEST DATA14	Measurement Uncertainty	
Test Procedure 13 Corrected Amplitude & Margin Calculation 14 Test Equipment List and Details 14 Test Results Summary 14 Test Data 14		
CORRECTED AMPLITUDE & MARGIN CALCULATION 14 TEST EQUIPMENT LIST AND DETAILS 14 TEST RESULTS SUMMARY 14 TEST DATA 14	EMI TEST RECEIVER SETUP	
Test Equipment List and Details. 14 Test Results Summary. 14 Test Data 14	Test Procedure	
Test Results Summary		
Test Data14		

FCC Part15B

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SHENZHEN TENDA TECHNOLOGY CO.,LTD.*'s product, model number: *D301(FCC ID: V7TD301)* (the "EUT") in this report was a *ADSL Router*, which was measured approximately: 17.3 cm (L) x 14.5 cm (W) x 18.5 cm (H), rated input voltage: DC 9.0V from adapter. The highest operating frequency is 333MHz.

Adapter Information: HEWEISHUN MODEL: TEA09U-09100 INPUT: AC 100-240V, 50/60Hz, 0.3A OUTPUT: DC 9V, 1.0A

* All measurement and test data in this report was gathered from production sample serial number: 130813004 (Assigned by BACL.Dongguan). The EUT was received on 2013-08-15.

Objective

This report is prepared on behalf of *SHENZHEN TENDA TECHNOLOGY CO.,LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: V7TD301 for Wifi.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at http://ts.nist.gov/standards/scopes/5000690.htm

FCC Part15B

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

No software was used.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
DELL	РС	GX620	/
Huawei	DSLAM Swieth	MA5615	98MA6444773-001
Kingston	Flash Disk	DT101 G2	N/A

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	То
Parallel Cable	yes	no	1.2	Laptop	Printer
Serial Cable	yes	no	1.2	Laptop	Modem
RJ45 Cable	no	no	1.0	EUT	Laptop
RJ45 Cable*3	no	no	10.0	EUT	PC
RJ11 Cable	no	no	10.0	EUT	DSLAM Swicth
Keyboard Cable	yes	no	2.0	Laptop	Keyboard

Report No.: R2DG130813004-00A

Block Diagram of Test Setup

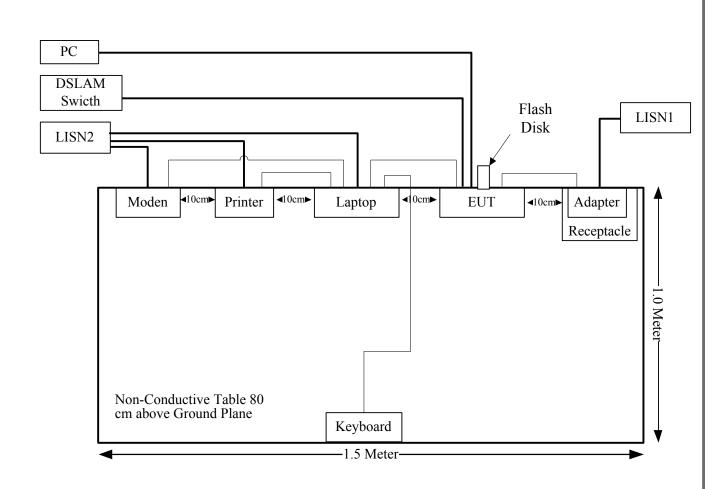

FCC Part15B

Page 5 of 18

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;


- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values	of	$U_{\rm cispr}$
------------------	----	-----------------

Measurement	$U_{ m cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

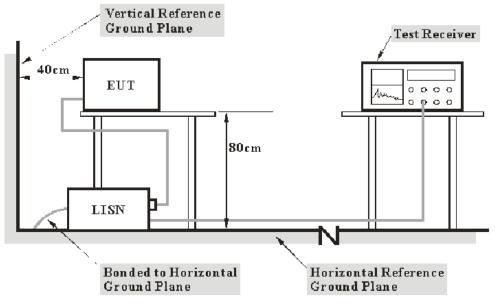

Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm

from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\label{eq:VC} \begin{split} V_{C} &= V_{R} + A_{C} + VDF \\ C_{f} &= A_{C} + VDF \end{split}$$

Herein, V_C (cord. Reading): corrected voltage amplitude V_R : reading voltage amplitude A_c : attenuation caused by cable loss VDF: voltage division factor of AMN C_f : Correction Factor

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Report No.: R2DG130813004-00A

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECIEVER	ESCS 30	830245/006	2013-1-10	2014-1-9
R&S	L.I.S.N	ESH3-Z5	843331/015	2012-9-17	2013-9-16
R&S	L.I.S.N	ESH3-Z5	100113	2012-11-29	2013-11-28
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

Test Equipment List and Details

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

13.46 dB at 1.130 MHz in the Line conducted mode

Test Data

Environmental Conditions


Temperature:	26.9 °C
Relative Humidity:	63 %
ATM Pressure:	99.1kPa

The testing was performed by Leon Chen on 2013-08-16.

Report No.: R2DG130813004-00A


Test mode: Operating

120 V, 60 Hz, Line:

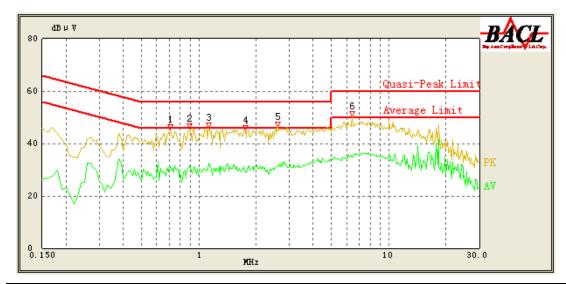

Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/AV/QP)
0.710	39.28	0.31	56.00	16.72	QP
0.710	31.05	0.31	46.00	14.95	AV
0.890	39.54	0.32	56.00	16.46	QP
0.890	31.56	0.32	46.00	14.44	AV
1.130	39.80	0.32	56.00	16.20	QP
1.130	32.54	0.32	46.00	13.46	AV
1.760	40.15	0.35	56.00	15.85	QP
1.750	29.80	0.35	46.00	16.20	AV
2.610	39.13	0.38	56.00	16.87	QP
2.600	31.62	0.38	46.00	14.38	AV
6.430	42.17	0.59	60.00	17.83	QP
6.370	35.43	0.58	50.00	14.57	AV

120 V, 60 Hz, Neutral:

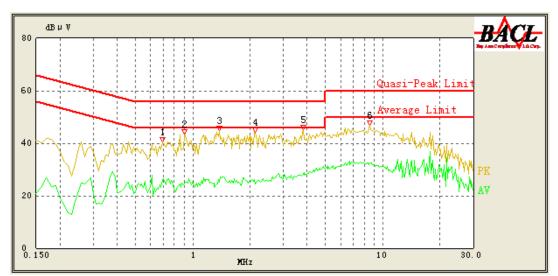

Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/AV/QP)
0.690	35.17	0.22	56.00	20.83	QP
0.690	25.76	0.22	46.00	20.24	AV
0.900	35.00	0.23	56.00	21.00	QP
0.900	24.37	0.23	46.00	21.63	AV
1.380	35.14	0.25	56.00	20.86	QP
1.380	25.14	0.25	46.00	20.86	AV
2.140	34.15	0.28	56.00	21.85	QP
2.140	24.41	0.28	46.00	21.59	AV
3.830	36.07	0.34	56.00	19.93	QP
3.840	28.69	0.34	46.00	17.31	AV
8.520	39.76	0.67	60.00	20.24	QP
8.450	31.89	0.67	50.00	18.11	AV

FCC §15.109 - RADIATED EMISSIONS

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;

- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 5.0 dB 200M~1GHz: 6.2 dB 1G~6GHz: 4.45 dB 6G~18GHz: 5.23 dB

Table 2 – Values of
$$U_{\text{cispr}}$$


Measurement				
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB			
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB			
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB			

EUT Setup

Below 1 GHz:

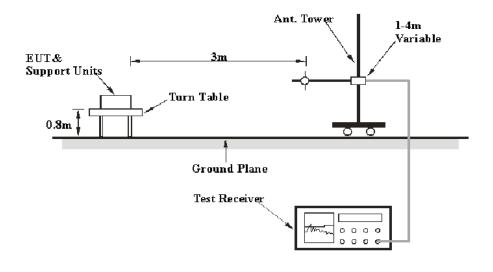

Above 1GHz:

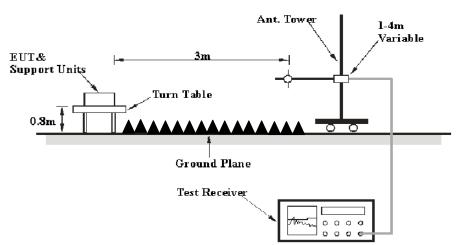

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

According to FCC 15.33 requirements, the system was measured from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	Range RBW		IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	РК
Above I GHZ	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in Quasi-peak detection mode for 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCI	100224	2013-5-6	2014-5-5
Sunol Sciences	Antenna	JB3	A060611-1	2011-9-6	2014-9-5
HP	HP AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-12-7	2013-12-6
ETS LINDGREN	horn antenna	3115	000 527 35	2012-9-6	2015-9-5
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	N/A	N/A
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

Test Equipment List and Details

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the <u>FCC 15.109, Class B</u>, with the worst margin reading of:

4.74 dB at 333.6100 MHz in the Vertical polarization for below 1G

Test Data

Environmental Conditions


Temperature:	23.5 °C		
Relative Humidity:	57 %		
ATM Pressure:	100.5 kPa		

The testing was performed by Leon Chen on 2013-09-11.

1) Below 1G:

Test mode: Operating

Horizontal:

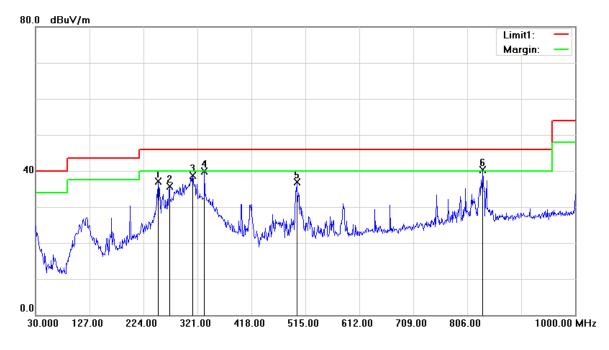


Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
250.1900	44.53	QP	-7.48	37.05	46.00	8.95
270.5600	41.73	QP	-5.95	35.78	46.00	10.22
312.2700	43.96	QP	-5.26	38.70	46.00	7.30
333.6100	44.73	QP	-4.84	39.89	46.00	6.11*
499.4800	38.27	QP	-1.37	36.90	46.00	9.10
834.1300	37.02	QP	3.37	40.39	46.00	5.61*

*Within measurement uncertainty!

Report No.: R2DG130813004-00A

Vertical:

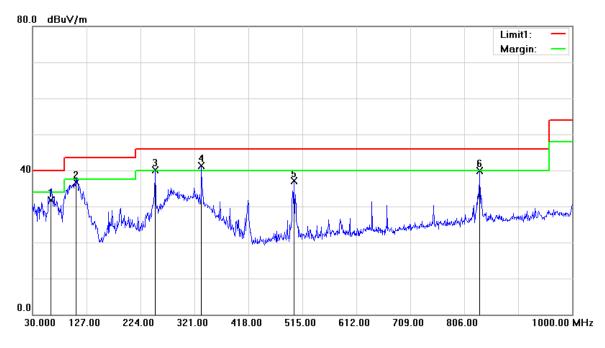

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
62.9800	44.36	QP	-12.56	31.80	40.00	8.20
108.5700	44.23	QP	-7.43	36.80	43.50	6.70
250.1900	47.59	QP	-7.48	40.11	46.00	5.89*
333.6100	46.10	QP	-4.84	41.26	46.00	4.74*
499.4800	38.51	QP	-1.37	37.14	46.00	8.86
834.1300	36.62	QP	3.37	39.99	46.00	6.01*


*Within measurement uncertainty!

2) Above 1G:

Test mode: Operating

Horizontal:


100.0 dBuV/m

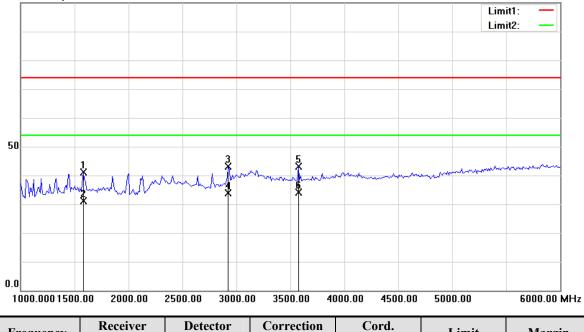

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1581.162	41.11	peak	0.07	41.18	74.00	32.82
1581.162	31.18	AVG	0.07	31.25	54.00	22.75
2923.848	36.85	peak	6.26	43.11	74.00	30.89
2923.848	27.59	AVG	6.26	33.85	54.00	20.15
3575.150	36.39	peak	6.68	43.07	74.00	30.93
3575.150	27.44	AVG	6.68	34.12	54.00	19.88

Report No.: R2DG130813004-00A

Vertical:

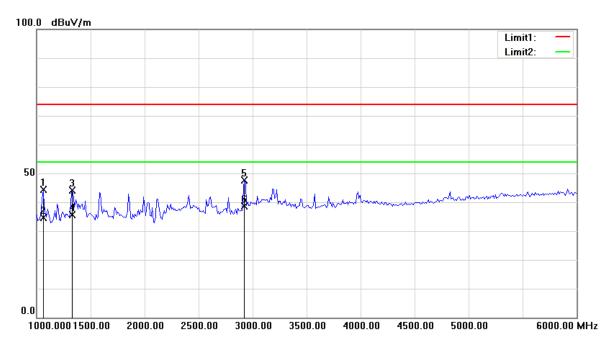

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1060.120	46.46	peak	-2.09	44.37	74.00	29.63
1060.120	36.60	AVG	-2.09	34.51	54.00	19.49
1330.661	45.22	peak	-1.04	44.18	74.00	29.82
1330.661	36.66	AVG	-1.04	35.62	54.00	18.38
2923.848	41.49	peak	6.26	47.75	74.00	26.25
2923.848	32.39	AVG	6.26	38.65	54.00	15.35

***** END OF REPORT *****