



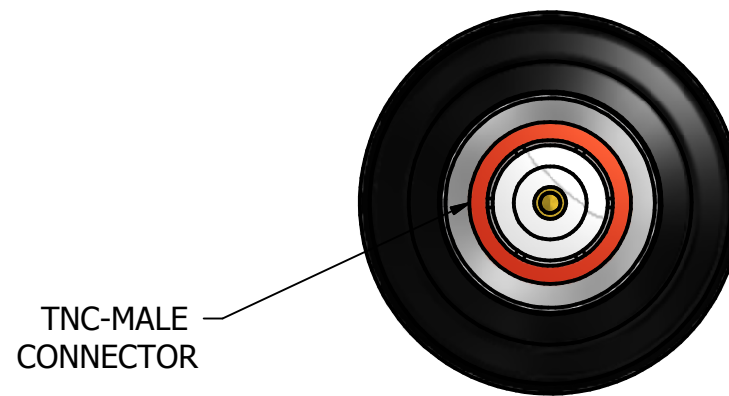



POLYBAG IMAGE

NOTES:

- Each antenna to be placed in an individual polybag.
- Bulk pack in multiples of 40 or 50 pieces per carton.
Provide carton label with part number, quantity, and P.O. number
- Antennas shall BE well protected to negate any possible damage in transit

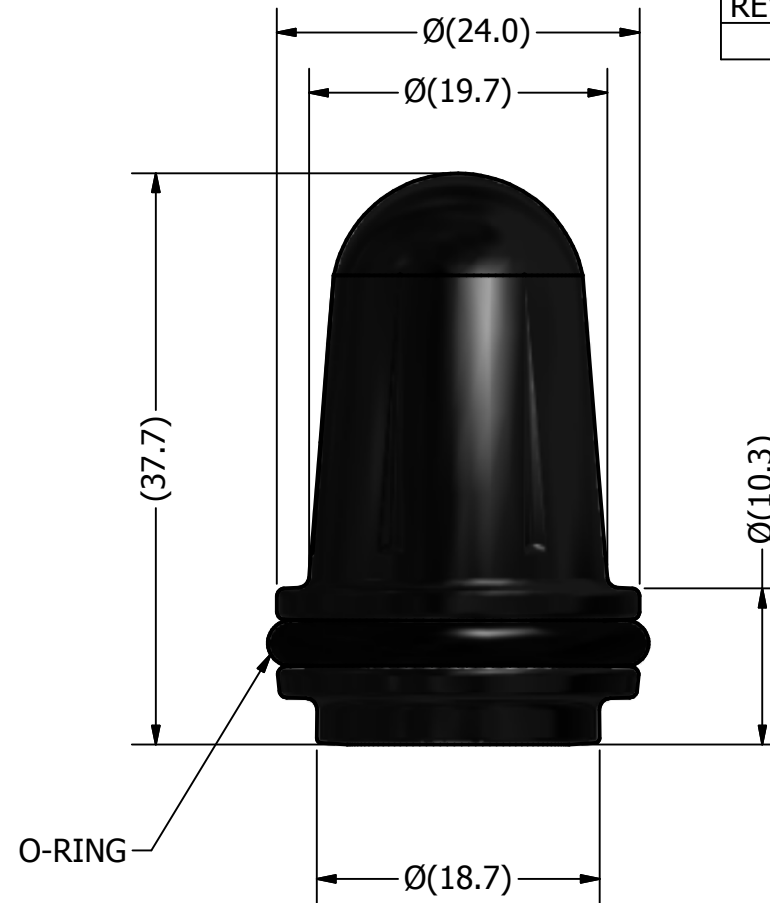

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
	INITIAL RELEASE	4/28/2016	MP

SUPPLIER PRINT ACCEPTANCE:		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		DRAWN MP		DATE 4/28/2016		 PCTEL, INC. 471 BRIGHTON DRIVE BLOOMINGDALE, IL 60108 PH. 630-372-6800 FAX. 630-372-8077			
<input type="checkbox"/> Accept drawing/specification: No changes needed: <input type="checkbox"/> This part is RoHS compliant <input type="checkbox"/> This part is REACH compliant <input type="checkbox"/> Accept drawing/specification. Notes/Mark-ups added <input type="checkbox"/> Cannot accept drawing/spec. Notes/Mark-ups added Supplier Projected Outgoing Quality: SIGMA LEVEL : _____ or PPM: _____ Signature _____ Date: _____		FOR TOLERANCES NOT SPECIFIED USE: [X mm ± 3 mm] [X.X mm ± .3 mm] [X.XX mm ± .13 mm] ANGULAR ± 1°		CHECKED _____ DATE _____		MATERIAL: SEE COMPONENT PRINTS FINISH: SEE COMPONENT PRINTS					
		THIRD ANGLE PROJECTION 						DESCRIPTION 3.650 GHz Stubby Antenna with Integrated TNC Male Connector, ODD			
		PCTEL PROPRIETARY DATA THE INFORMATION AND/OR DRAWINGS CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL AND PROPRIETARY TO PCTEL, INC. AND MAY NOT BE USED, REPRODUCED, IN WHOLE OR IN PART, OR MODIFIED IN ANY WAY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN AUTHORIZED REPRESENTATIVE OF PCTEL, INC.						DRAWING NO. 75-100155-036_ODD			
						SIZE B		SCALE 2:1		SHEET 1 OF 1	

75-100155-036 - -3.65 GHz Omnidirectional Antenna Specifications

RF/ELECTRICAL SPECIFICATIONS						
Part Number	Frequency Range	Nominal Gain	Return Loss	E-Plane Beamwidth	Connector Type	Avg. Power
75-100155-036	3.65-3.675 GHz	2 dBi	> 14 dB	70°	TNC Male	10 W

MECHANICAL SPECIFICATIONS		
Part Number	Weight	Height
75-100155-036	27 g	37.7 mm