


S1000

USB/BLUETOOTH CONFERENCE
SPEAKERPHONE

USER GUIDE

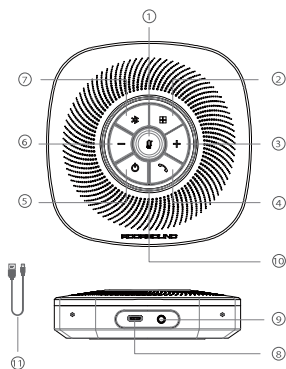

- | | |
|---------------------------|-----------------------------|
| 1. Mute Button and LED | 7. Bluetooth Button and LED |
| 2. Multifunctional Button | 8. USB-C Charge Port |
| 3. Volume + | 9. 3.5mm Aux Port |
| 4. Call Answer/End | 10. LED Indicator |
| 5. Power ON/OFF and LED | 11. USB Cable |
| 6. Volume - | |

Functions and buttons

Buttons/Port	Function
Mute Button	Press to mute/unmute the microphone.
1 Mute LED	Solid red LED: Microphone is muted. No LED Display: Microphone is unmuted.
2 Multifunctional Button	Press to pause/play audio. Press and hold the button for 5 seconds to activate the voice assistant.
3 Volume +	Press to increase the volume.
4 Call Answer/End	Press to answer/end the call. Press and hold the button for 3 seconds to reject the call. Press and hold the button for 3 seconds to power on or off. Press the button to show the battery remaining (#10).
Power ON/OFF	Solid white LED: Battery full or enough to use S1000. Solid red LED: Battery charging.
5 Power ON/OFF LED	Flashing red LED: Battery low. Press to decrease the volume.
6 Volume -	Press to decrease the volume.
7 Bluetooth Button	Pair/connect Bluetooth-enabled devices or disconnect. Solid blue LED: Bluetooth device is connected. (Pairing successful)
8 Bluetooth LED	Flashing blue LED: Bluetooth pairing.
9 USB-C Charge Port	USB-C port, plug the USB cable to this port.
3.5mm Aux Port	Connect the audio device with 3.5mm plug to the port.
LED Indicator	Solid red LED: Microphone is muted. Flashing red LED: Battery low. Flashing blue LED: Bluetooth pairing.
10 Red LED	Blue LED lights up for two seconds: Bluetooth device is connected. Blue LED lights up in a clockwise direction: volume + Blue LED lights up in a counter-clockwise direction: volume -
10 Blue LED	

10	Green LED	Green LED illuminates for two seconds in a clockwise direction: power on. Green LED illuminates for two seconds in a counter-clockwise direction: power off. Green LED illuminates for two seconds in part: battery remaining. Flashing green LED: incoming call
11	USB Cable	Connect the USB port of S1000 to PC.

Installation Instruction

1. Turn on/off S1000

S1000 turns on automatically without using the Power ON/OFF button (#5) when it connects to power.
Press and hold Power ON/OFF (#5) for 3 seconds to turn S1000 on or off when it does not connect to any power. It will turn off automatically if there is no Bluetooth connection in 5 minutes.
You hear "power on" and the LED indicator (#10) will light up green for 2 seconds in a clockwise direction when it turns on.
You hear "power off" and the LED indicator (#10) will light up green for 2 seconds in a counter-clockwise direction when it turns off.

2. Connect to power and charge S1000

Plug the USB Cable (#11) to USB Port (#8) of S1000, and then, connect the other end of the USB Cable (#11) into any USB port of your PC or USB power adapter (not included) to charge the battery.

The indicator of Power ON/OFF (#5) is solid red when charging. It turns solid white when it is fully charged.
Press Power ON/OFF (#5), and green LED (#10) illuminates for two seconds in part to show battery remaining.

3. Connect to Bluetooth-enabled mobile devices

Press Bluetooth button (#7) into Bluetooth pairing mode. You hear "pairing" and the LED indicator (#10) flashes blue. Enable Bluetooth on your device and search new devices. Select "ADDA-S1000" as Bluetooth device.
When pairing is successful, you hear "Your device is connected," and the LED indicator (#10) turns solid blue for two seconds and then, turn off. The LED indicator (#7) turns solid blue.
Now you can take calls or stream media.
*** S1000 will connect with the last successfully connected Bluetooth device automatically.

4. Connect to PC through USB cable

Plug the USB cable (#11) to USB port (#8) of S1000, and then, connect the other end of the USB cable (#11) into any USB port of your PC. You hear "USB enabled".
Make sure to set ADDA-S1000 as default audio device in the sound settings of your Windows Control Panel and softphone.



Usage Instruction

Answer/end or reject a call

Press the call answer/end button (#4) to answer/end the call. Press and hold the button (#4) for 3 seconds to reject the call. The LED indicator (#10) flashes green when there is an incoming call.

Mute/unmute the microphone

Press the mute button (#1) to mute the microphone. The mute indicator (#1) and the LED indicator (#10) will show solid red.
Press again to unmute the microphone.

Adjust the volume

Press the volume + (#3) button to increase the volume and the blue LED indicator (#10) lights up in a clockwise direction.
Press the volume - (#6) button to decrease the volume and the blue LED indicator (#10) lights up in a counter-clockwise direction.

Activate the voice assistant on your mobile phone

Press the multifunctional button (#2) for 5 seconds to activate the voice assistant of your mobile phone.

Activate voice prompt

Voice prompt will be activated automatically when S1000 is powered on.

Trouble Shooting

1. When S1000 is connected to PC, there is no sound from the speakerphone.
Make sure to choose ADDA S1000 as default playback and recording device in the audio settings of your PC system.

Usage Attention:

Make sure to store the speakerphone when it is powered off. The speakerphone is not waterproof. Don't put it in humid environments.
Extreme temperatures may affect the battery life and performance.

Accessories

S1000 Speakerphone X1
USB Charging Cable X1
User Manual X1
Warranty Card X1



FCC:

1. S1000 FCC ID: 24HSP-S1000
2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.
3. This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
4. NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.
5. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.
- This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.
6. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

RED:

1. RF information:
Bluetooth: 2402-2480MHz
Max power: 1,999mW
Battery: 18650-2600mAh, 3, 6V, 4, 2V
2. CAUTION : RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.
3. Charger description: The product does not come with a charger as standard. It is recommended that the user can use the charger specification (5V 1A charger). The maximum operating temperature of the product, please refer to: Ideal temperatures: 0° C to 45° C for operating.
4. The device complies with RF specifications when the device used at 20 cm from your body.