

RADIO TEST REPORT

FCC ID: WA5WS3910

Product : Weather Station(receiver)

Trade Mark : N/A

Model Name : WS3910

Family Model : WS3900BU,WS39XX (X=0~9)

Report No. : S24041901806002

Prepared for

Shenzhen Fine Offset Electronics Co., Ltd.
A, 4/F, Bldg.C, Dist.A, Minzhu Jiujiu Ind. City, Xihuan Rd., Shajing St.,
Baoan Dist. Shenzhen, Guangdong, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,Xixiang Street Bao'an
District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Fine Offset Electronics Co., Ltd.
Address : A, 4/F, Bldg.C, Dist.A, Minzhu Jiujiu Ind. City, Xihuan Rd., Shajing St., Baoan Dist. Shenzhen, Guangdong, China
Manufacturer's Name : Shenzhen Fine Offset Electronics Co., Ltd.
Address : A, 4/F, Bldg.C, Dist.A, Minzhu Jiujiu Ind. City, Xihuan Rd., Shajing St., Baoan Dist. Shenzhen, Guangdong, China

Product description

Product name : Weather Station(receiver)
Model and/or type reference : WS3910
Family Model WS3900BU, WS39XX (X=0~9)
Rating(s) : DC 5V from USB port or DC 3x1.5V AA battery

Standards : FCC Part15.249

Test procedure ANSI C63.10-2013

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number : S240419018006

Date of Test :

Date (s) of performance of tests : Apr 19, 2024 ~ Jun 12, 2024

Date of Issue : Jun 12, 2024

Test Result : **Pass**

Prepared By : Allen Liu
Allen Liu
(Project Engineer)

Reviewed By : Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By : Alex Li
Alex Li
(Manager)

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . ANTENNA REQUIREMENT	13
3.1 STANDARD REQUIREMENT	13
3.2 EUT ANTENNA	13
3.3 CONDUCTED EMISSION MEASUREMENT	14
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.3.2 TEST PROCEDURE	15
3.3.3 DEVIATION FROM TEST STANDARD	15
3.3.4 TEST SETUP	15
3.2.5 TEST RESULT	16
3.4 RADIATED EMISSION MEASUREMENT	20
3.4.1 RADIATED EMISSION LIMITS	20
3.4.2 TEST PROCEDURE	21
3.4.3 DEVIATION FROM TEST STANDARD	21
3.4.4 TEST RESULTS (BELOW 30MHZ)	23
3.4.5 TEST RESULTS (BELOW 1000 MHZ)	24
3.4.6 TEST RESULTS (ABOVE 1000 MHZ)	28
3.4.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	30
4. BANDWIDTH TEST	32
4.1 TEST PROCEDURE	32
4.2 DEVIATION FROM STANDARD	32
4.3 TEST SETUP	32
6. TEST RESULTS	33

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.249)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249 15.209	Radiated Spurious Emission	Pass	
15.249(2)	Frequency Tolerance	N/A	
15.249(a)	Fundamental Measurement	Pass	
15.205	Band Edge Emission	Pass	
15.215	Occupied Bandwidth	Pass	

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd
 Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
 FCC FRN Registration No.:463705; FCC FRN Designation Number: CN1184
 IC Registration No.:9270A
 CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	Occupied bandwidth	$\pm 4.7\%$
9	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Weather Station(receiver)	
Trade Mark	N/A	
Model Name	WS3910	
Family Model	WS3900BU,WS39XX (X=0~9)	
Model Difference	All models have the same circuit and RF module, except CO2 sensor and the packaging is different in different sales areas.	
Product Description	The EUT is a Weather Station(receiver)	
	Operation Frequency:	915MHz
	Modulation Type:	FSK
	Antenna Designation:	FPC antenna
	Antenna Gain(Peak)	0.1 dBi
	Based on the application, features, or specification exhibited in User's Manual. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Adapter	N/A	
Battery	N/A	
Hardware version	WHP0284A1V06	
Firmware version	V1.2.8	
Software version	V1.2.8	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency(MHz)
01	915

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPC	N/A	0.1	Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	CH01
Mode 2	Normal link

For Radiated Spurious Emission	
Pretest Mode	Description
Mode 1	CH01


For Conducted Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	Normal link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

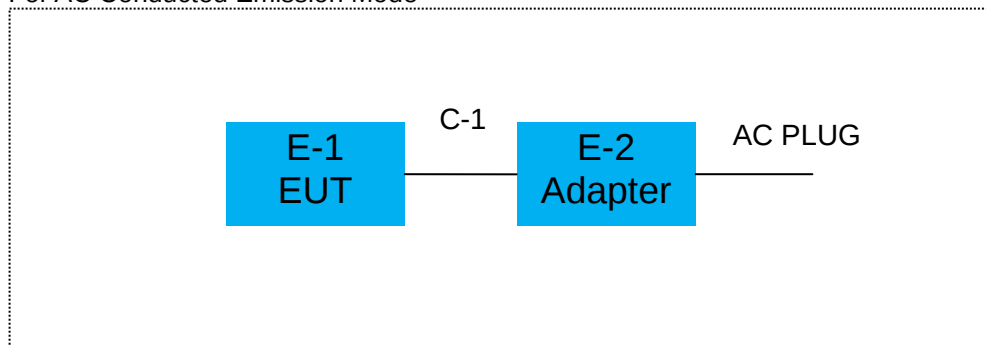

For Radiated Test Cases

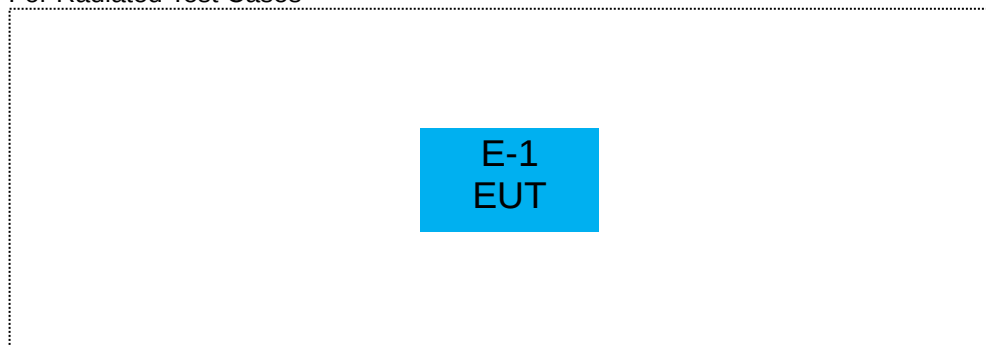

For Conducted Test Cases

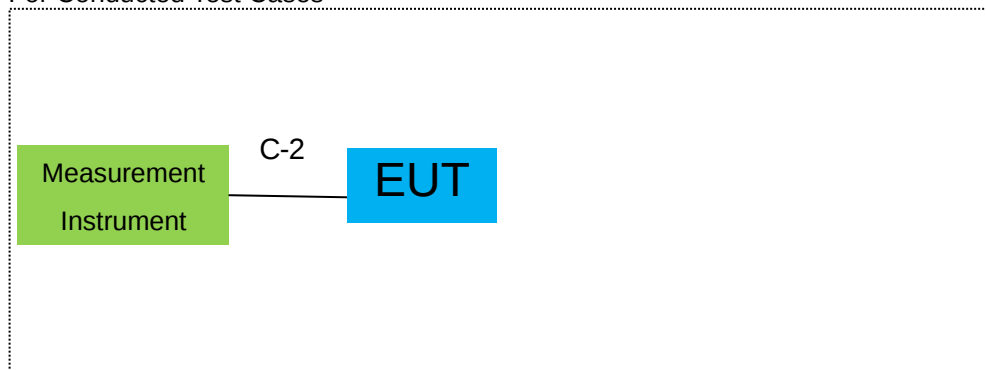

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Weather Station(receiver)	WS3910	N/A	N/A	EUT
E-2	Adapter	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	NO	1.5m	
C-2	RF Cable	YES	NO	0.1m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2024.03.12	2025.03.11	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023.05.29 2024.04.26	2024.05.28 2025.04.25	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2023.05.29 2024.04.26	2024.05.28 2025.04.25	1 year
4	Test Receiver	R&S	ESPI7	101318	2024.03.12	2025.03.11	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2024.03.11	2025.03.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2023.05.06	2026.05.05	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2023.01.12	2026.01.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2022.11.07	2025.11.06	3 year
9	Amplifier	EMC	EMC051835SE	980246	2023.05.29 2024.01.23	2024.05.28 2025.01.22	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2023.11.03	2026.11.02	3 year
11	Power Meter	DARE	RPR3006W	15I00041SNO84	2023.05.29 2024.04.25	2024.05.28 2025.04.24	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2023.03.26	2026.03.25	3 year
16	Filter	TRILTHIC	2400MHz	29	2024.03.12	2025.03.11	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2024.03.12	2025.03.11	1 year
2	LISN	R&S	ENV216	101313	2024.03.12	2025.03.11	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2024.03.12	2025.03.11	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2023.05.06	2026.05.05	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is FPC Antenna (Gain:0.1dBi). It comply with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

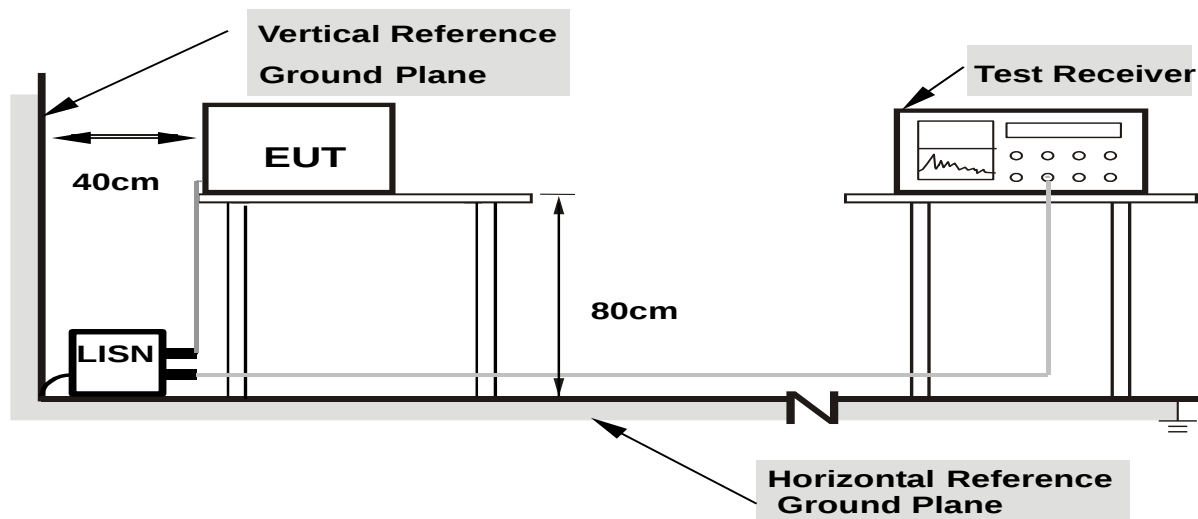

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.2.5 TEST RESULT


EUT :	Weather Station(receiver)	Model Name. :	WS3910
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from USB port AC 120V/60Hz	Test Mode :	Normal Link

With CO2 sensor:

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	25.36	9.95	35.31	65.57	-30.26	QP
0.1580	15.41	9.95	25.36	55.57	-30.21	AVG
0.4860	23.19	10.63	33.82	56.24	-22.42	QP
0.4860	12.52	10.63	23.15	46.24	-23.09	AVG
0.7580	21.56	11.18	32.74	56.00	-23.26	QP
0.7580	10.84	11.18	22.02	46.00	-23.98	AVG
1.4299	18.25	12.52	30.77	56.00	-25.23	QP
1.4299	6.81	12.52	19.33	46.00	-26.67	AVG
2.3300	18.02	9.66	27.68	56.00	-28.32	QP
2.3300	7.59	9.66	17.25	46.00	-28.75	AVG
11.3860	18.57	9.69	28.26	60.00	-31.74	QP
11.3860	8.64	9.69	18.33	50.00	-31.67	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

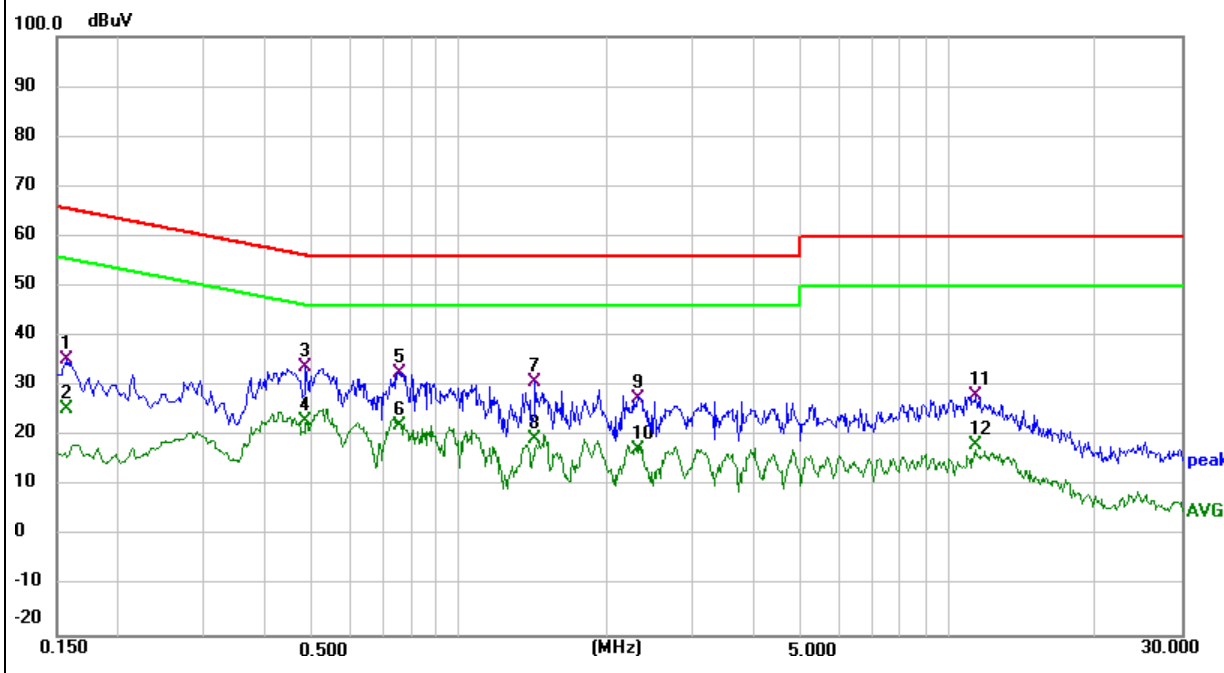


EUT :	Weather Station(receiver)	Model Name. :	WS3910
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from USB port AC 120V/60Hz	Test Mode :	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1940	24.34	10.01	34.35	63.86	-29.51	QP
0.1940	12.01	10.01	22.02	53.86	-31.84	AVG
0.4380	26.36	10.53	36.89	57.10	-20.21	QP
0.4380	12.92	10.53	23.45	47.10	-23.65	AVG
0.8620	25.34	11.38	36.72	56.00	-19.28	QP
0.8620	13.73	11.38	25.11	46.00	-20.89	AVG
1.2940	19.35	12.24	31.59	56.00	-24.41	QP
1.2940	8.77	12.24	21.01	46.00	-24.99	AVG
2.7139	19.92	9.67	29.59	56.00	-26.41	QP
2.7139	6.66	9.67	16.33	46.00	-29.67	AVG
12.1380	20.99	9.70	30.69	60.00	-29.31	QP
12.1380	8.75	9.70	18.45	50.00	-31.55	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

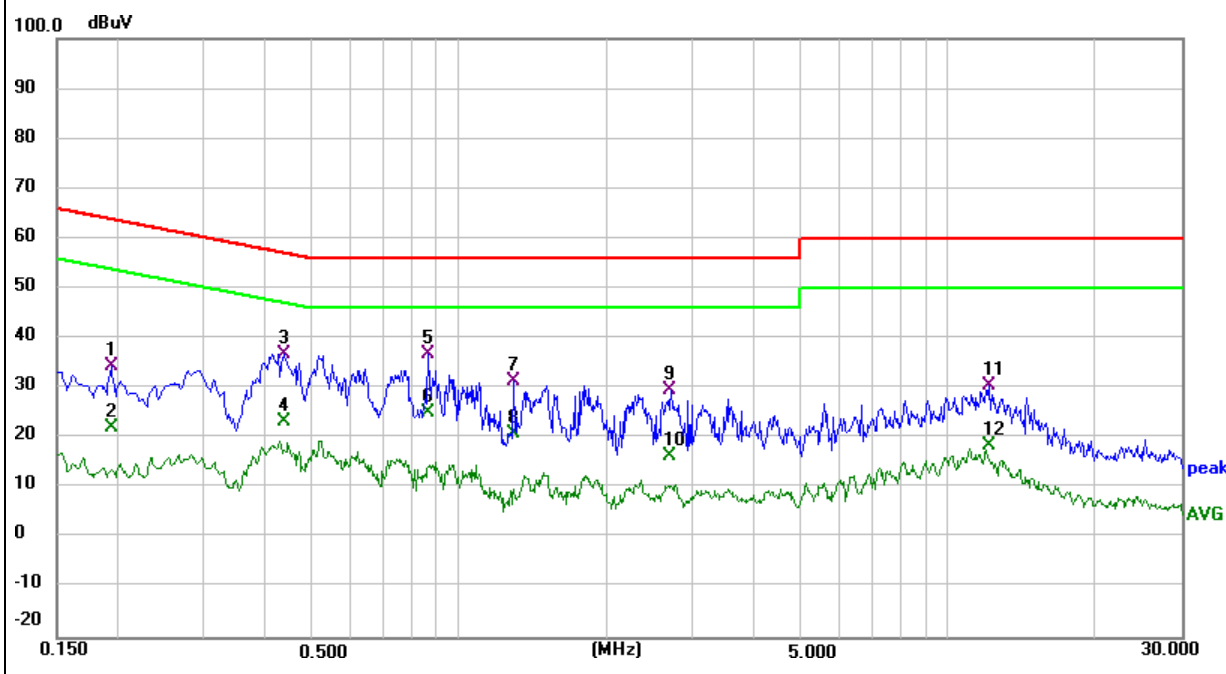


EUT :	Weather Station(receiver)	Model Name. :	WS3900
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from USB port AC 120V/60Hz	Test Mode :	Normal Link

Without CO2 sensor:

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	24.86	9.95	34.81	65.57	-30.76	QP
0.1580	12.95	9.95	22.90	55.57	-32.67	AVG
0.4860	23.69	10.63	34.32	56.24	-21.92	QP
0.4860	10.67	10.63	21.30	46.24	-24.94	AVG
0.7580	22.06	11.18	33.24	56.00	-22.76	QP
0.7580	8.84	11.18	20.02	46.00	-25.98	AVG
1.4299	18.75	12.52	31.27	56.00	-24.73	QP
1.4299	8.56	12.52	21.08	46.00	-24.92	AVG
1.6220	17.13	12.90	30.03	56.00	-25.97	QP
1.6220	6.45	12.90	19.35	46.00	-26.65	AVG
11.0100	19.63	9.69	29.32	60.00	-30.68	QP
11.0100	8.53	9.69	18.22	50.00	-31.78	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

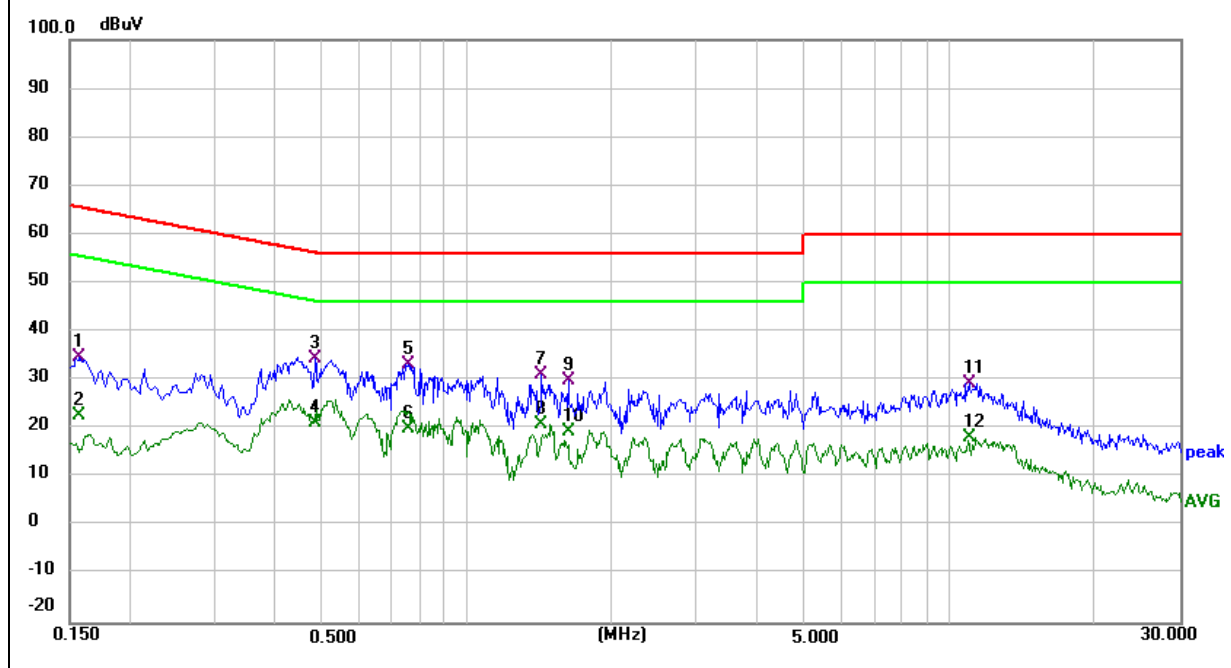


EUT :	Weather Station(receiver)	Model Name. :	WS3900
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from USB port AC 120V/60Hz	Test Mode :	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1940	23.84	10.01	33.85	63.86	-30.01	QP
0.1940	13.19	10.01	23.20	53.86	-30.66	AVG
0.4237	25.53	10.49	36.02	57.38	-21.36	QP
0.4237	14.01	10.49	24.50	47.38	-22.88	AVG
0.8620	22.34	11.38	33.72	56.00	-22.28	QP
0.8620	11.64	11.38	23.02	46.00	-22.98	AVG
1.2940	18.85	12.24	31.09	56.00	-24.91	QP
1.2940	8.80	12.24	21.04	46.00	-24.96	AVG
1.7940	16.86	13.24	30.10	56.00	-25.90	QP
1.7940	7.26	13.24	20.50	46.00	-25.50	AVG
12.1380	21.99	9.70	31.69	60.00	-28.31	QP
12.1380	9.90	9.70	19.60	50.00	-30.40	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

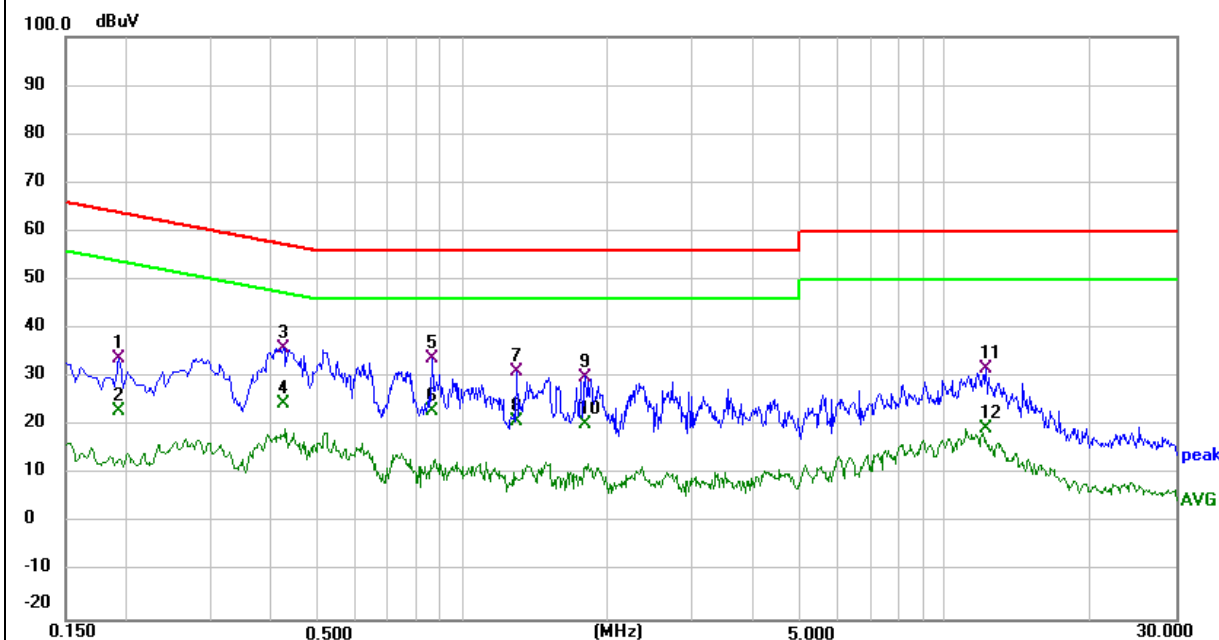

3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
Frequency (MHz)	Limit (dBuV)	
30~88	40	3
88~216	43.5	3
216~960	46	3
960 -10000	54.00	3
*902 - 928	94.00	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).
- (3) *Note: This is the limit for the fundamental frequency.

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
902-928	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported


3.4.3 DEVIATION FROM TEST STANDARD

No deviation


(A) Radiated Emission Test-Up Frequency Below 30MHz

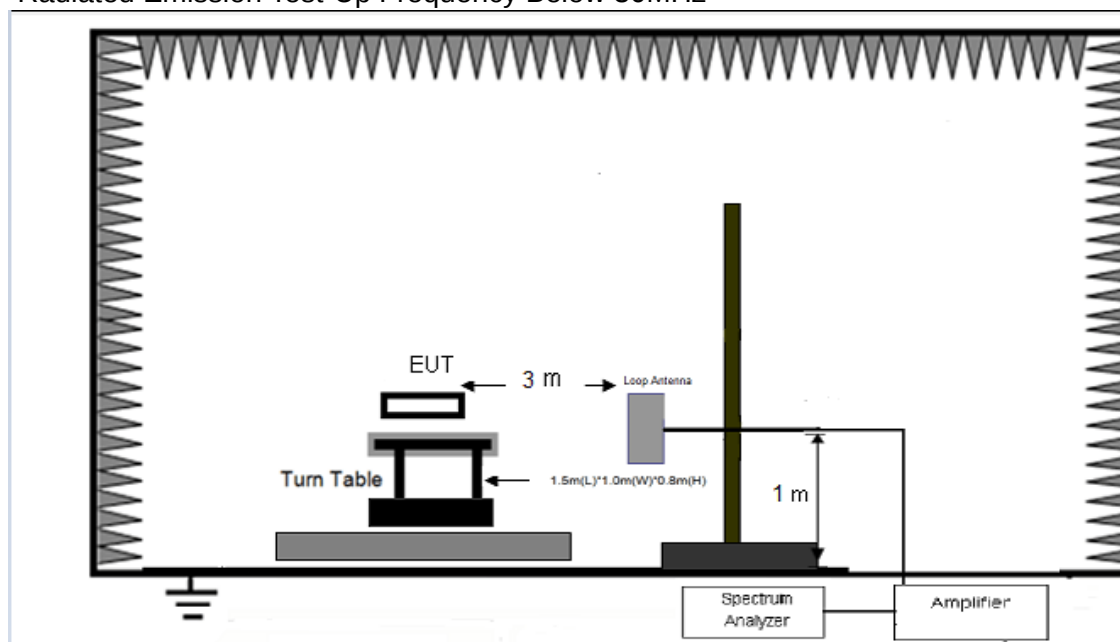

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

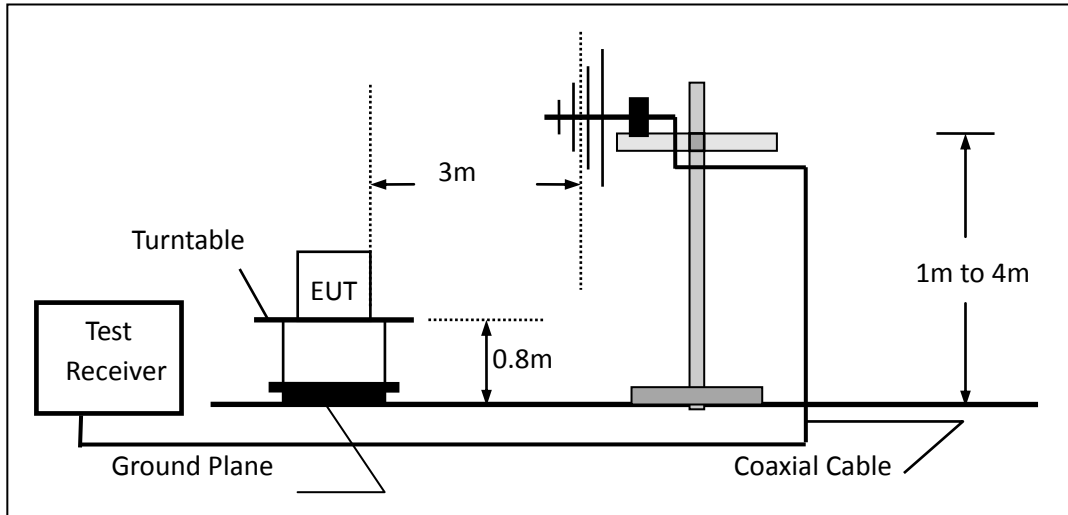

(C) Radiated Emission Test-Up Frequency Above 1GHz

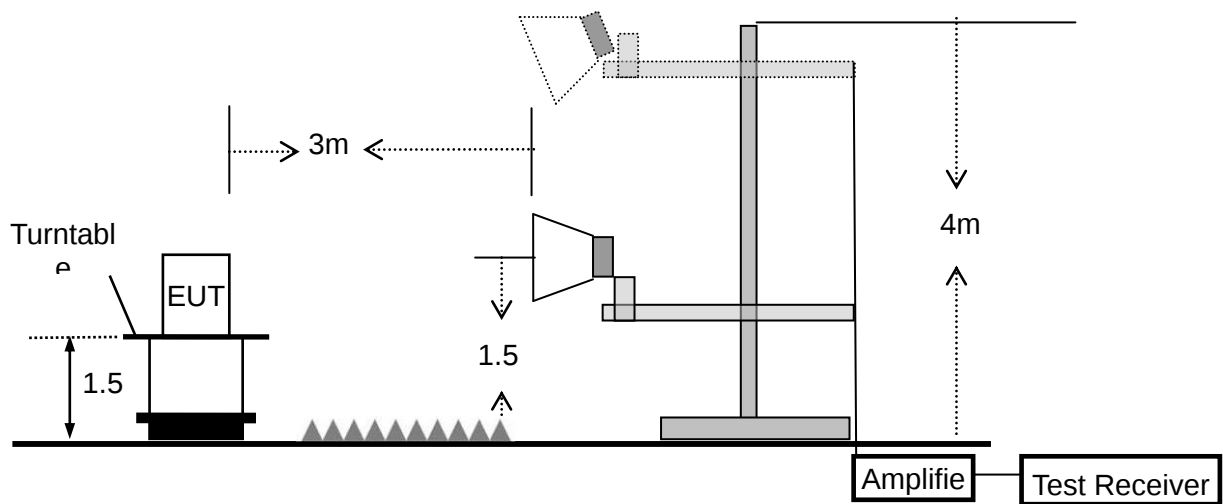

3.4.4 TEST RESULTS (BELOW 30MHz)

EUT :	Weather Station(receiver)	Model Name. :	WS3910
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Remark :1. Emission level in dBuV/m= $20 \log (\mu \text{V/m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor = $40 \log (\text{Specific distance/ test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor = $20 \log (\text{Specific distance/ test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.4.5 TEST RESULTS (BELOW 1000 MHz)


EUT :	Weather Station(receiver)	Model Name :	WS3910
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	Mode 1	Polarization :	Vertical

With CO2 sensor:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
50.5860	7.23	20.38	27.61	40.00	-12.39	QP
111.3468	6.27	18.46	24.73	43.50	-18.77	QP
212.2695	5.53	18.49	24.02	43.50	-19.48	QP
316.5890	5.33	20.67	26.00	46.00	-20.00	QP
586.8437	5.85	25.39	31.24	46.00	-14.76	QP
915.0000	61.89	29.65	91.54	94.00	-2.46	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

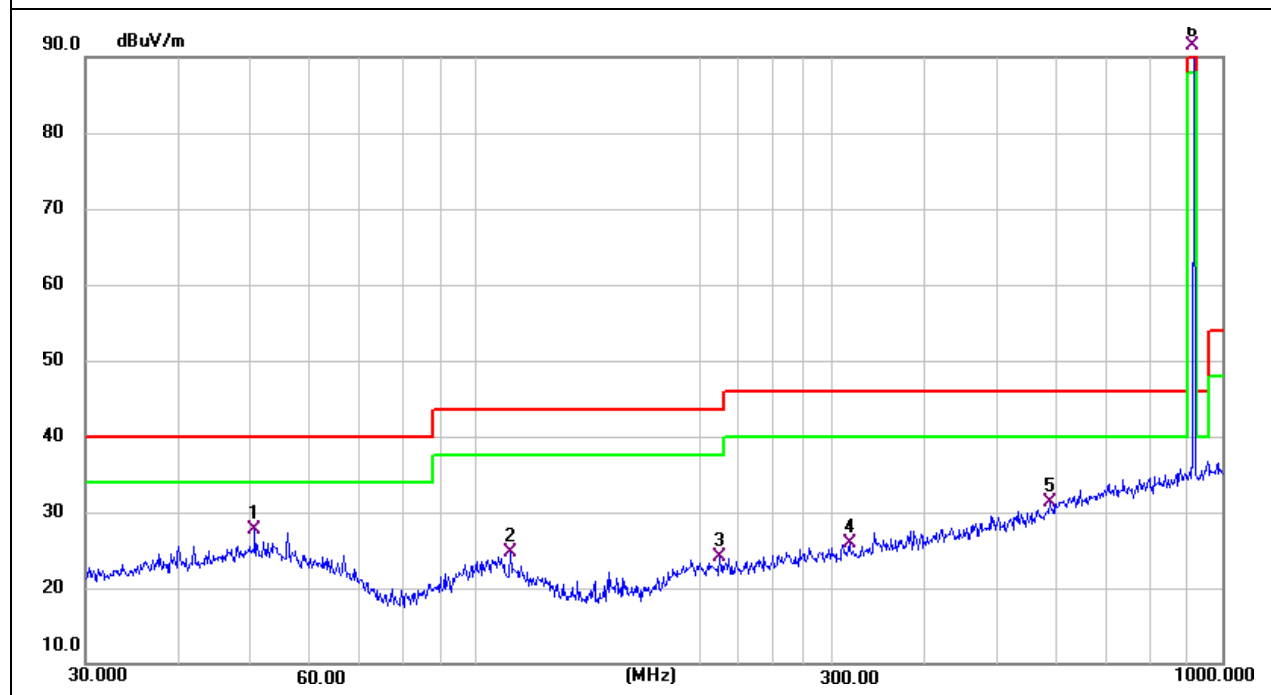


EUT :	Weather Station(receiver)	Model Name :	WS3910
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
37.9450	5.75	19.36	25.11	40.00	-14.89	QP
53.1313	5.06	20.05	25.11	40.00	-14.89	QP
106.7587	5.04	19.13	24.17	43.50	-19.33	QP
208.5803	9.97	18.44	28.41	43.50	-15.09	QP
389.3549	8.86	21.98	30.84	46.00	-15.16	QP
915.0000	57.54	29.65	87.19	94.00	-6.81	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

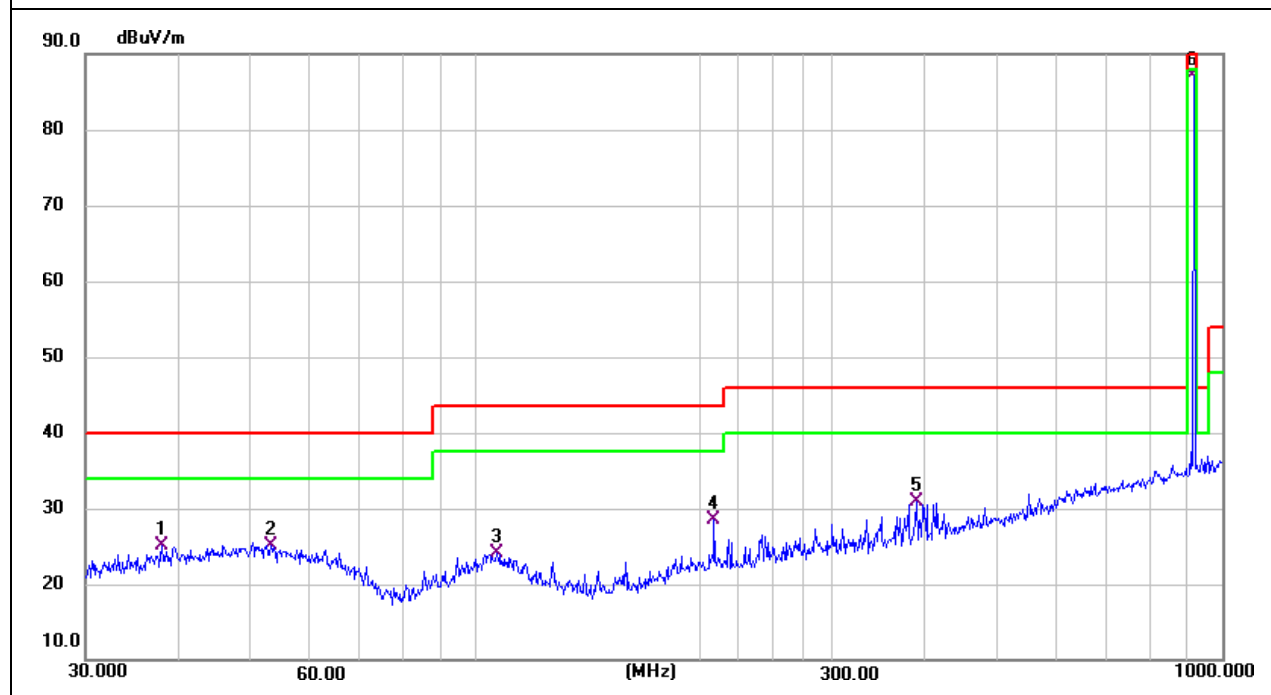


EUT :	Weather Station(receiver)	Model Name :	WS3900
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	Mode 1	Polarization :	Vertical

Without CO2 sensor:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
50.5860	6.23	20.38	26.61	40.00	-13.39	QP
111.3468	6.27	18.46	24.73	43.50	-18.77	QP
250.3010	5.88	19.34	25.22	46.00	-20.78	QP
382.5878	7.14	21.88	29.02	46.00	-16.98	QP
645.1194	7.36	26.08	33.44	46.00	-12.56	QP
915.0000	57.39	29.65	87.04	94.00	-6.96	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

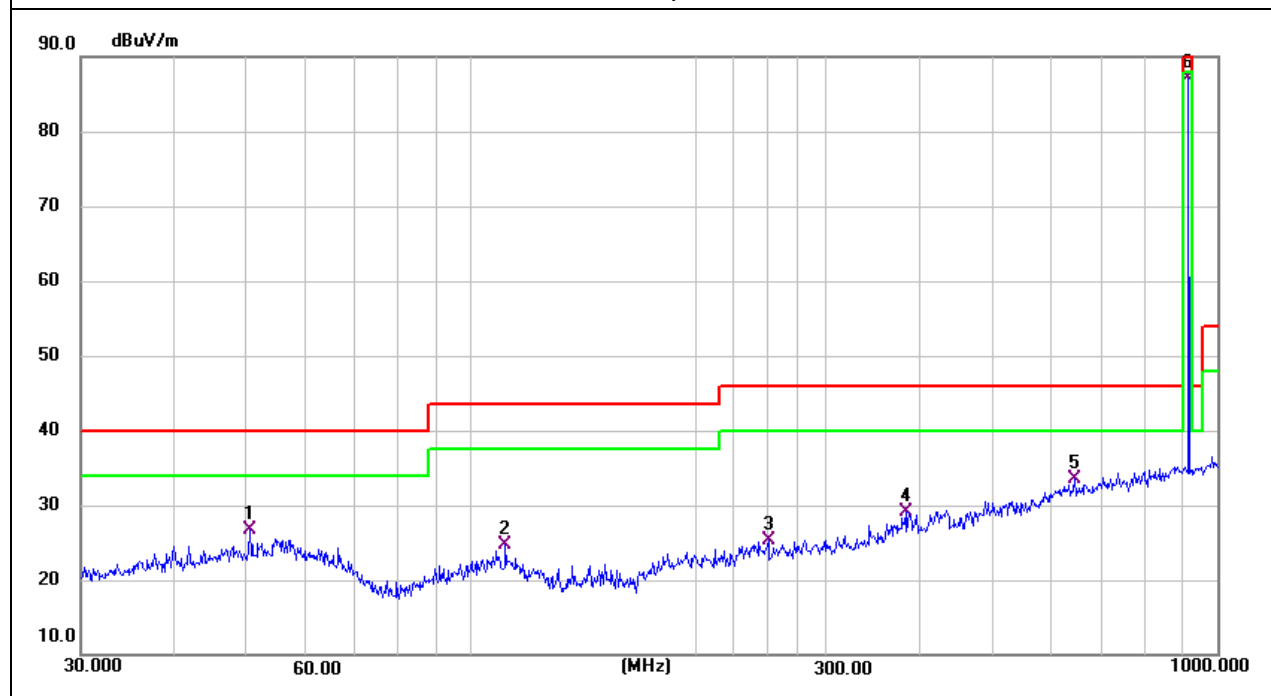


EUT :	Weather Station(receiver)	Model Name :	WS3900
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
53.1313	7.06	20.05	27.11	40.00	-12.89	QP
85.2980	6.30	15.93	22.23	40.00	-17.77	QP
208.5800	6.97	18.44	25.41	43.50	-18.09	QP
333.6865	9.16	20.87	30.03	46.00	-15.97	QP
618.5366	6.91	25.91	32.82	46.00	-13.18	QP
915.0000	56.04	29.65	85.69	94.00	-8.31	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

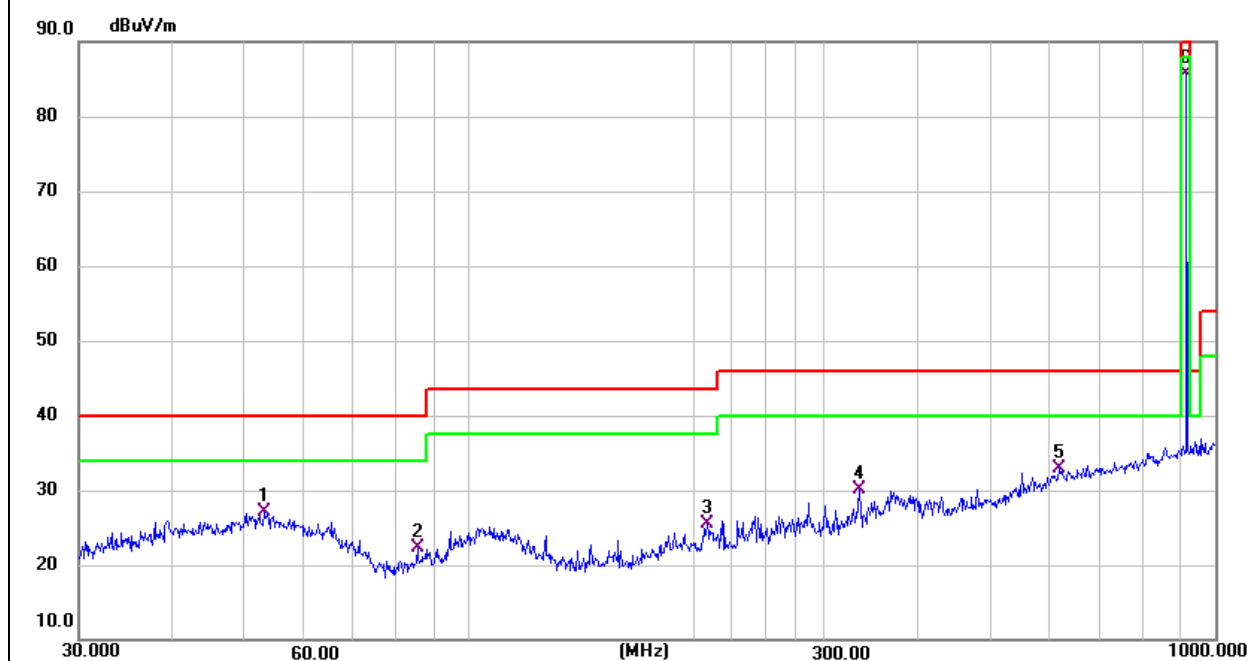


3.4.6 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Weather Station(receiver)	Model Name :	WS3910
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2751.000	61.53	-17.07	44.46	74.00	-29.54	peak
2751.000	51.57	-17.07	34.50	54.00	-19.50	AVG
3652.000	69.19	-15.53	53.66	74.00	-20.34	peak
3658.000	56.88	-15.50	41.38	54.00	-12.62	AVG
4570.000	57.87	-14.08	43.79	74.00	-30.21	peak
4570.000	47.10	-14.08	33.02	54.00	-20.98	AVG
5488.000	54.95	-12.77	42.18	74.00	-31.82	peak
5488.000	45.27	-12.77	32.50	54.00	-21.50	AVG
7834.000	50.33	-7.87	42.46	74.00	-31.54	peak
7834.000	38.27	-7.87	30.40	54.00	-23.60	AVG
10435.000	47.85	-4.06	43.79	74.00	-30.21	peak
10435.000	35.15	-4.06	31.09	54.00	-22.91	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

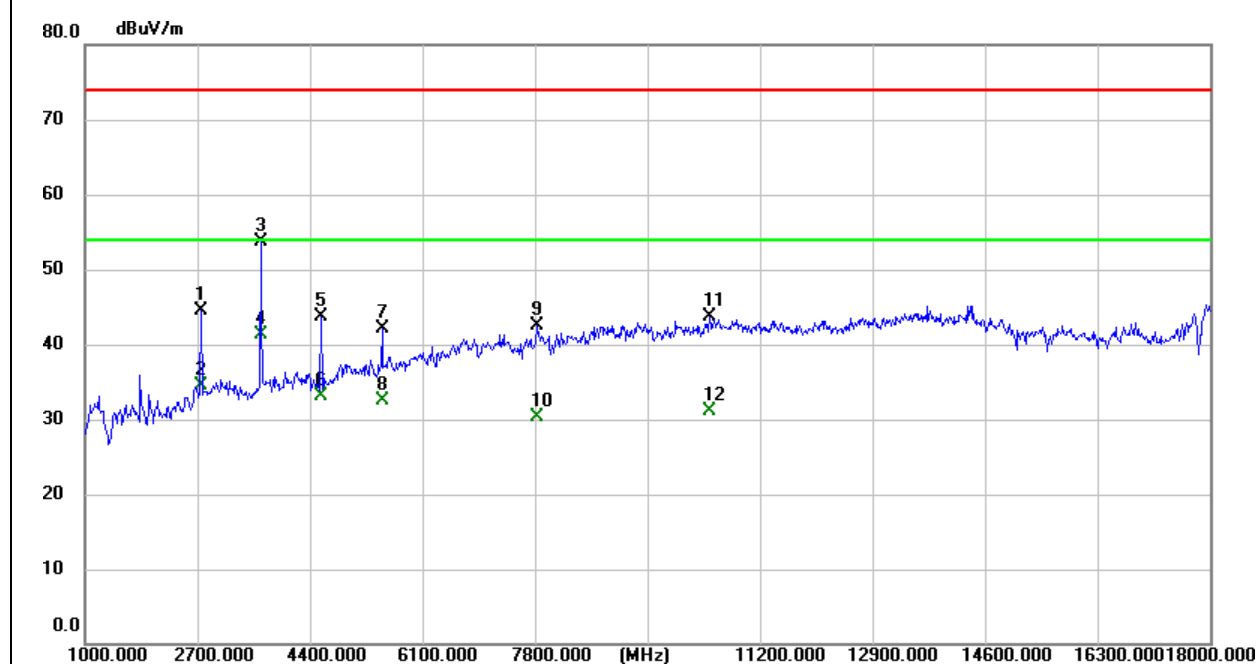


EUT :	Weather Station(receiver)	Model Name :	WS3910
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2751.000	60.32	-17.07	43.25	74.00	-30.75	peak
2751.000	50.15	-17.07	33.08	54.00	-20.92	AVG
3652.000	61.80	-15.53	46.27	74.00	-27.73	peak
3652.000	51.78	-15.53	36.25	54.00	-17.75	AVG
5488.000	53.75	-12.77	40.98	74.00	-33.02	peak
5488.000	42.35	-12.77	29.58	54.00	-24.42	AVG
7324.000	50.62	-8.43	42.19	74.00	-31.81	peak
7324.000	38.88	-8.43	30.45	54.00	-23.55	AVG
8871.000	48.44	-5.89	42.55	74.00	-31.45	peak
8871.000	35.77	-5.89	29.88	54.00	-24.12	AVG
10418.000	47.65	-4.10	43.55	74.00	-30.45	peak
10418.000	32.57	-4.10	28.47	54.00	-25.53	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

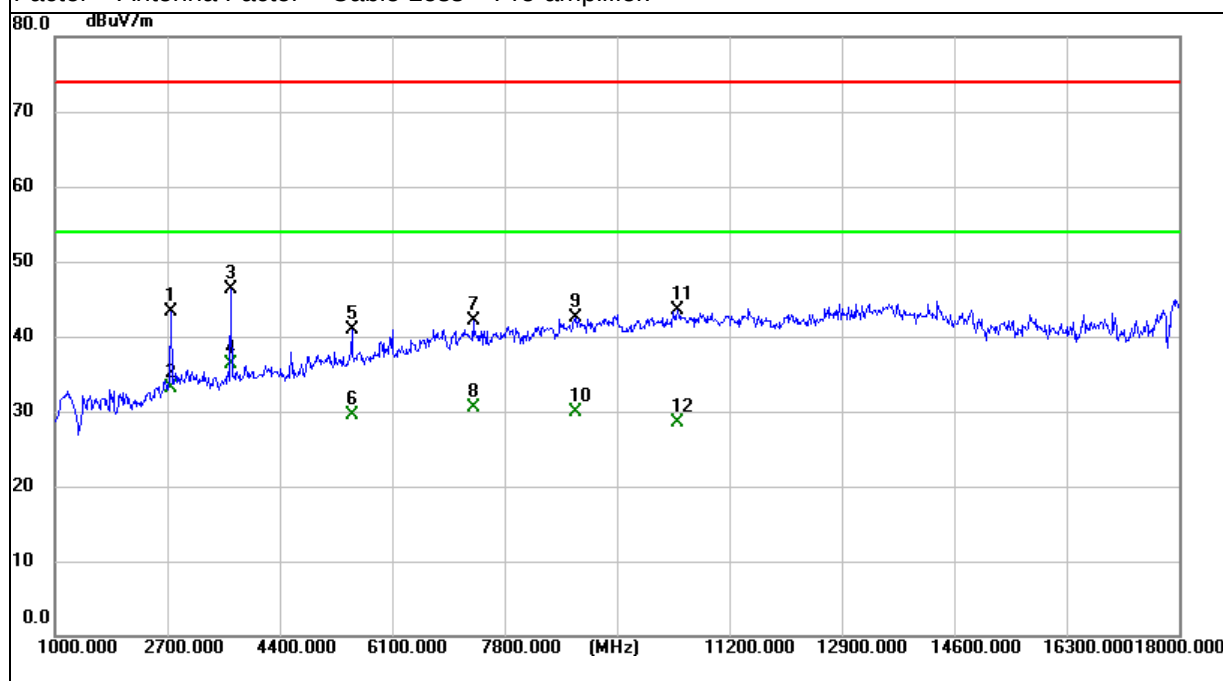

Note:

- 1) EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).
- 2) Since the PEAK test results are below the AV limit, according to 15.31, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3.4.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT :	Weather Station(receiver)	Model Name :	WS3910
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	TX-915MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-4.36	30.38	26.02	46.00	-19.98	QP
928.0000	-5.04	30.91	25.87	46.00	-20.13	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

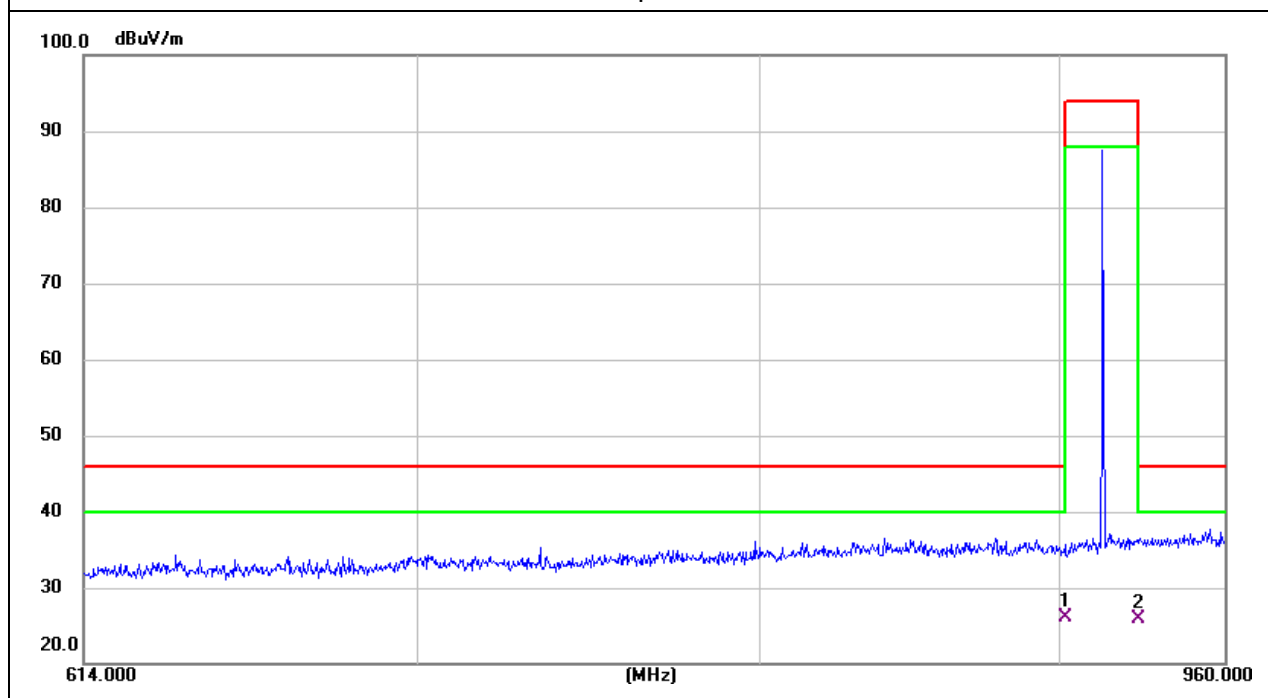


EUT :	Weather Station(receiver)	Model Name :	WS3910
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 4.5V
Test Mode :	TX-915MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-1.83	30.38	28.55	46.00	-17.45	QP
928.0000	-1.88	30.91	29.03	46.00	-16.97	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

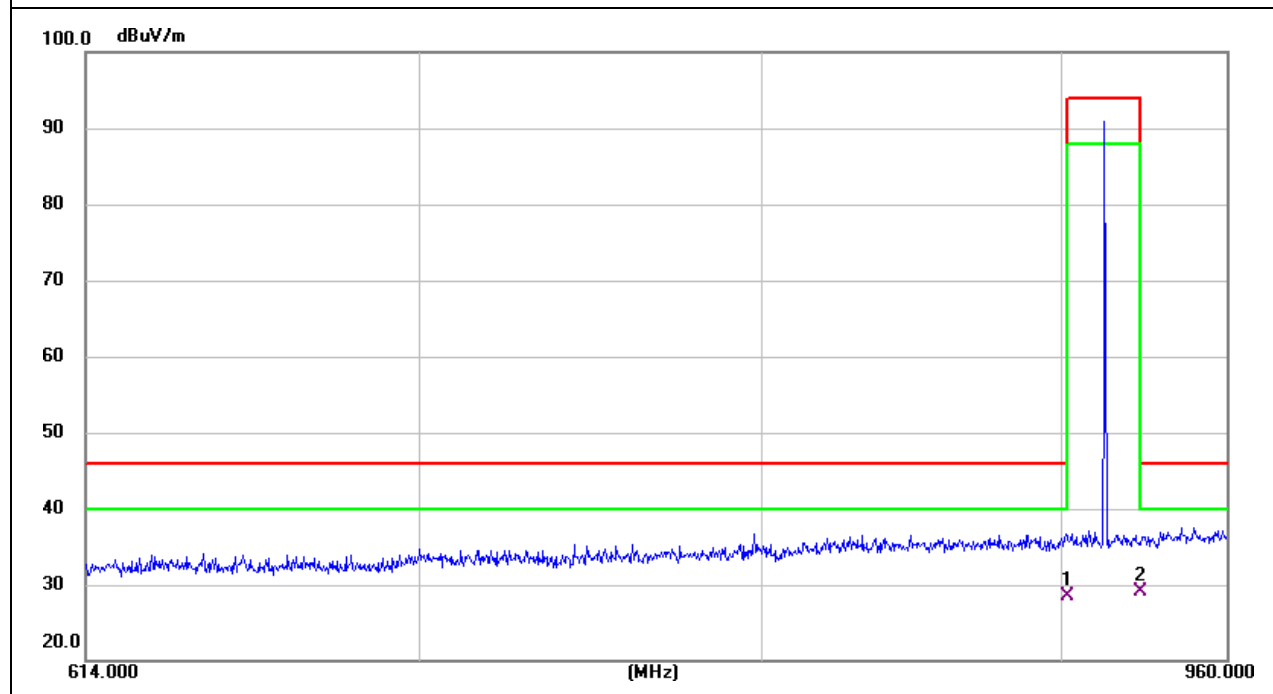

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value., Sweep time = Auto.

4.2 DEVIATION FROM STANDARD

No deviation.

4.3 TEST SETUP




6. TEST RESULTS

EUT :	Weather Station(receiver)	Model Name :	WS3910
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 4.5V
Test Mode :	Mode 1		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)
CH01	915	0.1216

915 MHz

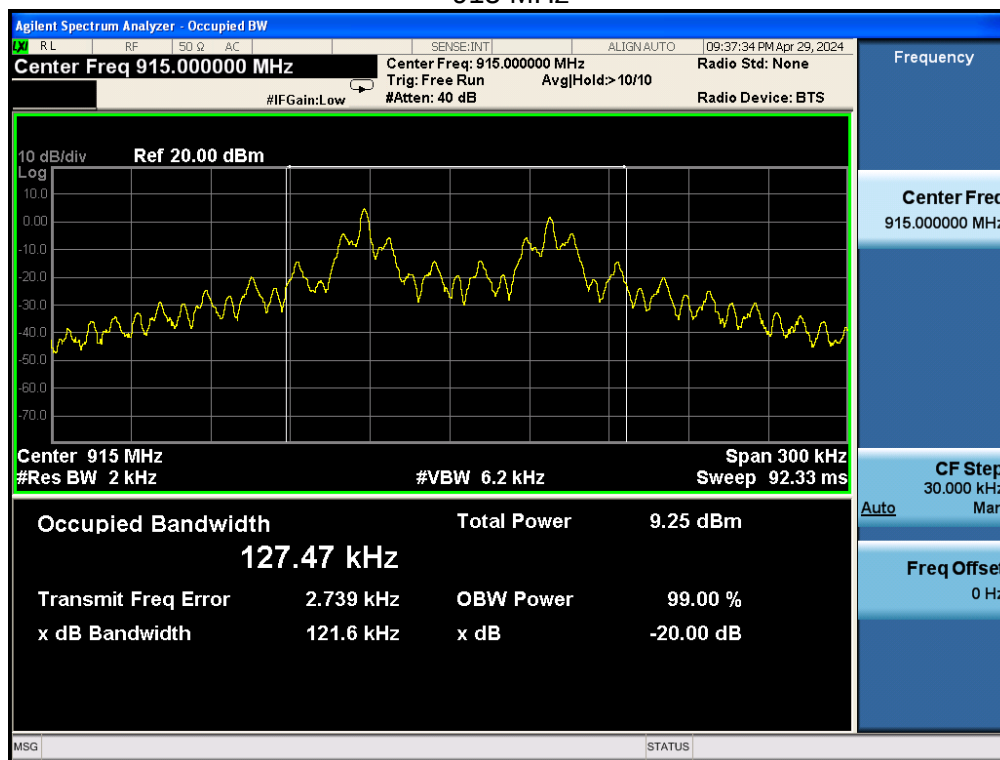

END OF REPORT