
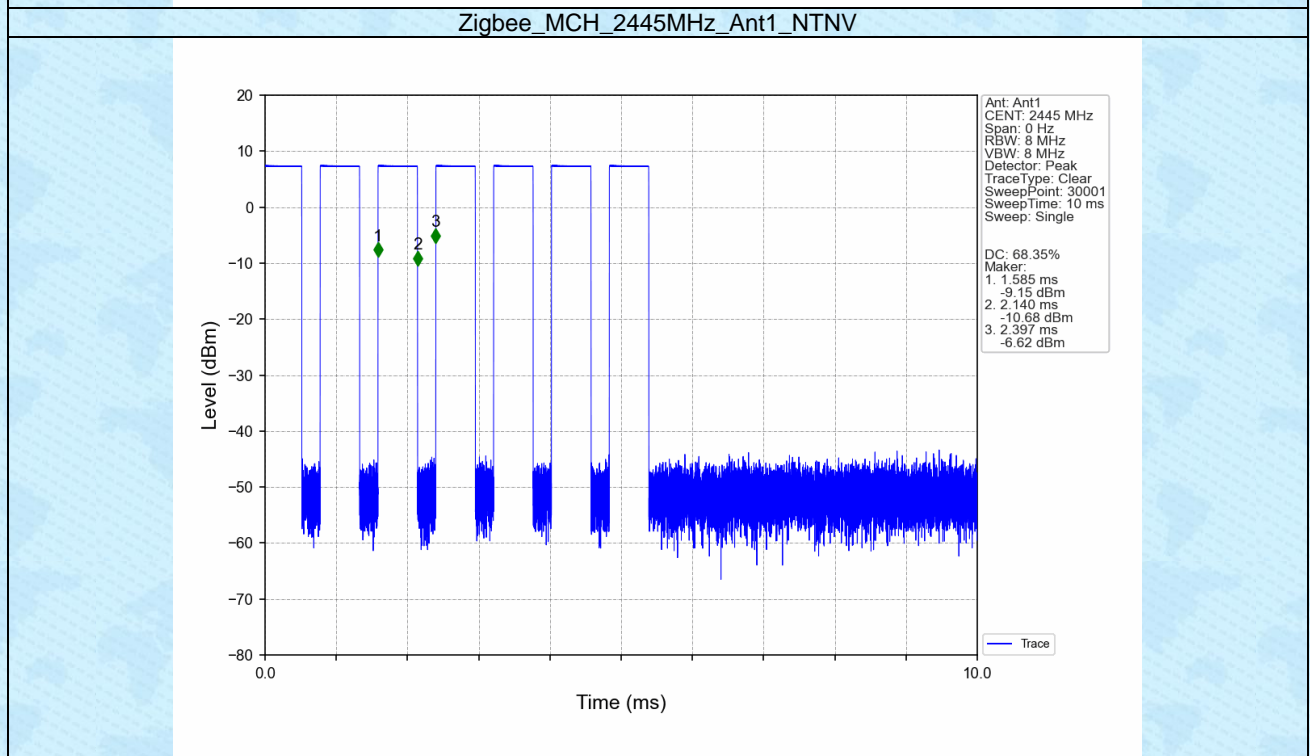



1. Duty Cycle

1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
Zigbee	SISO	2405	0.555	0.812	68.35	1.65	0.06
		2445	0.555	0.812	68.35	1.65	0.03
		2480	0.556	0.812	68.47	1.64	0.02

1.2 Test Graph

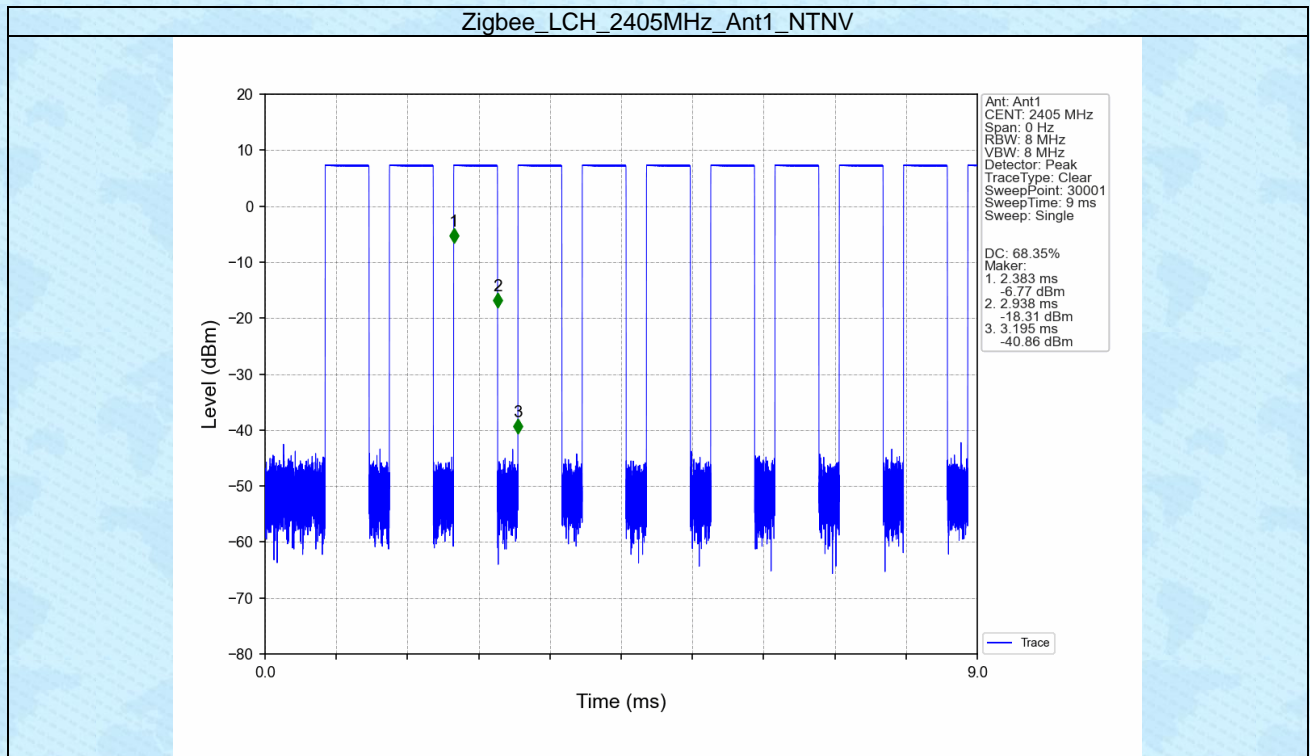

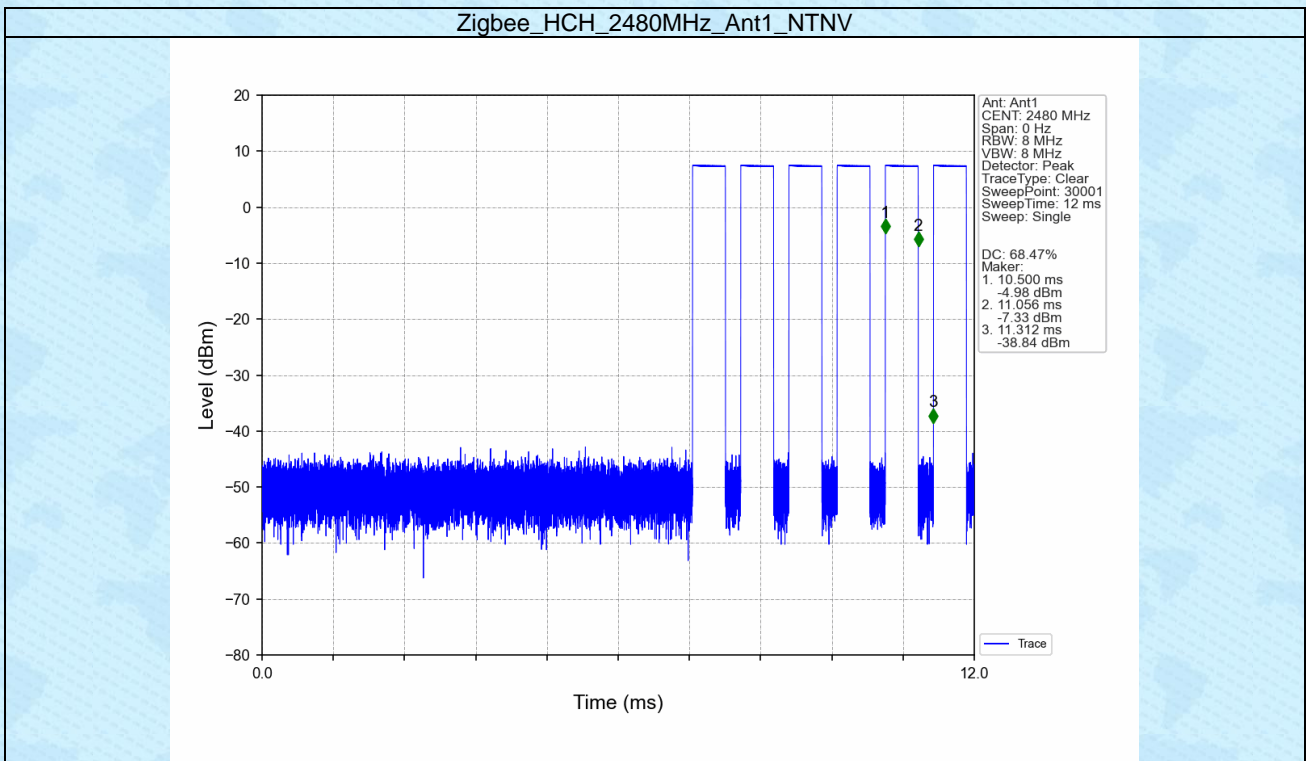

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
Zigbee	SISO	2405	1	2.290	/	Pass
		2445	1	2.296	/	Pass
		2480	1	2.293	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
Zigbee	SISO	2405	1	1.478	≥ 0.5	Pass
		2445	1	1.479	≥ 0.5	Pass
		2480	1	1.469	≥ 0.5	Pass


2.2 Test Graph


2.2.1 OBW

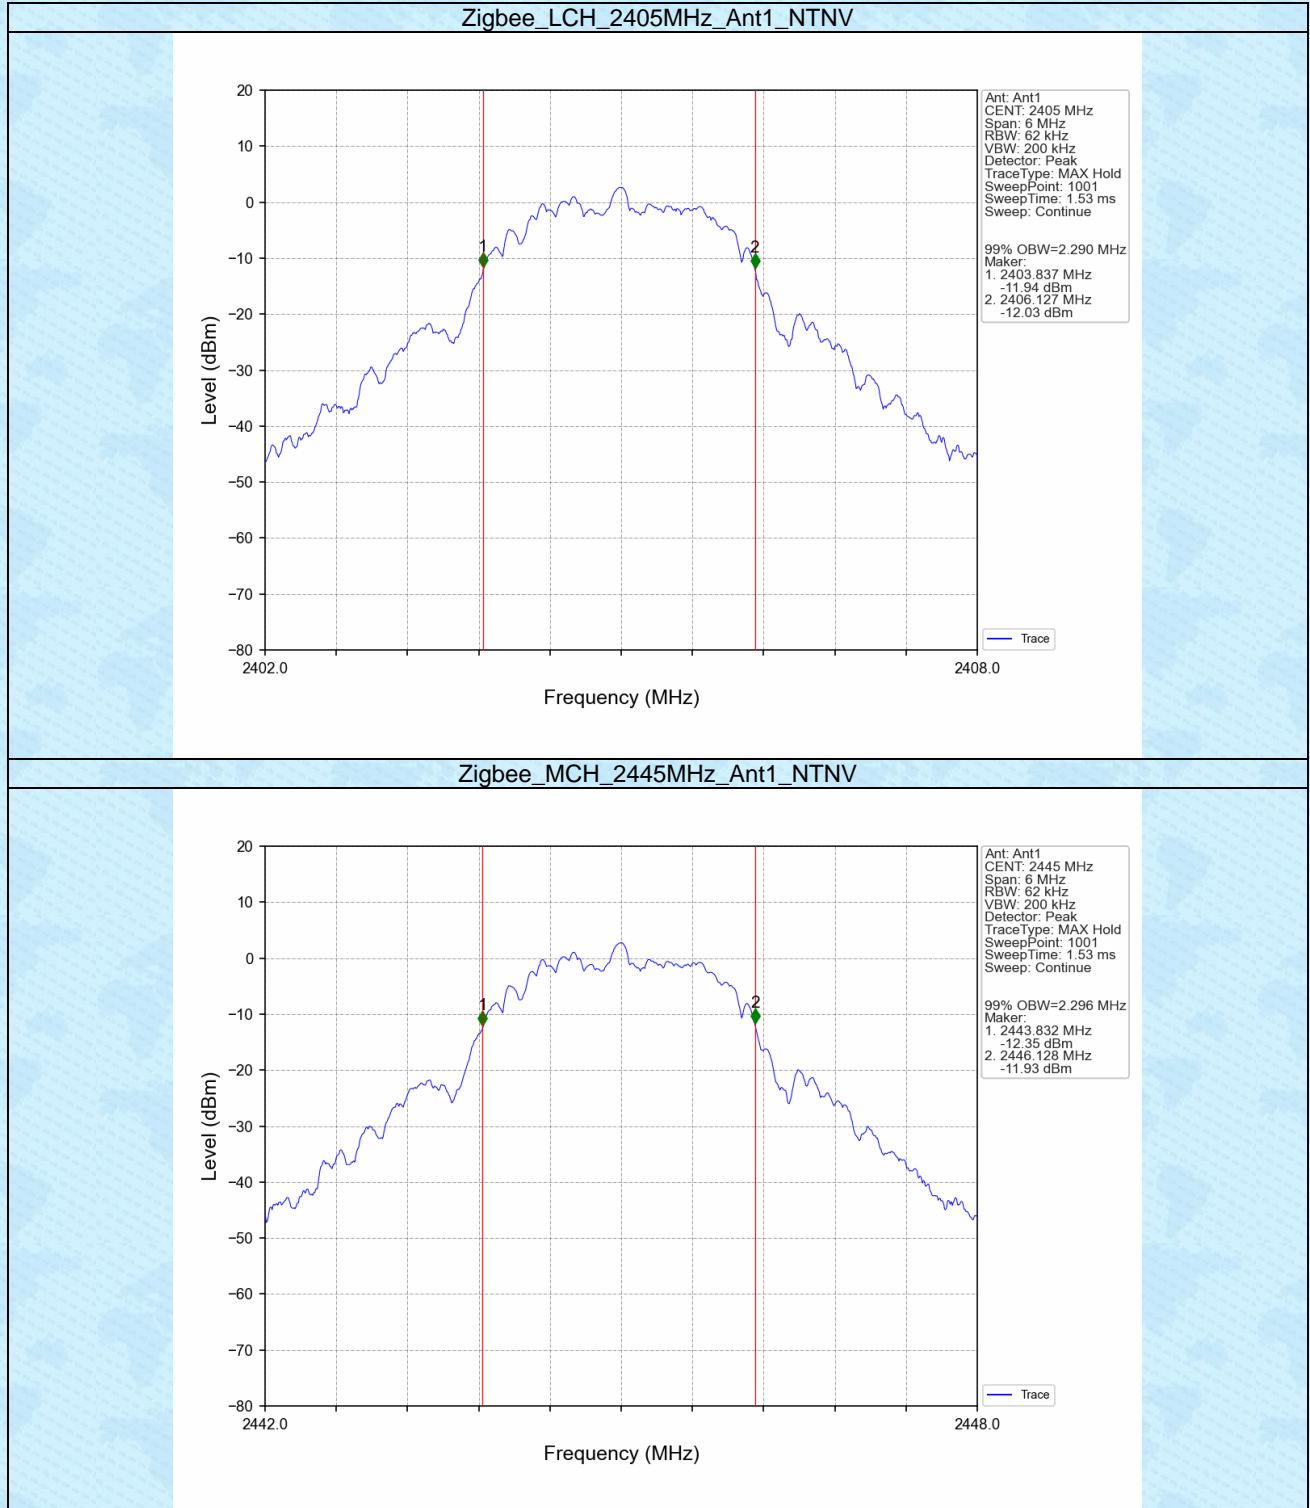

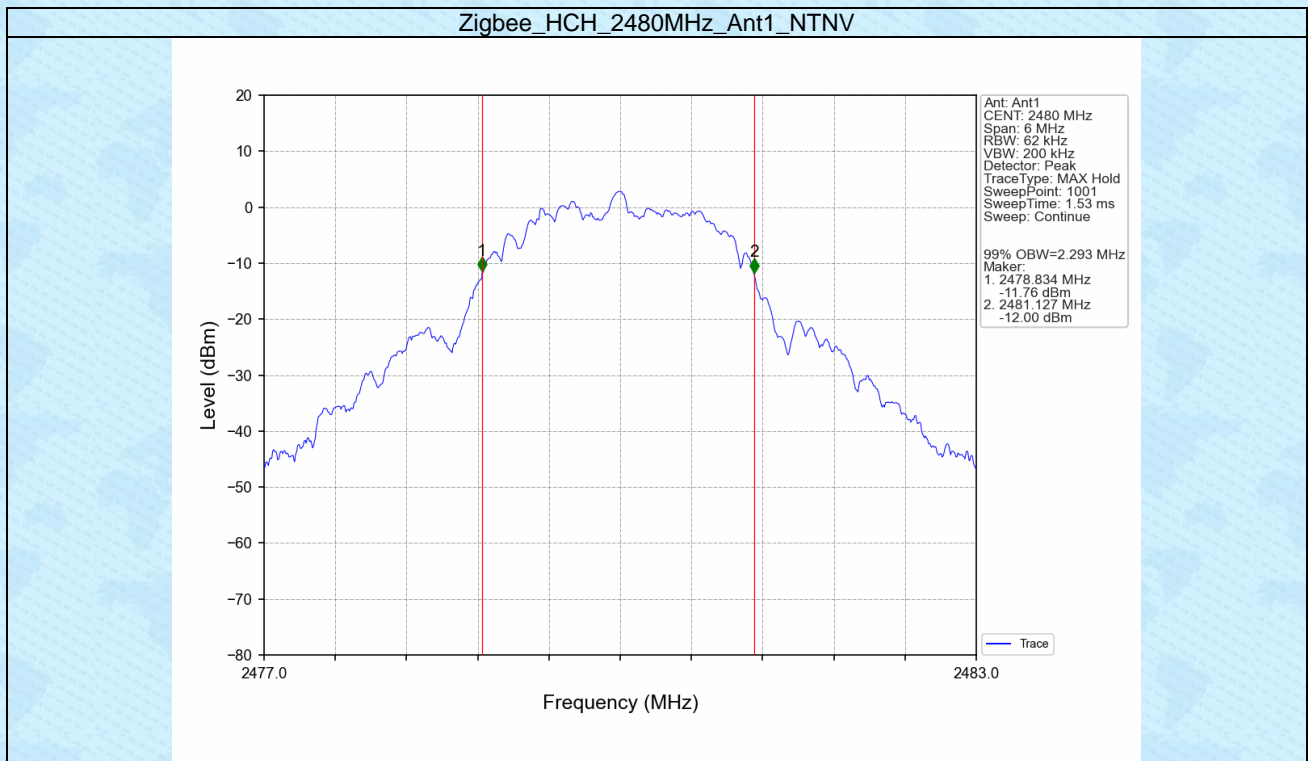

2.2.2 6dB BW

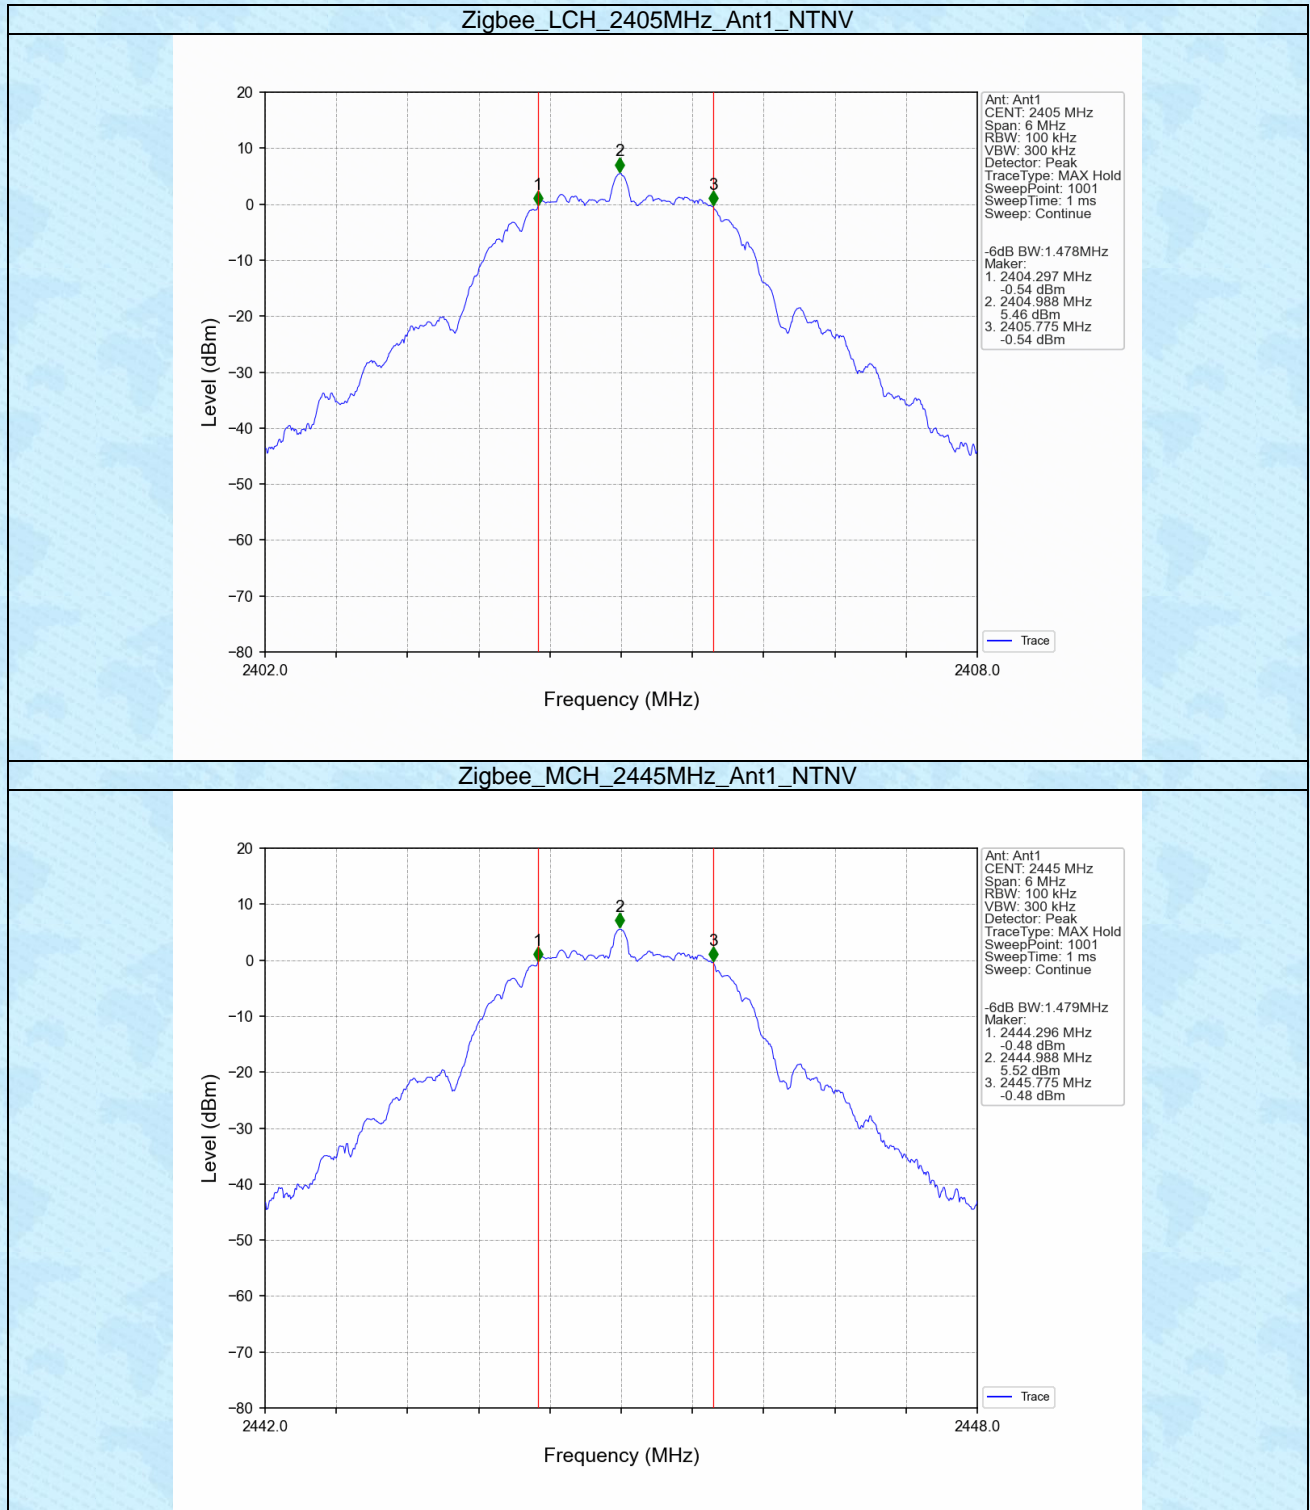

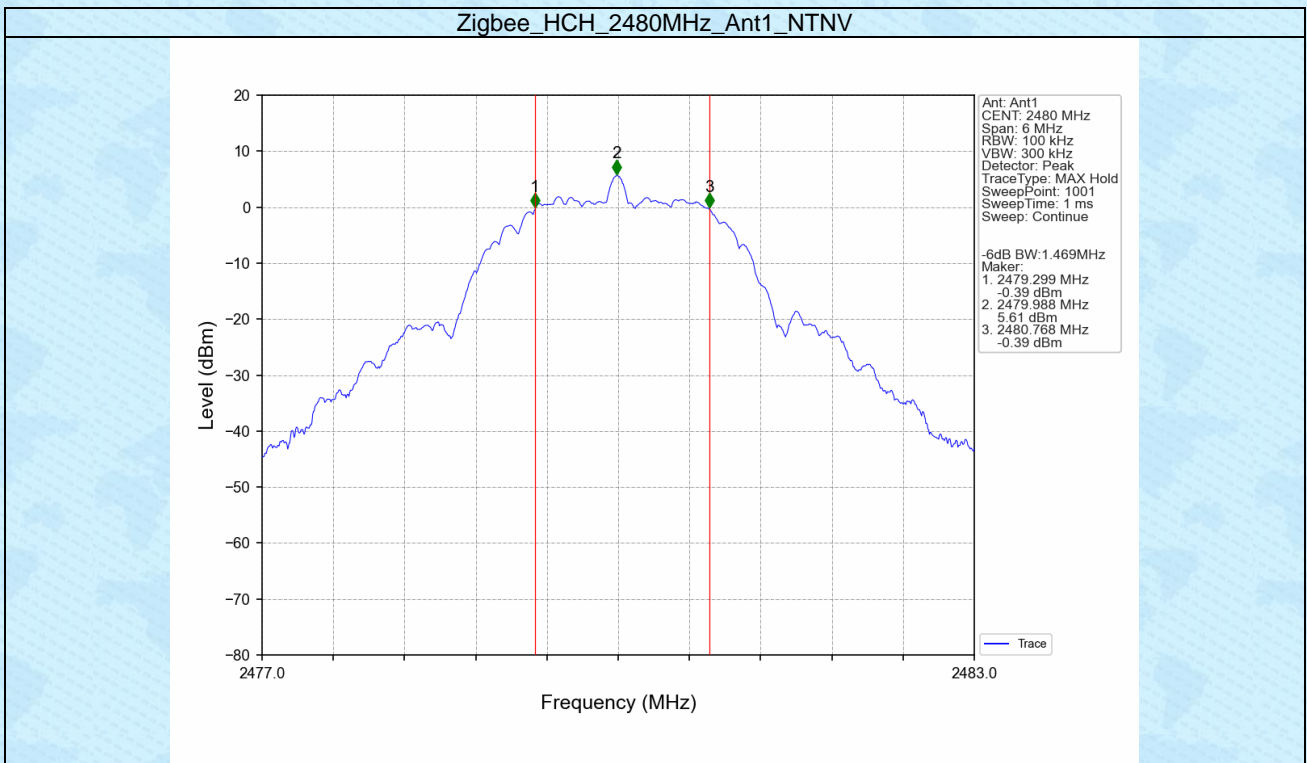



3. Maximum Conducted Output Power

3.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
Zigbee	SISO	2405	7.31	<=30	Pass
		2445	7.39	<=30	Pass
		2480	7.45	<=30	Pass

3.2 Test Graph

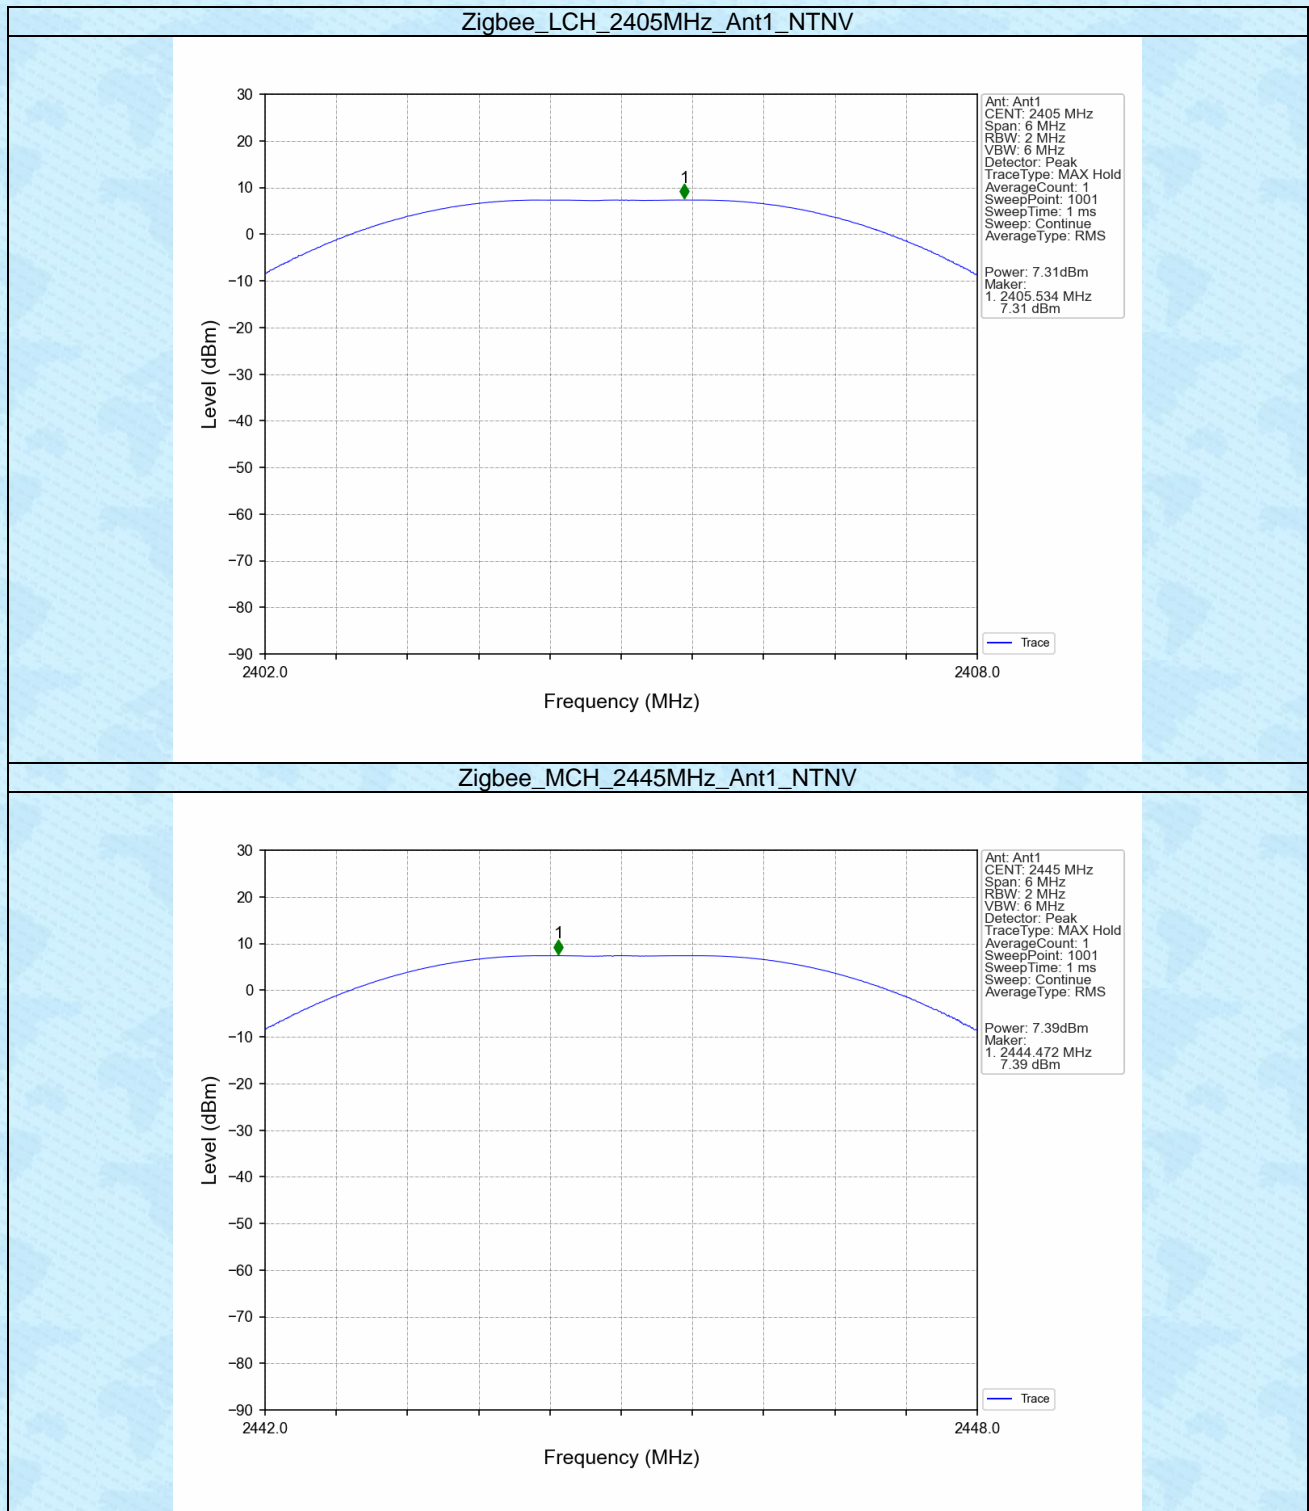


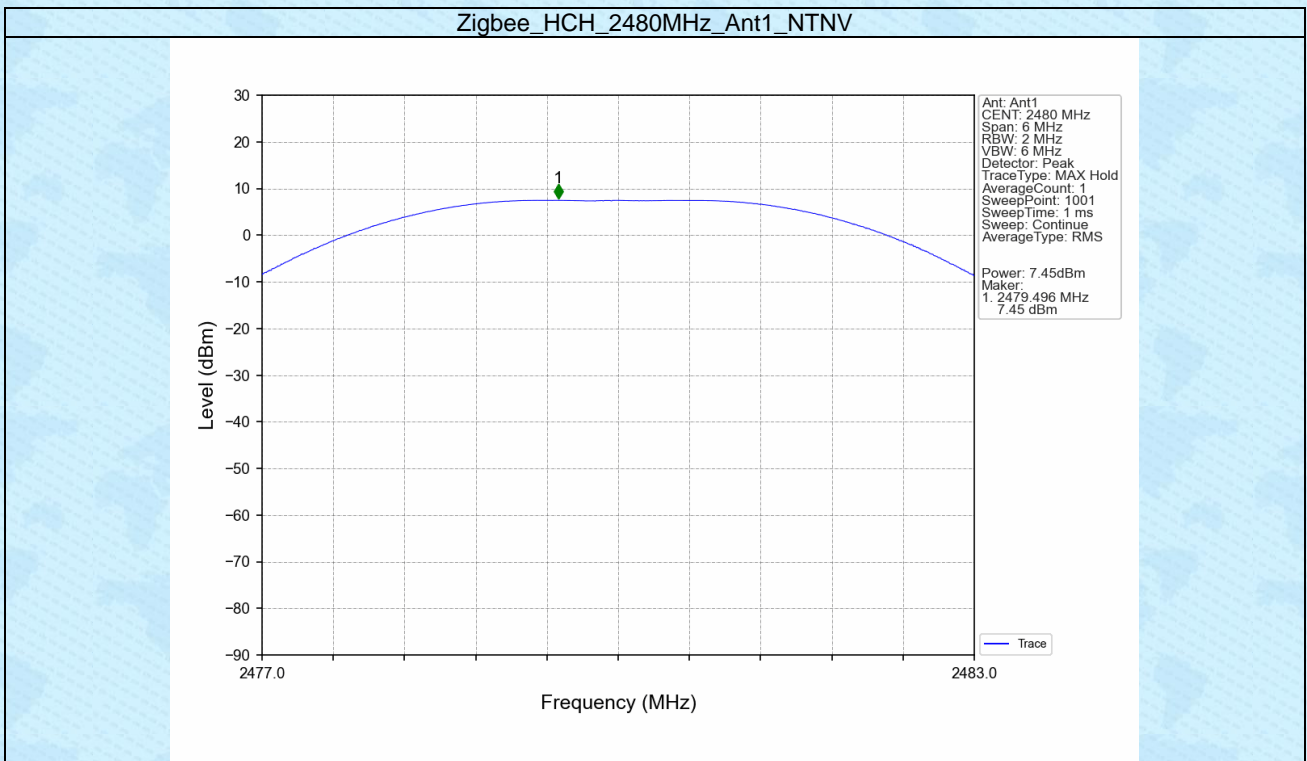



4. Maximum Power Spectral Density

4.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
Zigbee	SISO	2405	-7.74	<=8	Pass
		2445	-7.66	<=8	Pass
		2480	-7.92	<=8	Pass

4.2 Test Graph

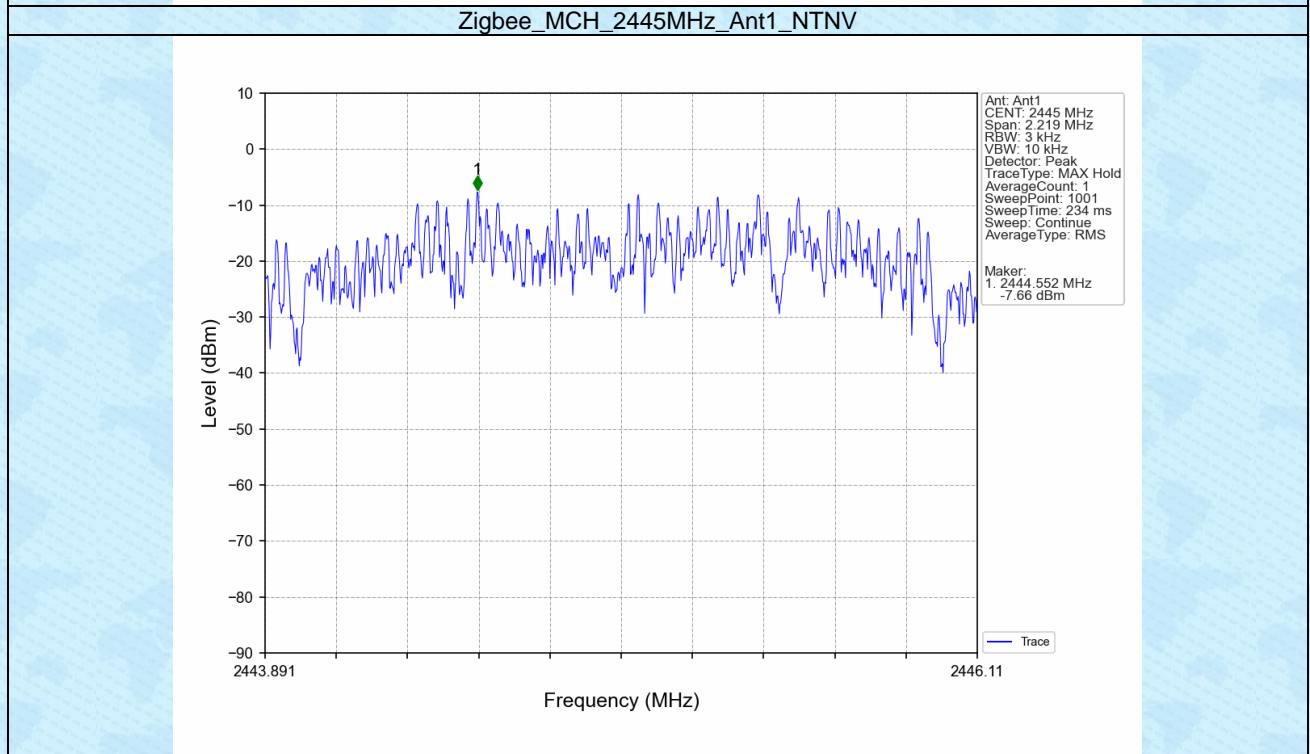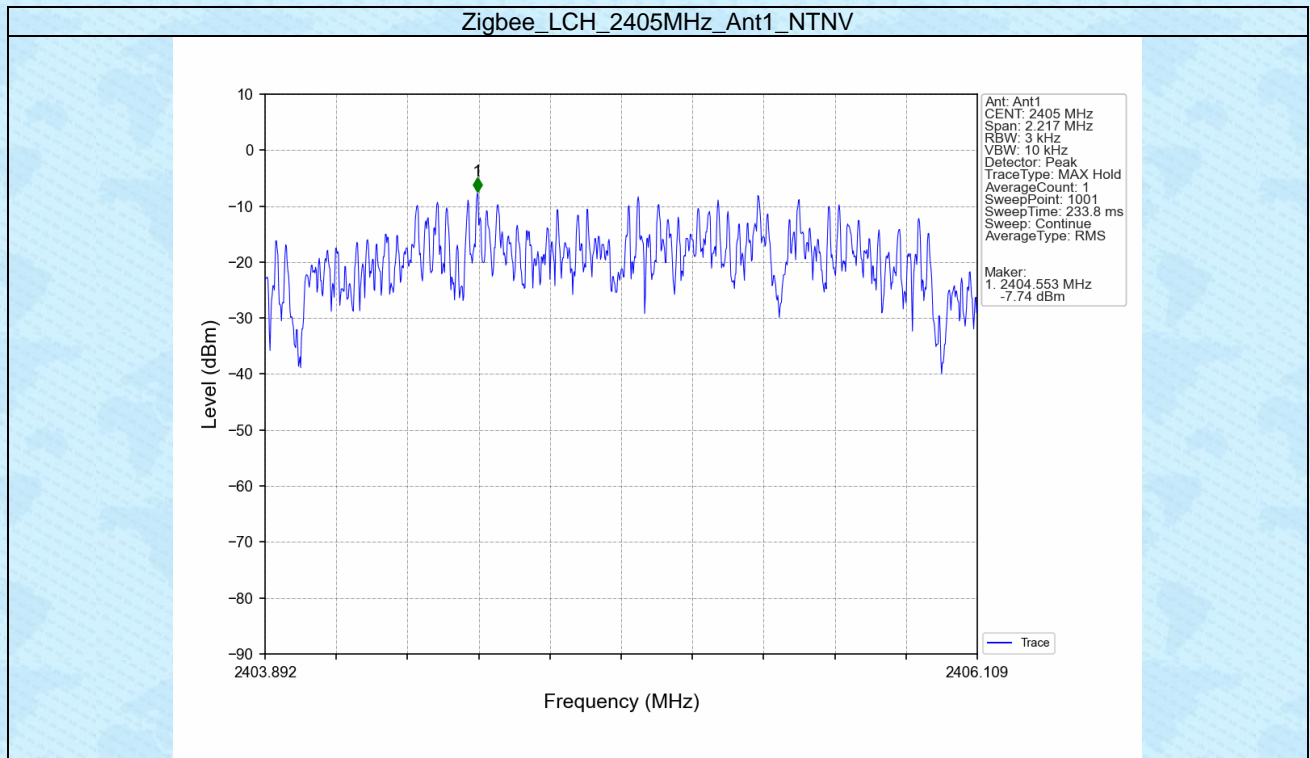

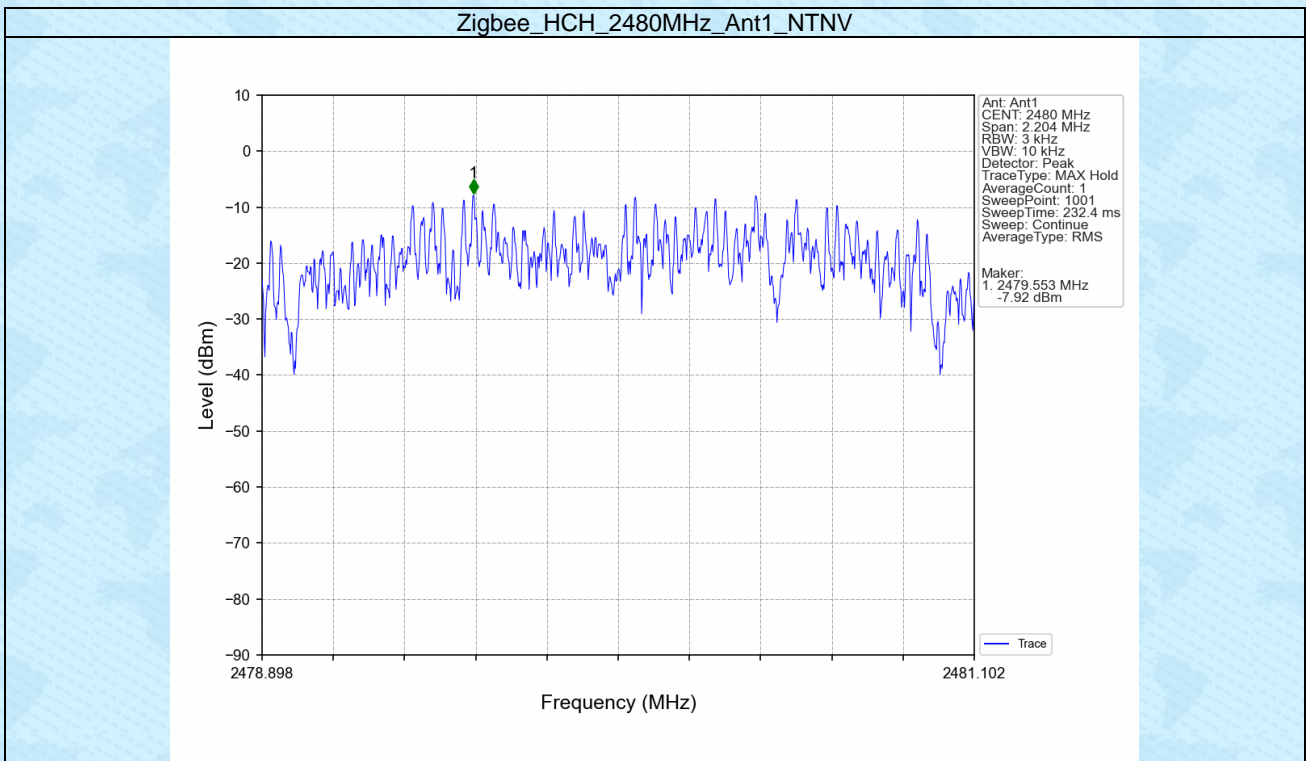

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
Zigbee	SISO	2405	1	5.37
		2445	1	5.45
		2480	1	5.52

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
Zigbee	SISO	2405	1	5.52	-14.48	Pass
		2445	1	5.52	-14.48	Pass
		2480	1	5.52	-14.48	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


5.2 Test Graph

5.2.1 Ref

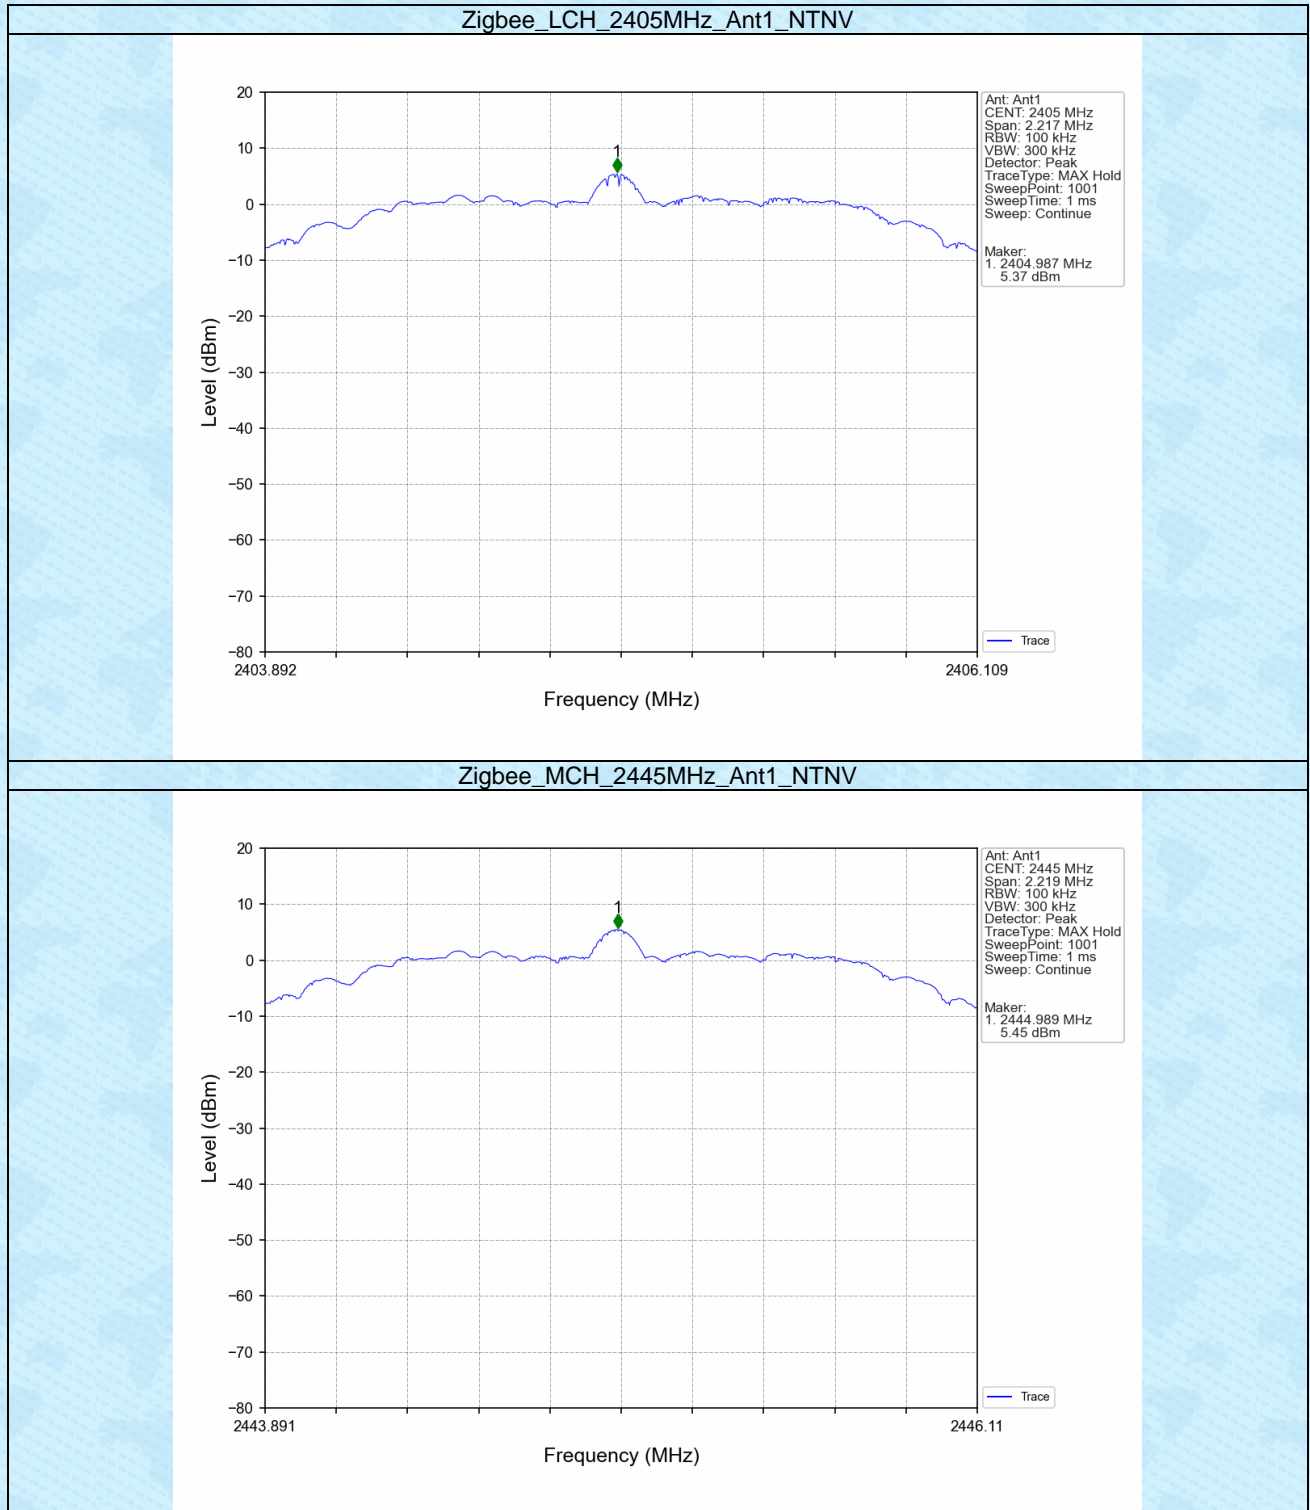


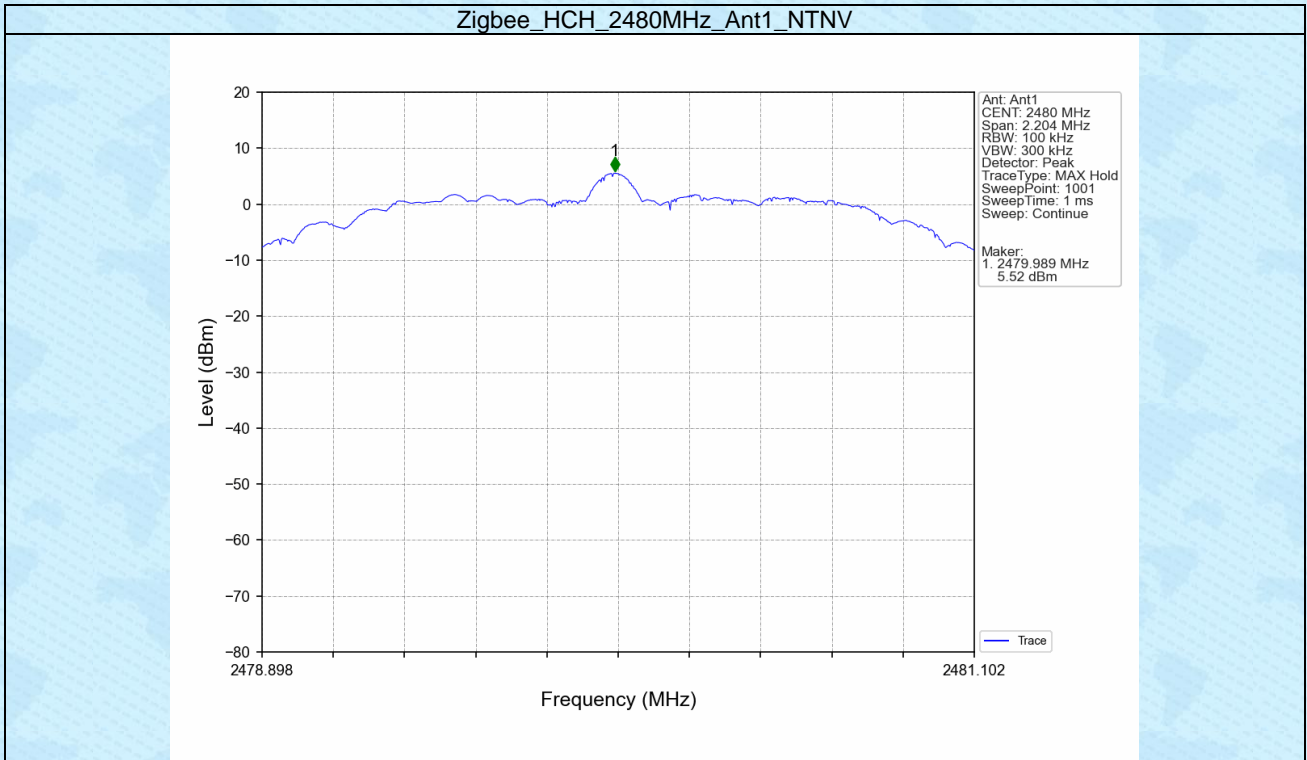


5.2.2 CSE

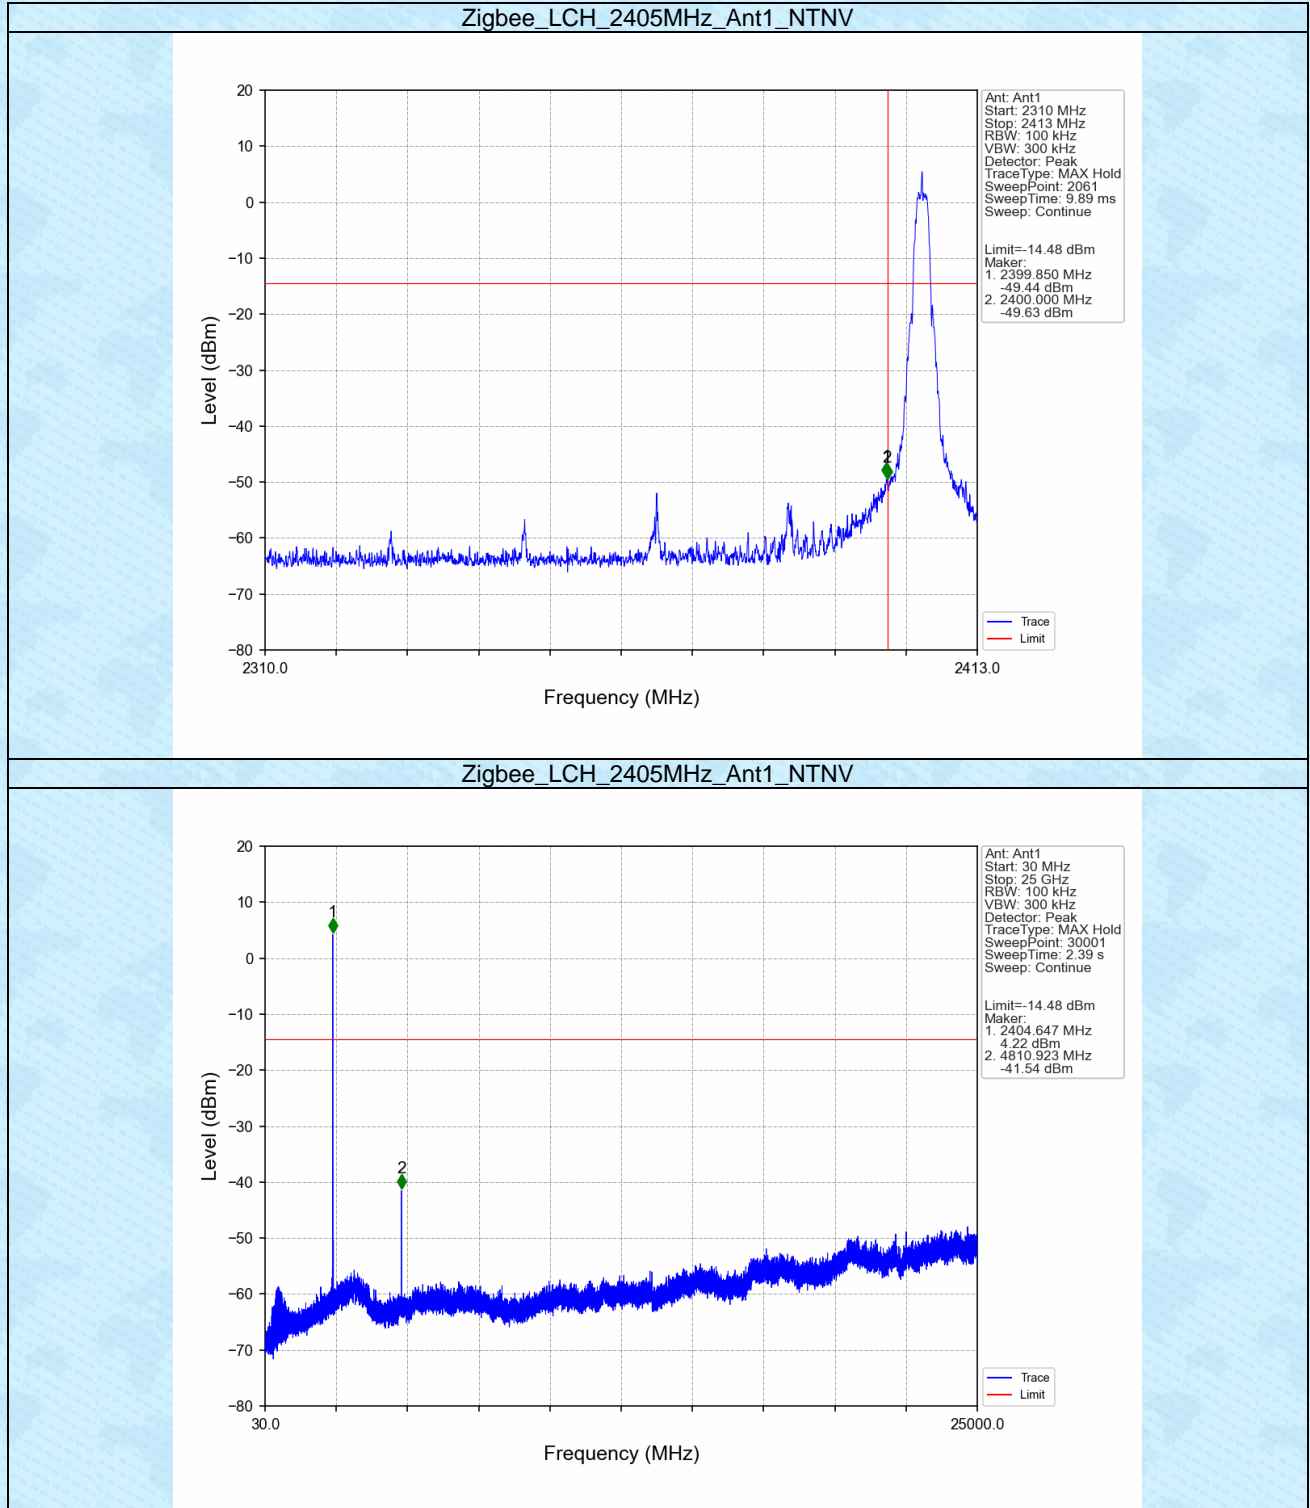


Zigbee_MCH_2445MHz_Ant1_NTNV

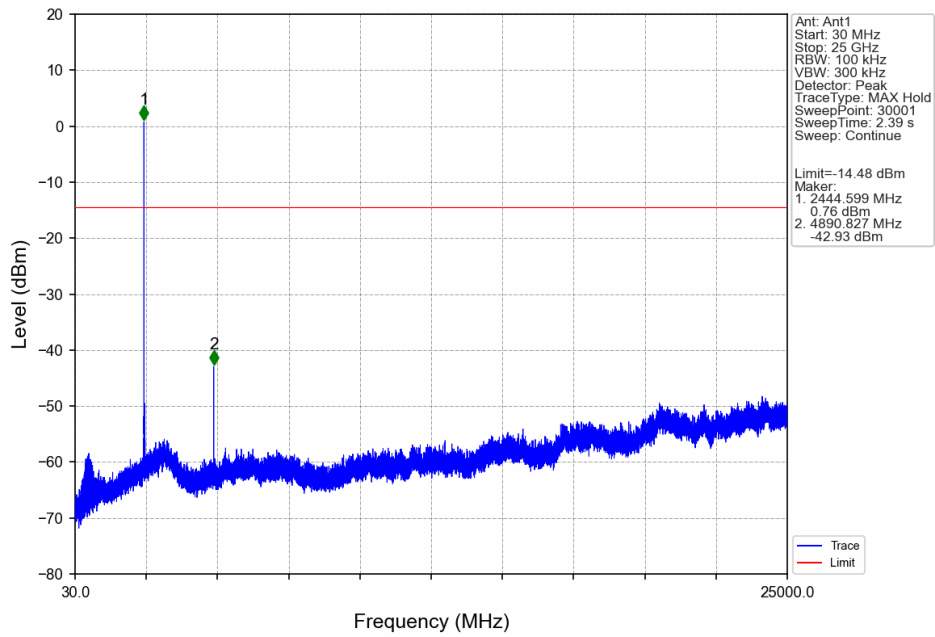

Zigbee_HCH_2480MHz_Ant1_NTNV

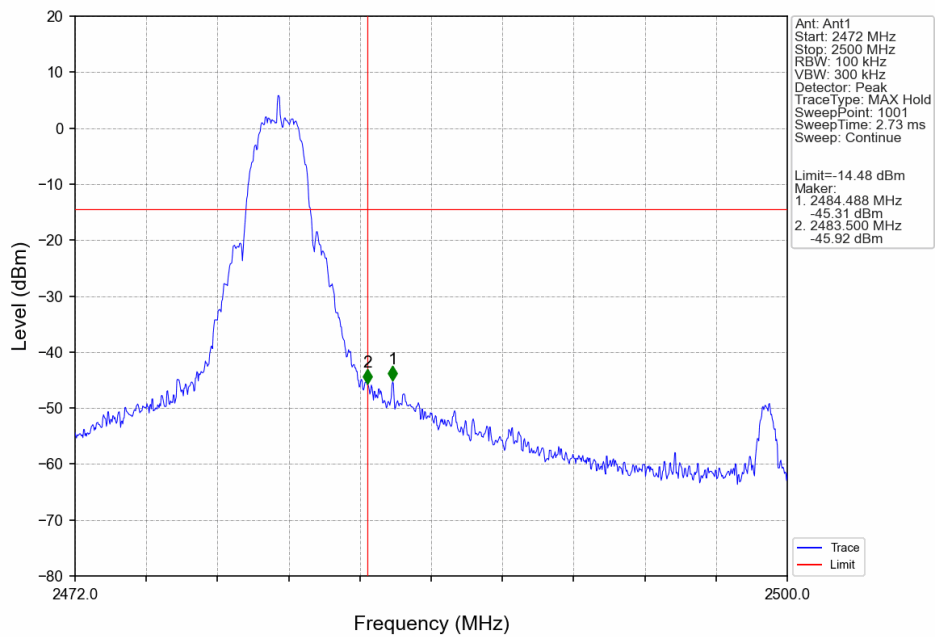

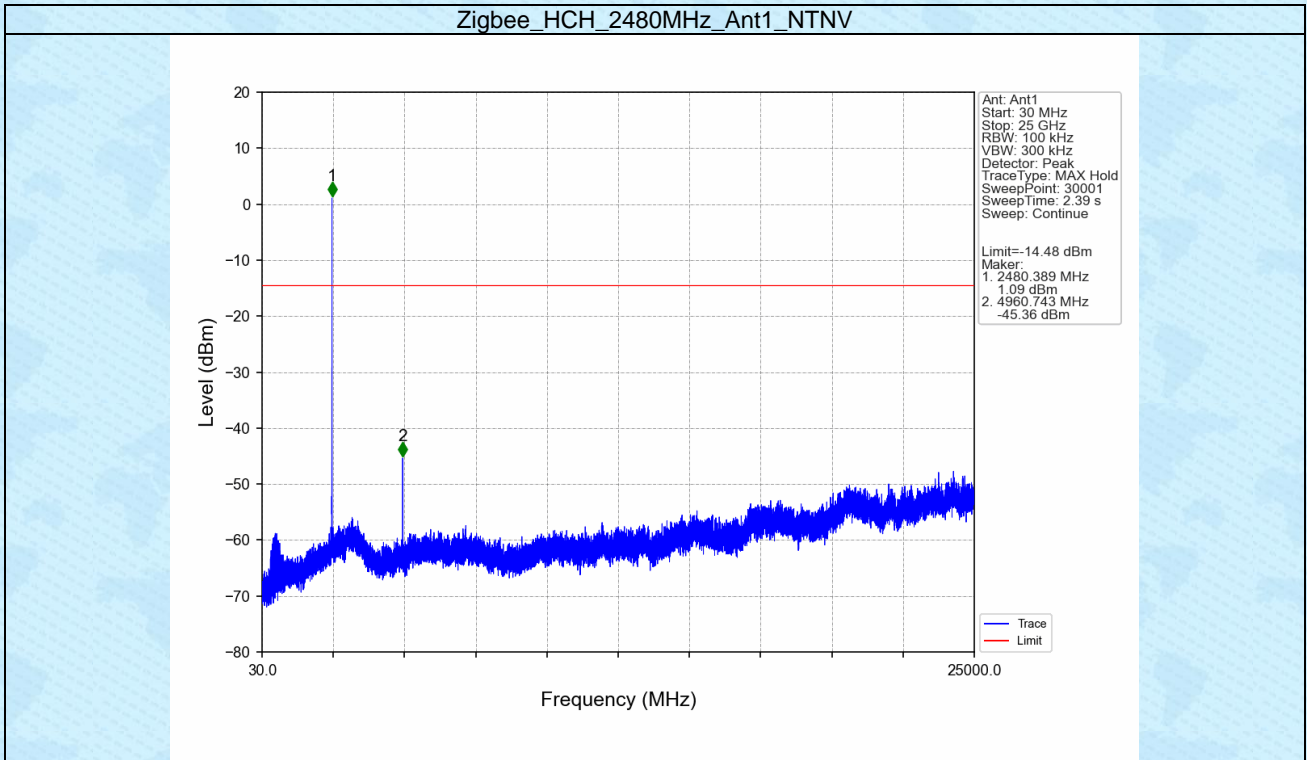

-----End-----