



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: INGENICO

Address: 9 Avenue de la gare - Rovaltain TGV, BP25156, Valence Cedex
9,26958 ,France

FCC ID: XKB-DX4CL4GWBT

Product Name: Smart POS Terminal

**Standard(s): 47 CFR Part 15, Subpart C(15.225)
ANSI C63.10-2013**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231167140-00B

Date Of Issue: 2024/1/13

Reviewed By: Julie Tan

Title: RF Engineer

Julie Tan

Approved By: Sun Zhong

Title: Manager

Sun Zhong

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	9
2. SUMMARY OF TEST RESULTS	10
3. REQUIREMENTS AND TEST PROCEDURES	11
3.1 AC LINE CONDUCTED EMISSIONS.....	11
3.1.1 Applicable Standard.....	11
3.1.2 EUT Setup.....	12
3.1.3 EMI Test Receiver Setup	12
3.1.4 Test Procedure	13
3.1.5 Corrected Amplitude & Margin Calculation.....	13
3.2 RADIATED SPURIOUS EMISSIONS.....	14
3.2.1 Applicable Standard.....	14
3.2.2 EUT Setup.....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	15
3.2.4 Corrected Amplitude & Margin Calculation.....	15
3.3 20 dB EMISSION BANDWIDTH	16
3.3.1 Applicable Standard.....	16
3.3.2 EUT Setup.....	16
3.3.3 Test Procedure	16
3.4 FREQUENCY STABILITY.....	18
3.4.1 Applicable Standard.....	18
3.4.2 EUT Setup.....	18
3.4.3 Test Procedure	18
3.5 ANTENNA REQUIREMENT.....	20
3.5.1 Applicable Standard.....	20
3.5.2 Judgment.....	20
4. TEST DATA AND RESULTS	21
4.1 AC LINE CONDUCTED EMISSIONS.....	21
4.2 RADIATION SPURIOUS EMISSIONS	32
4.3 20 dB EMISSION BANDWIDTH	88
4.4 FREQUENCY STABILITY.....	90
5. RF EXPOSURE EVALUATION	91

APPLICABLE STANDARD.....	91
6. EUT PHOTOGRAPHS	92
7. TEST SETUP PHOTOGRAPHS	93

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231167140-00B	Original Report	2024/1/13

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smart POS Terminal
EUT Model:	AXIUM DX4000
Operation Frequency:	13.56 MHz
Modulation Type:	ASK
Rated Input Voltage:	DC 7.4V from battery or DC 5V from Adapter
Serial Number:	AC Line Conducted Emission/Radiated Spurious Emission Test: 2DS1-6(Configuration 1#) 2DS1-5(Configuration 2#) 2DS1-4(Configuration 3#)
EUT Received Date:	2023/11/17
EUT Received Status:	Good

EUT Configuration Detail:

Configuration	Item	Manufacturer	Model
1#	Screen	GuangDonghongbosheng Optoelectronic Technology Co.,Ltd.	MDT0500L
2#	Screen	GuangDonghongbosheng Optoelectronic Technology Co.,Ltd.	MDT0500M
3#	Screen	Shenzhen Great Prospect Optoelectronics Co.,Ltd.	MDT0500N

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Near Field Antenna	50	13.56MHz	Unknown
The Method of §15.203 Compliance:			
<input checked="" type="checkbox"/> Antenna was permanently attached to the unit. <input type="checkbox"/> Antenna use a unique type of connector to attach to the EUT. <input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter 1#	Xiamen Keli Electronics Co.,Ltd.	SW-0983	Input: 100-240V~50/60Hz, 0.5A Output: 5.0V, 2.0A
Adapter 2#	Jiangxi Jian Aohai Technology Co.,Ltd.	A319-050200U-US2	Input: 100-240V~50/60Hz,0.3A Output: 5.0V, 2.0A
Adapter 3#	SHENZHEN KEYU POWER SUPPLY TECHNOLOGY CO.,LTD.	KA12C-0502000US	Input: 100-240V~50/60Hz, 0.35A Output: 5.0V, 2000mA

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer. Test Mode: M1: Transmitting & Screen 1# + Adapter 1# M2: Transmitting & Screen 1# + Adapter 2# M3: Transmitting & Screen 1# + Adapter 3# M4: Transmitting & Screen 2#+ Worst Adapter M5: Transmitting & Screen 3#+ Worst Adapter
Equipment Modifications:	No
EUT Exercise Software:	No
Engineering Mode was provided by manufacturer▲. The maximum power was configured default setting.	

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
ingenico	NFC Card	EINOLDA	EMZBNC21103001


1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.2	Adapter	EUT


1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

M1-M5:

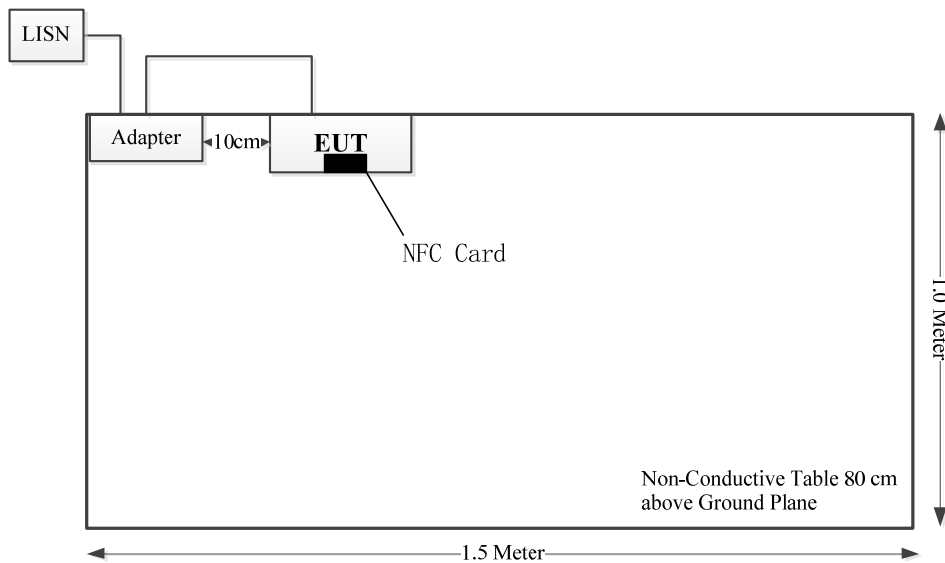

Radiated Spurious Emissions:
M1-M5:

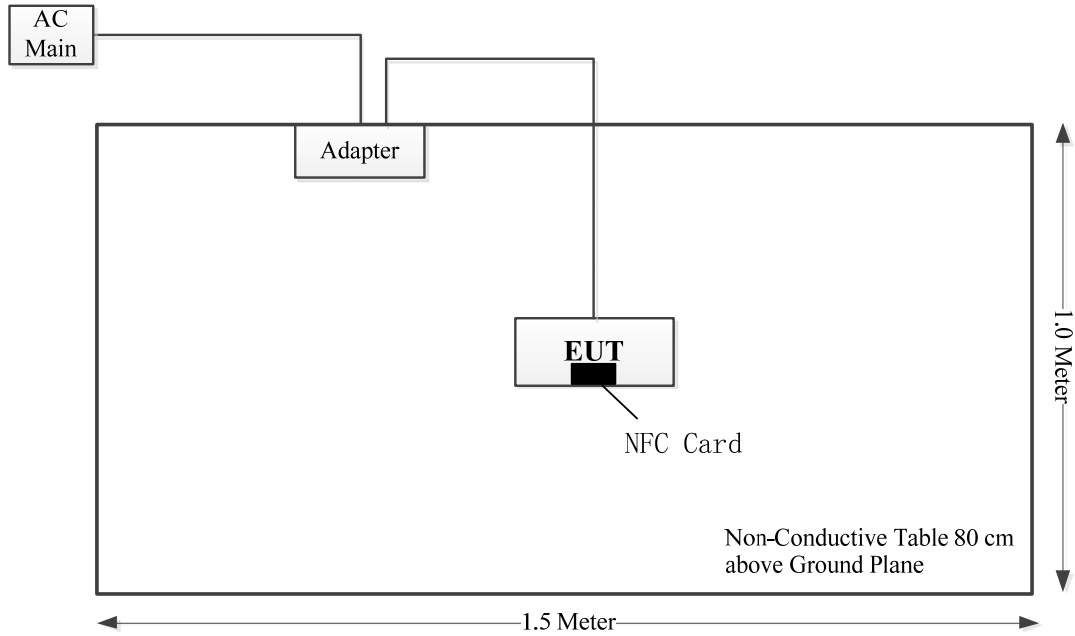

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.203	Antenna Requirement	Compliant
FCC§15.207 (a)	Conducted Emissions	Compliant
§15.225 §15.209 §15.205	Radiated Emission Test	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215(c)	20 dB Bandwidth	Compliant
§1.1310 & §2.1093	RF Exposure	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiated Spurious Emissions


3.2.1 Applicable Standard

As per FCC Part 15.225


- The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

3.2.2 EUT Setup

9kHz~30MHz:

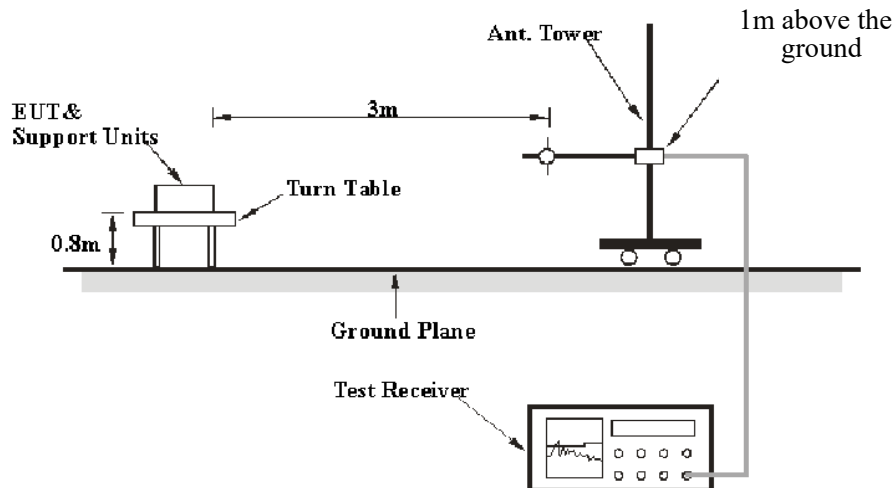

30MHz-1GHz:

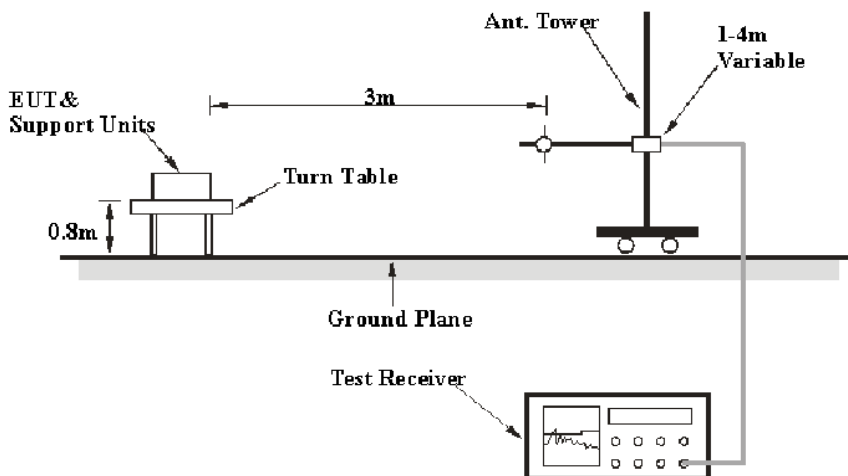

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2013.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	/	PK
	/	/	120 kHz	QP

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP measurement

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Emission Bandwidth

3.3.1 Applicable Standard

FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of band operation.

3.3.2 EUT Setup



3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


3.4 Frequency Stability

3.4.1 Applicable Standard

As per FCC Part 15.225:

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

3.4.2 EUT Setup

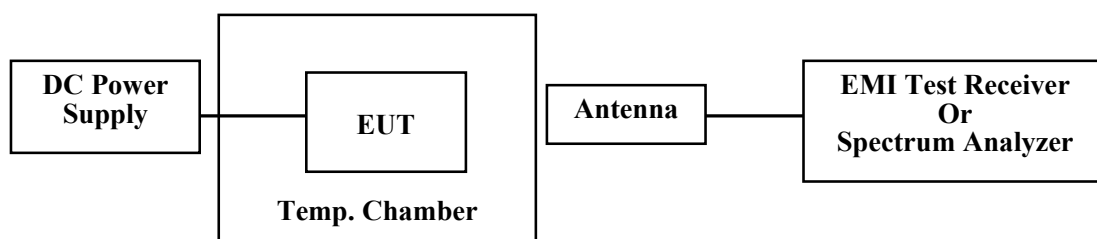

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 6.8

Frequency stability with respect to ambient temperature

- Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

- Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in 5.6.
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than 10 °C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15 °C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage as described in 5.13.

3.5 Antenna Requirement

3.5.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

3.5.2 Judgment

Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2DS1-4,2DS1-5,2DS1-6	Test Date:	2023/12/11
Test Site:	CE	Test Mode:	Transmitting
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.1	Relative Humidity: (%)	52	ATM Pressure: (kPa)	100.9
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Screen 1#+Adapter 1#:

Project No.: CR231167140-RF
 Tester: David Huang
 Port: Line
 Note: M1 Transmitting + Screen1# + Adapter 1#

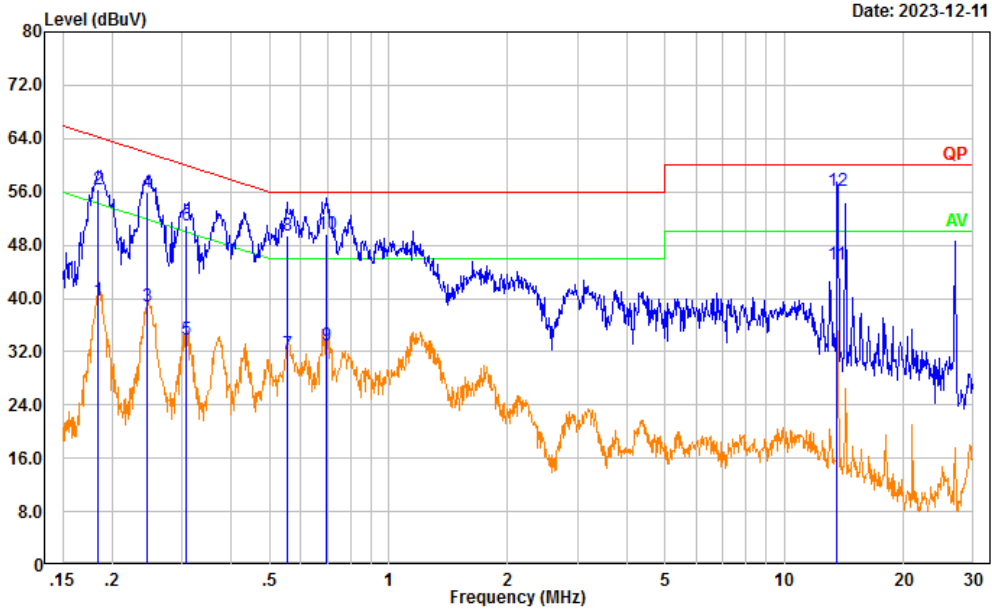


Date: 2023-12-11

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.185	30.17	9.61	39.78	54.27	14.49	Average
2	0.185	46.80	9.61	56.41	64.27	7.86	QP
3	0.246	29.27	9.61	38.88	51.89	13.01	Average
4	0.246	46.30	9.61	55.91	61.89	5.98	QP
5	0.308	24.30	9.61	33.91	50.03	16.12	Average
6	0.308	41.39	9.61	51.00	60.03	9.03	QP
7	0.554	22.02	9.62	31.64	46.00	14.36	Average
8	0.554	39.85	9.62	49.47	56.00	6.53	QP
9	0.696	23.27	9.62	32.89	46.00	13.11	Average
10	0.696	39.93	9.62	49.55	56.00	6.45	QP
11	13.560	35.51	9.68	45.19	50.00	4.81	Average
12	13.560	46.49	9.68	56.17	60.00	3.83	QP

Project No.: CR231167140-RF
 Tester: David Huang
 Port: neutral
 Note: M1 Transmitting + Screen1# + Adapter 1#


Date: 2023-12-11

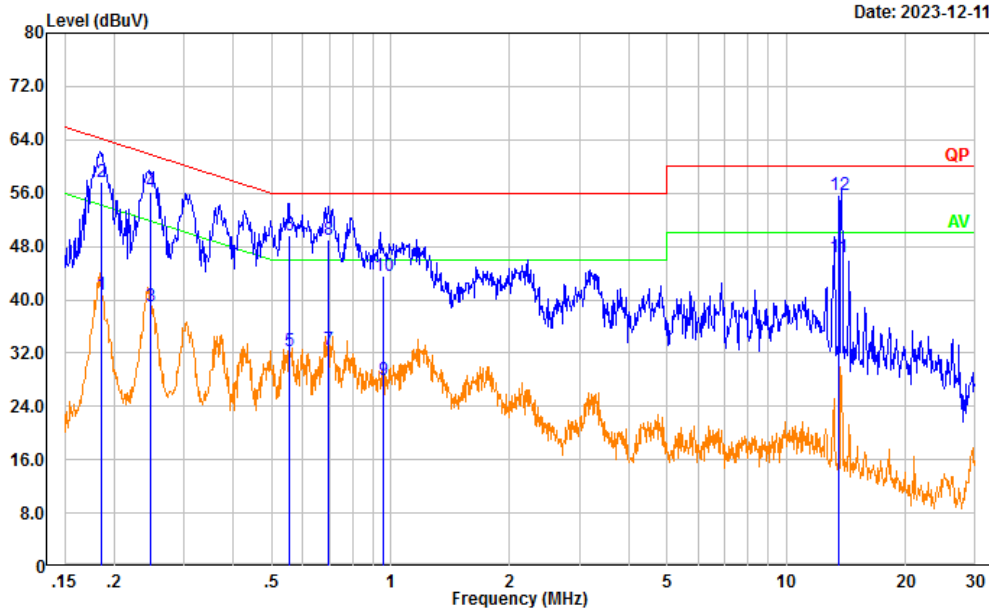

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.186	31.13	9.61	40.74	54.22	13.48	Average
2	0.186	48.05	9.61	57.66	64.22	6.56	QP
3	0.247	29.52	9.61	39.13	51.84	12.71	Average
4	0.247	46.57	9.61	56.18	61.84	5.66	QP
5	0.555	22.74	9.62	32.36	46.00	13.64	Average
6	0.555	39.99	9.62	49.61	56.00	6.39	QP
7	0.694	22.88	9.62	32.50	46.00	13.50	Average
8	0.694	39.41	9.62	49.03	56.00	6.97	QP
9	0.957	18.38	9.62	28.00	46.00	18.00	Average
10	0.957	34.02	9.62	43.64	56.00	12.36	QP
11	13.560	36.71	9.68	46.39	50.00	3.61	Average
12	13.560	46.08	9.68	55.76	60.00	4.24	QP

Screen 1#+Adapter 2#:

Project No.: CR231167140-RF
 Tester: David Huang
 Port: Line
 Note: M2 Transmitting + Screen1# + Adapter 2#

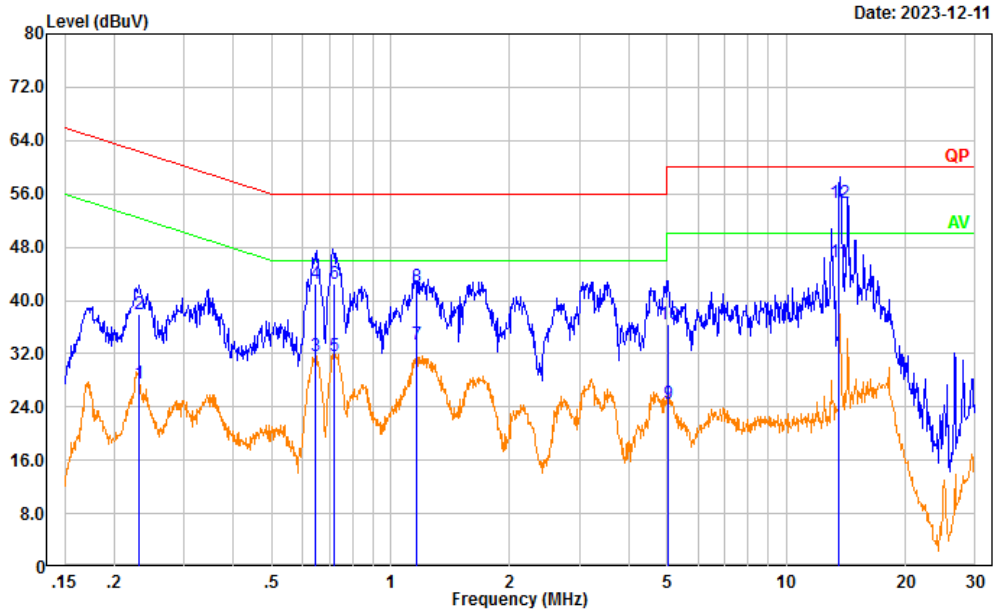


Date: 2023-12-11

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.232	17.98	9.61	27.59	52.38	24.79	Average
2	0.232	28.39	9.61	38.00	62.38	24.38	QP
3	0.644	21.99	9.62	31.61	46.00	14.39	Average
4	0.644	32.77	9.62	42.39	56.00	13.61	QP
5	0.719	22.06	9.62	31.68	46.00	14.32	Average
6	0.719	32.91	9.62	42.53	56.00	13.47	QP
7	1.167	23.86	9.62	33.48	46.00	12.52	Average
8	1.167	32.34	9.62	41.96	56.00	14.04	QP
9	5.035	14.94	9.66	24.60	50.00	25.40	Average
10	5.035	26.87	9.66	36.53	60.00	23.47	QP
11	13.560	36.00	9.68	45.68	50.00	4.32	Average
12	13.560	44.93	9.68	54.61	60.00	5.39	QP

Project No.: CR231167140-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Transmitting + Screen1# + Adapter 2#


Date: 2023-12-11

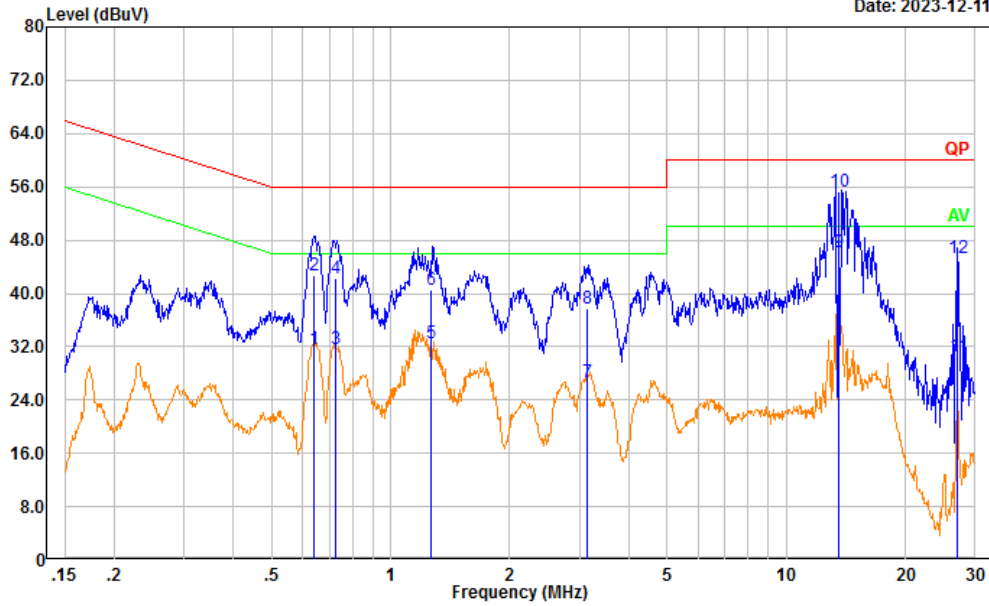

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.641	22.13	9.62	31.75	46.00	14.25	Average
2	0.641	33.09	9.62	42.71	56.00	13.29	QP
3	0.725	22.02	9.62	31.64	46.00	14.36	Average
4	0.725	32.75	9.62	42.37	56.00	13.63	QP
5	1.263	22.84	9.62	32.46	46.00	13.54	Average
6	1.263	30.91	9.62	40.53	56.00	15.47	QP
7	3.131	16.93	9.65	26.58	46.00	19.42	Average
8	3.131	28.02	9.65	37.67	56.00	18.33	QP
9	13.561	36.47	9.68	46.15	50.00	3.85	Average
10	13.561	45.52	9.68	55.20	60.00	4.80	QP
11	27.119	20.83	9.80	30.63	50.00	19.37	Average
12	27.119	35.58	9.80	45.38	60.00	14.62	QP

Screen 1#+Adapter 3#:


Project No.: CR231167140-RF
 Tester: David Huang
 Port: Line
 Note: M3 Transmitting + Screen1# + Adapter 3#

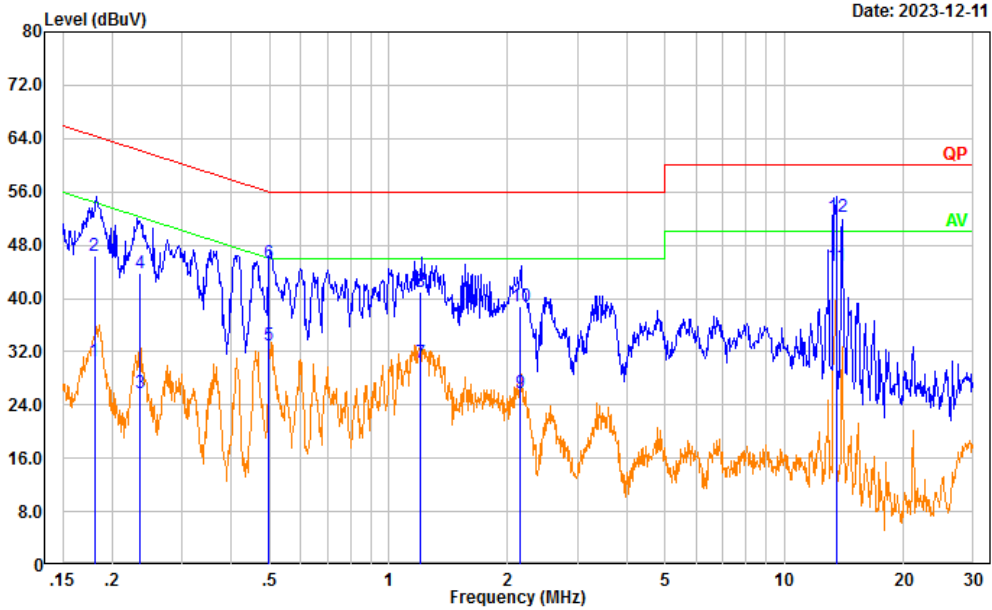

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.180	20.97	9.61	30.58	54.47	23.89	Average
2	0.180	36.84	9.61	46.45	64.47	18.02	QP
3	0.236	16.09	9.61	25.70	52.25	26.55	Average
4	0.236	34.13	9.61	43.74	62.25	18.51	QP
5	0.498	23.27	9.61	32.88	46.04	13.16	Average
6	0.498	35.72	9.61	45.33	56.04	10.71	QP
7	1.201	20.79	9.62	30.41	46.00	15.59	Average
8	1.201	31.34	9.62	40.96	56.00	15.04	QP
9	2.143	16.14	9.63	25.77	46.00	20.23	Average
10	2.143	29.16	9.63	38.79	56.00	17.21	QP
11	13.560	35.09	9.68	44.77	50.00	5.23	Average
12	13.560	42.50	9.68	52.18	60.00	7.82	QP

Project No.: CR231167140-RF
 Tester: David Huang
 Port: neutral
 Note: M3 Transmitting + Screen1# + Adapter 3#

Date: 2023-12-11

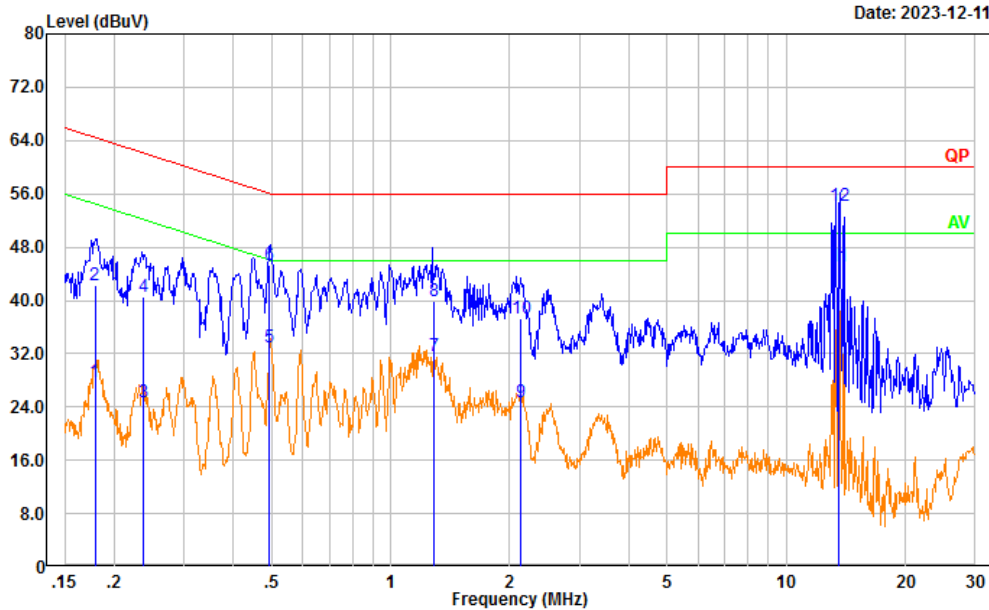


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.179	18.20	9.61	27.81	54.54	26.73	Average
2	0.179	32.73	9.61	42.34	64.54	22.20	QP
3	0.237	15.21	9.61	24.82	52.22	27.40	Average
4	0.237	30.93	9.61	40.54	62.22	21.68	QP
5	0.494	23.31	9.61	32.92	46.10	13.18	Average
6	0.494	35.69	9.61	45.30	56.10	10.80	QP
7	1.287	22.02	9.62	31.64	46.00	14.36	Average
8	1.287	30.27	9.62	39.89	56.00	16.11	QP
9	2.137	15.07	9.63	24.70	46.00	21.30	Average
10	2.137	27.73	9.63	37.36	56.00	18.64	QP
11	13.561	35.40	9.68	45.08	50.00	4.92	Average
12	13.561	44.45	9.68	54.13	60.00	5.87	QP

Screen 2#+Adapter 1#:

Project No.: CR231167140-RF
 Tester: David Huang
 Port: Line
 Note: M4 Transmitting + Screen2# + Adapter 1#


Date: 2023-12-11

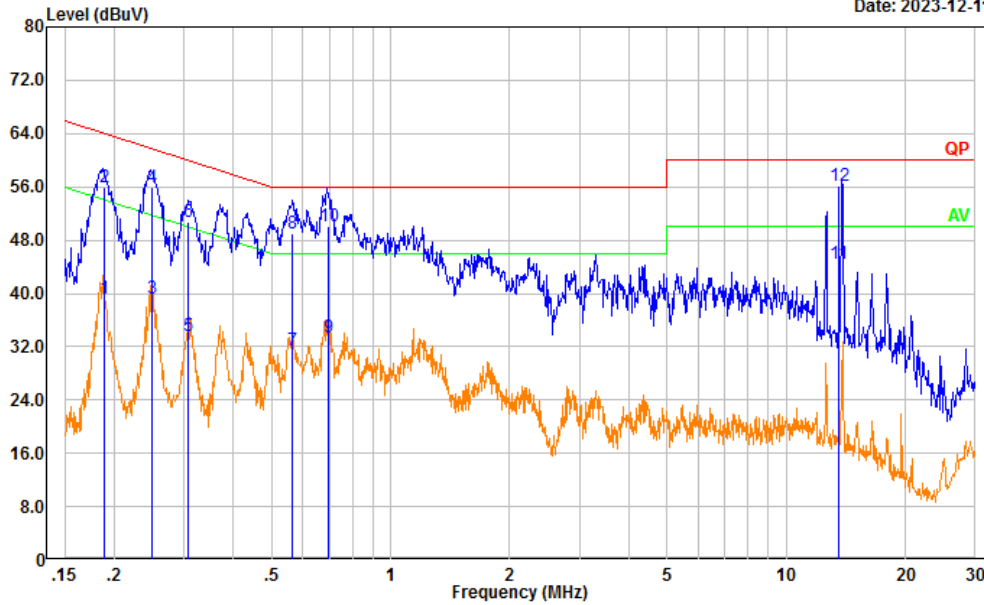

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.188	29.68	9.61	39.29	54.11	14.82	Average
2	0.188	46.35	9.61	55.96	64.11	8.15	QP
3	0.250	29.57	9.61	39.18	51.77	12.59	Average
4	0.250	46.38	9.61	55.99	61.77	5.78	QP
5	0.308	23.99	9.61	33.60	50.04	16.44	Average
6	0.308	41.07	9.61	50.68	60.04	9.36	QP
7	0.563	21.76	9.62	31.38	46.00	14.62	Average
8	0.563	39.47	9.62	49.09	56.00	6.91	QP
9	0.694	23.73	9.62	33.35	46.00	12.65	Average
10	0.694	40.49	9.62	50.11	56.00	5.89	QP
11	13.560	34.67	9.68	44.35	50.00	5.65	Average
12	13.560	46.50	9.68	56.18	60.00	3.82	QP

Project No.: CR231167140-RF
 Tester: David Huang
 Port: neutral
 Note: M4 Transmitting + Screen2# + Adapter 1#


Date: 2023-12-11

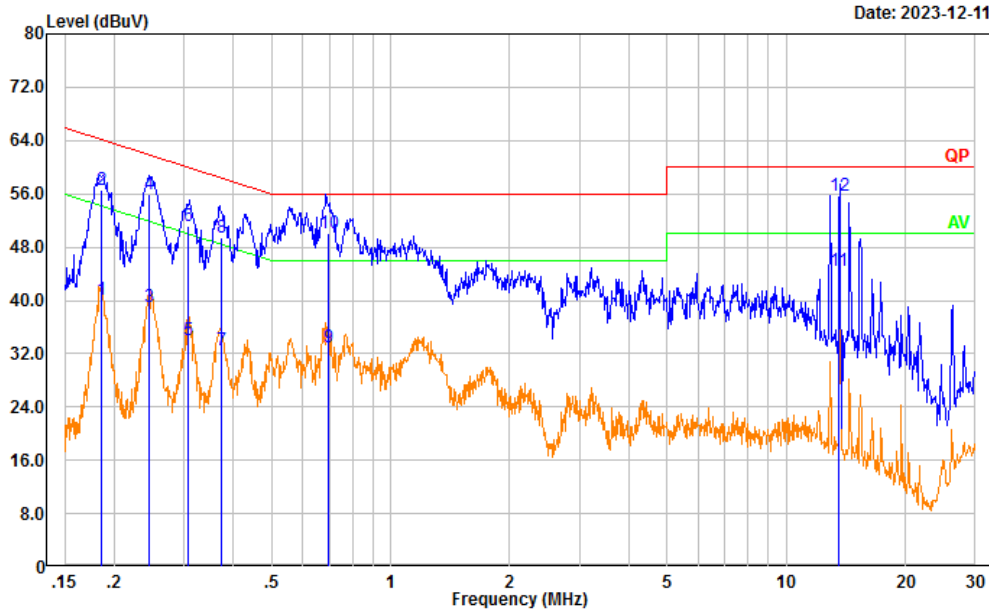

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.186	30.54	9.61	40.15	54.20	14.05	Average
2	0.186	46.87	9.61	56.48	64.20	7.72	QP
3	0.246	29.33	9.61	38.94	51.89	12.95	Average
4	0.246	46.37	9.61	55.98	61.89	5.91	QP
5	0.308	24.38	9.61	33.99	50.03	16.04	Average
6	0.308	41.54	9.61	51.15	60.03	8.88	QP
7	0.374	22.92	9.61	32.53	48.41	15.88	Average
8	0.374	39.79	9.61	49.40	58.41	9.01	QP
9	0.696	23.37	9.62	32.99	46.00	13.01	Average
10	0.696	40.43	9.62	50.05	56.00	5.95	QP
11	13.560	34.80	9.68	44.48	50.00	5.52	Average
12	13.560	46.11	9.68	55.79	60.00	4.21	QP

Screen 3#+Adapter 1#:


Project No.: CR231167140-RF
 Tester: David Huang
 Port: Line
 Note: M5 Transmitting + Screen3# + Adapter 1#

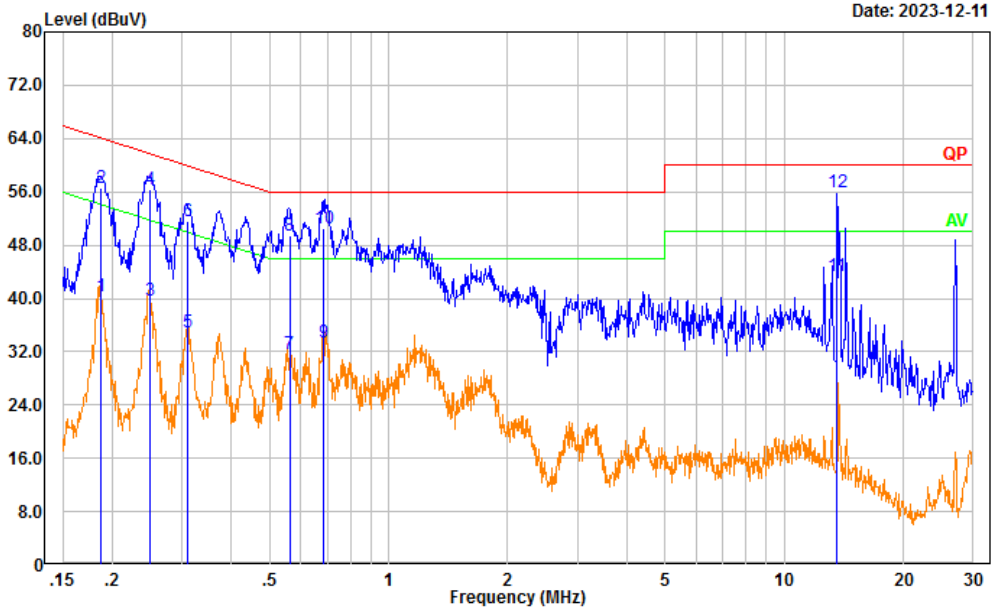

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.187	30.73	9.61	40.34	54.18	13.84	Average
2	0.187	47.05	9.61	56.66	64.18	7.52	QP
3	0.249	30.09	9.61	39.70	51.78	12.08	Average
4	0.249	46.75	9.61	56.36	61.78	5.42	QP
5	0.310	25.36	9.61	34.97	49.97	15.00	Average
6	0.310	42.07	9.61	51.68	59.97	8.29	QP
7	0.562	22.01	9.62	31.63	46.00	14.37	Average
8	0.562	39.89	9.62	49.51	56.00	6.49	QP
9	0.686	23.71	9.62	33.33	46.00	12.67	Average
10	0.686	40.94	9.62	50.56	56.00	5.44	QP
11	13.561	33.77	9.68	43.45	50.00	6.55	Average
12	13.561	46.20	9.68	55.88	60.00	4.12	QP

Project No.: CR231167140-RF
 Tester: David Huang
 Port: neutral
 Note: M5 Transmitting + Screen3# + Adapter 1#

Date: 2023-12-11

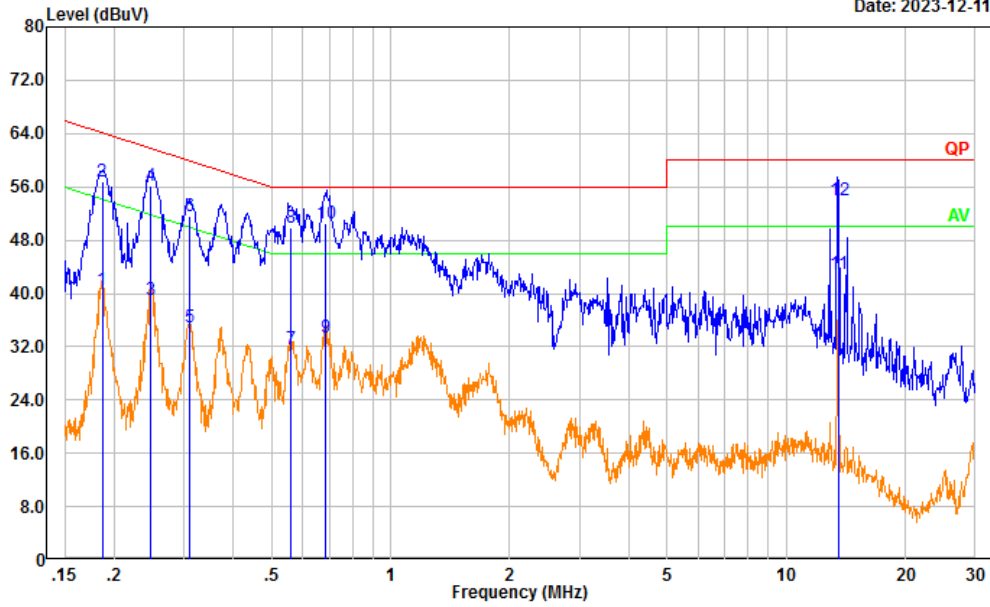

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.187	30.85	9.61	40.46	54.19	13.73	Average
2	0.187	47.13	9.61	56.74	64.19	7.45	QP
3	0.246	29.46	9.61	39.07	51.88	12.81	Average
4	0.246	46.50	9.61	56.11	61.88	5.77	QP
5	0.311	25.39	9.61	35.00	49.94	14.94	Average
6	0.311	42.00	9.61	51.61	59.94	8.33	QP
7	0.560	22.05	9.62	31.67	46.00	14.33	Average
8	0.560	40.28	9.62	49.90	56.00	6.10	QP
9	0.684	23.76	9.62	33.38	46.00	12.62	Average
10	0.684	40.94	9.62	50.56	56.00	5.44	QP
11	13.560	33.25	9.68	42.93	50.00	7.07	Average
12	13.560	44.30	9.68	53.98	60.00	6.02	QP

4.2 Radiation Spurious Emissions

Serial Number:	2DS1-6 , 2DS1-5, 2DS1-4	Test Date:	2024/1/5-2024/1/8
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8-25.1	Relative Humidity: (%)	40-45	ATM Pressure: (kPa)	101.4
----------------------	-----------	---------------------------	-------	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BACL	Loop Antenna	1313-1P	3092721	2023/10/20	2026/10/19
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to plots.


1) 9 kHz~30MHz:

Screen 1#+Adapter 1#:

Parallel:


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen1# + Adapter 1#

Date: 2024-01-05

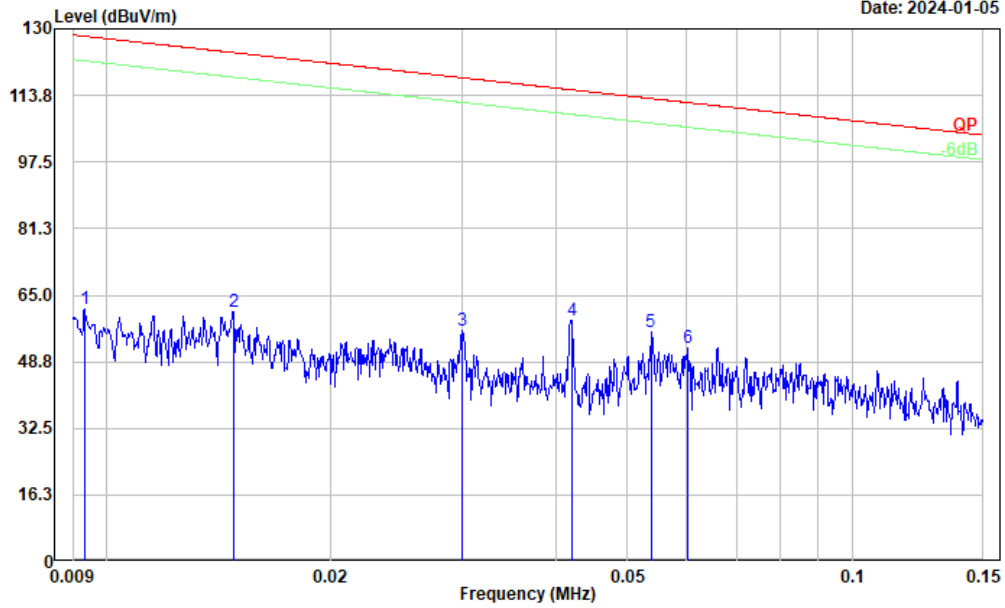


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	2.88	58.62	61.50	128.20	66.70	Peak
2	0.015	6.07	55.05	61.12	124.19	63.07	Peak
3	0.030	9.48	46.97	56.45	118.06	61.61	Peak
4	0.042	14.59	44.23	58.82	115.13	56.31	Peak
5	0.054	14.01	41.95	55.96	113.00	57.04	Peak
6	0.060	10.99	41.06	52.05	112.00	59.95	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen1# + Adapter 1#

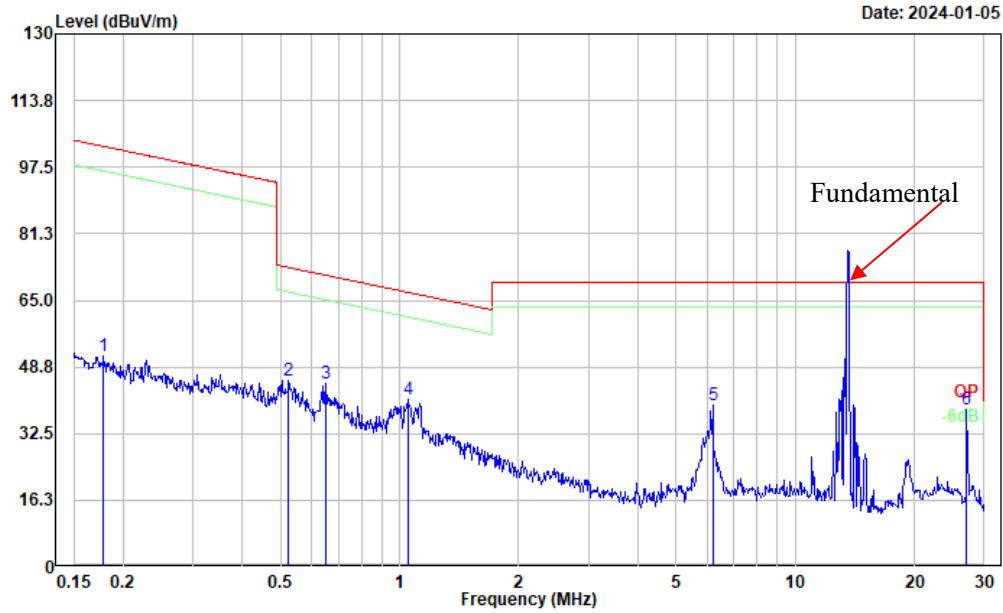

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.179	18.91	32.60	51.51	102.56	51.05	Peak
2	0.524	23.19	22.16	45.35	73.21	27.86	Peak
3	0.651	24.28	20.49	44.77	71.28	26.51	Peak
4	1.049	24.38	16.34	40.72	67.05	26.33	Peak
5	6.186	35.26	4.15	39.41	69.54	30.13	Peak
6	27.127	37.01	1.52	38.53	69.54	31.01	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen1# + Adapter 1#

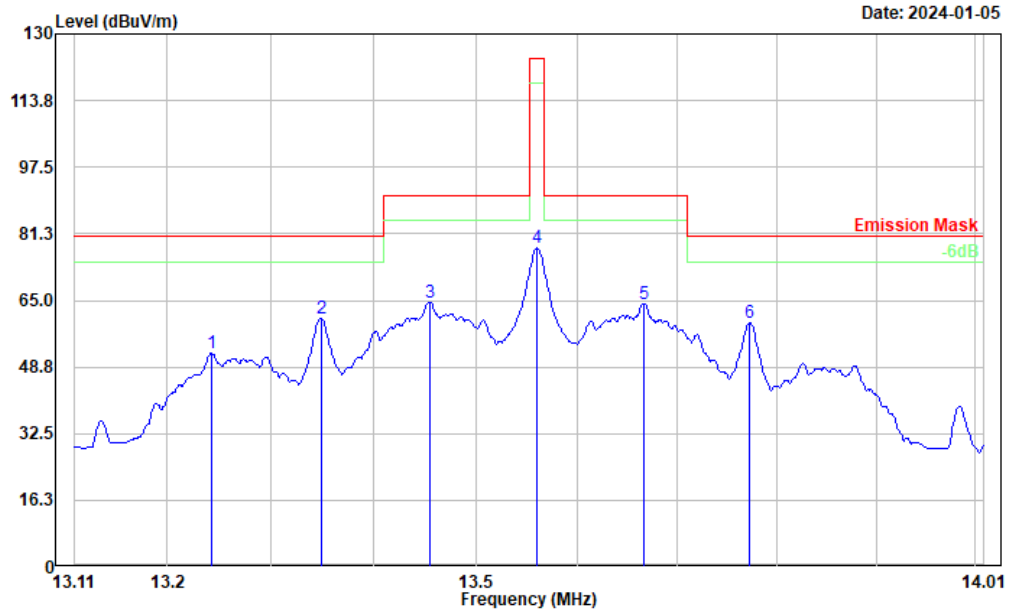

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	49.98	2.13	52.11	80.51	28.40	Peak
2	13.349	58.53	2.12	60.65	80.51	19.86	Peak
3	13.455	62.49	2.10	64.59	90.47	25.88	Peak
4	13.561	75.75	2.10	77.85	124.00	46.15	Peak
5	13.666	62.04	2.08	64.12	90.47	26.35	Peak
6	13.772	57.52	2.06	59.58	80.51	20.93	Peak


Perpendicular:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen1# + Adapter 1#

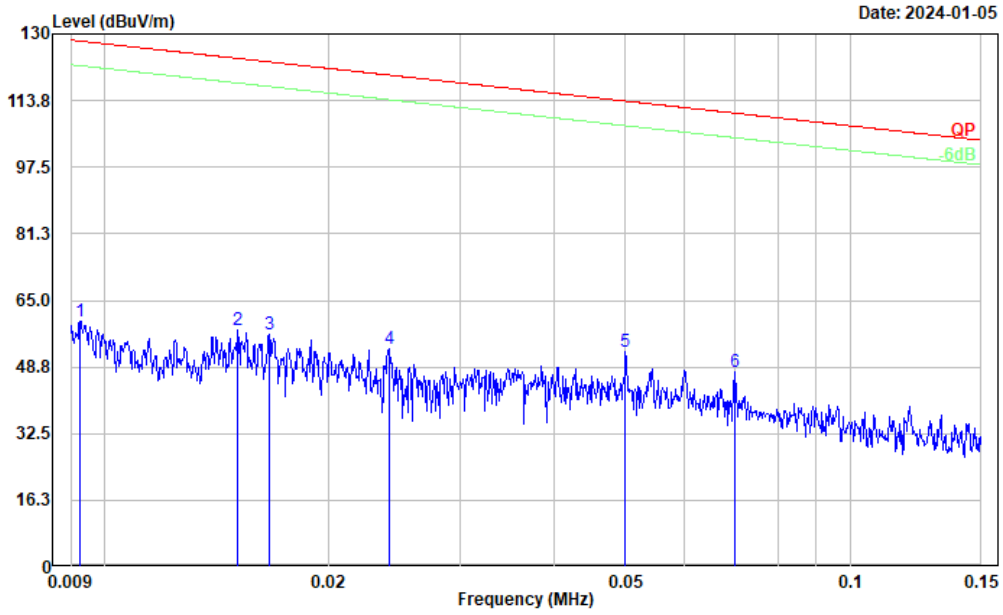


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	1.31	58.71	60.02	128.28	68.26	Peak
2	0.015	3.06	54.88	57.94	124.02	66.08	Peak
3	0.017	2.67	53.99	56.66	123.19	66.53	Peak
4	0.024	3.08	49.95	53.03	119.97	66.94	Peak
5	0.050	9.96	42.47	52.43	113.64	61.21	Peak
6	0.070	7.74	39.68	47.42	110.68	63.26	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen1# + Adapter 1#

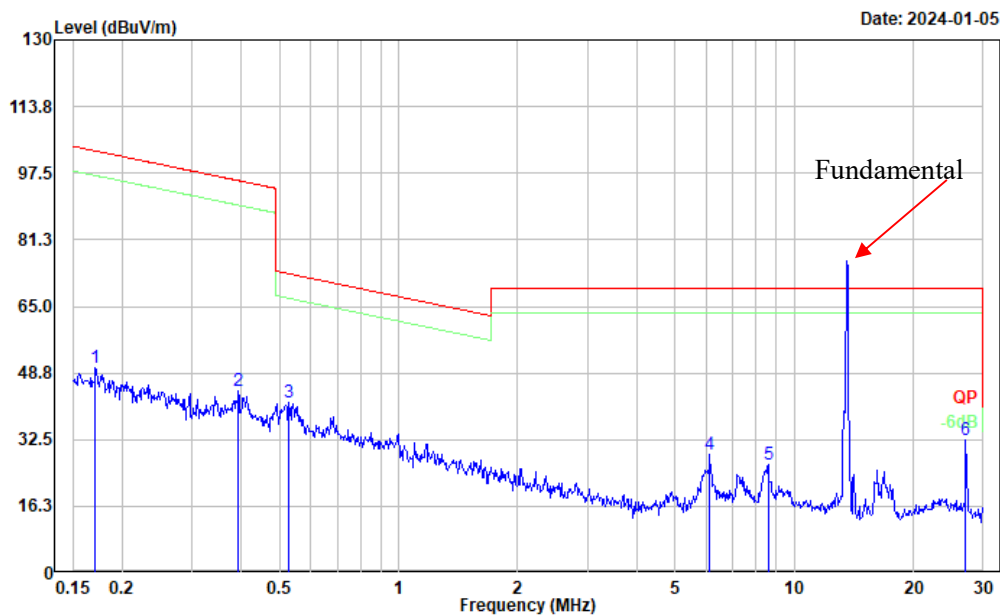

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.171	17.11	32.96	50.07	102.93	52.86	Peak
2	0.393	19.62	24.80	44.42	95.71	51.29	Peak
3	0.529	19.32	22.09	41.41	73.11	31.70	Peak
4	6.121	24.75	4.18	28.93	69.54	40.61	Peak
5	8.592	23.34	3.00	26.34	69.54	43.20	Peak
6	27.127	30.94	1.52	32.46	69.54	37.08	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen1# + Adapter 1#

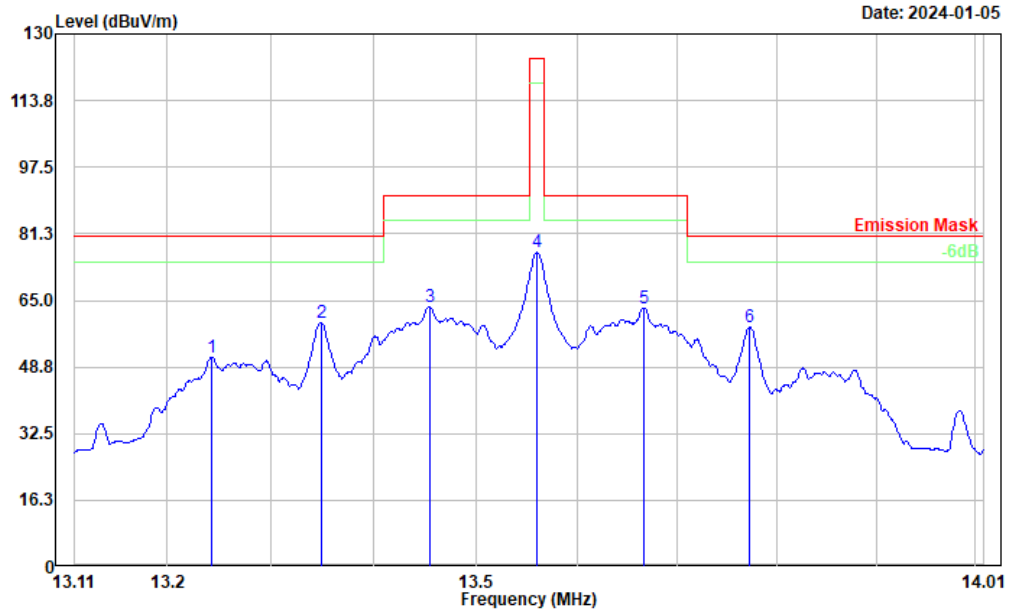

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13.242	49.00	2.13	51.13	80.51	29.38	Peak
2	13.349	57.43	2.12	59.55	80.51	20.96	Peak
3	13.455	61.44	2.10	63.54	90.47	26.93	Peak
4	13.561	74.59	2.10	76.69	124.00	47.31	Peak
5	13.666	60.99	2.08	63.07	90.47	27.40	Peak
6	13.772	56.41	2.06	58.47	80.51	22.04	Peak

Ground-parallel:


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen1# + Adapter 1#

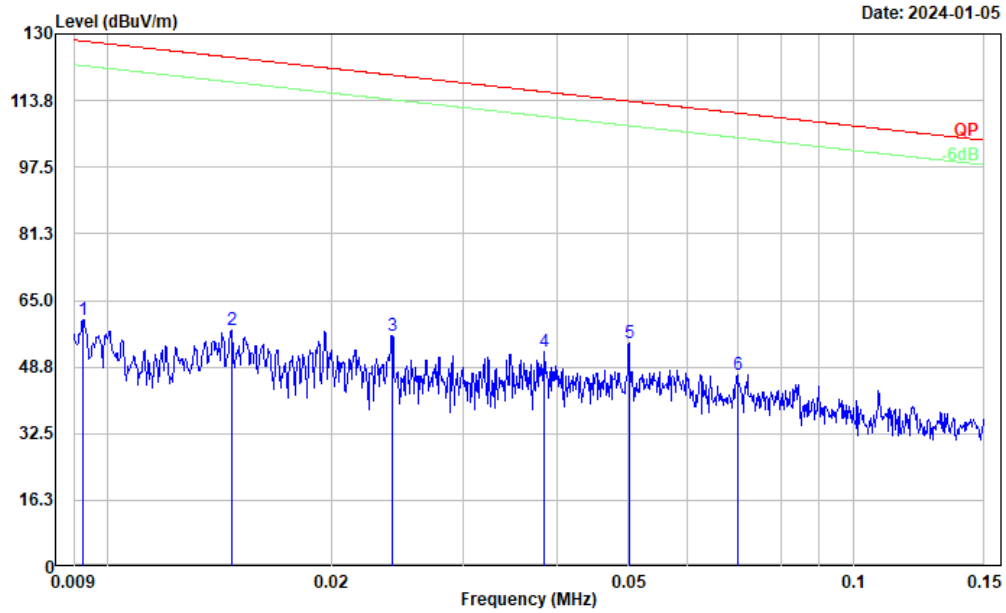

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	1.54	58.71	60.25	128.28	68.03	Peak
2	0.015	2.79	55.15	57.94	124.29	66.35	Peak
3	0.024	6.59	49.95	56.54	119.97	63.43	Peak
4	0.039	7.32	45.02	52.34	115.89	63.55	Peak
5	0.050	12.02	42.44	54.46	113.61	59.15	Peak
6	0.070	7.07	39.71	46.78	110.70	63.92	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen1# + Adapter 1#

Date: 2024-01-05

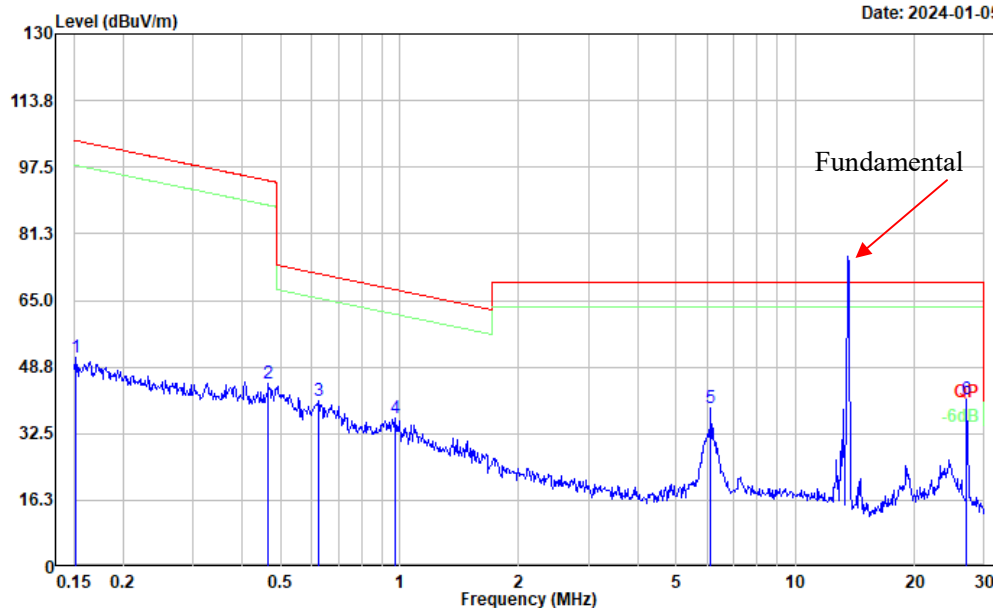

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.152	17.06	33.85	50.91	103.94	53.03	Peak
2	0.466	21.63	23.23	44.86	94.23	49.37	Peak
3	0.624	19.62	20.83	40.45	71.66	31.21	Peak
4	0.974	19.44	16.86	36.30	67.71	31.41	Peak
5	6.121	34.49	4.18	38.67	69.54	30.87	Peak
6	27.127	39.47	1.52	40.99	69.54	28.55	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen1# + Adapter 1#

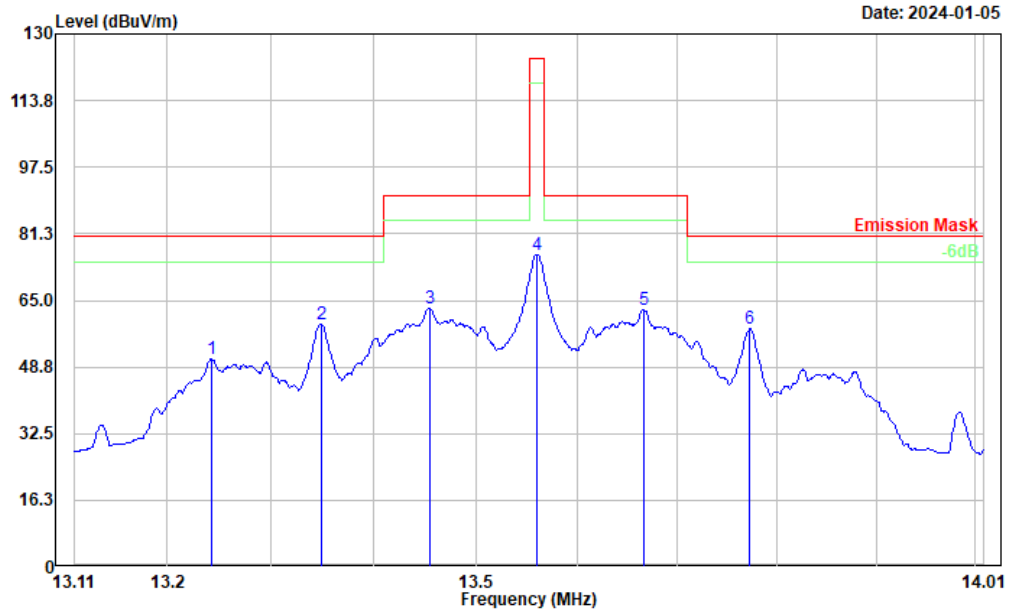

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13.242	48.57	2.13	50.70	80.51	29.81	Peak
2	13.349	57.03	2.12	59.15	80.51	21.36	Peak
3	13.455	61.03	2.10	63.13	90.47	27.34	Peak
4	13.561	74.16	2.10	76.26	124.00	47.74	Peak
5	13.666	60.57	2.08	62.65	90.47	27.82	Peak
6	13.772	55.94	2.06	58.00	80.51	22.51	Peak


**Screen 1#+Adapter 2#:
Parallel:**

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 1# + Adapter 2#

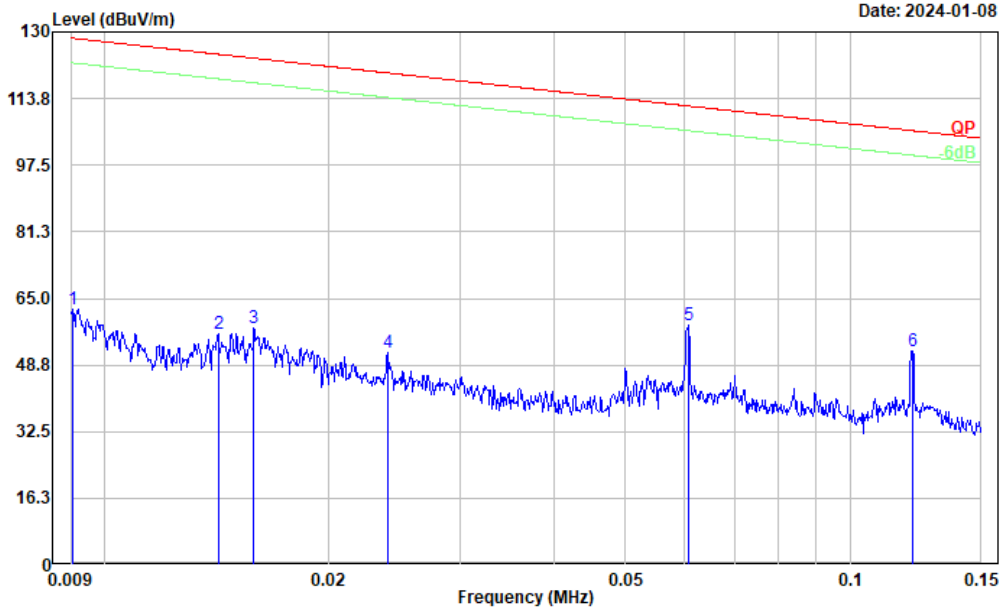

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	3.43	58.95	62.38	128.47	66.09	Peak
2	0.014	0.93	55.40	56.33	124.56	68.23	Peak
3	0.016	3.26	54.45	57.71	123.61	65.90	Peak
4	0.024	1.72	50.02	51.74	120.02	68.28	Peak
5	0.061	17.32	40.99	58.31	111.93	53.62	Peak
6	0.121	16.99	35.31	52.30	105.92	53.62	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 1# + Adapter 2#

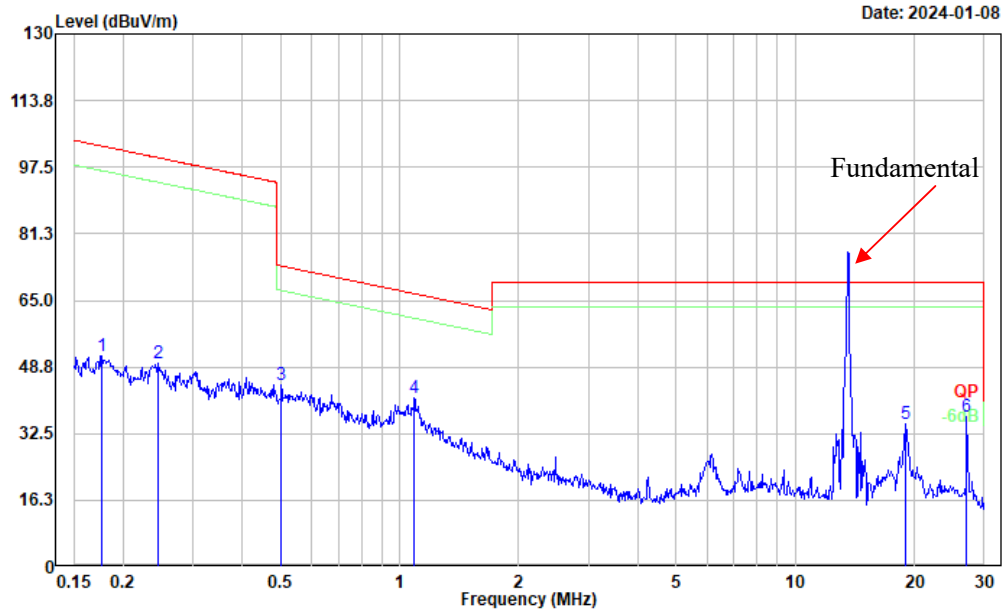

Date: 2024-01-08

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.177	18.90	32.69	51.59	102.66	51.07	Peak
2	0.246	20.19	29.44	49.63	99.80	50.17	Peak
3	0.502	22.07	22.45	44.52	73.58	29.06	Peak
4	1.088	24.94	16.12	41.06	66.72	25.66	Peak
5	18.920	33.24	1.71	34.95	69.54	34.59	Peak
6	27.127	35.24	1.52	36.76	69.54	32.78	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 1# + Adapter 2#

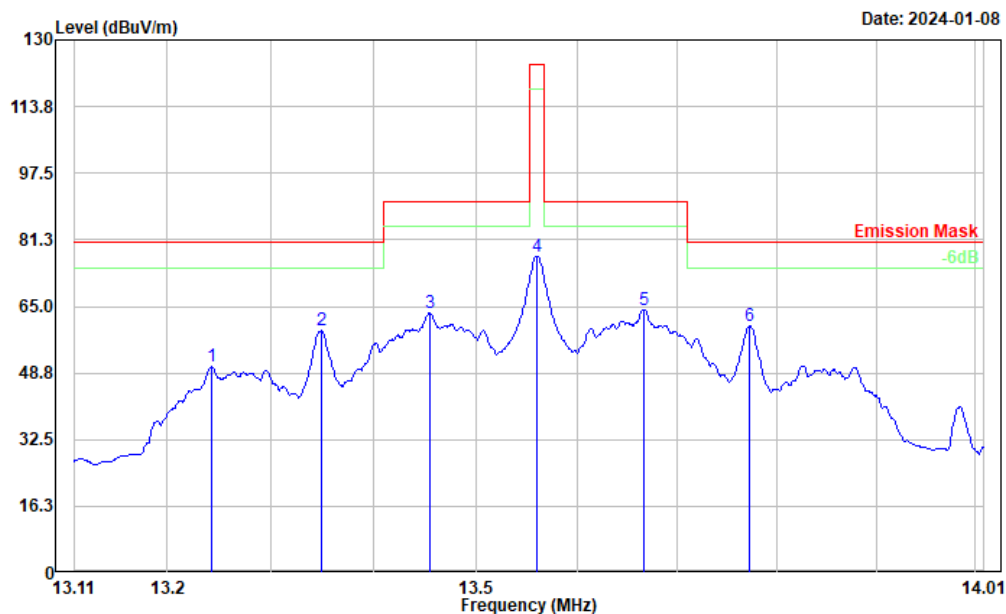

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	48.11	2.13	50.24	80.51	30.27	Peak
2	13.349	56.96	2.12	59.08	80.51	21.43	Peak
3	13.455	61.32	2.10	63.42	90.47	27.05	Peak
4	13.561	75.19	2.10	77.29	124.00	46.71	Peak
5	13.666	62.19	2.08	64.27	90.47	26.20	Peak
6	13.772	58.25	2.06	60.31	80.51	20.20	Peak

Perpendicular:


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 1# + Adapter 2#

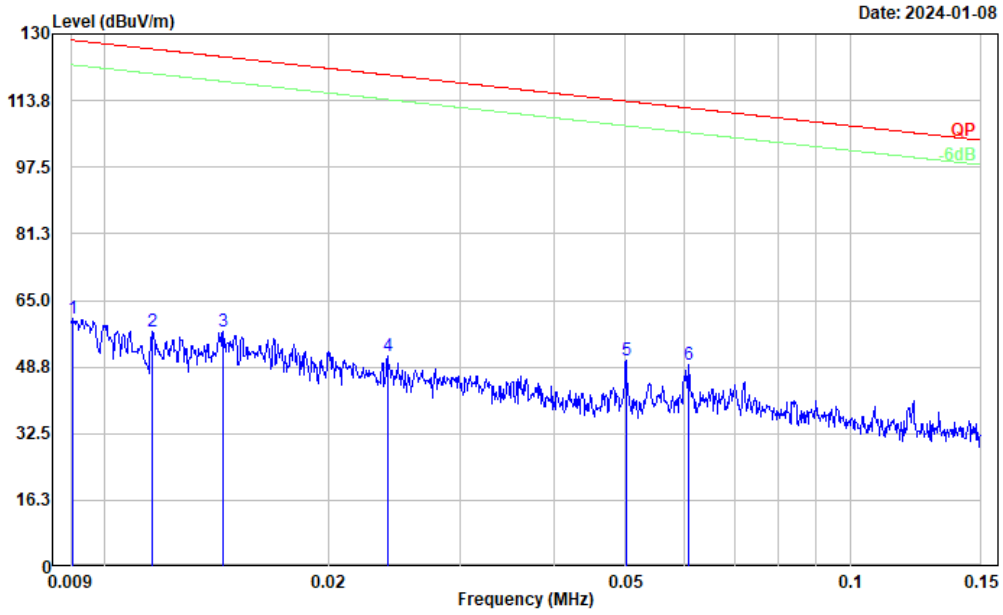

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	1.62	58.95	60.57	128.47	67.90	Peak
2	0.012	0.61	56.92	57.53	126.32	68.79	Peak
3	0.014	2.09	55.29	57.38	124.44	67.06	Peak
4	0.024	1.48	50.02	51.50	120.02	68.52	Peak
5	0.050	7.77	42.44	50.21	113.61	63.40	Peak
6	0.061	8.45	41.02	49.47	111.95	62.48	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 1# + Adapter 2#

Date: 2024-01-08

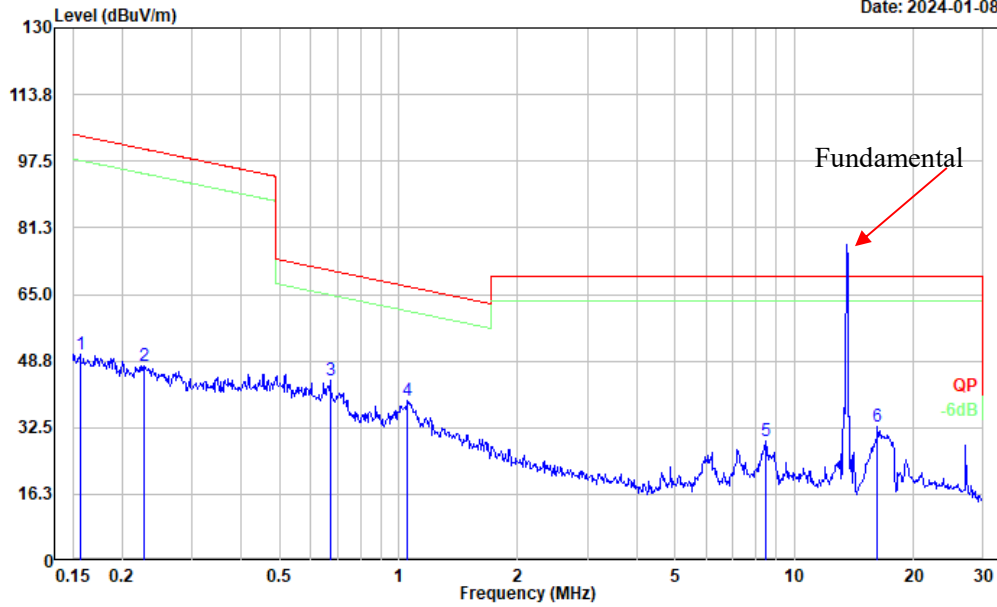

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.156	16.87	33.66	50.53	103.71	53.18	Peak
2	0.228	17.33	30.27	47.60	100.45	52.85	Peak
3	0.672	23.72	20.21	43.93	71.00	27.07	Peak
4	1.054	22.63	16.31	38.94	67.01	28.07	Peak
5	8.456	26.14	3.02	29.16	69.54	40.38	Peak
6	16.226	30.99	1.84	32.83	69.54	36.71	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 1# + Adapter 2#

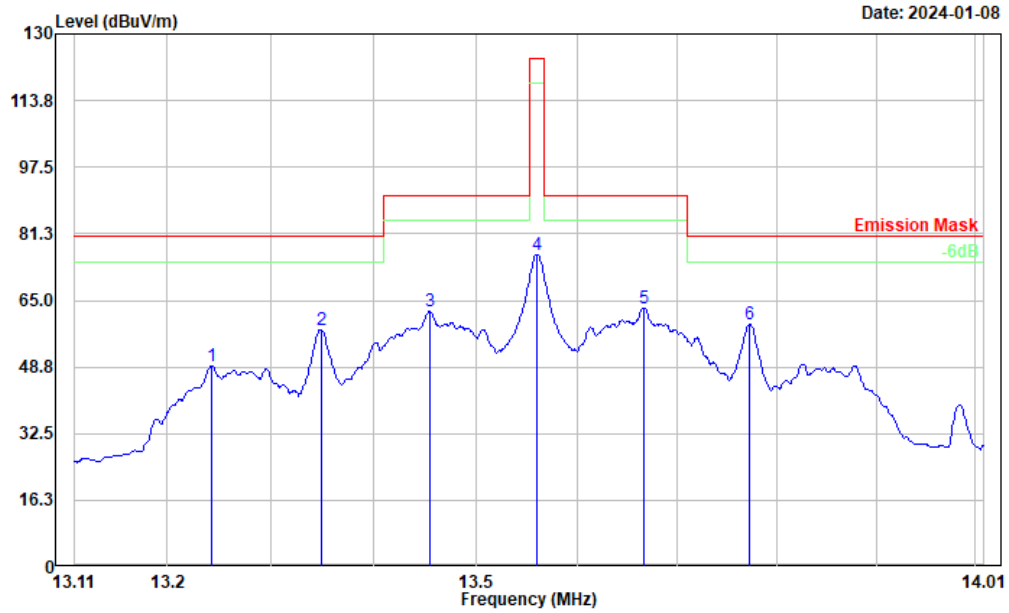

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	46.93	2.13	49.06	80.51	31.45	Peak
2	13.349	55.82	2.12	57.94	80.51	22.57	Peak
3	13.455	60.21	2.10	62.31	90.47	28.16	Peak
4	13.561	74.08	2.10	76.18	124.00	47.82	Peak
5	13.666	61.07	2.08	63.15	90.47	27.32	Peak
6	13.772	57.15	2.06	59.21	80.51	21.30	Peak


Ground-parallel:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 1# + Adapter 2#

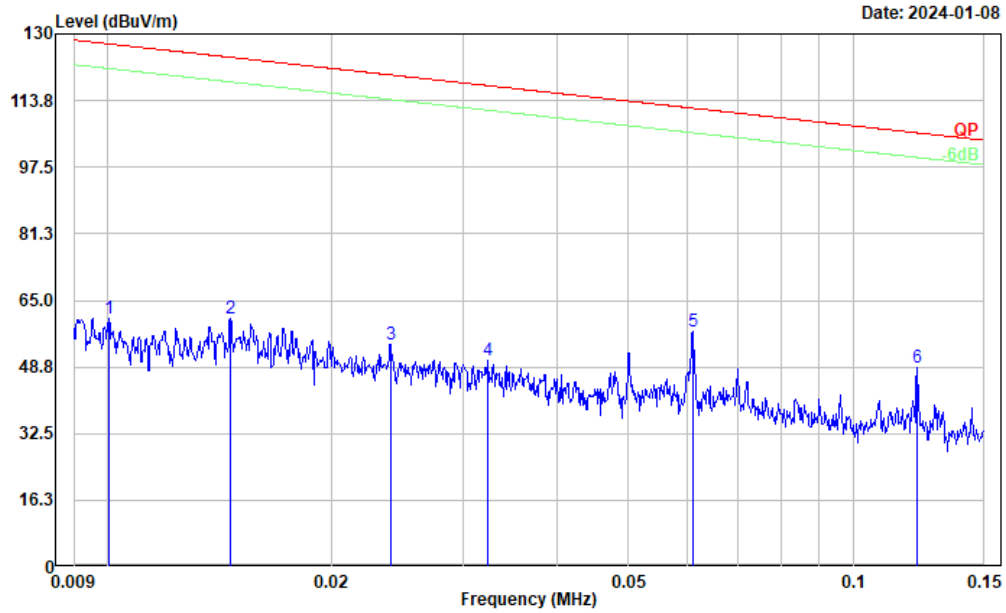


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.010	2.82	57.83	60.65	127.57	66.92	Peak
2	0.015	5.51	55.17	60.68	124.32	63.64	Peak
3	0.024	4.30	50.02	54.32	120.02	65.70	Peak
4	0.032	4.11	46.43	50.54	117.40	66.86	Peak
5	0.061	16.32	40.97	57.29	111.90	54.61	Peak
6	0.122	13.28	35.28	48.56	105.87	57.31	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 1# + Adapter 2#

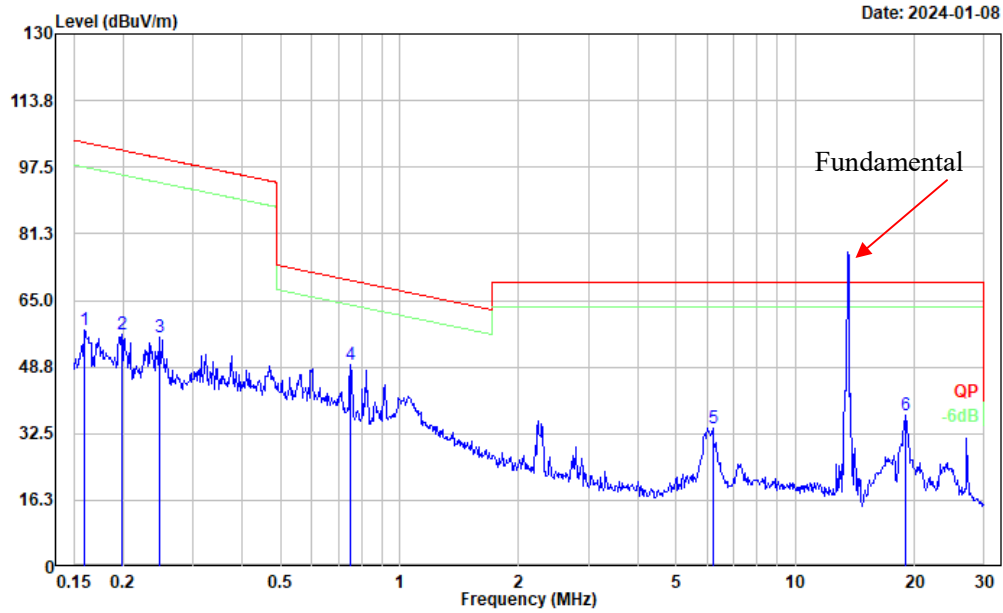

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.160	24.13	33.50	57.63	103.53	45.90	Peak
2	0.199	24.93	31.67	56.60	101.64	45.04	Peak
3	0.247	26.53	29.38	55.91	99.76	43.85	Peak
4	0.751	30.08	19.15	49.23	70.01	20.78	Peak
5	6.186	29.84	4.15	33.99	69.54	35.55	Peak
6	18.920	35.26	1.71	36.97	69.54	32.57	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 1# + Adapter 2#

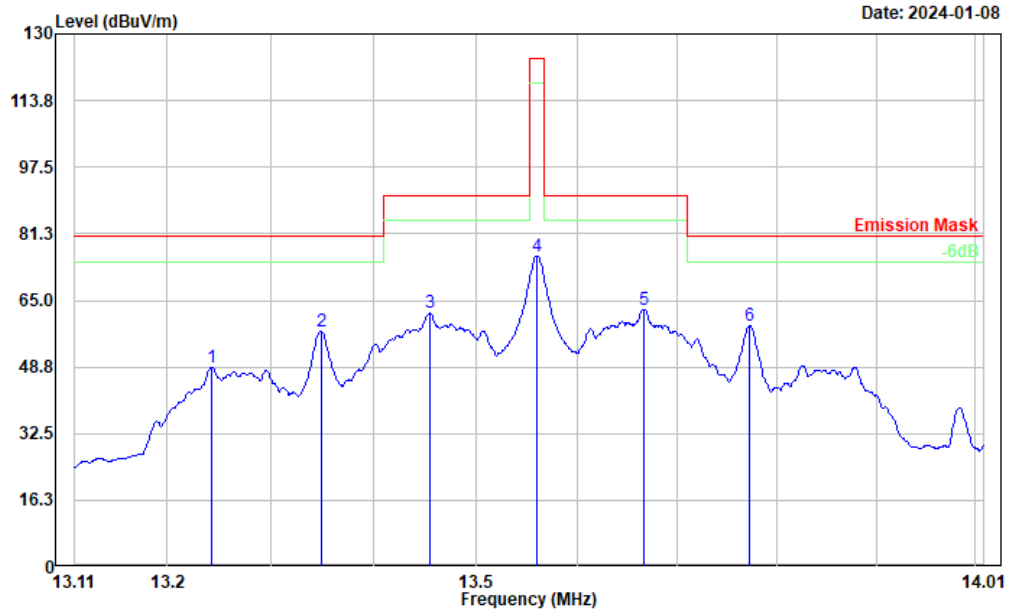

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	46.51	2.13	48.64	80.51	31.87	Peak
2	13.349	55.40	2.12	57.52	80.51	22.99	Peak
3	13.455	59.77	2.10	61.87	90.47	28.60	Peak
4	13.561	73.74	2.10	75.84	124.00	48.16	Peak
5	13.666	60.65	2.08	62.73	90.47	27.74	Peak
6	13.772	56.72	2.06	58.78	80.51	21.73	Peak


**Screen 1#+Adapter 3#:
Parallel:**

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 1# + Adapter 3#

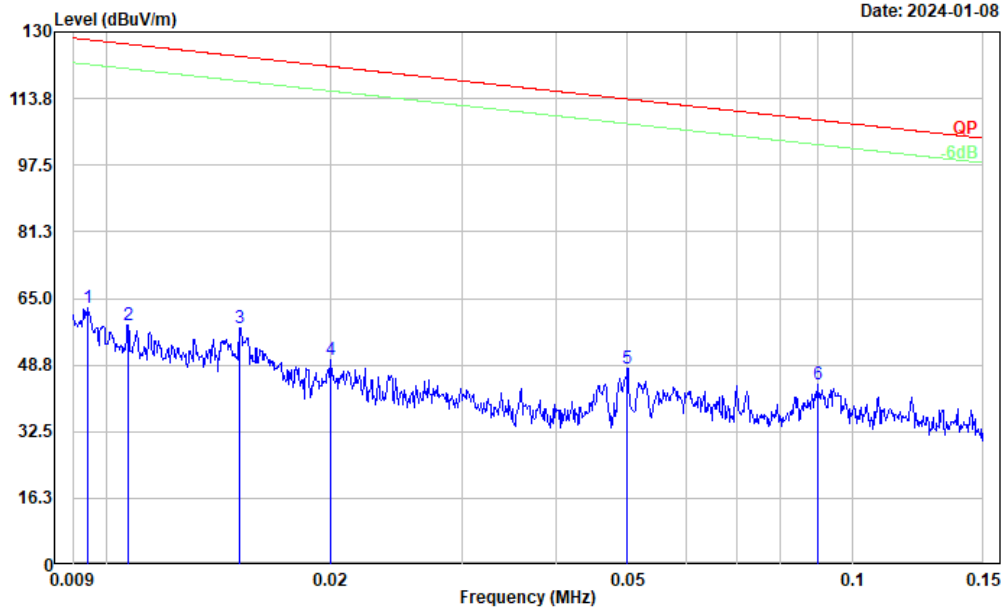


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	4.05	58.53	62.58	128.13	65.55	Peak
2	0.011	1.08	57.45	58.53	127.03	68.50	Peak
3	0.015	2.90	54.88	57.78	124.02	66.24	Peak
4	0.020	-2.12	52.04	49.92	121.60	71.68	Peak
5	0.050	5.57	42.47	48.04	113.64	65.60	Peak
6	0.090	6.62	37.34	43.96	108.53	64.57	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 1# + Adapter 3#

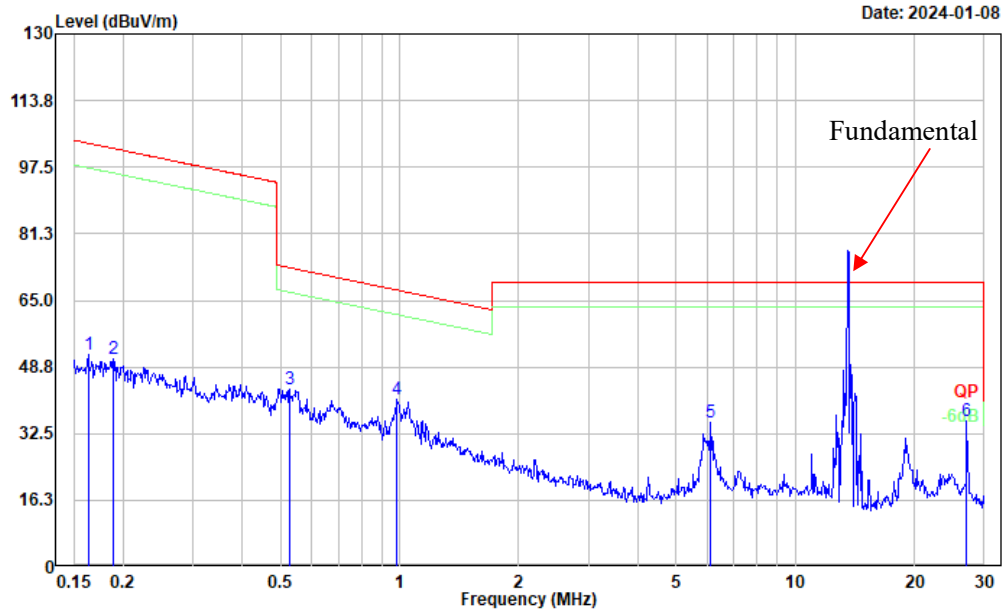

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.163	18.63	33.33	51.96	103.35	51.39	Peak
2	0.189	18.69	32.10	50.79	102.06	51.27	Peak
3	0.527	21.35	22.13	43.48	73.16	29.68	Peak
4	0.984	24.15	16.76	40.91	67.62	26.71	Peak
5	6.121	30.89	4.18	35.07	69.54	34.47	Peak
6	27.127	34.05	1.52	35.57	69.54	33.97	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 1# + Adapter 3#

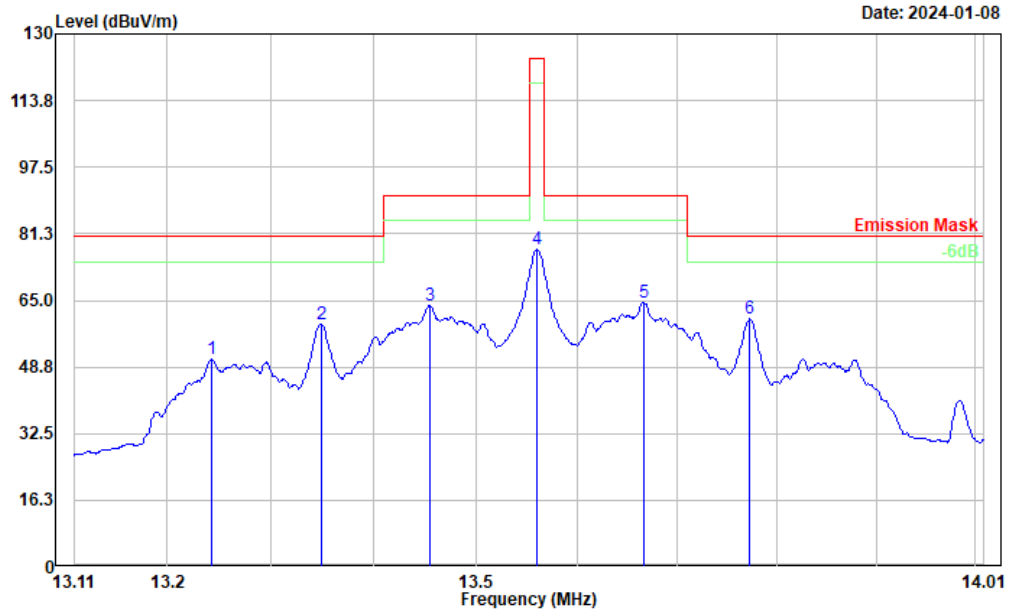

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	48.45	2.13	50.58	80.51	29.93	Peak
2	13.349	57.23	2.12	59.35	80.51	21.16	Peak
3	13.455	61.55	2.10	63.65	90.47	26.82	Peak
4	13.561	75.36	2.10	77.46	124.00	46.54	Peak
5	13.666	62.36	2.08	64.44	90.47	26.03	Peak
6	13.772	58.38	2.06	60.44	80.51	20.07	Peak


Perpendicular:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 1# + Adapter 3#

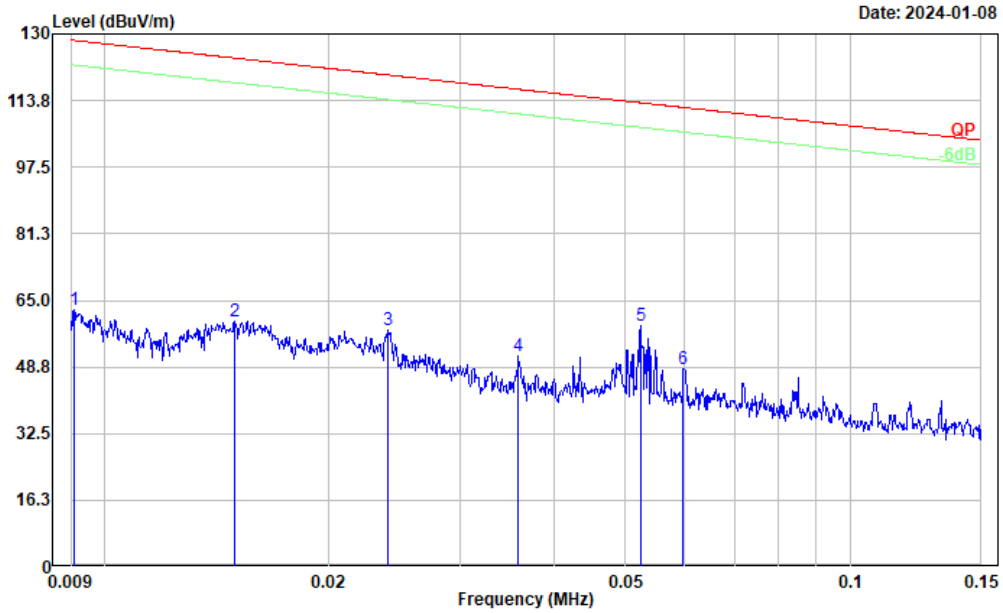

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	3.74	58.89	62.63	128.42	65.79	Peak
2	0.015	5.02	54.98	60.00	124.12	64.12	Peak
3	0.024	7.90	49.99	57.89	119.99	62.10	Peak
4	0.036	5.74	45.62	51.36	116.50	65.14	Peak
5	0.052	16.53	42.13	58.66	113.22	54.56	Peak
6	0.060	7.22	41.13	48.35	112.07	63.72	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 1# + Adapter 3#

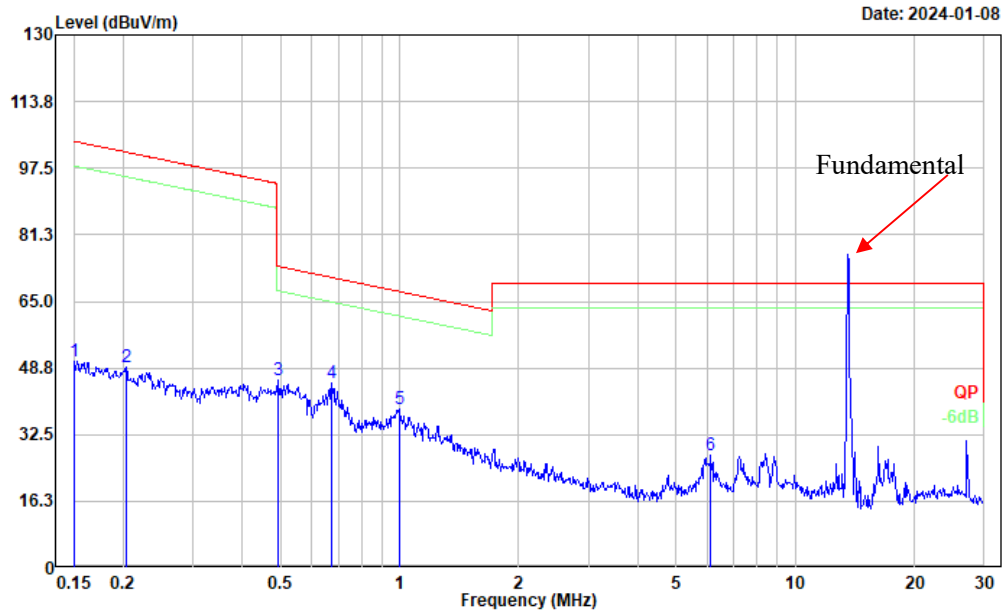

Date: 2024-01-08

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.150	16.33	33.96	50.29	104.08	53.79	Peak
2	0.204	17.63	31.41	49.04	101.41	52.37	Peak
3	0.491	23.28	22.67	45.95	73.77	27.82	Peak
4	0.675	24.86	20.16	45.02	70.95	25.93	Peak
5	1.000	22.17	16.61	38.78	67.48	28.70	Peak
6	6.121	23.24	4.18	27.42	69.54	42.12	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 1# + Adapter 3#

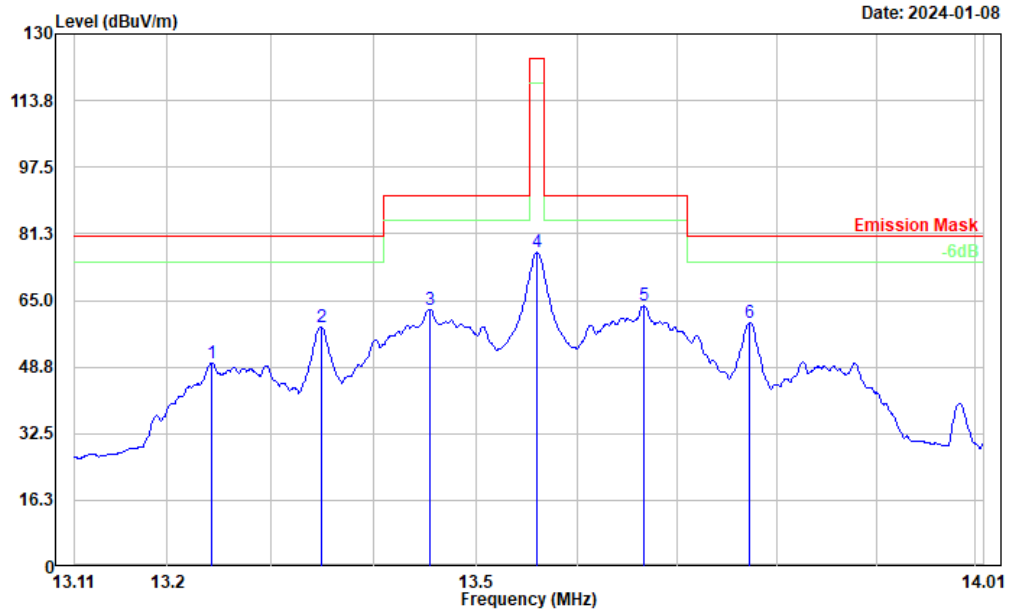

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13.242	47.64	2.13	49.77	80.51	30.74	Peak
2	13.349	56.45	2.12	58.57	80.51	21.94	Peak
3	13.455	60.77	2.10	62.87	90.47	27.60	Peak
4	13.561	74.58	2.10	76.68	124.00	47.32	Peak
5	13.666	61.56	2.08	63.64	90.47	26.83	Peak
6	13.772	57.60	2.06	59.66	80.51	20.85	Peak


Ground-parallel:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 1# + Adapter 3#

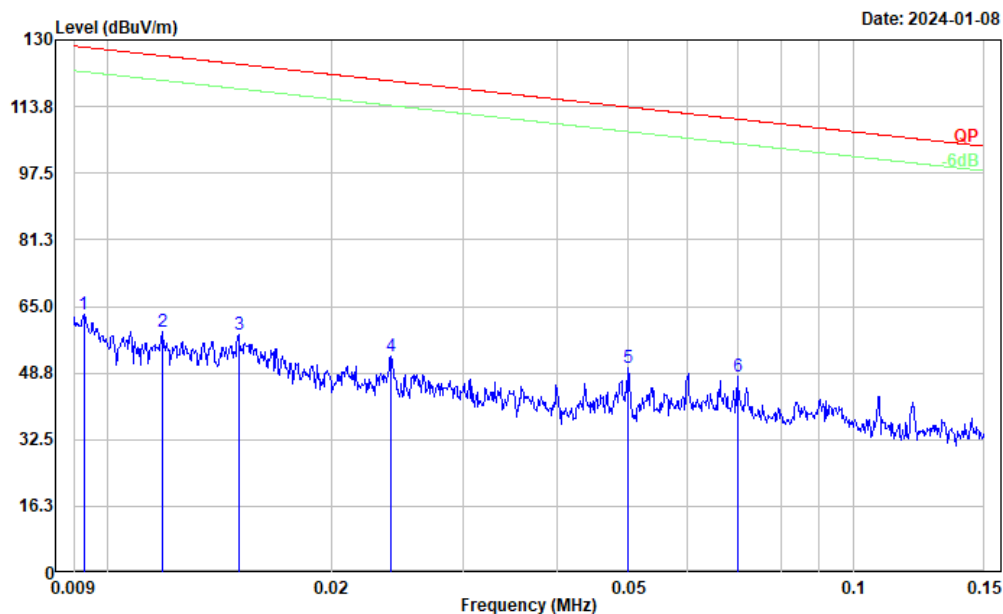


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	4.27	58.69	62.96	128.25	65.29	Peak
2	0.012	2.02	56.79	58.81	126.15	67.34	Peak
3	0.015	3.20	54.95	58.15	124.10	65.95	Peak
4	0.024	3.03	49.99	53.02	119.99	66.97	Peak
5	0.050	7.49	42.47	49.96	113.64	63.68	Peak
6	0.070	8.23	39.71	47.94	110.70	62.76	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 1# + Adapter 3#

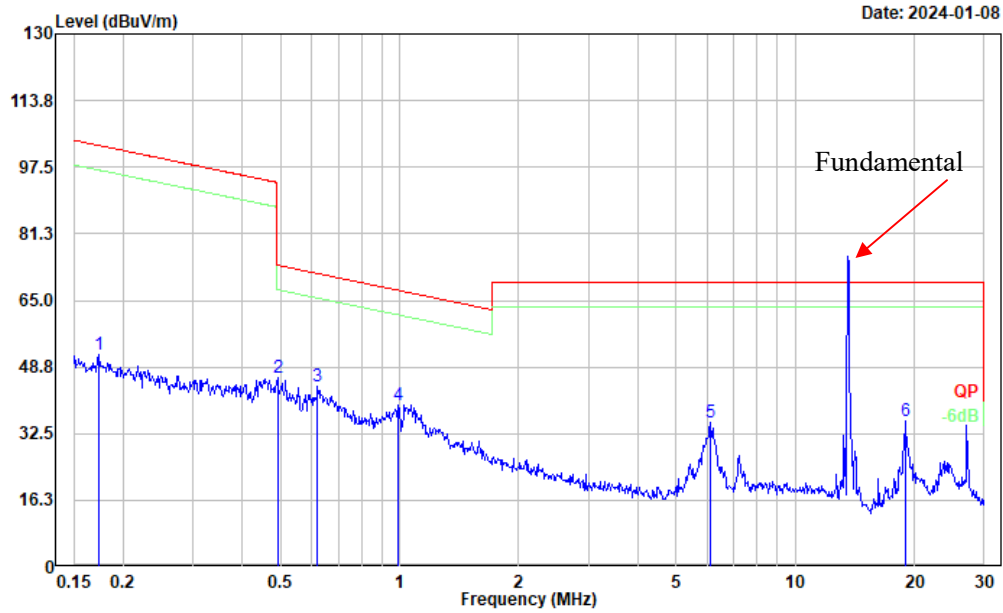

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.173	18.95	32.87	51.82	102.84	51.02	Peak
2	0.491	23.33	22.67	46.00	73.77	27.77	Peak
3	0.621	23.03	20.87	43.90	71.71	27.81	Peak
4	0.994	22.86	16.66	39.52	67.52	28.00	Peak
5	6.121	30.92	4.18	35.10	69.54	34.44	Peak
6	18.920	33.81	1.71	35.52	69.54	34.02	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 1# + Adapter 3#

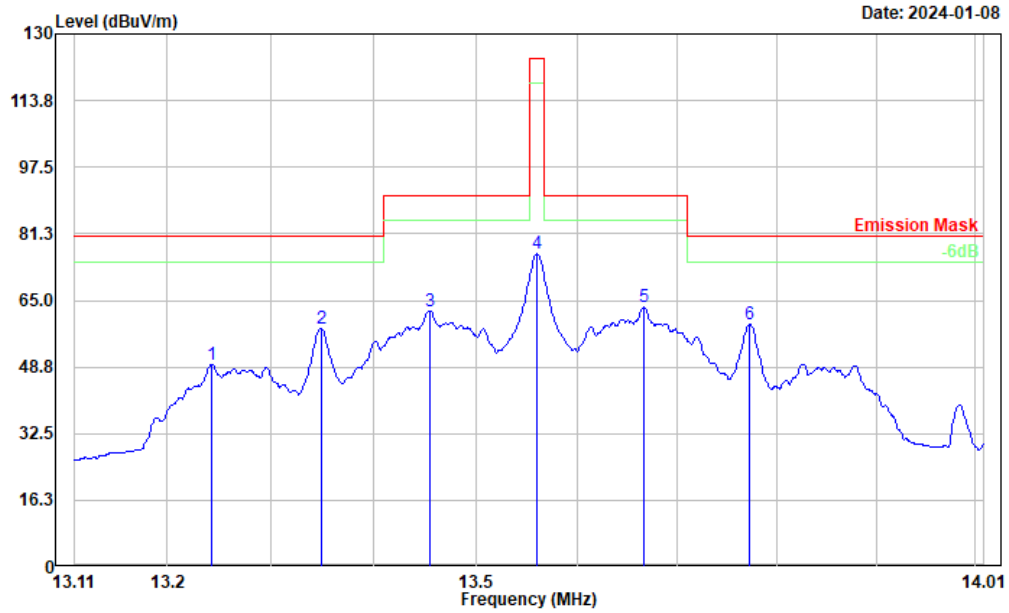

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	13.243	47.25	2.13	49.38	80.51	31.13	Peak
2	13.349	56.09	2.12	58.21	80.51	22.30	Peak
3	13.455	60.38	2.10	62.48	90.47	27.99	Peak
4	13.561	74.19	2.10	76.29	124.00	47.71	Peak
5	13.666	61.17	2.08	63.25	90.47	27.22	Peak
6	13.772	57.22	2.06	59.28	80.51	21.23	Peak


**Screen 2#+Adapter 1#:
Parallel:**

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 2# + Adapter 1#

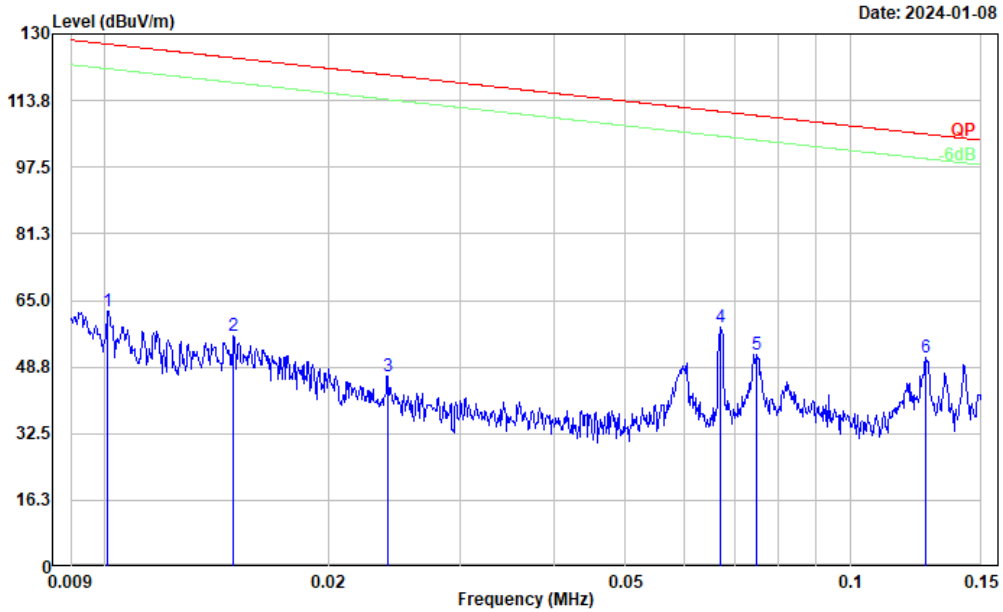

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.010	4.72	57.79	62.51	127.52	65.01	Peak
2	0.015	1.49	55.00	56.49	124.15	67.66	Peak
3	0.024	-3.50	50.02	46.52	120.02	73.50	Peak
4	0.067	18.48	40.11	58.59	111.07	52.48	Peak
5	0.075	12.94	39.01	51.95	110.09	58.14	Peak
6	0.126	15.85	35.08	50.93	105.57	54.64	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 2# + Adapter 1#

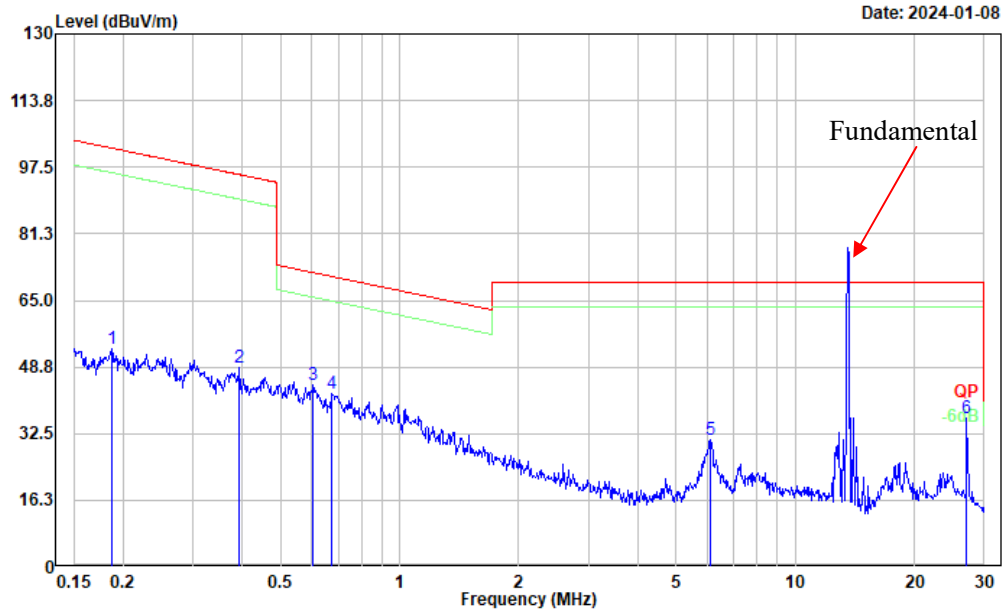

Date: 2024-01-08

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.187	21.09	32.20	53.29	102.15	48.86	Peak
2	0.393	23.66	24.80	48.46	95.71	47.25	Peak
3	0.604	23.16	21.09	44.25	71.94	27.69	Peak
4	0.675	22.28	20.16	42.44	70.95	28.51	Peak
5	6.089	26.67	4.20	30.87	69.54	38.67	Peak
6	27.127	34.73	1.52	36.25	69.54	33.29	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 2# + Adapter 1#

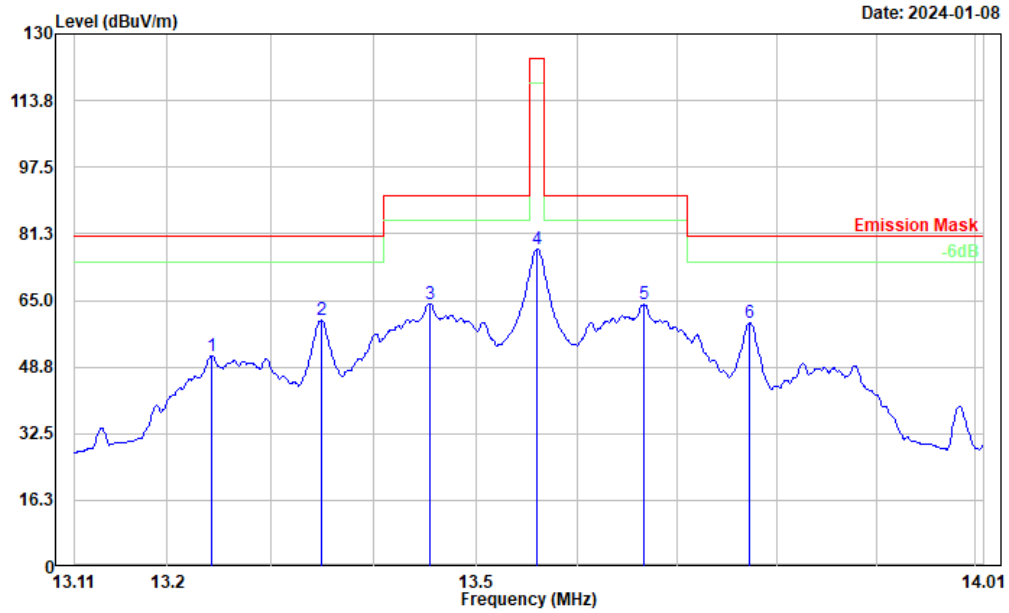

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.243	49.39	2.13	51.52	80.51	28.99	Peak
2	13.349	57.99	2.12	60.11	80.51	20.40	Peak
3	13.455	62.12	2.10	64.22	90.47	26.25	Peak
4	13.561	75.49	2.10	77.59	124.00	46.41	Peak
5	13.666	61.96	2.08	64.04	90.47	26.43	Peak
6	13.772	57.44	2.06	59.50	80.51	21.01	Peak

Perpendicular:


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 2# + Adapter 1#

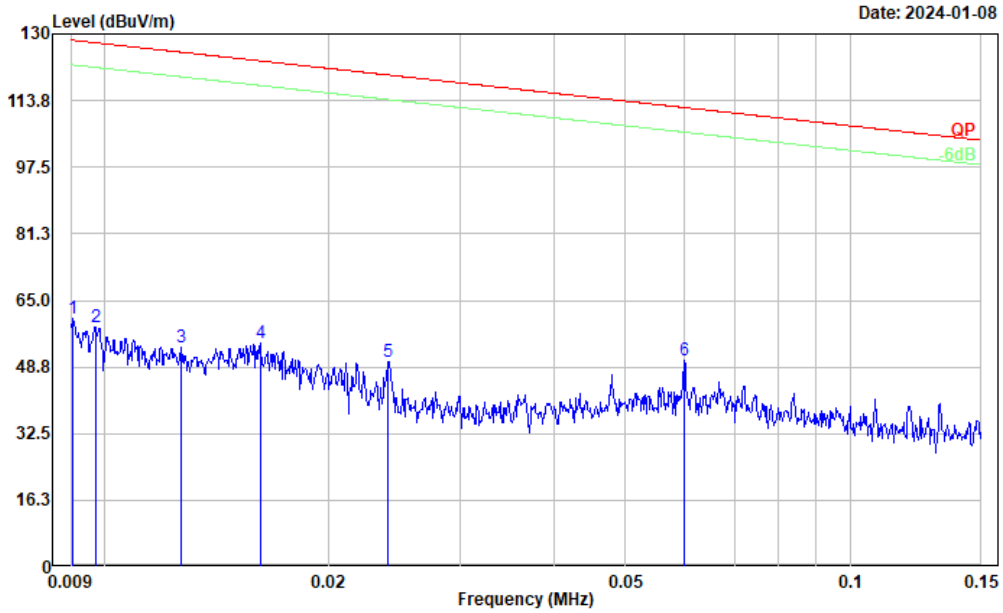

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	1.54	58.92	60.46	128.45	67.99	Peak
2	0.010	0.32	58.19	58.51	127.86	69.35	Peak
3	0.013	-2.86	56.30	53.44	125.56	72.12	Peak
4	0.016	0.17	54.26	54.43	123.44	69.01	Peak
5	0.024	0.08	49.99	50.07	119.99	69.92	Peak
6	0.060	9.10	41.11	50.21	112.05	61.84	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 2# + Adapter 1#

Date: 2024-01-08

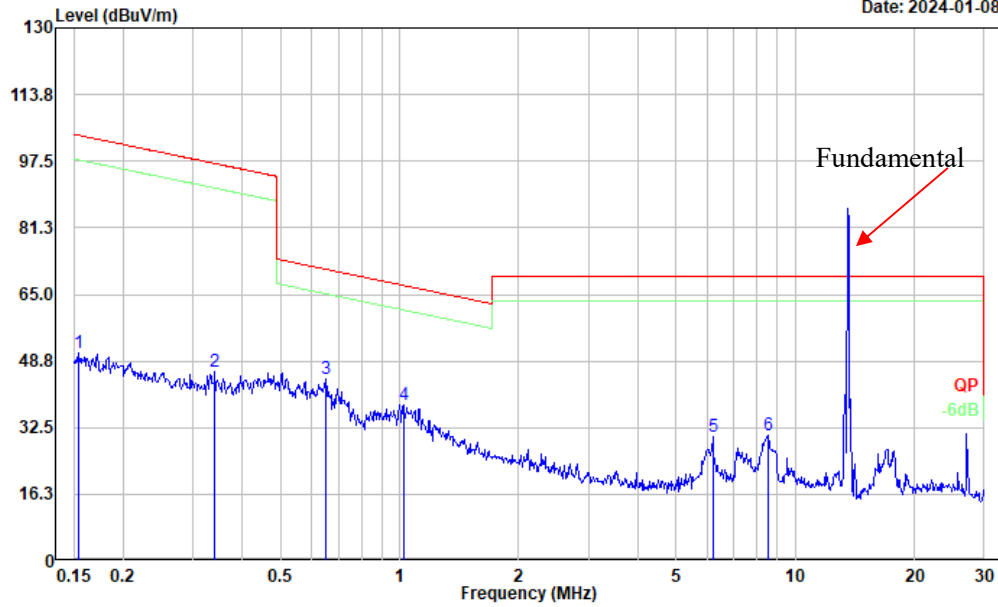

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.154	16.91	33.77	50.68	103.85	53.17	Peak
2	0.341	20.09	25.96	46.05	96.95	50.90	Peak
3	0.651	23.95	20.49	44.44	71.28	26.84	Peak
4	1.021	21.68	16.49	38.17	67.29	29.12	Peak
5	6.186	26.28	4.15	30.43	69.54	39.11	Peak
6	8.546	27.60	3.02	30.62	69.54	38.92	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 2# + Adapter 1#

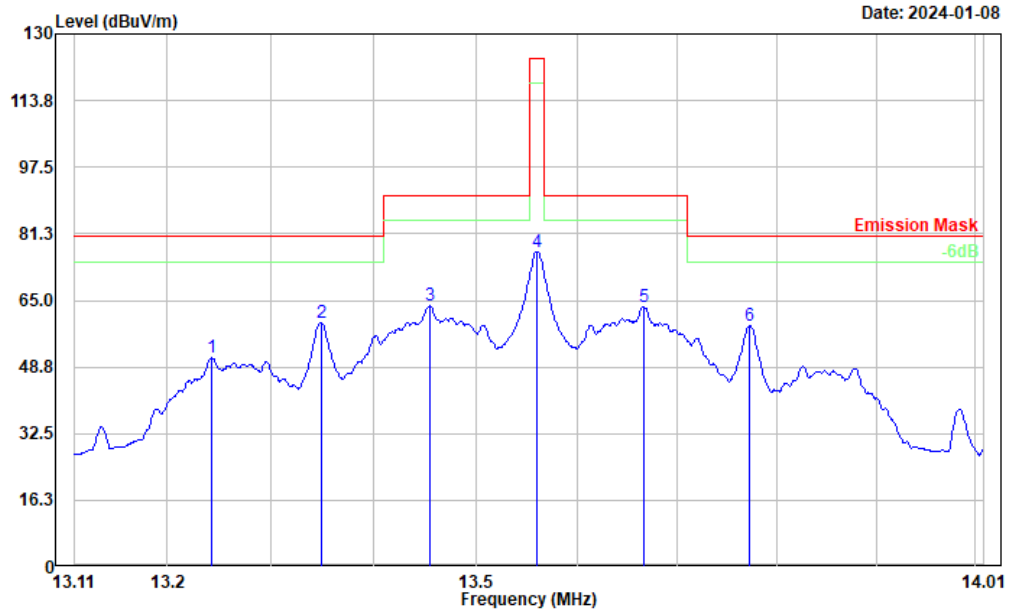

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.243	48.86	2.13	50.99	80.51	29.52	Peak
2	13.349	57.39	2.12	59.51	80.51	21.00	Peak
3	13.455	61.50	2.10	63.60	90.47	26.87	Peak
4	13.561	74.80	2.10	76.90	124.00	47.10	Peak
5	13.666	61.29	2.08	63.37	90.47	27.10	Peak
6	13.772	56.76	2.06	58.82	80.51	21.69	Peak


Ground-parallel:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 2# + Adapter 1#

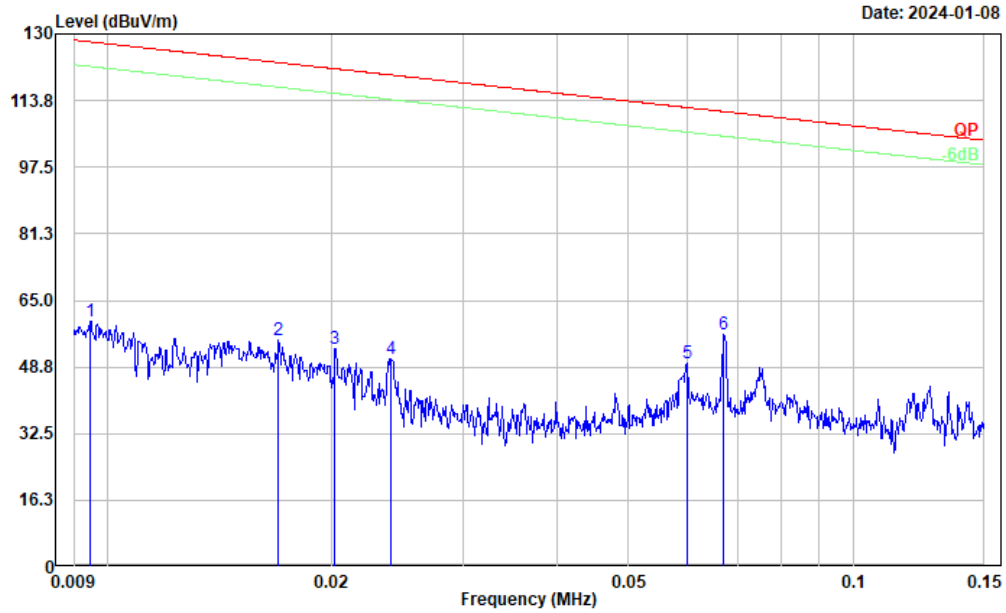

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	1.47	58.47	59.94	128.08	68.14	Peak
2	0.017	1.43	53.80	55.23	123.02	67.79	Peak
3	0.020	1.36	51.93	53.29	121.51	68.22	Peak
4	0.024	0.77	49.99	50.76	119.99	69.23	Peak
5	0.060	8.51	41.11	49.62	112.05	62.43	Peak
6	0.067	16.46	40.11	56.57	111.07	54.50	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 2# + Adapter 1#

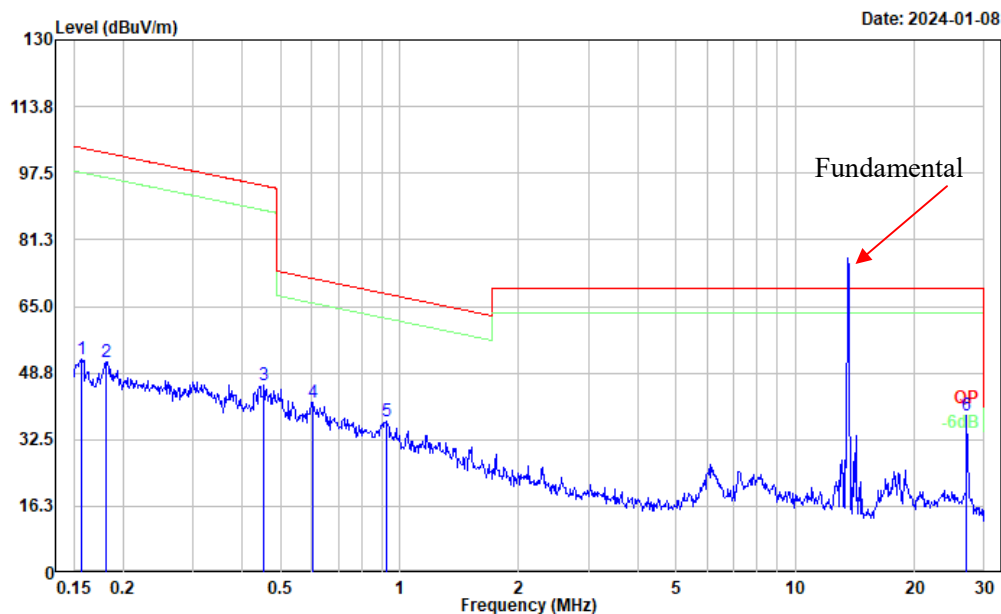

Date: 2024-01-08

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.156	18.53	33.66	52.19	103.71	51.52	Peak
2	0.182	18.95	32.47	51.42	102.43	51.01	Peak
3	0.454	22.26	23.49	45.75	94.46	48.71	Peak
4	0.601	20.49	21.13	41.62	71.99	30.37	Peak
5	0.923	19.77	17.34	37.11	68.18	31.07	Peak
6	27.127	36.98	1.52	38.50	69.54	31.04	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 2# + Adapter 1#

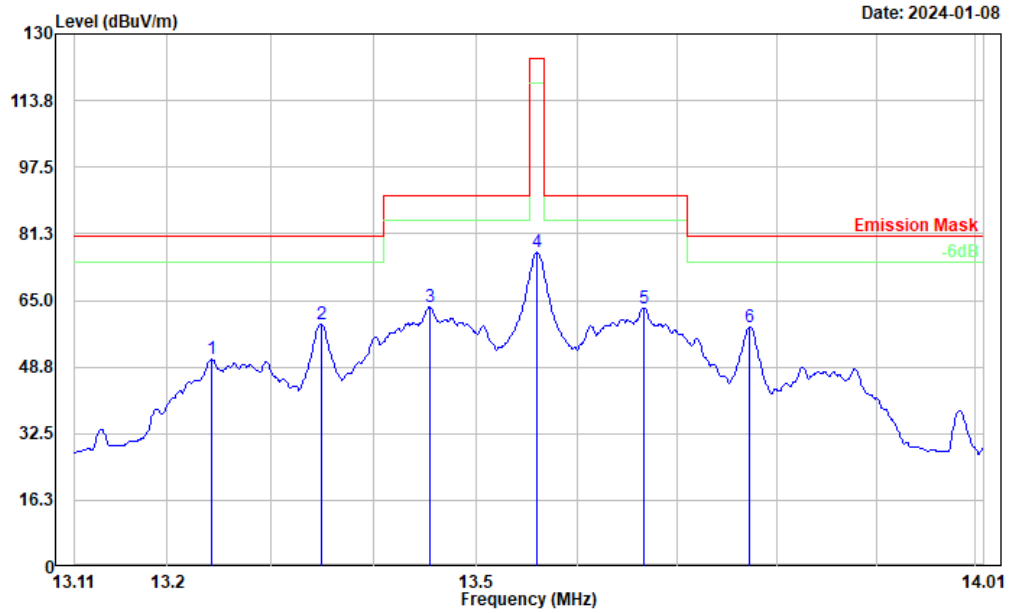

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	48.50	2.13	50.63	80.51	29.88	Peak
2	13.349	57.18	2.12	59.30	80.51	21.21	Peak
3	13.455	61.22	2.10	63.32	90.47	27.15	Peak
4	13.561	74.61	2.10	76.71	124.00	47.29	Peak
5	13.666	60.99	2.08	63.07	90.47	27.40	Peak
6	13.772	56.54	2.06	58.60	80.51	21.91	Peak


**Screen 3#+Adapter 1#:
Parallel:**

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 3# + Adapter 1#

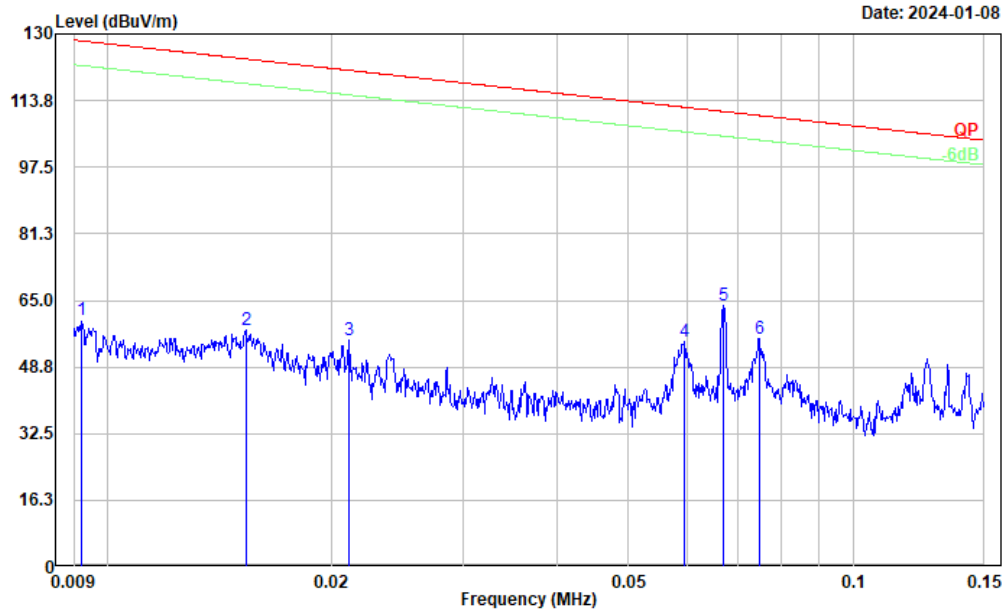


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	1.33	58.74	60.07	128.30	68.23	Peak
2	0.015	2.91	54.75	57.66	123.90	66.24	Peak
3	0.021	3.80	51.49	55.29	121.14	65.85	Peak
4	0.059	13.84	41.18	55.02	112.12	57.10	Peak
5	0.067	23.79	40.11	63.90	111.07	47.17	Peak
6	0.075	16.64	39.04	55.68	110.12	54.44	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 3# + Adapter 1#

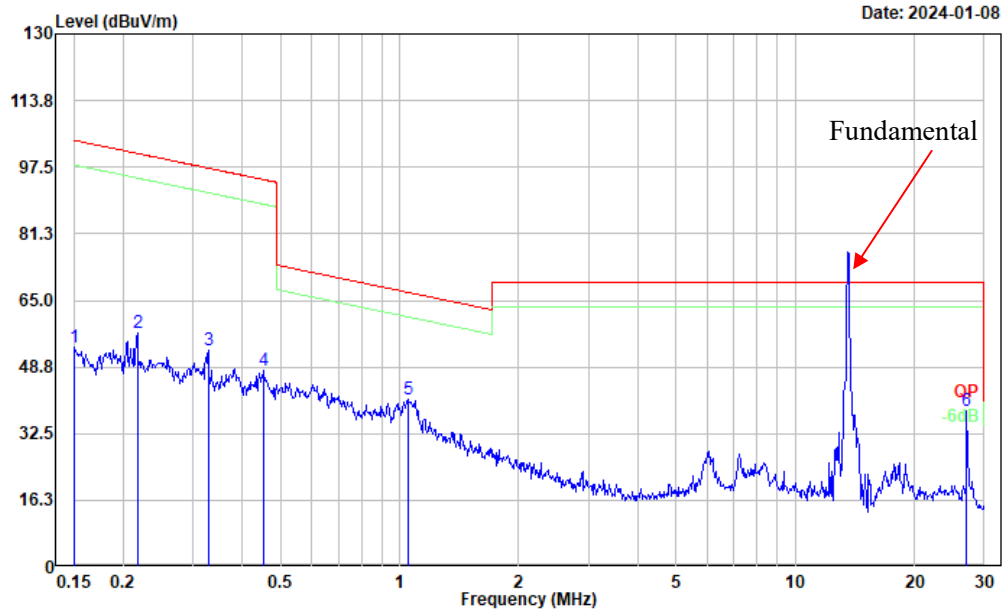

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.151	19.72	33.93	53.65	104.04	50.39	Peak
2	0.217	26.21	30.78	56.99	100.86	43.87	Peak
3	0.329	26.56	26.23	52.79	97.27	44.48	Peak
4	0.452	24.23	23.55	47.78	94.51	46.73	Peak
5	1.049	24.57	16.34	40.91	67.05	26.14	Peak
6	27.127	36.42	1.52	37.94	69.54	31.60	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Parallel
 Note: Transmitting + Screen 3# + Adapter 1#

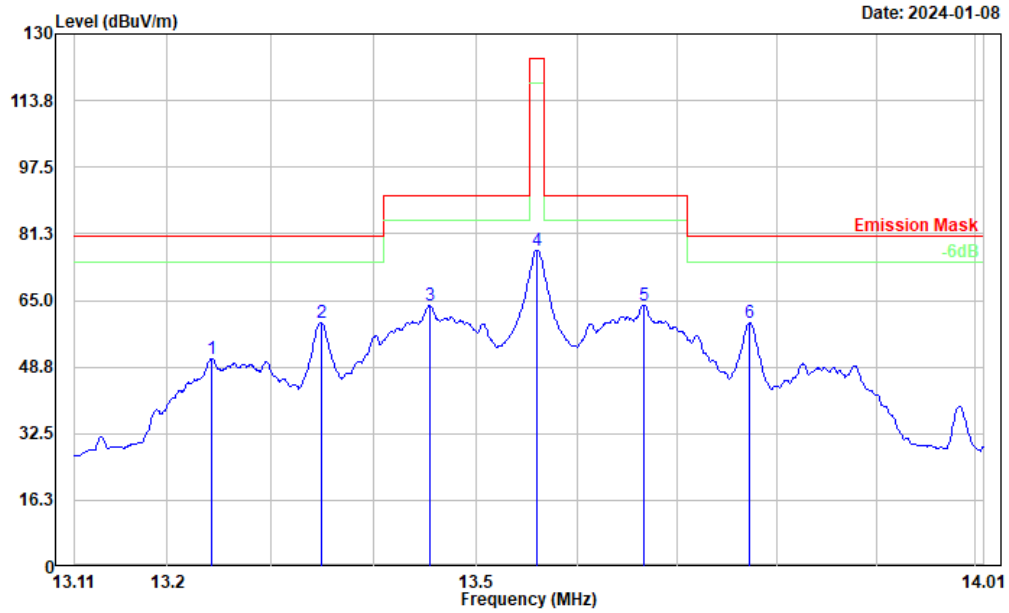

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	48.75	2.13	50.88	80.51	29.63	Peak
2	13.349	57.37	2.12	59.49	80.51	21.02	Peak
3	13.455	61.61	2.10	63.71	90.47	26.76	Peak
4	13.561	75.13	2.10	77.23	124.00	46.77	Peak
5	13.666	61.80	2.08	63.88	90.47	26.59	Peak
6	13.772	57.42	2.06	59.48	80.51	21.03	Peak


Perpendicular:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 3# + Adapter 1#

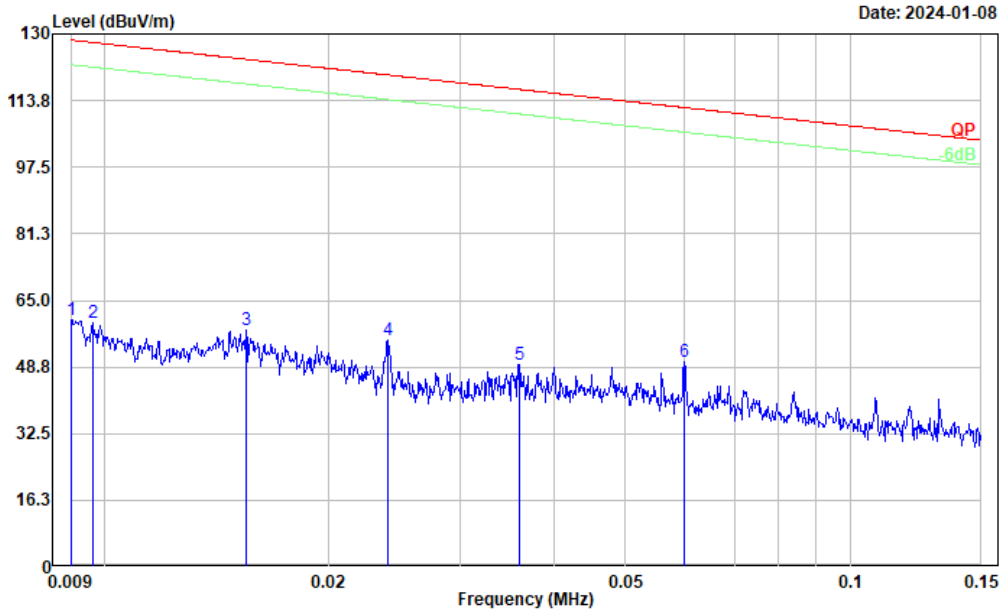


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	1.39	58.98	60.37	128.50	68.13	Peak
2	0.010	1.20	58.28	59.48	127.93	68.45	Peak
3	0.015	3.18	54.65	57.83	123.80	65.97	Peak
4	0.024	5.31	50.02	55.33	120.02	64.69	Peak
5	0.036	3.82	45.59	49.41	116.47	67.06	Peak
6	0.060	9.09	41.11	50.20	112.05	61.85	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 3# + Adapter 1#

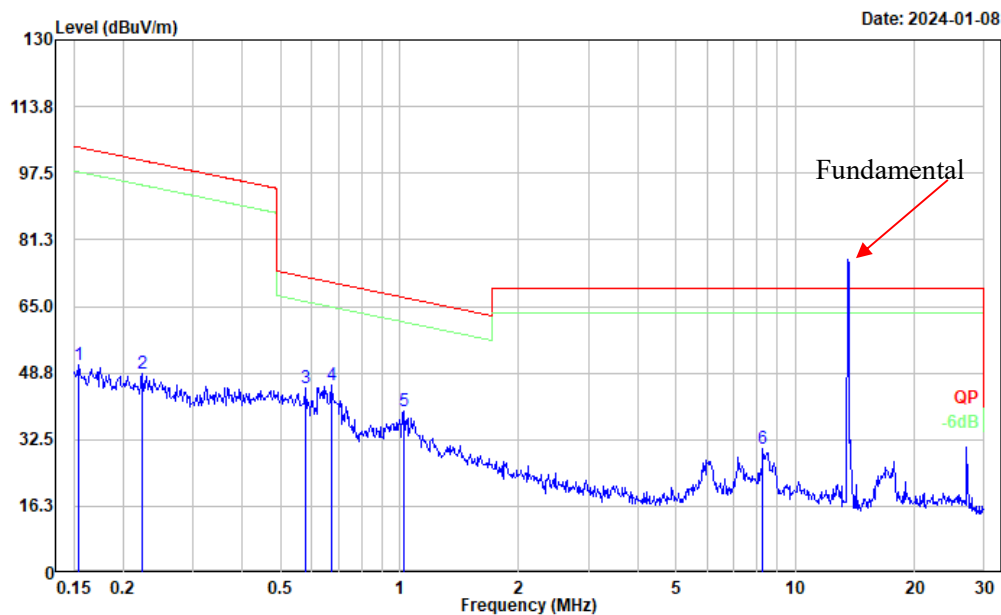

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	0.154	16.95	33.77	50.72	103.85	53.13	Peak
2	0.223	18.15	30.50	48.65	100.63	51.98	Peak
3	0.576	23.47	21.46	44.93	72.36	27.43	Peak
4	0.672	25.67	20.21	45.88	71.00	25.12	Peak
5	1.021	23.02	16.49	39.51	67.29	27.78	Peak
6	8.279	27.28	3.08	30.36	69.54	39.18	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note: Transmitting + Screen 3# + Adapter 1#

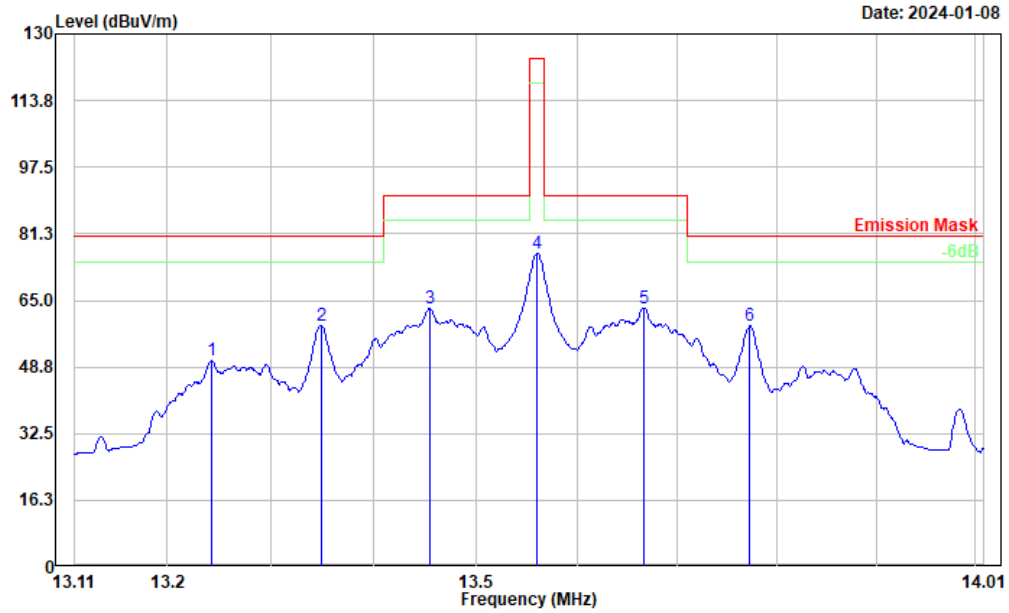


Date: 2024-01-08

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	48.11	2.13	50.24	80.51	30.27	Peak
2	13.349	56.68	2.12	58.80	80.51	21.71	Peak
3	13.455	60.88	2.10	62.98	90.47	27.49	Peak
4	13.561	74.36	2.10	76.46	124.00	47.54	Peak
5	13.666	61.03	2.08	63.11	90.47	27.36	Peak
6	13.772	56.66	2.06	58.72	80.51	21.79	Peak


Ground-parallel:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 3# + Adapter 1#

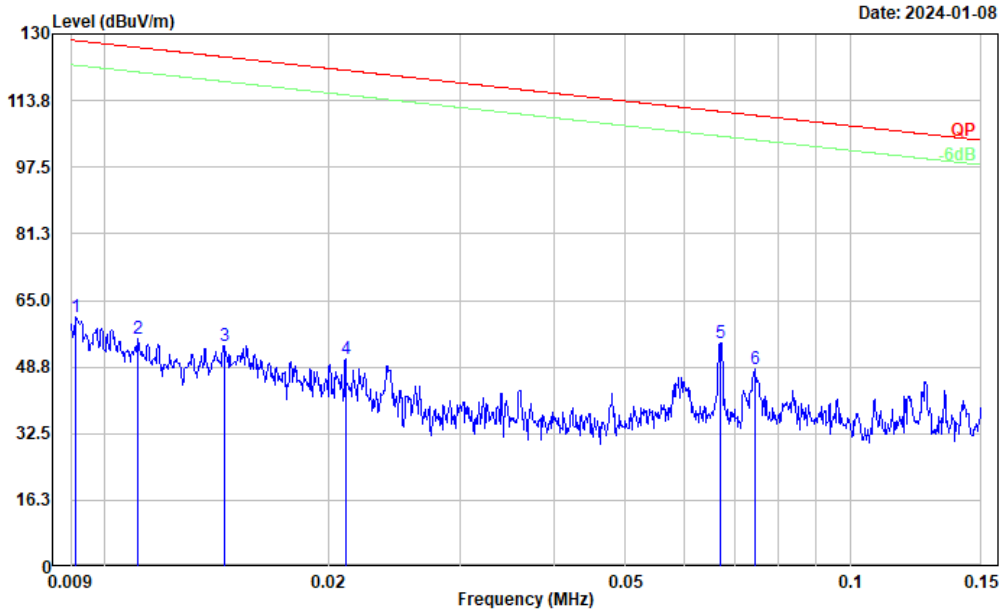

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	2.27	58.83	61.10	128.37	67.27	Peak
2	0.011	-1.39	57.21	55.82	126.71	70.89	Peak
3	0.014	-1.29	55.24	53.95	124.39	70.44	Peak
4	0.021	-0.87	51.49	50.62	121.14	70.52	Peak
5	0.067	14.65	40.11	54.76	111.07	56.31	Peak
6	0.074	9.06	39.10	48.16	110.17	62.01	Peak


Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 3# + Adapter 1#

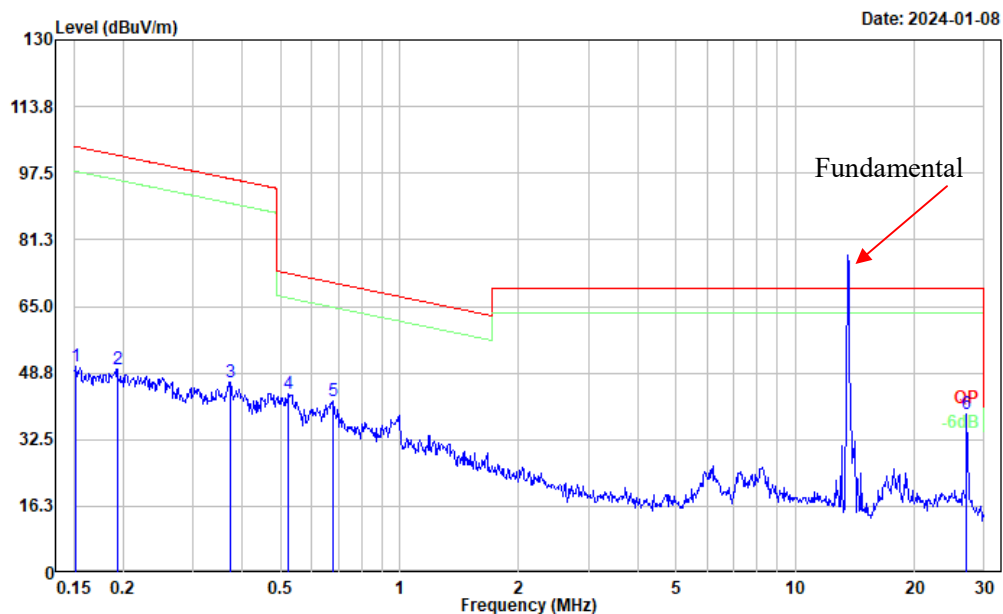

Date: 2024-01-08

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.152	16.63	33.85	50.48	103.94	53.46	Peak
2	0.193	17.90	31.91	49.81	101.87	52.06	Peak
3	0.373	21.27	25.25	46.52	96.17	49.65	Peak
4	0.524	21.54	22.16	43.70	73.21	29.51	Peak
5	0.679	21.89	20.11	42.00	70.91	28.91	Peak
6	27.127	37.19	1.52	38.71	69.54	30.83	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note: Transmitting + Screen 3# + Adapter 1#

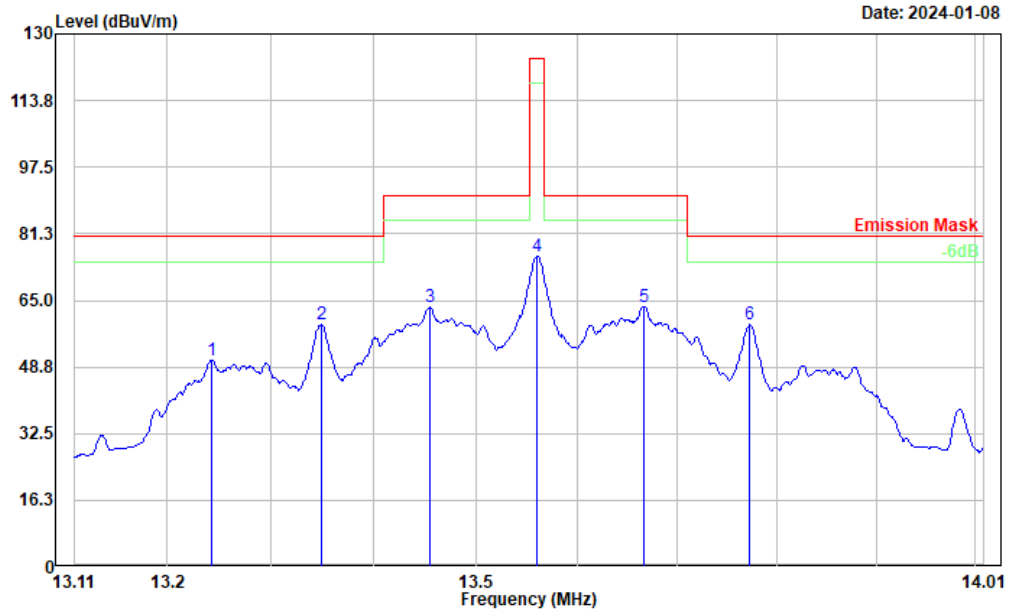


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.242	48.31	2.13	50.44	80.51	30.07	Peak
2	13.349	56.98	2.12	59.10	80.51	21.41	Peak
3	13.455	61.17	2.10	63.27	90.47	27.20	Peak
4	13.561	73.70	2.10	75.80	124.00	48.20	Peak
5	13.666	61.35	2.08	63.43	90.47	27.04	Peak
6	13.772	56.97	2.06	59.03	80.51	21.48	Peak

**30MHz-1GHz:
Screen 1#+Adapter 1#:**

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: horizontal
 Note: Transmitting + Screen1# + Adapter 1#


Date: 2024-01-05

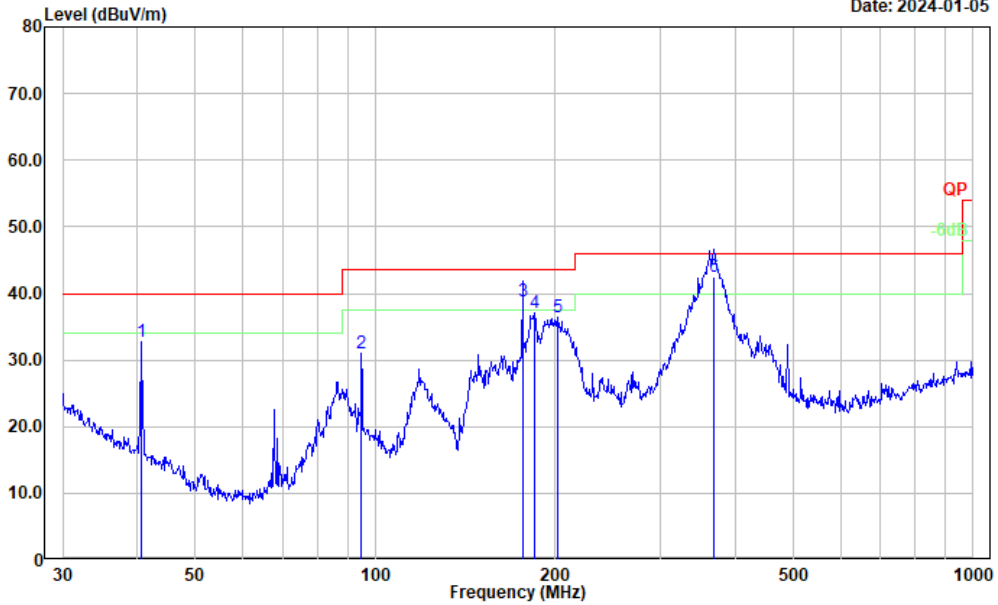

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	44.42	-11.61	32.81	40.00	7.19	Peak
2	94.760	46.98	-16.06	30.92	43.50	12.58	Peak
3	176.269	52.06	-13.20	38.86	43.50	4.64	QP
4	184.490	50.94	-13.78	37.16	43.50	6.34	Peak
5	201.393	49.09	-12.61	36.48	43.50	7.02	Peak
6	368.131	51.75	-9.18	42.57	46.00	3.43	QP

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: vertical
 Note: Transmitting + Screen1# + Adapter 1#

Date: 2024-01-05

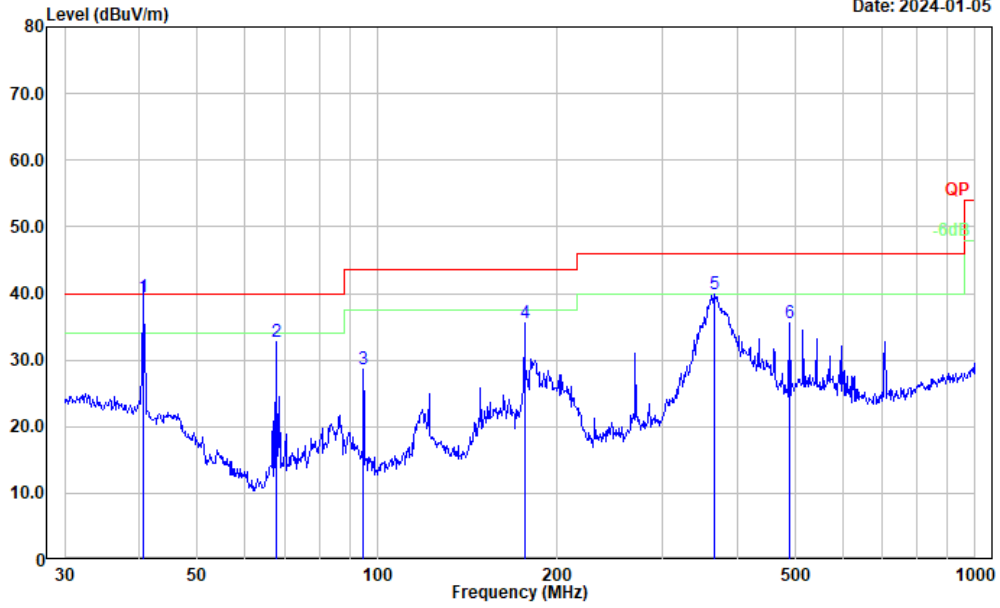


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	51.10	-11.61	39.49	40.00	0.51	QP
2	67.675	49.94	-17.23	32.71	40.00	7.29	Peak
3	94.760	44.63	-16.06	28.57	43.50	14.93	Peak
4	176.269	48.72	-13.20	35.52	43.50	7.98	Peak
5	365.539	49.14	-9.22	39.92	46.00	6.08	Peak
6	489.027	41.47	-5.95	35.52	46.00	10.48	Peak

Screen 1#+Adapter 2#:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: horizontal
 Note: Transmitting + Screen1# + Adapter 2#


Date: 2024-01-05

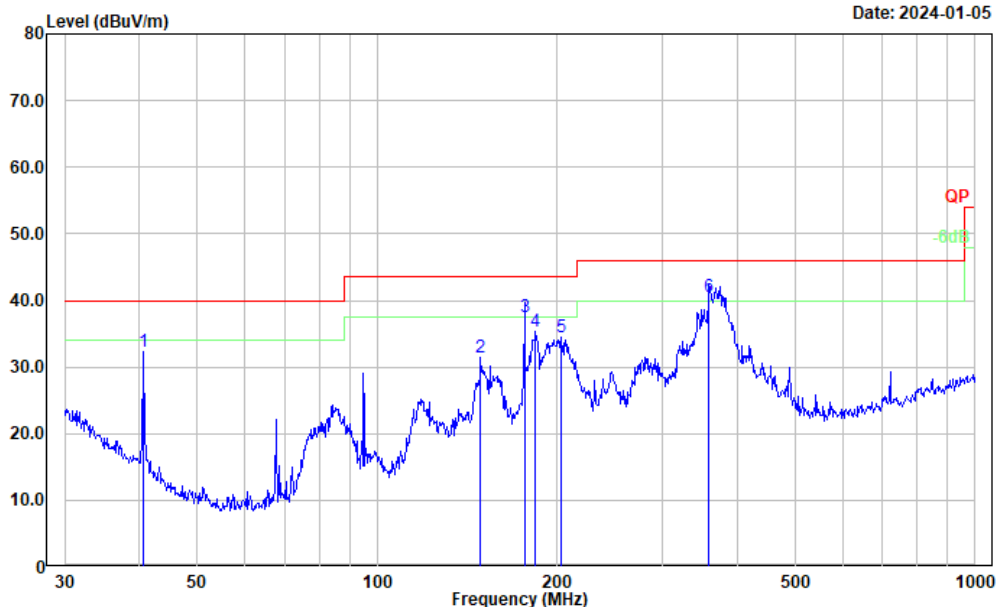

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	43.84	-11.61	32.23	40.00	7.77	Peak
2	148.963	43.61	-12.09	31.52	43.50	11.98	Peak
3	176.269	50.81	-13.20	37.61	43.50	5.89	QP
4	183.844	49.11	-13.76	35.35	43.50	8.15	Peak
5	203.523	47.41	-13.01	34.40	43.50	9.10	Peak
6	359.186	49.89	-9.35	40.54	46.00	5.46	QP

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: vertical
 Note: Transmitting + Screen1# + Adapter 2#

Date: 2024-01-05

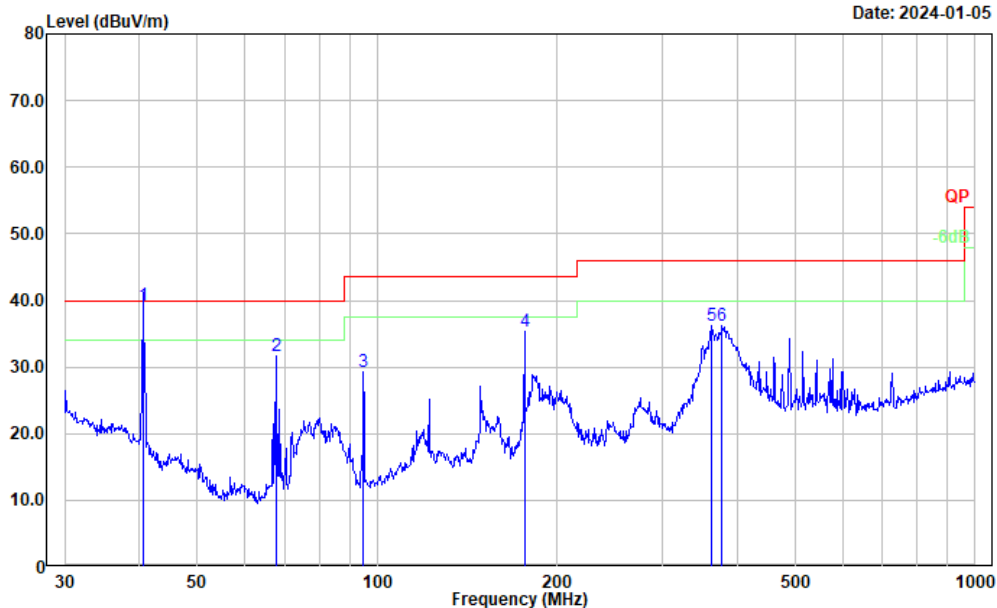


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	50.92	-11.61	39.31	40.00	0.69	QP
2	67.675	48.82	-17.23	31.59	40.00	8.41	Peak
3	94.760	45.24	-16.06	29.18	43.50	14.32	Peak
4	176.269	48.48	-13.20	35.28	43.50	8.22	Peak
5	361.714	45.55	-9.30	36.25	46.00	9.75	Peak
6	377.259	45.17	-8.88	36.29	46.00	9.71	Peak

Screen 1#+Adapter 3#:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: horizontal
 Note: Transmitting + Screen1# + Adapter 3#


Date: 2024-01-05

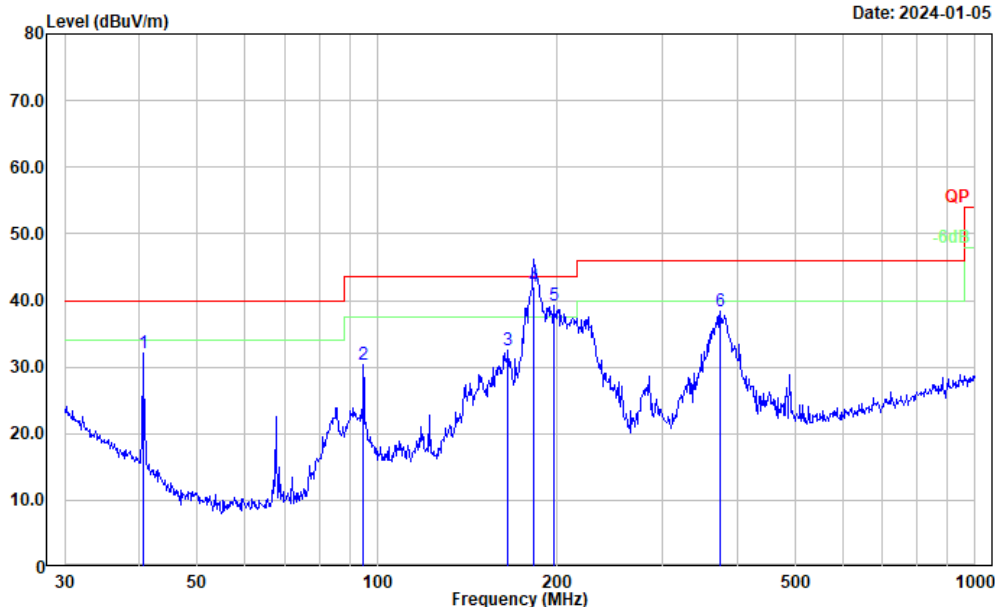

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	43.60	-11.61	31.99	40.00	8.01	Peak
2	94.760	46.52	-16.06	30.46	43.50	13.04	Peak
3	165.487	44.80	-12.24	32.56	43.50	10.94	Peak
4	182.559	55.73	-13.64	42.09	43.50	1.41	QP
5	197.200	52.13	-12.90	39.23	43.50	4.27	Peak
6	374.623	47.32	-9.04	38.28	46.00	7.72	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: vertical
 Note: Transmitting + Screen1# + Adapter 3#

Date: 2024-01-05

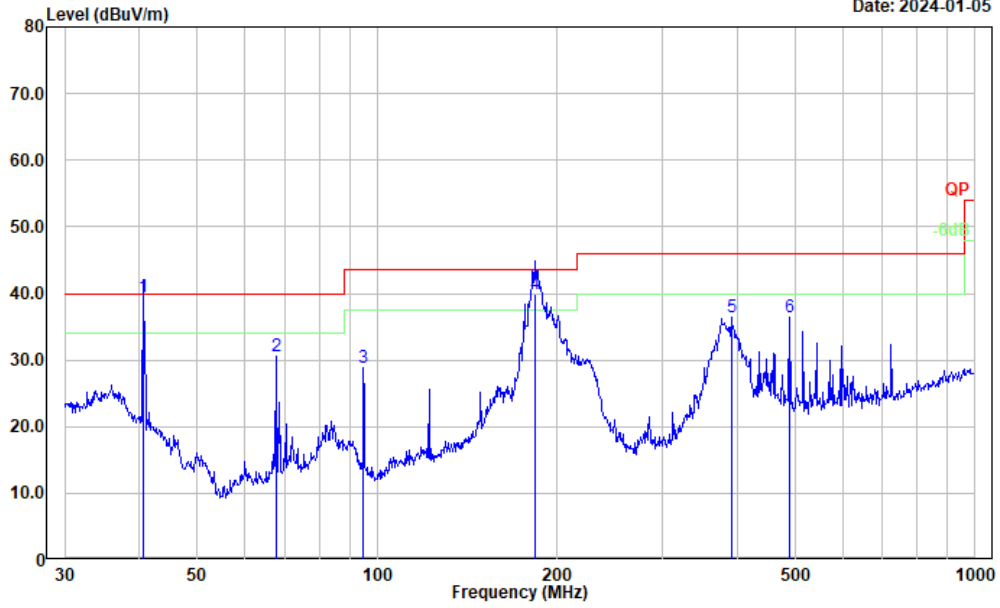


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	51.07	-11.61	39.46	40.00	0.54	QP
2	67.675	47.78	-17.23	30.55	40.00	9.45	Peak
3	94.760	44.87	-16.06	28.81	43.50	14.69	Peak
4	183.201	53.54	-13.70	39.84	43.50	3.66	QP
5	390.723	44.89	-8.43	36.46	46.00	9.54	Peak
6	489.027	42.30	-5.95	36.35	46.00	9.65	Peak

Screen 2#+Adapter 1#:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: horizontal
 Note: Transmitting + Screen2# + Adapter 1#


Date: 2024-01-05

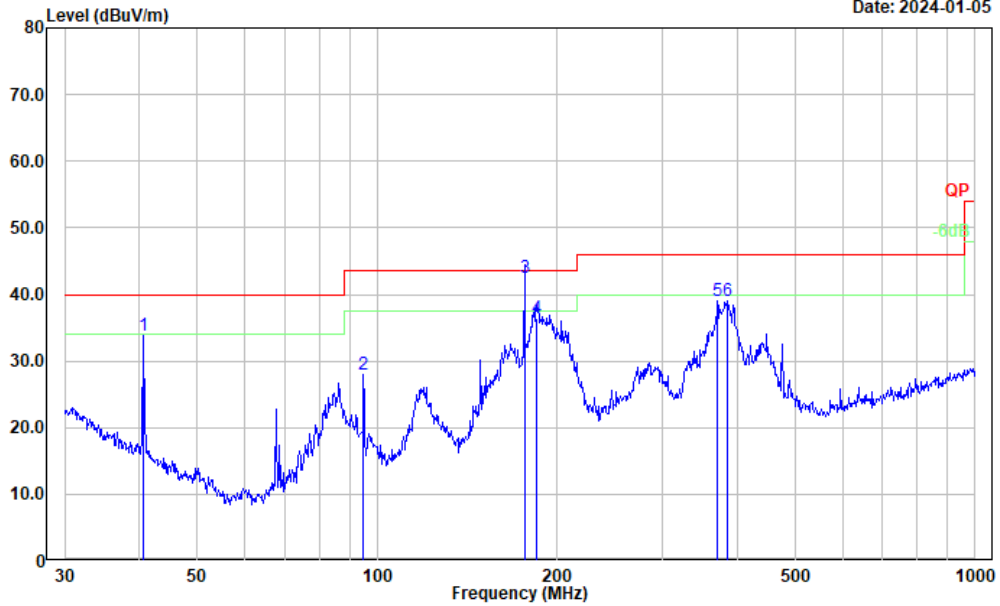

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	45.38	-11.61	33.77	40.00	6.23	Peak
2	94.760	44.05	-16.06	27.99	43.50	15.51	Peak
3	176.269	55.64	-13.20	42.44	43.50	1.06	QP
4	185.138	50.22	-13.78	36.44	43.50	7.06	QP
5	370.702	48.12	-9.13	38.99	46.00	7.01	Peak
6	385.281	47.53	-8.58	38.95	46.00	7.05	Peak

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: vertical
 Note: Transmitting + Screen2# + Adapter 1#

Date: 2024-01-05

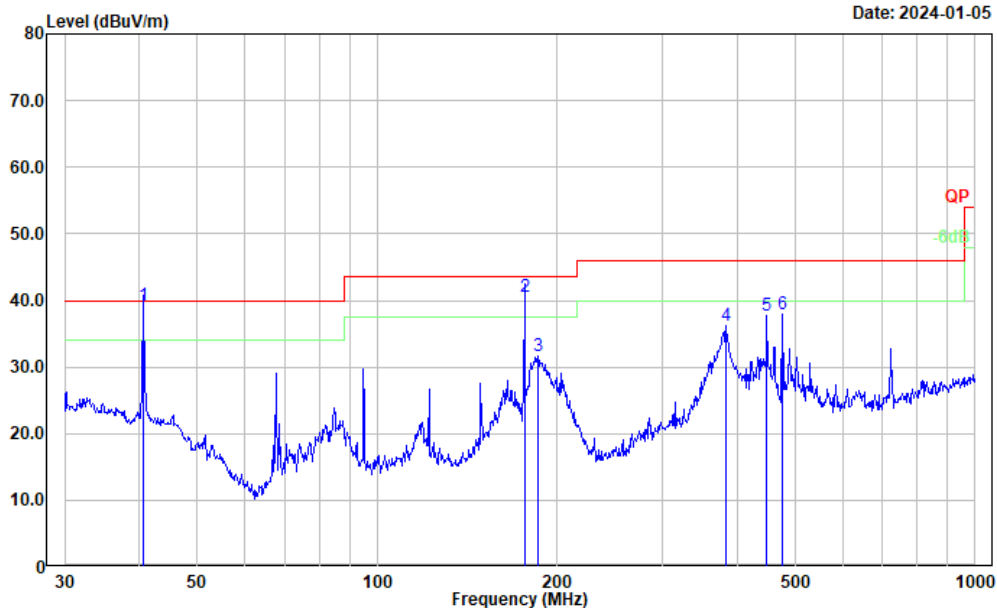


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	50.87	-11.61	39.26	40.00	0.74	QP
2	176.269	53.64	-13.20	40.44	43.50	3.06	QP
3	185.788	45.53	-13.78	31.75	43.50	11.75	Peak
4	383.932	44.72	-8.61	36.11	46.00	9.89	Peak
5	447.982	44.59	-6.89	37.70	46.00	8.30	Peak
6	475.499	44.18	-6.14	38.04	46.00	7.96	Peak

Screen 3#+Adapter 1#:

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: horizontal
 Note: Transmitting + Screen3# + Adapter 1#


Date: 2024-01-05

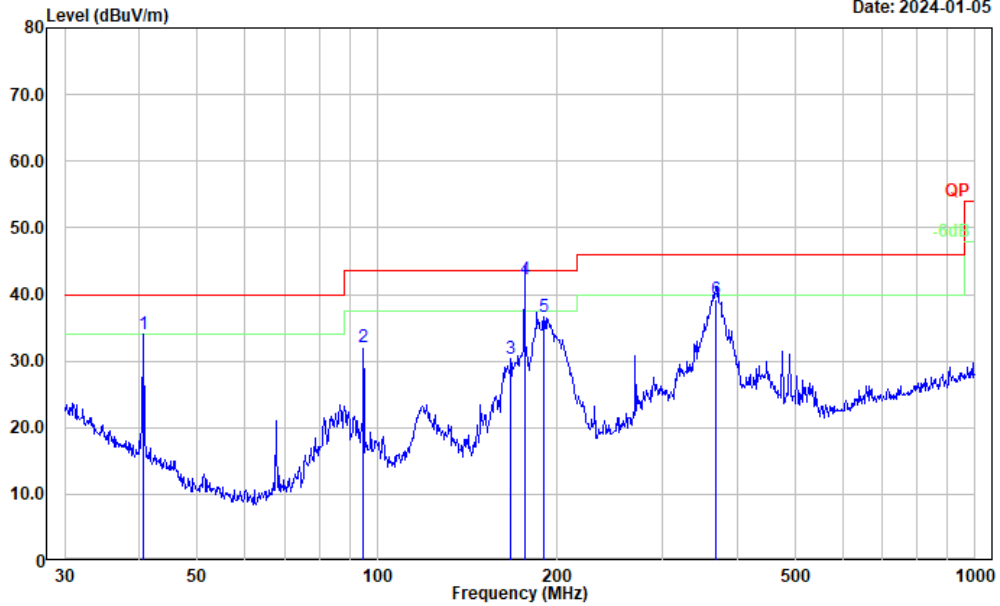

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	45.60	-11.61	33.99	40.00	6.01	Peak
2	94.760	48.04	-16.06	31.98	43.50	11.52	Peak
3	167.237	42.64	-12.35	30.29	43.50	13.21	Peak
4	176.269	55.53	-13.20	42.33	43.50	1.17	QP
5	189.739	50.39	-13.68	36.71	43.50	6.79	Peak
6	368.112	48.43	-9.18	39.25	46.00	6.75	QP

Project No.: CR231167140-RF
 Tester: Vic Du
 Polarization: vertical
 Note: Transmitting + Screen3# + Adapter 1#

Date: 2024-01-05

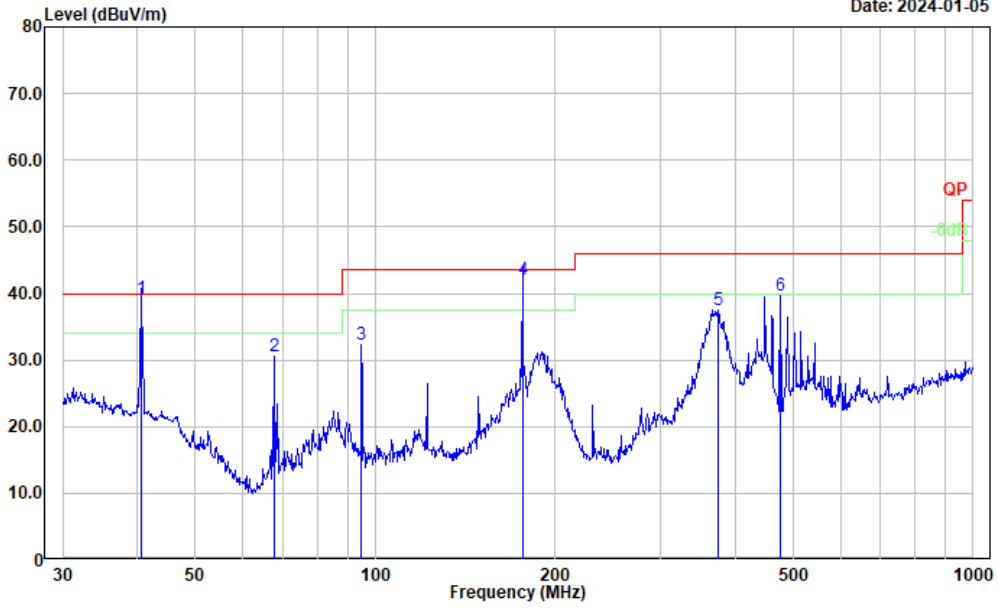

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	50.92	-11.61	39.31	40.00	0.69	QP
2	67.675	47.87	-17.23	30.64	40.00	9.36	Peak
3	94.760	48.37	-16.06	32.31	43.50	11.19	Peak
4	176.269	55.16	-13.20	41.96	43.50	1.54	QP
5	374.623	46.62	-9.04	37.58	46.00	8.42	Peak
6	475.499	45.77	-6.14	39.63	46.00	6.37	Peak

4.3 20 dB Emission Bandwidth

Serial Number:	2DS1-6	Test Date:	2024/1/5
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.4
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BACL	Loop Antenna	1313-1P	3092721	2023/10/20	2026/10/19
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (MHz)	20 dB Emission Bandwidth (Hz)
13.56	1499

20dB Emission Bandwidth

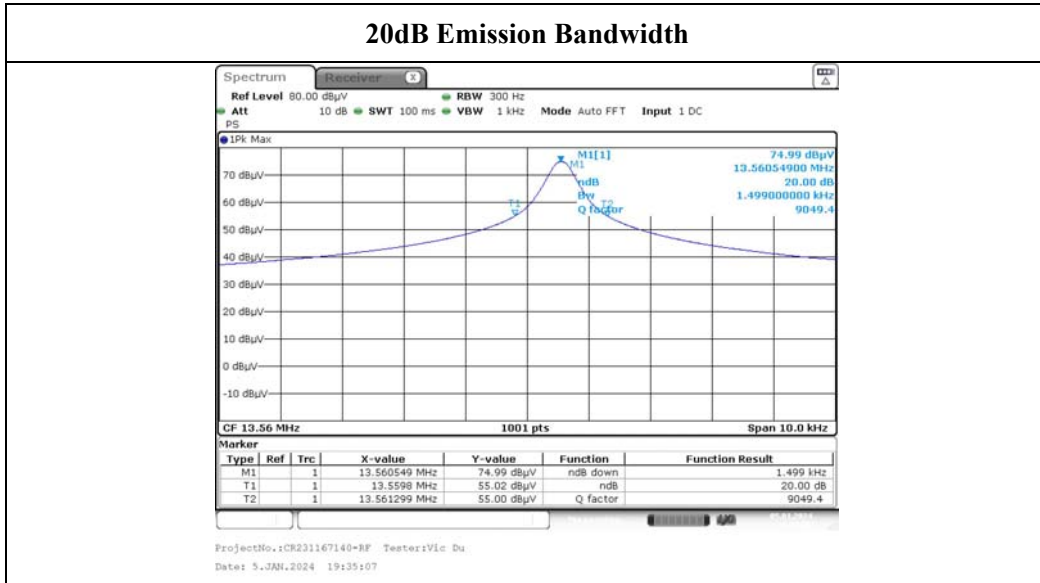

4.4 Frequency Stability

Serial Number:	2DS1-6	Test Date:	2024/1/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.4
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BACL	Loop Antenna	1313-1P	3092721	2023/10/20	2026/10/19
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
YINSAIGE	Coaxial Cable	SS402	SJ0300001	Each time	N/A
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

$f_0 = 13.56 \text{ MHz}$				
Temperature	Power Supplied	Measured frequency	Frequency Error	Limit
°C	V _{DC}	MHz	Hz	Hz
-20	7.4	13.560267	267	±1356
-10		13.560178	178	±1356
0		13.560256	256	±1356
10		13.560754	754	±1356
20		13.560549	549	±1356
25		13.560128	128	±1356
30		13.560983	983	±1356
40		13.560214	214	±1356
50		13.560172	172	±1356
20		6.95	13.560095	95
20	8.4	13.560918	918	±1356

Note: the extreme voltage provided by manufacturer.

5. RF EXPOSURE EVALUATION

Applicable Standard

According to KDB447498 D01 General RF Exposure Guidance v06: 4.3. General SAR test exclusion guidance

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

- 1) For *test separation distances* > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f_{\text{MHz}})]$
- 2) For *test separation distances* ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz

Measurement Result:

For NFC, the power of EUT: E Field@3m is 77.85 dBuV/m = -17.35dBm (0.02mW)

Note: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.

SAR test exclusion threshold for NFC(13.56MHz) separation distance < 50 mm

$$= [474 * (1 + \log(100/f_{\text{MHz}}))] / 2$$

$$= 443\text{mW}$$

$$> 0.02\text{mW}$$

Result: Compliant.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR231167140-EXP EUT EXTERNAL PHOTOGRAPHS and CR231167140-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231167140-00B-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====