

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2020-08-14_10.54.16

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

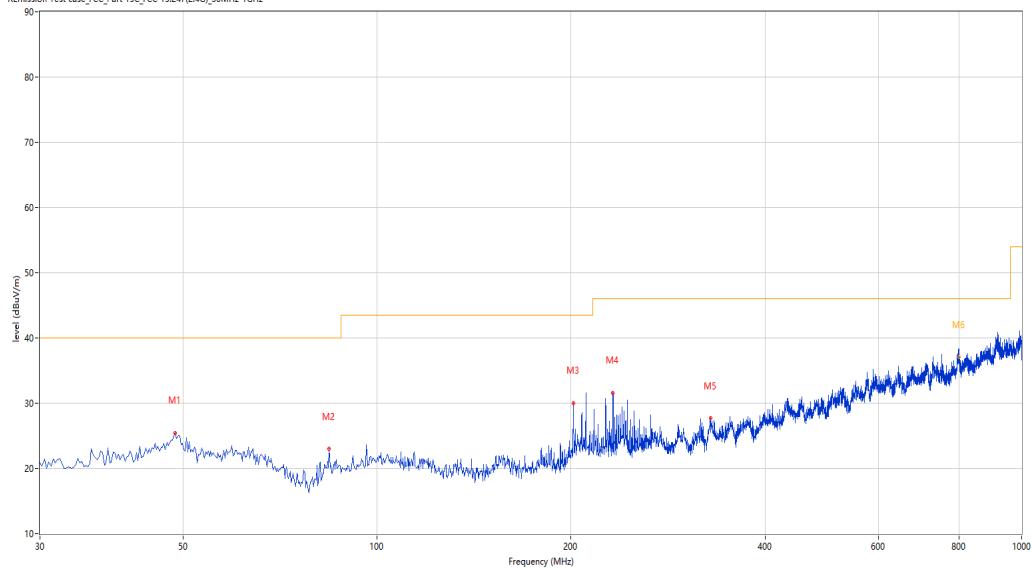

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.668	25.46	-23.83	40.0	-14.54	Peak	265.50	200	Horizontal	Pass
2	84.306	23.01	-27.87	40.0	-16.99	Peak	121.10	200	Horizontal	Pass
3	201.647	30.01	-26.72	43.5	-13.49	Peak	182.00	100	Horizontal	Pass
4	232.194	31.60	-25.96	46.0	-14.40	Peak	64.00	100	Horizontal	Pass
5	329.170	27.67	-21.92	46.0	-18.33	Peak	360.00	200	Horizontal	Pass
6	799.018	38.29	-11.88	46.0	-7.71	Peak	360.00	200	Horizontal	Pass
6*	799.018	37.05	-11.88	46.0	-8.95	QP	360.00	200	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_10.57.06

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

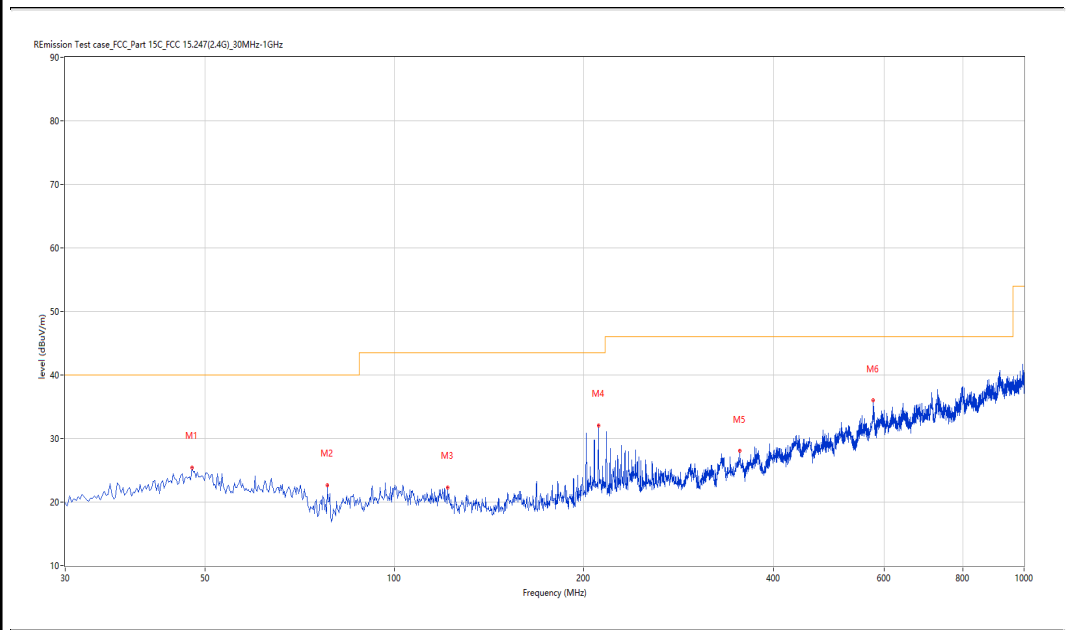

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.698	25.46	-23.77	40.0	-14.54	Peak	214.10	200	Vertical	Pass
2	78.245	22.68	-30.88	40.0	-17.32	Peak	162.10	100	Vertical	Pass
3	121.642	22.31	-27.67	43.5	-21.19	Peak	29.90	100	Vertical	Pass
4	210.860	32.09	-25.82	43.5	-11.41	Peak	341.80	100	Vertical	Pass
5	353.899	28.06	-21.75	46.0	-17.94	Peak	126.60	200	Vertical	Pass
6	575.731	36.01	-15.94	46.0	-9.99	Peak	2.10	100	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2020-08-14_10.59.34

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

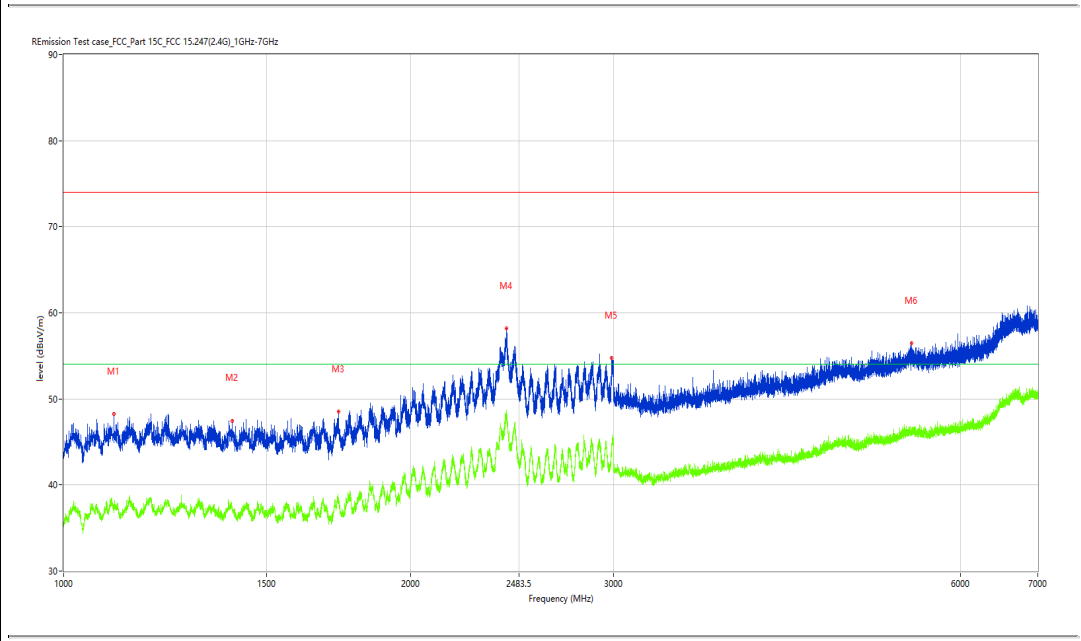

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1105.737	48.23	-4.33	74.0	-25.77	Peak	2.60	100	Horizontal	Pass
1**	1105.737	37.11	-4.33	54.0	-16.89	AV	2.60	100	Horizontal	Pass
2	1399.450	47.48	-4.92	74.0	-26.52	Peak	107.60	100	Horizontal	Pass
2**	1399.450	37.49	-4.92	54.0	-16.51	AV	107.60	100	Horizontal	Pass
3	1730.909	48.49	-4.71	74.0	-25.51	Peak	16.10	100	Horizontal	Pass
3**	1730.909	37.80	-4.71	54.0	-16.20	AV	16.10	100	Horizontal	Pass
4	2420.822	58.18	4.56	74.0	-15.82	Peak	244.60	100	Horizontal	Pass
4**	2420.822	47.66	4.56	54.0	-6.34	AV	244.60	100	Horizontal	Pass
5	2989.251	54.77	3.03	74.0	-19.23	Peak	342.40	100	Horizontal	Pass
5**	2989.251	44.86	3.03	54.0	-9.14	AV	342.40	100	Horizontal	Pass
6	5437.195	56.46	1.57	74.0	-17.54	Peak	358.20	100	Horizontal	Pass
6**	5437.195	46.62	1.57	54.0	-7.38	AV	358.20	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.23.29

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

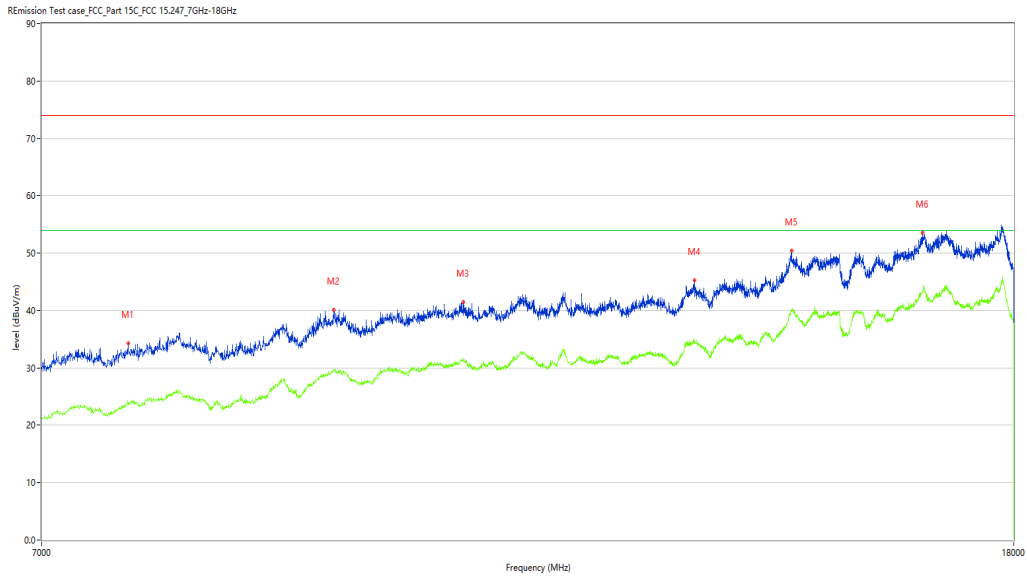

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7613.097	34.28	3.97	74.0	-39.72	Peak	254.90	100	Horizontal	Pass
1**	7613.097	23.75	3.97	54.0	-30.25	AV	254.90	100	Horizontal	Pass
2	9295.676	40.18	9.07	74.0	-33.82	Peak	184.90	100	Horizontal	Pass
2**	9295.676	29.60	9.07	54.0	-24.40	AV	184.90	100	Horizontal	Pass
3	10546.613	41.47	9.89	74.0	-32.53	Peak	122.10	100	Horizontal	Pass
3**	10546.613	31.62	9.89	54.0	-22.38	AV	122.10	100	Horizontal	Pass
4	13196.951	45.31	12.35	74.0	-28.69	Peak	316.60	100	Horizontal	Pass
4**	13196.951	34.82	12.35	54.0	-19.18	AV	316.60	100	Horizontal	Pass
5	14502.874	50.38	17.09	74.0	-23.62	Peak	250.40	100	Horizontal	Pass
5**	14502.874	39.89	17.09	54.0	-14.11	AV	250.40	100	Horizontal	Pass
6	16474.131	53.49	20.29	74.0	-20.51	Peak	46.90	100	Horizontal	Pass
6**	16474.131	43.37	20.29	54.0	-10.63	AV	46.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.01.52

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

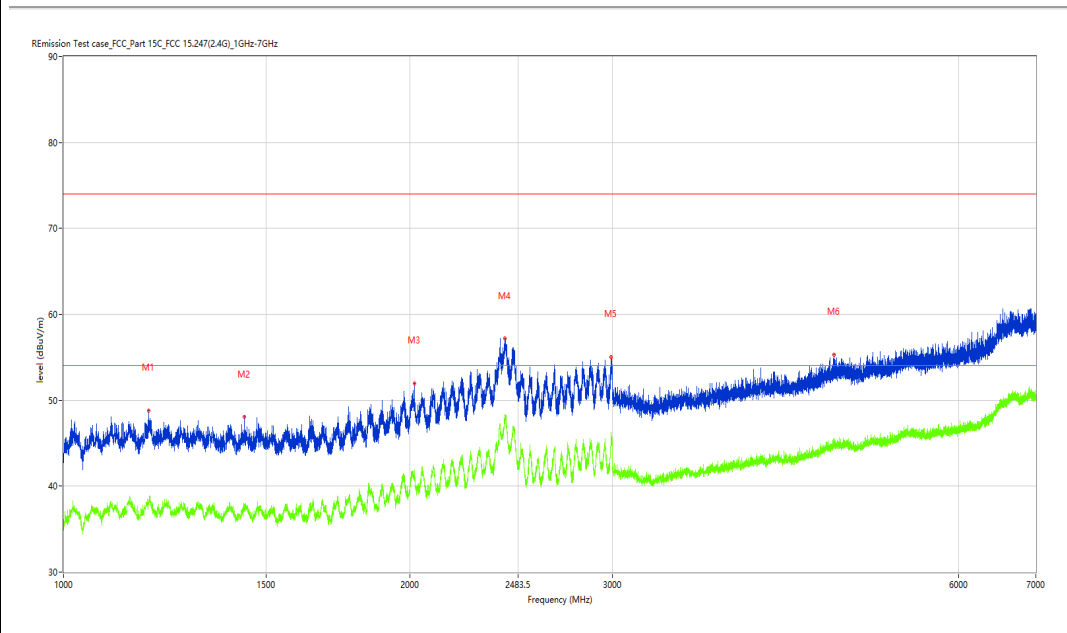

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1185.477	48.84	-4.14	74.0	-25.16	Peak	176.80	100	Vertical	Pass
1**	1185.477	37.96	-4.14	54.0	-16.04	AV	176.80	100	Vertical	Pass
2	1435.946	48.04	-5.20	74.0	-25.96	Peak	48.80	100	Vertical	Pass
2**	1435.946	37.64	-5.20	54.0	-16.36	AV	48.80	100	Vertical	Pass
3	2017.373	51.99	-1.89	74.0	-22.01	Peak	125.10	100	Vertical	Pass
3**	2017.373	41.18	-1.89	54.0	-12.82	AV	125.10	100	Vertical	Pass
4	2420.072	57.20	4.59	74.0	-16.80	Peak	351.70	100	Vertical	Pass
4**	2420.072	47.84	4.59	54.0	-6.16	AV	351.70	100	Vertical	Pass
5	2992.751	55.07	3.07	74.0	-18.93	Peak	330.90	100	Vertical	Pass
5**	2992.751	45.27	3.07	54.0	-8.73	AV	330.90	100	Vertical	Pass
6	4674.791	55.32	0.93	74.0	-18.68	Peak	359.20	100	Vertical	Pass
6**	4674.791	45.22	0.93	54.0	-8.78	AV	359.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.21.56

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

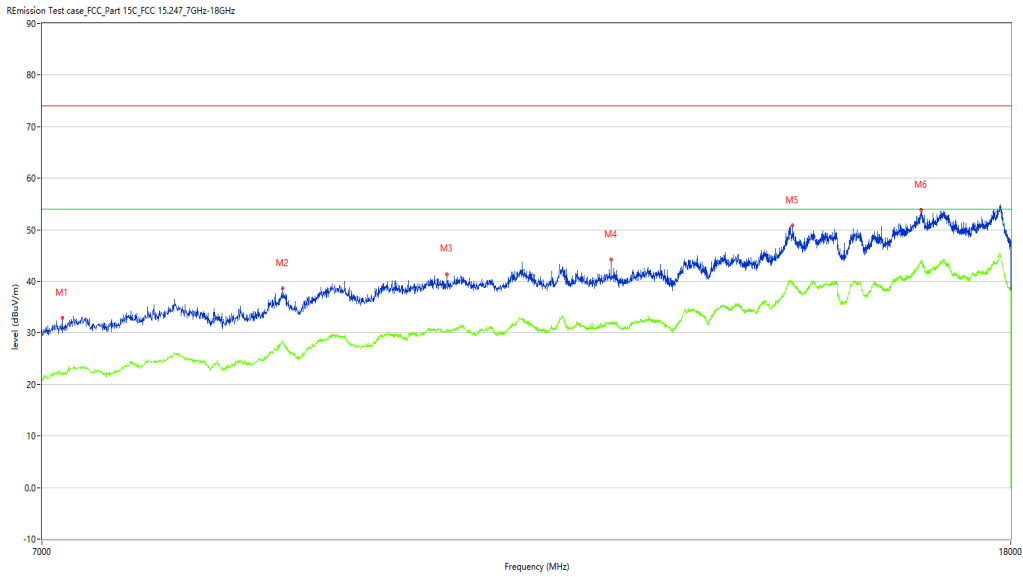

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7164.959	31.71	2.57	74.0	-42.29	Peak	164.90	100	Vertical	Pass
1**	7164.959	22.31	2.57	54.0	-31.69	AV	164.90	100	Vertical	Pass
2	8853.037	38.62	7.50	74.0	-35.38	Peak	93.10	100	Vertical	Pass
2**	8853.037	28.13	7.50	54.0	-25.87	AV	93.10	100	Vertical	Pass
3	10389.903	41.41	10.78	74.0	-32.59	Peak	237.10	100	Vertical	Pass
3**	10389.903	30.35	10.78	54.0	-23.65	AV	237.10	100	Vertical	Pass
4	12190.702	44.22	10.86	74.0	-29.78	Peak	0.00	100	Vertical	Pass
4**	12190.702	32.04	10.86	54.0	-21.96	AV	0.00	100	Vertical	Pass
5	14549.613	50.85	16.92	74.0	-23.15	Peak	264.30	100	Vertical	Pass
5**	14549.613	39.63	16.92	54.0	-14.37	AV	264.30	100	Vertical	Pass
6	16490.627	53.86	20.63	74.0	-20.14	Peak	335.40	100	Vertical	Pass
6**	16490.627	43.64	20.63	54.0	-10.36	AV	335.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.08.18

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

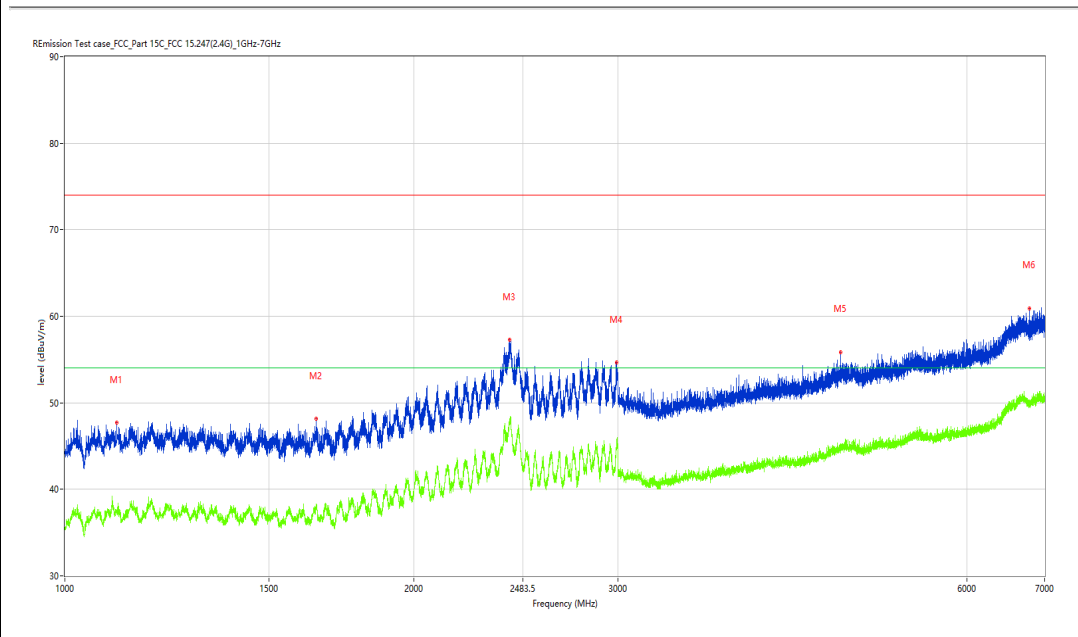

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1108.736	47.72	-3.98	74.0	-26.28	Peak	216.20	100	Horizontal	Pass
1**	1108.736	37.29	-3.98	54.0	-16.71	AV	216.20	100	Horizontal	Pass
2	1646.419	48.14	-4.95	74.0	-25.86	Peak	206.90	100	Horizontal	Pass
2**	1646.419	38.11	-4.95	54.0	-15.89	AV	206.90	100	Horizontal	Pass
3	2419.823	57.29	4.60	74.0	-16.71	Peak	168.90	100	Horizontal	Pass
3**	2419.823	48.09	4.60	54.0	-5.91	AV	168.90	100	Horizontal	Pass
4	2991.751	54.65	3.18	74.0	-19.35	Peak	16.70	100	Horizontal	Pass
4**	2991.751	45.22	3.18	54.0	-8.78	AV	16.70	100	Horizontal	Pass
5	4664.792	55.88	0.92	74.0	-18.12	Peak	205.90	100	Horizontal	Pass
5**	4664.792	45.08	0.92	54.0	-8.92	AV	205.90	100	Horizontal	Pass
6	6791.526	60.94	5.43	74.0	-13.06	Peak	341.70	100	Horizontal	Pass
6**	6791.526	50.05	5.43	54.0	-3.95	AV	341.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.18.35

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

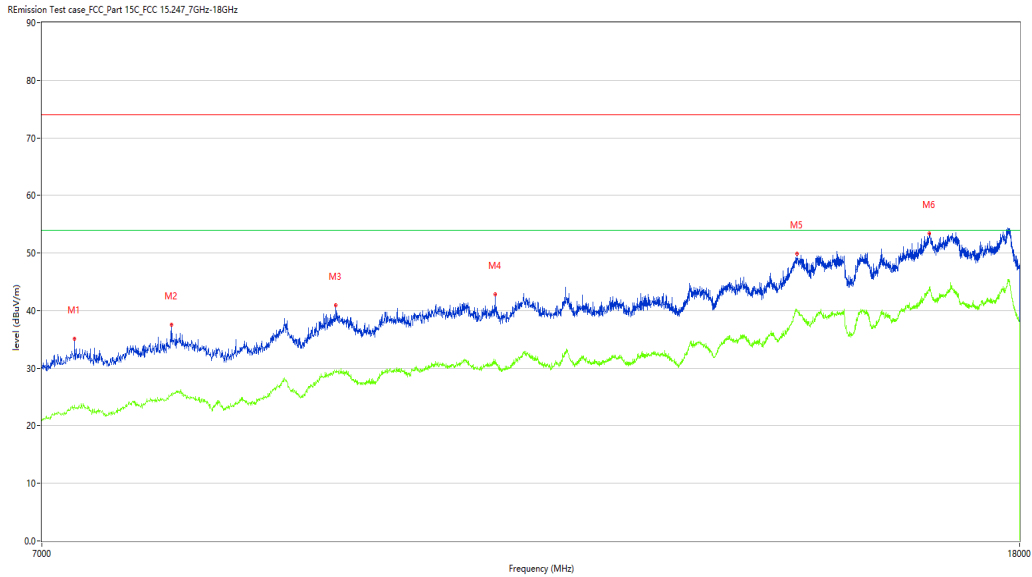

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7175.956	32.02	2.66	74.0	-41.98	Peak	355.50	100	Horizontal	Pass
1**	7175.956	22.74	2.66	54.0	-31.26	AV	355.50	100	Horizontal	Pass
2	7934.766	37.55	4.77	74.0	-36.45	Peak	89.50	100	Horizontal	Pass
2**	7934.766	25.68	4.77	54.0	-28.32	AV	89.50	100	Horizontal	Pass
3	9298.425	40.99	9.09	74.0	-33.01	Peak	352.50	100	Horizontal	Pass
3**	9298.425	29.41	9.09	54.0	-24.59	AV	352.50	100	Horizontal	Pass
4	10843.539	42.79	11.11	74.0	-31.21	Peak	133.60	100	Horizontal	Pass
4**	10843.539	31.44	11.11	54.0	-22.56	AV	133.60	100	Horizontal	Pass
5	14513.872	49.84	17.05	74.0	-24.16	Peak	76.10	100	Horizontal	Pass
5**	14513.872	40.15	17.05	54.0	-13.85	AV	76.10	100	Horizontal	Pass
6	16490.627	53.42	20.63	74.0	-20.58	Peak	1.50	100	Horizontal	Pass
6**	16490.627	43.40	20.63	54.0	-10.60	AV	1.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.06.10

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

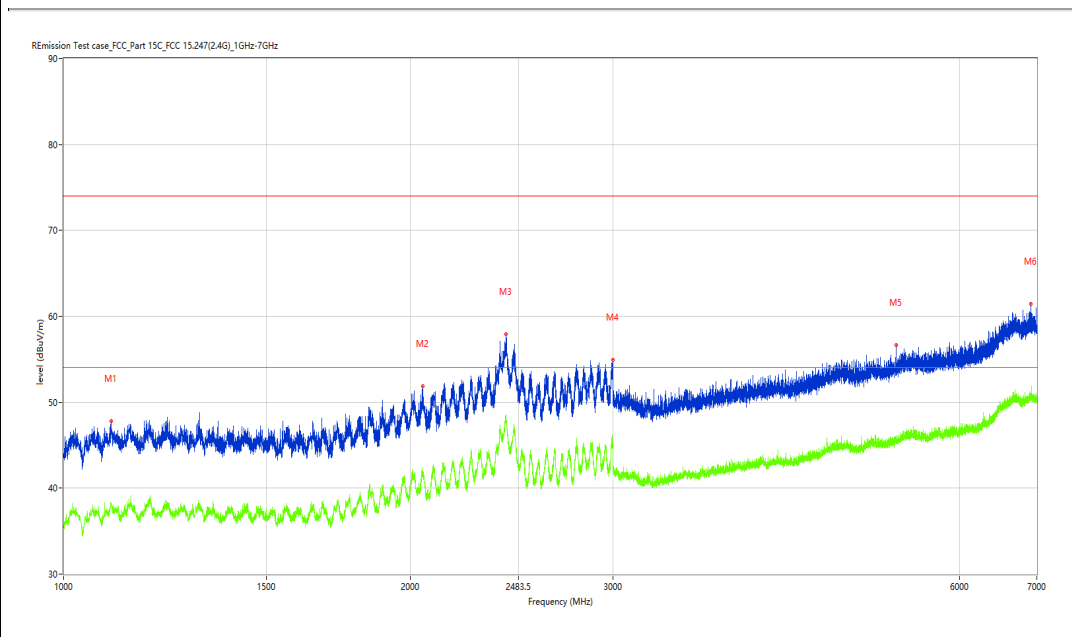

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1099.988	47.78	-3.84	74.0	-26.22	Peak	269.40	100	Vertical	Pass
1**	1099.988	38.09	-3.84	54.0	-15.91	AV	269.40	100	Vertical	Pass
2	2050.869	51.86	-1.87	74.0	-22.14	Peak	274.60	100	Vertical	Pass
2**	2050.869	41.66	-1.87	54.0	-12.34	AV	274.60	100	Vertical	Pass
3	2422.322	57.89	4.50	74.0	-16.11	Peak	210.60	100	Vertical	Pass
3**	2422.322	48.23	4.50	54.0	-5.77	AV	210.60	100	Vertical	Pass
4	2997.750	54.91	2.30	74.0	-19.09	Peak	269.40	100	Vertical	Pass
4**	2997.750	45.39	2.30	54.0	-8.61	AV	269.40	100	Vertical	Pass
5	5280.715	56.67	1.50	74.0	-17.33	Peak	248.80	100	Vertical	Pass
5**	5280.715	45.86	1.50	54.0	-8.14	AV	248.80	100	Vertical	Pass
6	6914.511	61.42	5.74	74.0	-12.58	Peak	156.90	100	Vertical	Pass
6**	6914.511	50.58	5.74	54.0	-3.42	AV	156.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.20.03

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

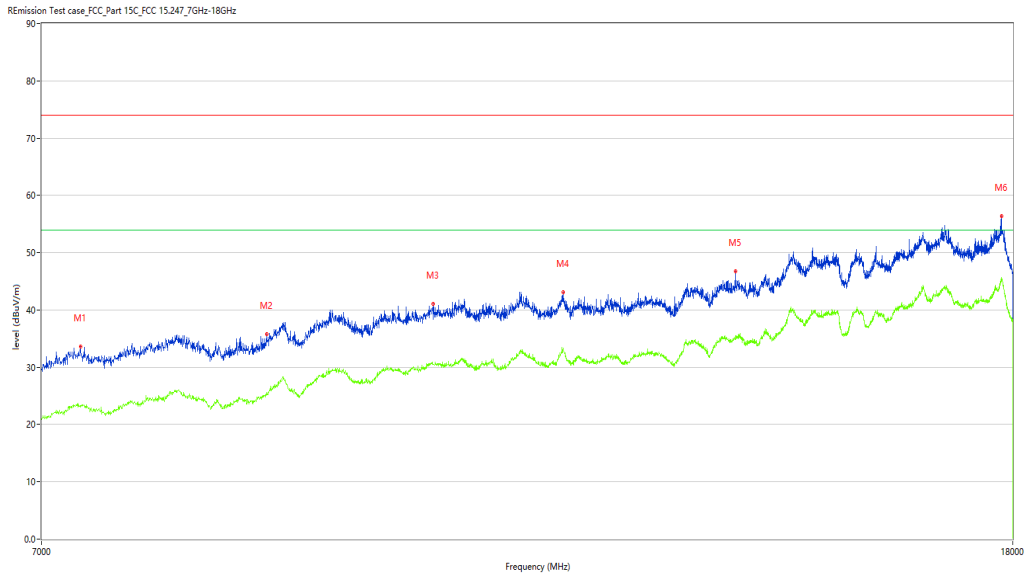

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7269.433	33.57	2.87	74.0	-40.43	Peak	30.60	100	Vertical	Pass
1**	7269.433	23.05	2.87	54.0	-30.95	AV	30.60	100	Vertical	Pass
2	8712.822	35.78	6.15	74.0	-38.22	Peak	132.60	100	Vertical	Pass
2**	8712.822	25.63	6.15	54.0	-28.37	AV	132.60	100	Vertical	Pass
3	10241.440	41.12	10.66	74.0	-32.88	Peak	53.30	100	Vertical	Pass
3**	10241.440	30.45	10.66	54.0	-23.55	AV	53.30	100	Vertical	Pass
4	11621.595	43.16	11.24	74.0	-30.84	Peak	359.70	100	Vertical	Pass
4**	11621.595	33.35	11.24	54.0	-20.65	AV	359.70	100	Vertical	Pass
5	13744.064	46.78	13.62	74.0	-27.22	Peak	330.20	100	Vertical	Pass
5**	13744.064	35.30	13.62	54.0	-18.70	AV	330.20	100	Vertical	Pass
6	17799.300	56.34	21.10	74.0	-17.66	Peak	0.00	100	Vertical	Pass
6**	17799.300	45.04	21.10	54.0	-8.96	AV	0.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.11.03

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

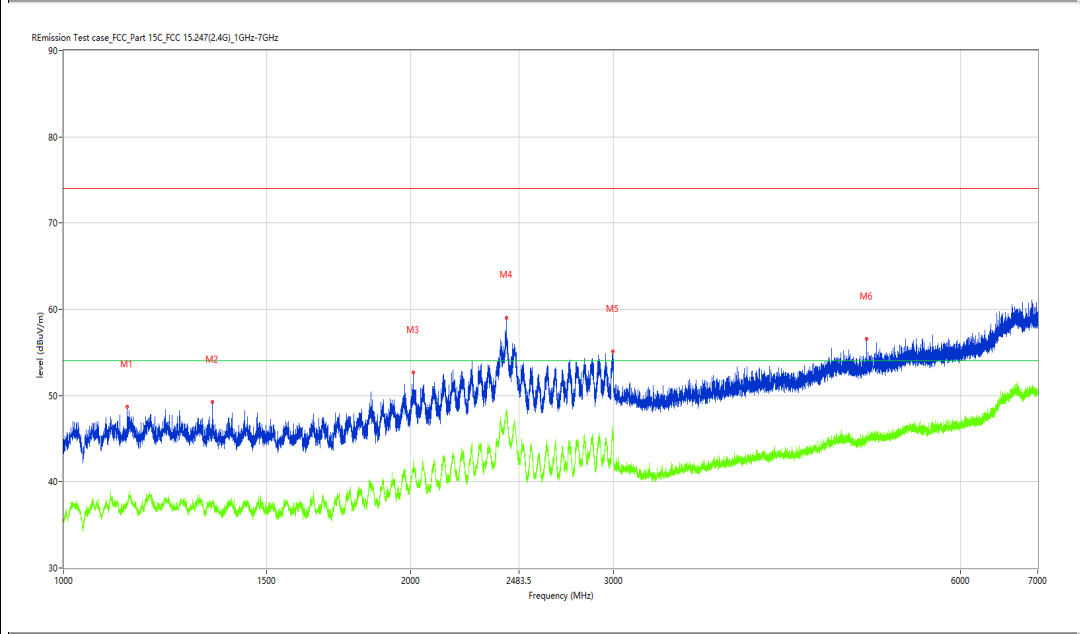

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1135.733	48.68	-4.30	74.0	-25.32	Peak	192.70	100	Horizontal	Pass
1**	1135.733	37.44	-4.30	54.0	-16.56	AV	192.70	100	Horizontal	Pass
2	1346.707	49.22	-5.07	74.0	-24.78	Peak	78.00	100	Horizontal	Pass
2**	1346.707	37.66	-5.07	54.0	-16.34	AV	78.00	100	Horizontal	Pass
3	2010.874	52.65	-2.36	74.0	-21.35	Peak	97.30	100	Horizontal	Pass
3**	2010.874	42.53	-2.36	54.0	-11.47	AV	97.30	100	Horizontal	Pass
4	2420.822	59.04	4.56	74.0	-14.96	Peak	0.00	100	Horizontal	Pass
4**	2420.822	47.90	4.56	54.0	-6.10	AV	0.00	100	Horizontal	Pass
5	2995.751	55.11	2.54	74.0	-18.89	Peak	63.80	100	Horizontal	Pass
5**	2995.751	45.41	2.54	54.0	-8.59	AV	63.80	100	Horizontal	Pass
6	4973.253	56.56	1.55	74.0	-17.44	Peak	351.40	100	Horizontal	Pass
6**	4973.253	45.31	1.55	54.0	-8.69	AV	351.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.16.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7266.683	31.63	2.86	74.0	-42.37	Peak	0.00	100	Horizontal	Pass
1**	7266.683	23.16	2.86	54.0	-30.84	AV	0.00	100	Horizontal	Pass
2	9840.040	40.00	9.49	74.0	-34.00	Peak	102.70	100	Horizontal	Pass
2**	9840.040	29.51	9.49	54.0	-24.49	AV	102.70	100	Horizontal	Pass
3	11184.454	42.89	10.75	74.0	-31.11	Peak	256.70	100	Horizontal	Pass
3**	11184.454	32.68	10.75	54.0	-21.32	AV	256.70	100	Horizontal	Pass
4	12603.099	44.07	11.15	74.0	-29.93	Peak	157.80	100	Horizontal	Pass
4**	12603.099	33.04	11.15	54.0	-20.96	AV	157.80	100	Horizontal	Pass
5	14511.122	49.85	17.06	74.0	-24.15	Peak	356.70	100	Horizontal	Pass
5**	14511.122	39.89	17.06	54.0	-14.11	AV	356.70	100	Horizontal	Pass
6	16507.123	55.11	20.53	74.0	-18.89	Peak	232.20	100	Horizontal	Pass
6**	16507.123	43.67	20.53	54.0	-10.33	AV	232.20	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.13.28

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

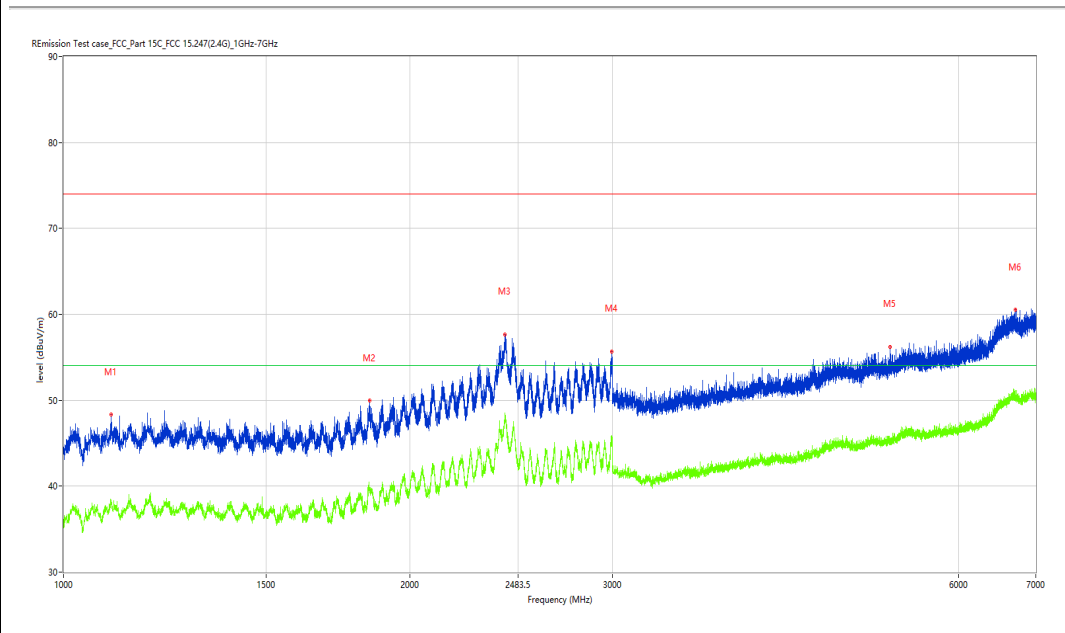

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1099.238	48.33	-3.72	74.0	-25.67	Peak	107.60	100	Vertical	Pass
1**	1099.238	38.01	-3.72	54.0	-15.99	AV	107.60	100	Vertical	Pass
2	1844.394	49.97	-3.64	74.0	-24.03	Peak	332.00	100	Vertical	Pass
2**	1844.394	39.81	-3.64	54.0	-14.19	AV	332.00	100	Vertical	Pass
3	2418.823	57.65	4.64	74.0	-16.35	Peak	1.60	100	Vertical	Pass
3**	2418.823	48.15	4.64	54.0	-5.85	AV	1.60	100	Vertical	Pass
4	2995.751	55.68	2.54	74.0	-18.32	Peak	247.50	100	Vertical	Pass
4**	2995.751	45.91	2.54	54.0	-8.09	AV	247.50	100	Vertical	Pass
5	5226.222	56.23	1.61	74.0	-17.77	Peak	84.40	100	Vertical	Pass
5**	5226.222	45.50	1.61	54.0	-8.50	AV	84.40	100	Vertical	Pass
6	6721.035	60.53	5.85	74.0	-13.47	Peak	193.80	100	Vertical	Pass
6**	6721.035	50.20	5.85	54.0	-3.80	AV	193.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2020-08-14_11.15.27

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

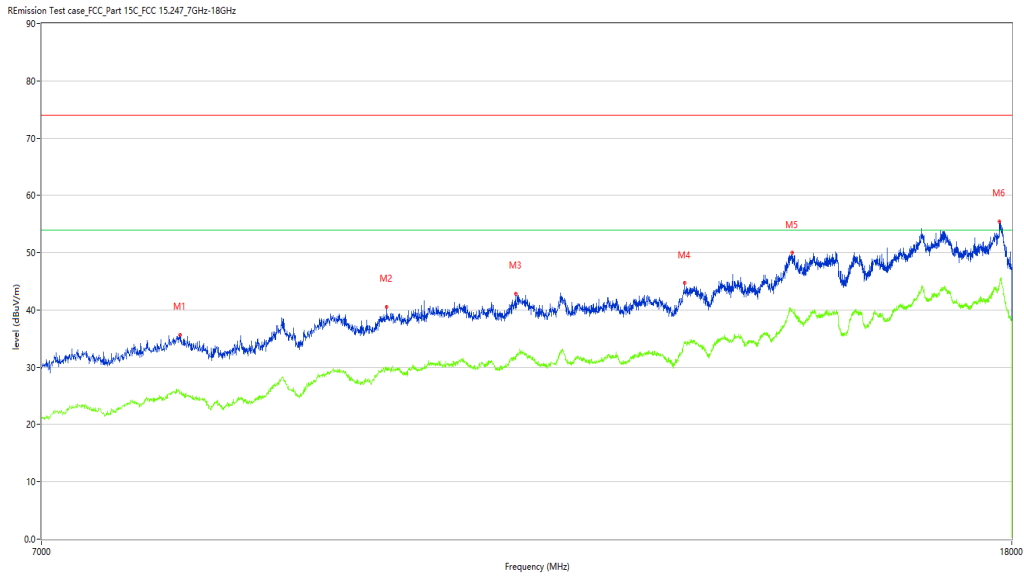

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8011.747	35.70	5.61	74.0	-38.30	Peak	0.20	100	Vertical	Pass
1**	8011.747	25.53	5.61	54.0	-28.47	AV	0.20	100	Vertical	Pass
2	9793.302	40.56	9.63	74.0	-33.44	Peak	0.80	100	Vertical	Pass
2**	9793.302	29.93	9.63	54.0	-24.07	AV	0.80	100	Vertical	Pass
3	11107.473	42.82	10.63	74.0	-31.18	Peak	251.20	100	Vertical	Pass
3**	11107.473	31.76	10.63	54.0	-22.24	AV	251.20	100	Vertical	Pass
4	13089.728	44.67	12.43	74.0	-29.33	Peak	94.20	100	Vertical	Pass
4**	13089.728	34.14	12.43	54.0	-19.86	AV	94.20	100	Vertical	Pass
5	14533.117	49.96	16.98	74.0	-24.04	Peak	357.30	100	Vertical	Pass
5**	14533.117	39.89	16.98	54.0	-14.11	AV	357.30	100	Vertical	Pass
6	17780.055	55.45	21.19	74.0	-18.55	Peak	360.00	100	Vertical	Pass
6**	17780.055	44.34	21.19	54.0	-9.66	AV	360.00	100	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-08-14_11.25.20

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

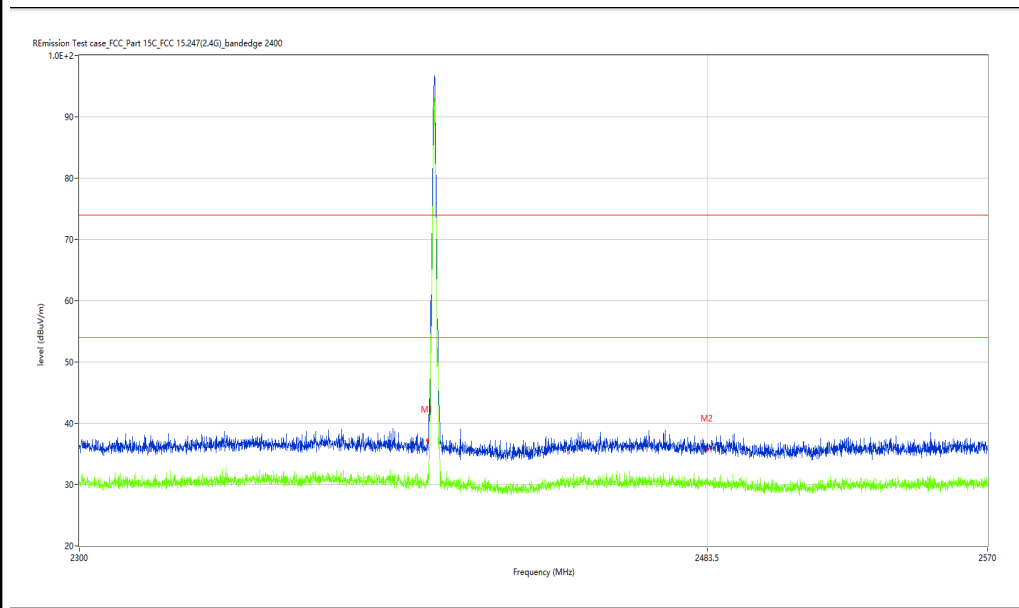

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	37.24	-4.18	74.0	-36.76	Peak	60.26	100	H	Pass
1**	2400.000	30.85	-4.18	54.0	-23.15	AV	60.26	100	H	Pass
2	2483.500	35.71	-3.87	74.0	-38.29	Peak	196.21	100	H	Pass
2**	2483.500	29.69	-3.87	54.0	-24.31	AV	196.21	100	H	Pass

BLE-Bandedge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2020-08-14_11.27.22

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

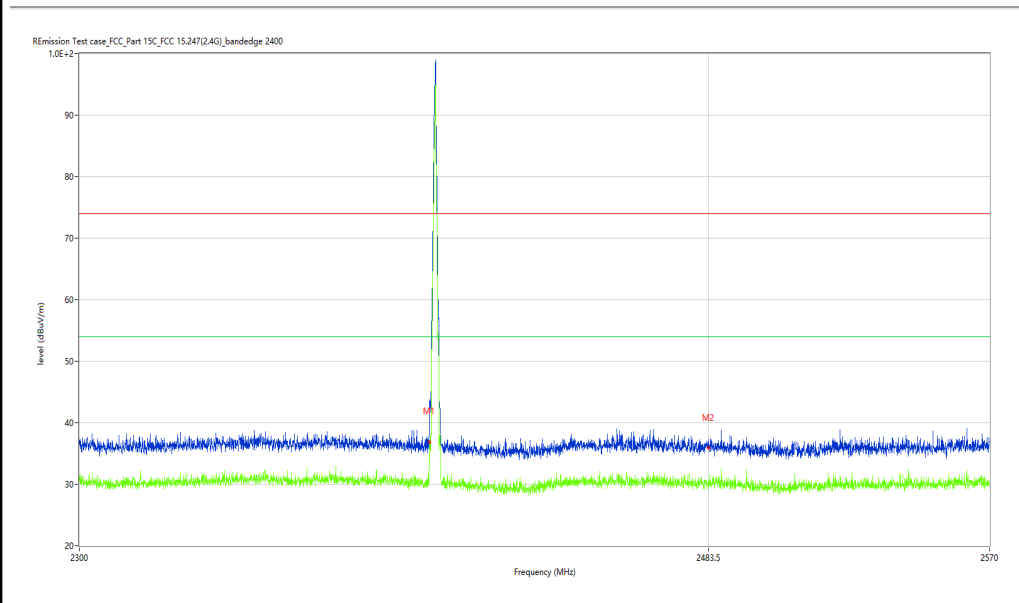

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	37.04	-4.18	74.0	-36.96	Peak	319.16	100	V	Pass
1**	2400.000	31.53	-4.18	54.0	-22.47	AV	319.16	100	V	Pass
2	2483.500	35.73	-3.87	74.0	-38.27	Peak	112.46	100	V	Pass
2**	2483.500	30.60	-3.87	54.0	-23.40	AV	112.46	100	V	Pass

BLE-Bandedge -High channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2020-08-14_11.33.59

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

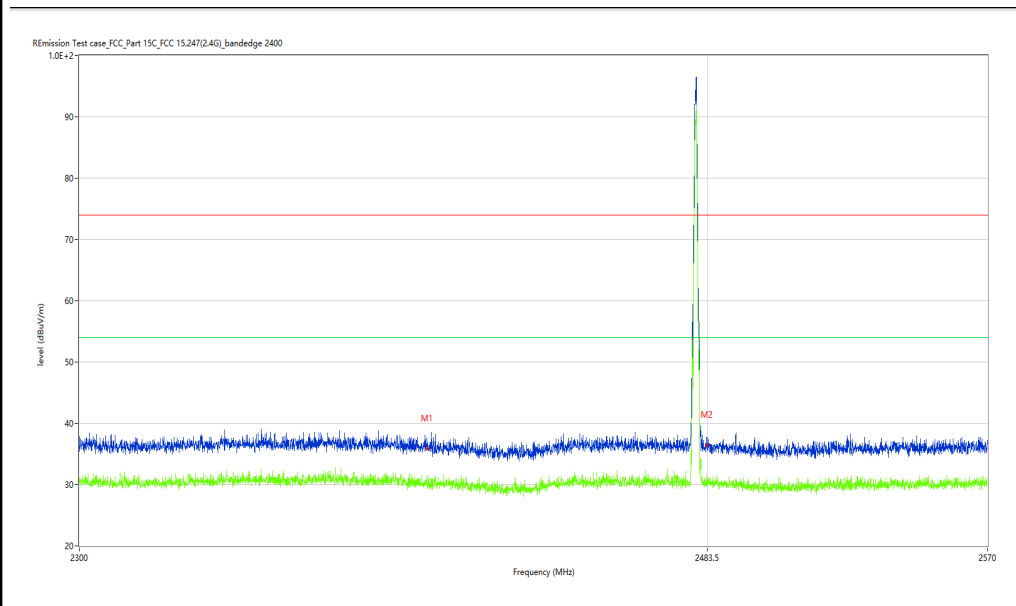

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	35.99	-4.18	74.0	-38.01	Peak	117.12	100	H	Pass
1**	2400.000	29.86	-4.18	54.0	-24.14	AV	117.12	100	H	Pass
2	2483.500	36.39	-3.87	74.0	-37.61	Peak	321.45	100	H	Pass
2**	2483.500	30.58	-3.87	54.0	-23.42	AV	321.45	100	H	Pass

BLE-Bandedge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2020-08-14_11.32.22

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: normal

Temp.(oC): 24.0

Load: full load

Hum.: 58

Remark: DR-RSE01-E20080008-01#01

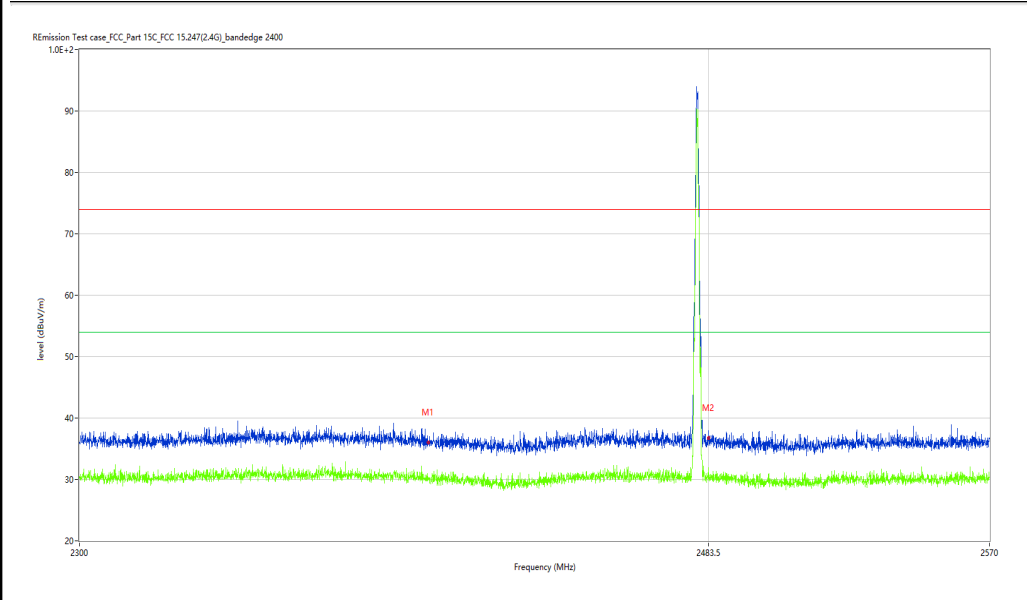

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2400.000	36.02	-4.18	74.0	-37.98	Peak	304.87	100	V	Pass
1**	2400.000	30.15	-4.18	54.0	-23.85	AV	304.87	100	V	Pass
2	2483.500	36.59	-3.87	74.0	-37.41	Peak	92.16	100	V	Pass
2**	2483.500	30.38	-3.87	54.0	-23.62	AV	92.16	100	V	Pass