




Step 1: Set Up

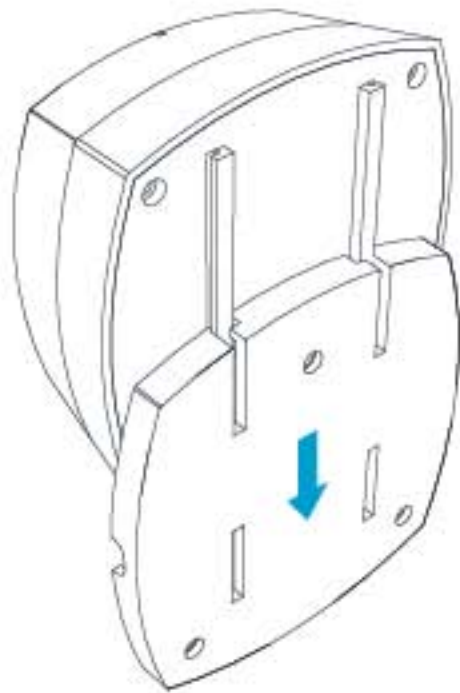

1. Bring the Smart Garage Door Opener close to your router
2. Slide and remove the backing of the Smart Garage Door Opener

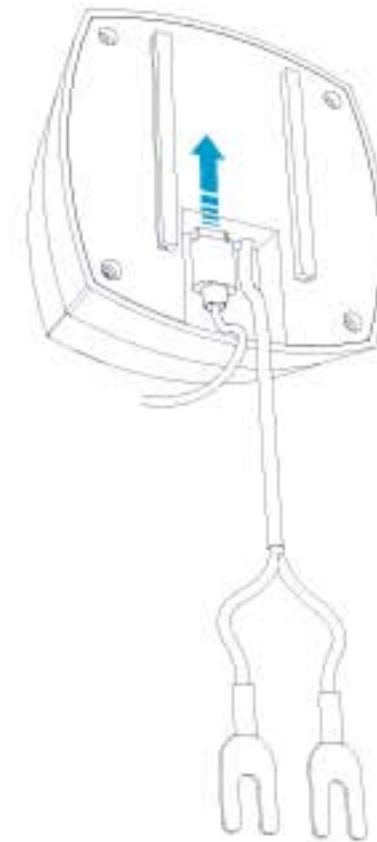


3. Plug the micro-USB cable into the Smart Garage Door Opener and slide the backing back on.

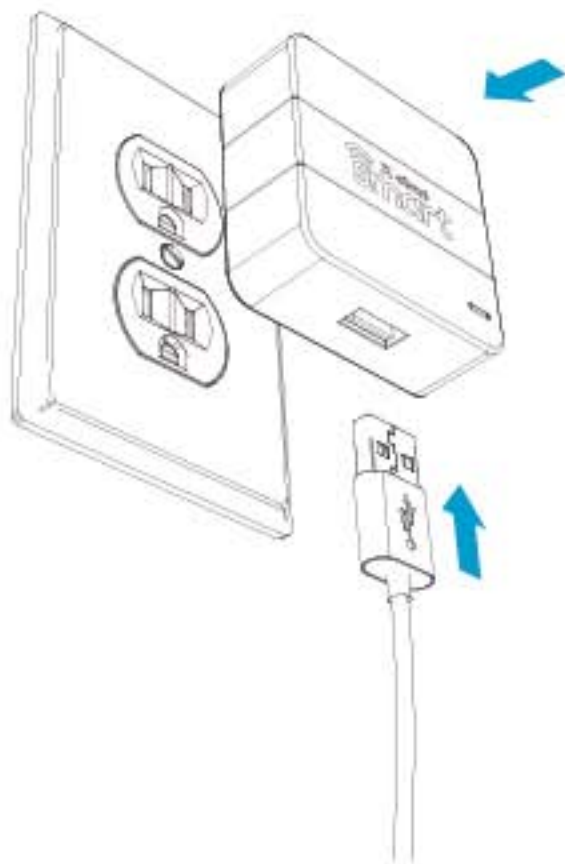

4. Plug the USB into the Smart Wall Adaptor and plug the Smart Wall Adaptor into your wall outlet.

Step 2: Download App

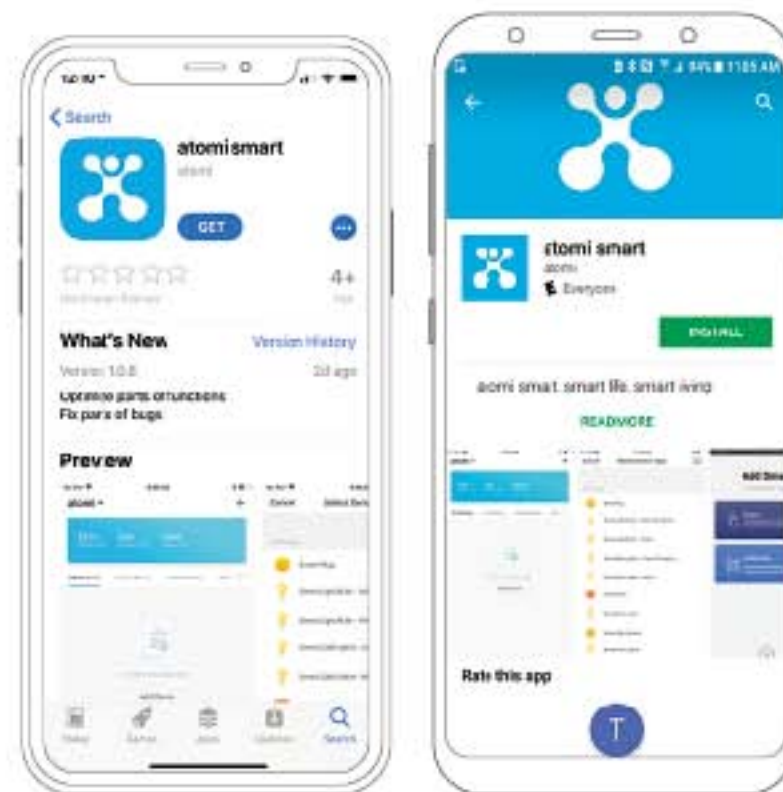

Download the atomi smart app from the App Store or Google Play.

Step 3: Register



Enter your mobile phone number or email address.



Enter the verification code and create a password.



Log into the app.


Step 4: Add Device



Select "Add Device" or click (+) at the top right corner of the Devices Screen.




Choose "Smart Garage Door Opener" from the Device list.

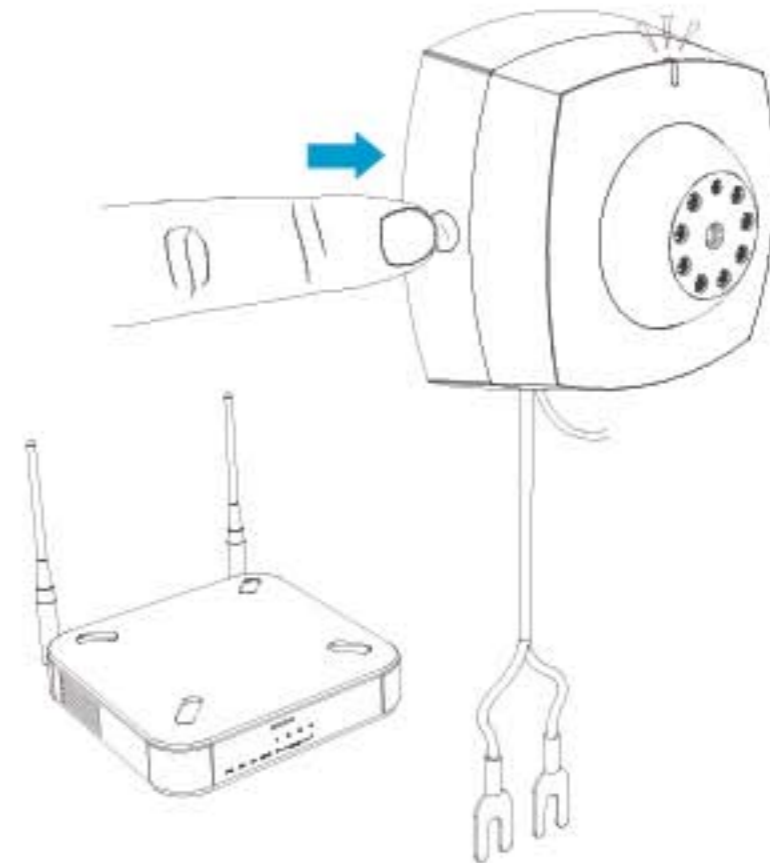


Hold the power button on the side of your Smart Garage Door Opener for five seconds until the indicator light is flashing rapidly. Then press "Continue".


3. Connect the white and red wires running from the Smart Garage Door Opener to the corresponding screw on the back of your garage door opener panel i.e white to white and red to red
4. Secure the garage door opener panel back to the wall and position your Smart Garage Door Opener right above it.
5. Use the screws included in your product packaging to secure the Smart Garage Door Opener's backing onto the wall.
6. Plug the Smart Power Adaptor into your desired wall outlet.
7. Adjust and position the camera on your Smart Garage Door Opener and test the view on the atomi smart app to make sure you are happy with the facing angle.
8. Testing the device:
 - a) Open the app, choose "Smart Garage Door Opener" and press the light icon button. Check if the device light is turning ON/OFF.
 - b) Press the camera icon button. You should receive a notification with the captured photo.
 - c) Slide up the switch to open your garage door. Check if your garage door is opening.
 - d) Slide down the switch to close your garage door. Check if your garage door is closing.

If you have problems with any of these steps. see our FAQs section on this guide or visit atomismart.com for more information.

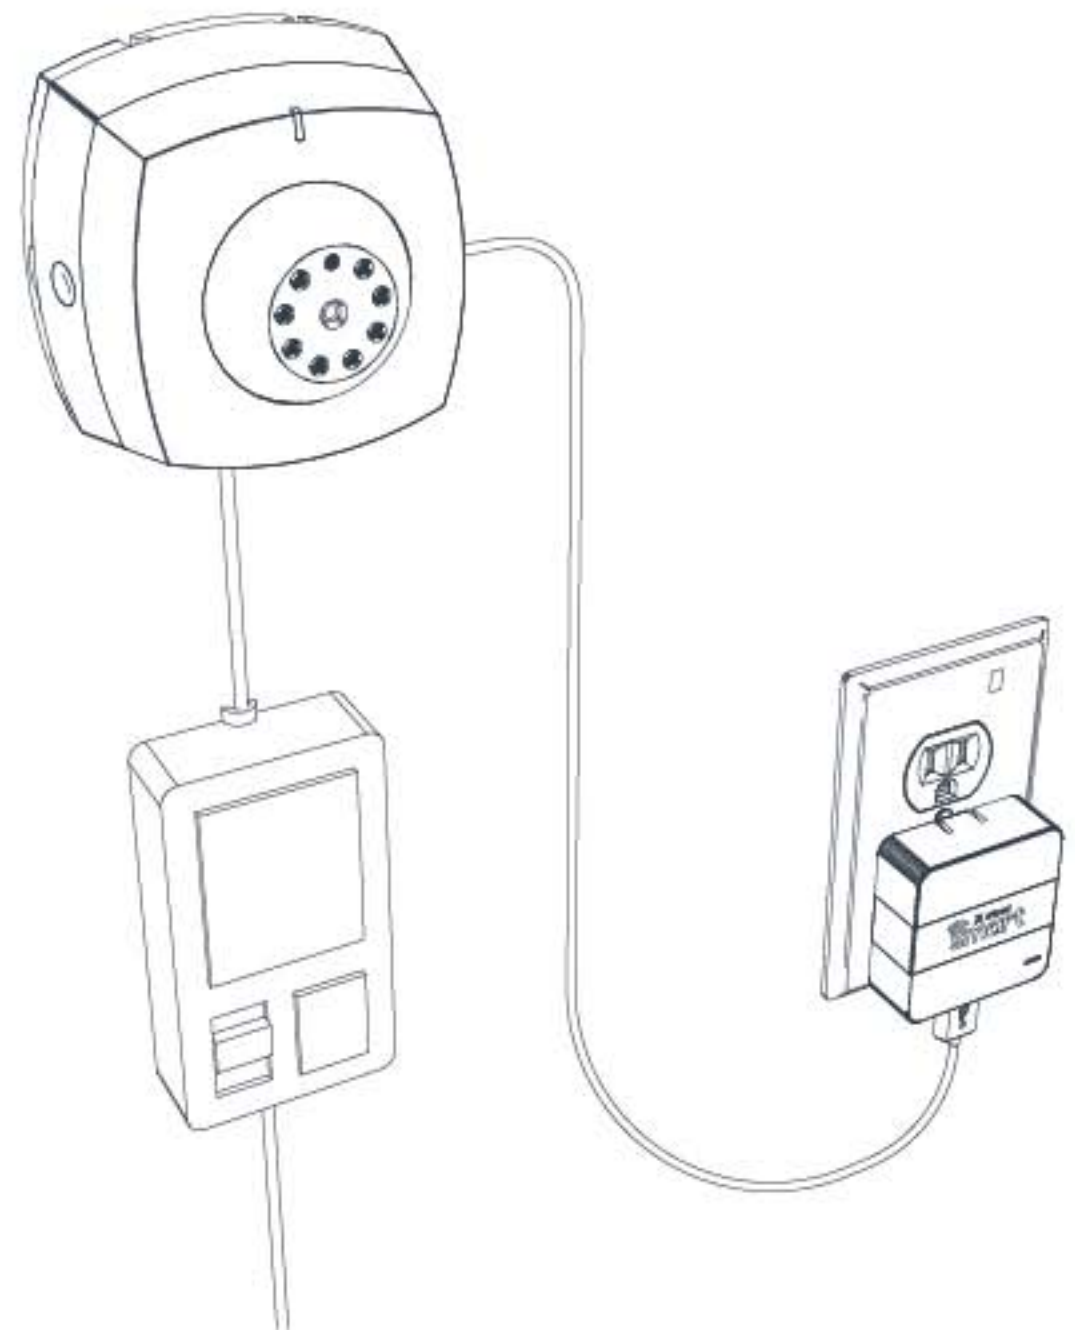

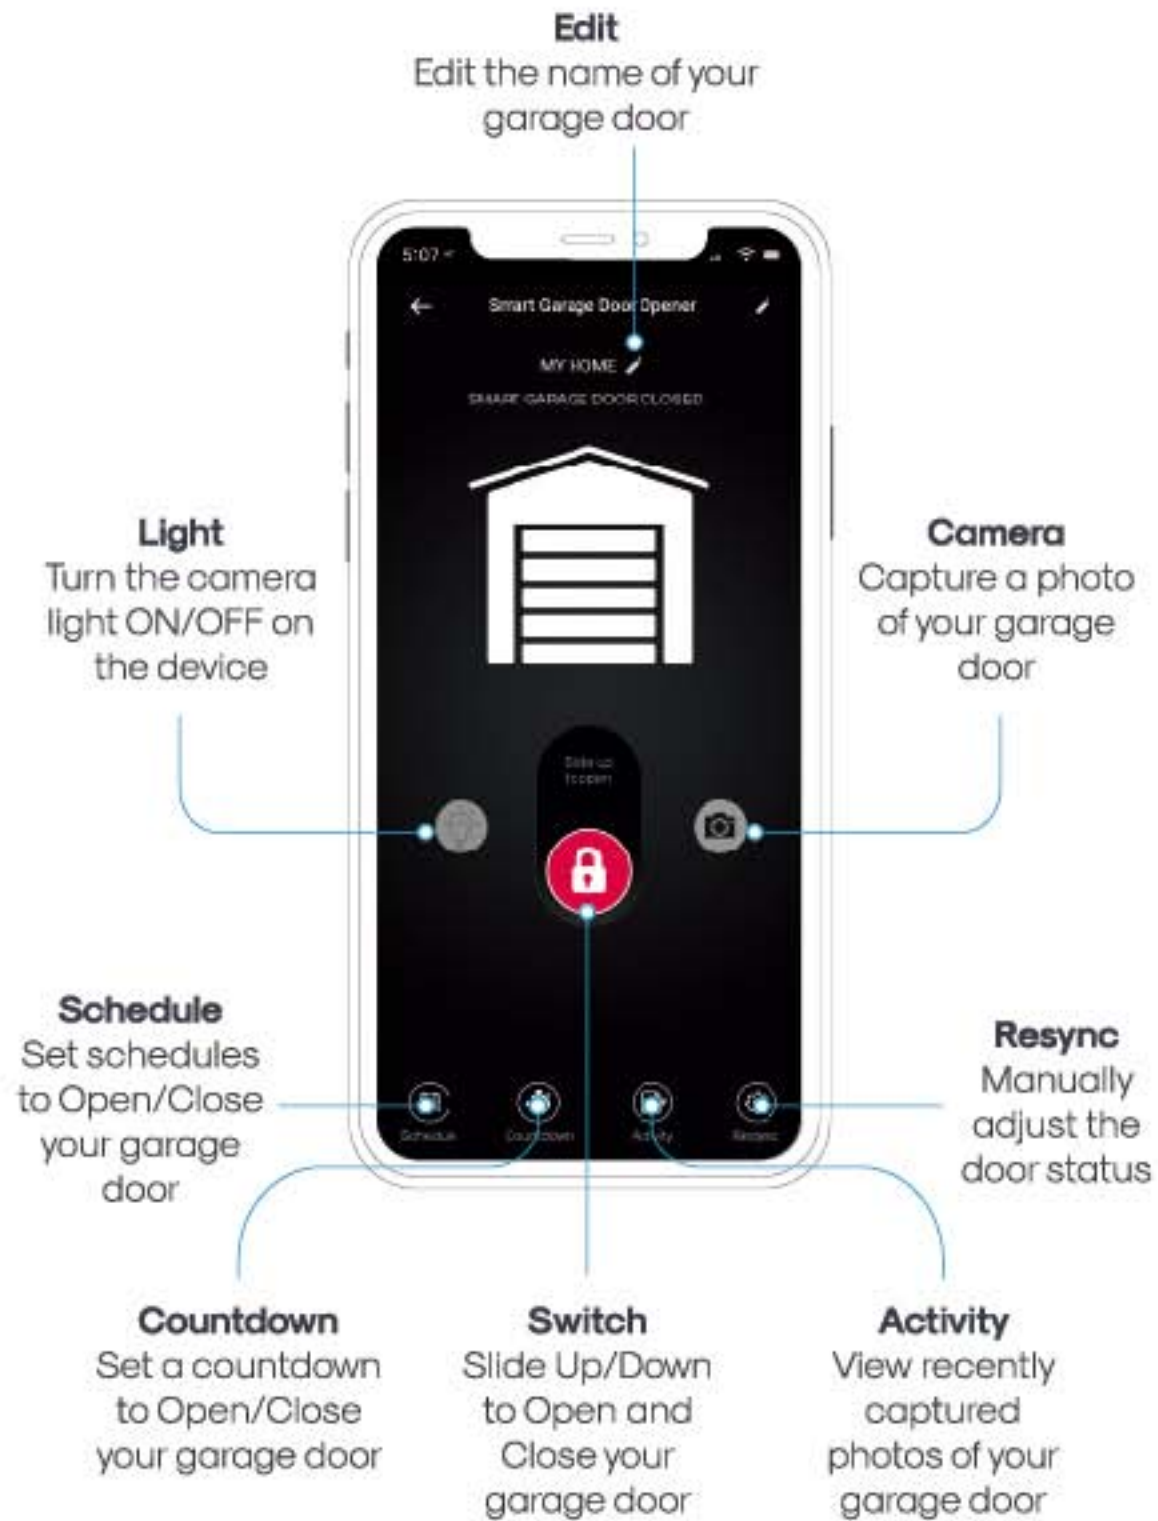


Schedule

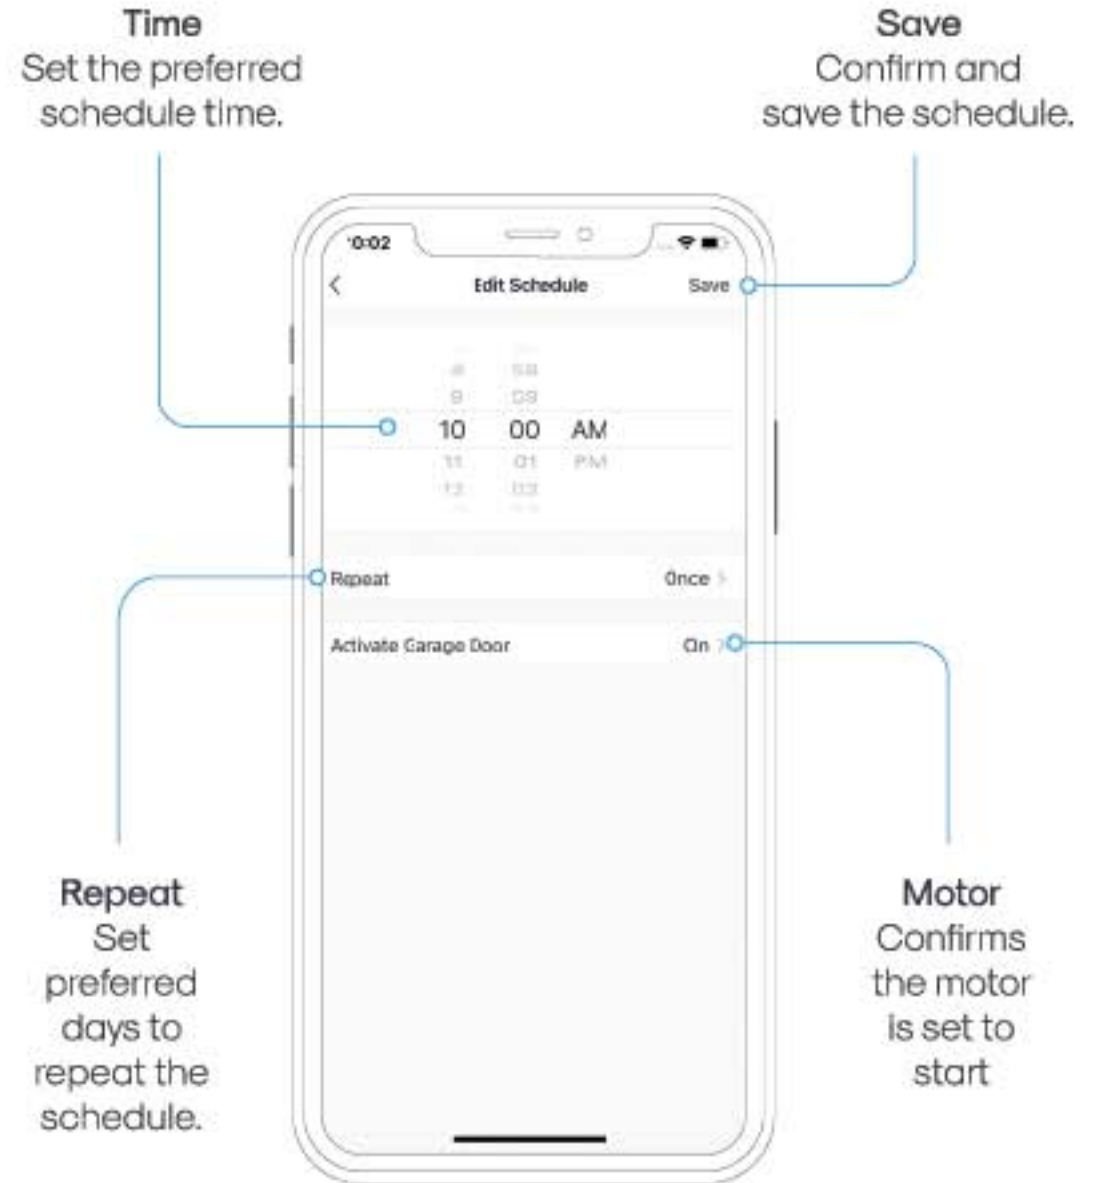

You can set up your Smart Garage Door Opener to open and close at specific times on specific days of the week.

Countdown

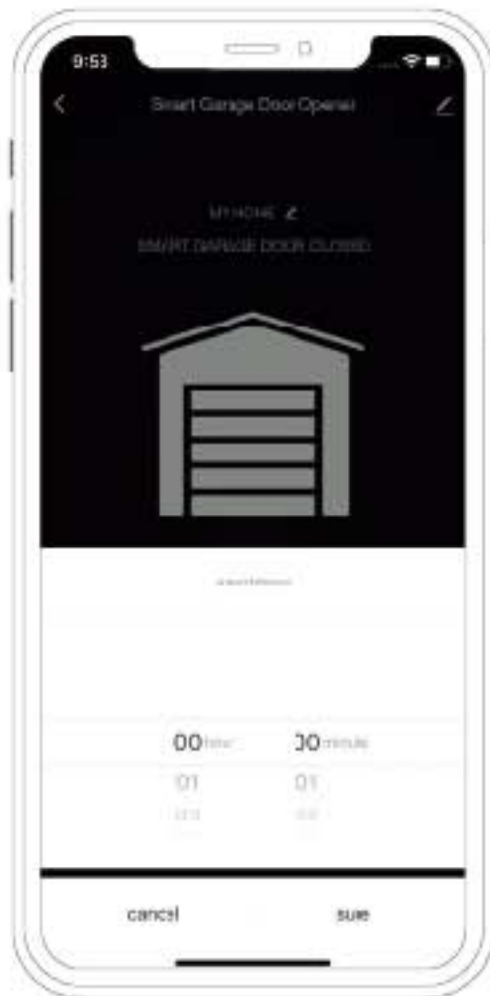

Set a countdown to automatically open and close your garage door

Activity



View recently captured photos of your garage door

Compatibility

The following models are compatible with the atomi Smart Garage Door Opener.

If you have any questions or concerns please email support@atomiusa.com

4Ddoors
GA103

AERF
DUAL 2H4 MN
POWER 1R0

AHOUSE
EM SWING GATE
RAM 100

Aiphone
JO-1FD

ALEKO
13XX
22XX
AC1400
AR1400
AR900
AS 1300
AS 450
AS 650
AS 900
GateGuard 1300
GateGuard 1700
GateGuard 450
GateGuard 650
GateGuard 850
GateGuard 900

ALL-O-MATIC
SL-100
SL-100DC
SL-150
SL-150DC
SL-150DC-50
SL-45DC
SL-90DC
SW-300
SW-350

TORO 24
AV
AV1

ALLSTAR
3000
3500
3500-P
6000
6500
6500-P
AC9000 Series
IIA(Type II)
J3500
J6500
GS4000
MVP

Alulux
Berry 3.0

Alutech
Levigato (LG Series)

Ansa
RS-1
Thermaglide

APC
CB-SGX12
CBSW-24

APERTO
550L
868L
868 LX
Baseline+
Apollo
1050
1500
1550ETL

1650
1650ETL
3500ETL
3600ETL
633 Control Board
634 Control Board
635
636
7000ETL
835
836

Aprimatic
ALZO 55 with Control board
T230
EM51 with control board
T3EC-T3SC

ASA
asa300
asa400
K50 Control Board

Assa Abloy
840C-50
841C-35
841C-50
850C-50
851C-35
851C-50

Auto-Over
DC850

Automat Easy
SCOR 800

Automatic Remote Access
PY500AC

FCC ID: 2AIPA-AT1348

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.