




Appendix A3: Min emission bandwidth Test Result B4


Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	16.52	5711.68	5728.20	0.5	PASS
		5720 UNII-3	3.2	5725	5728.20	0.5	PASS
		5745	16.36	5736.80	5753.16	0.5	PASS
		5785	16.40	5776.76	5793.16	0.5	PASS
		5825	16.32	5816.80	5833.12	0.5	PASS
11AC20SISO	Ant1	5720	17.60	5711.16	5728.76	0.5	PASS
		5720 UNII-3	3.76	5725	5728.76	0.5	PASS
		5745	17.60	5736.16	5753.76	0.5	PASS
		5785	17.60	5776.16	5793.76	0.5	PASS
		5825	17.60	5816.16	5833.76	0.5	PASS
11AC40SISO	Ant1	5710	34.48	5693.68	5728.16	0.5	PASS
		5710 UNII-3	3.16	5725	5728.16	0.5	PASS
		5755	35.36	5737.24	5772.60	0.5	PASS
		5795	35.36	5777.24	5812.60	0.5	PASS
11AC80SISO	Ant1	5690	73.92	5653.68	5727.60	0.5	PASS
		5690 UNII-3	2.6	5725	5727.60	0.5	PASS
		5775	75.20	5737.40	5812.60	0.5	PASS


Test Graphs B4

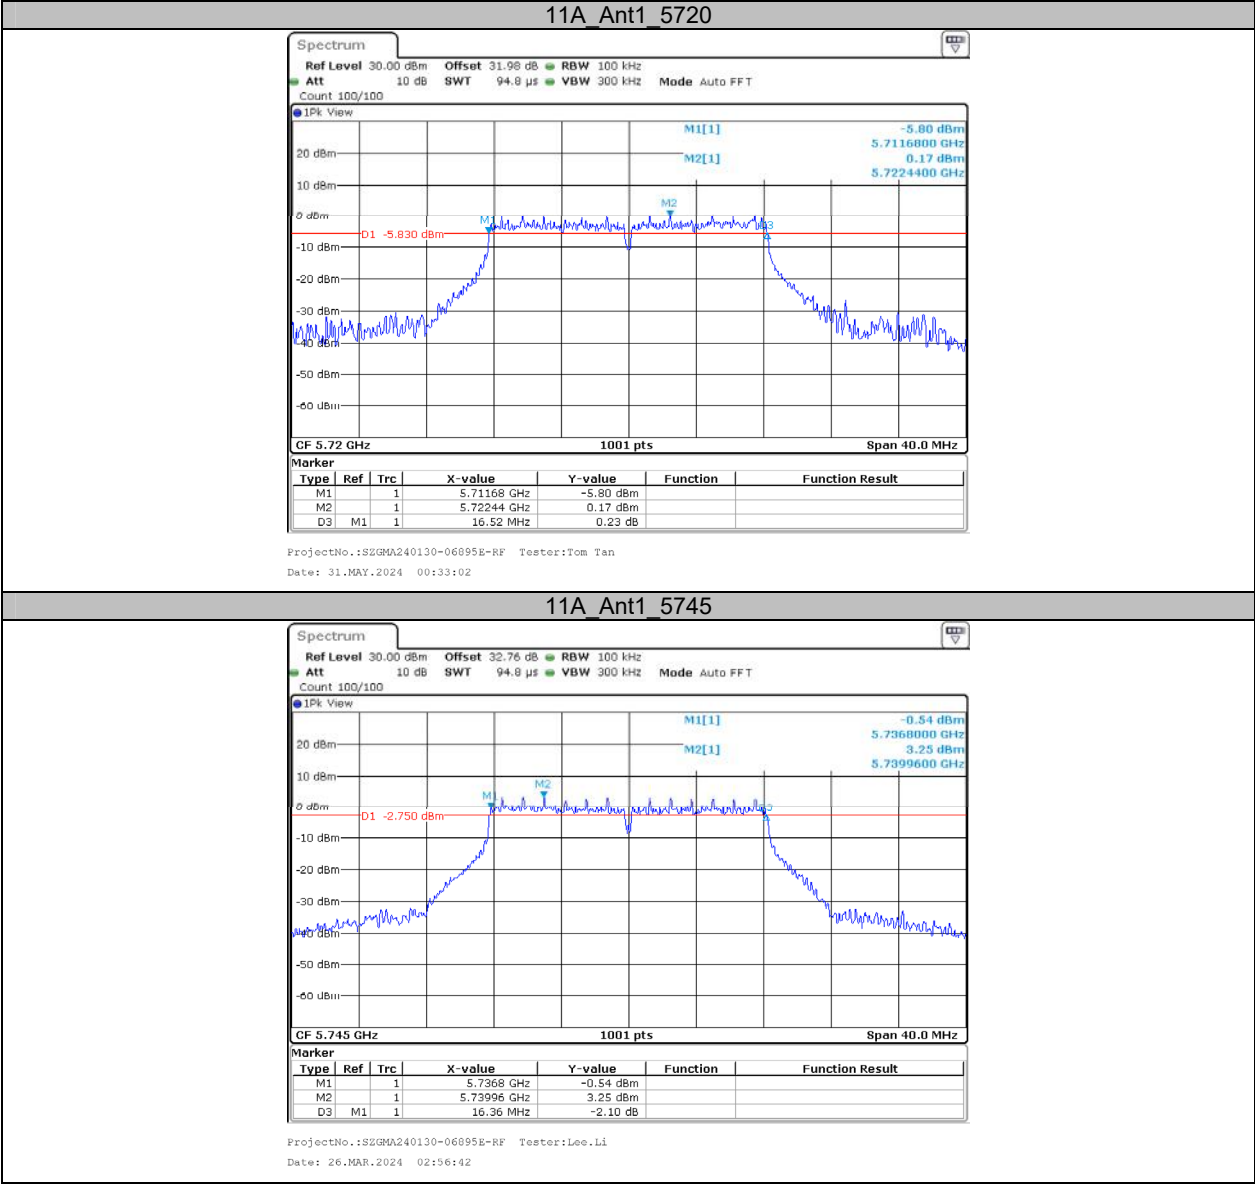


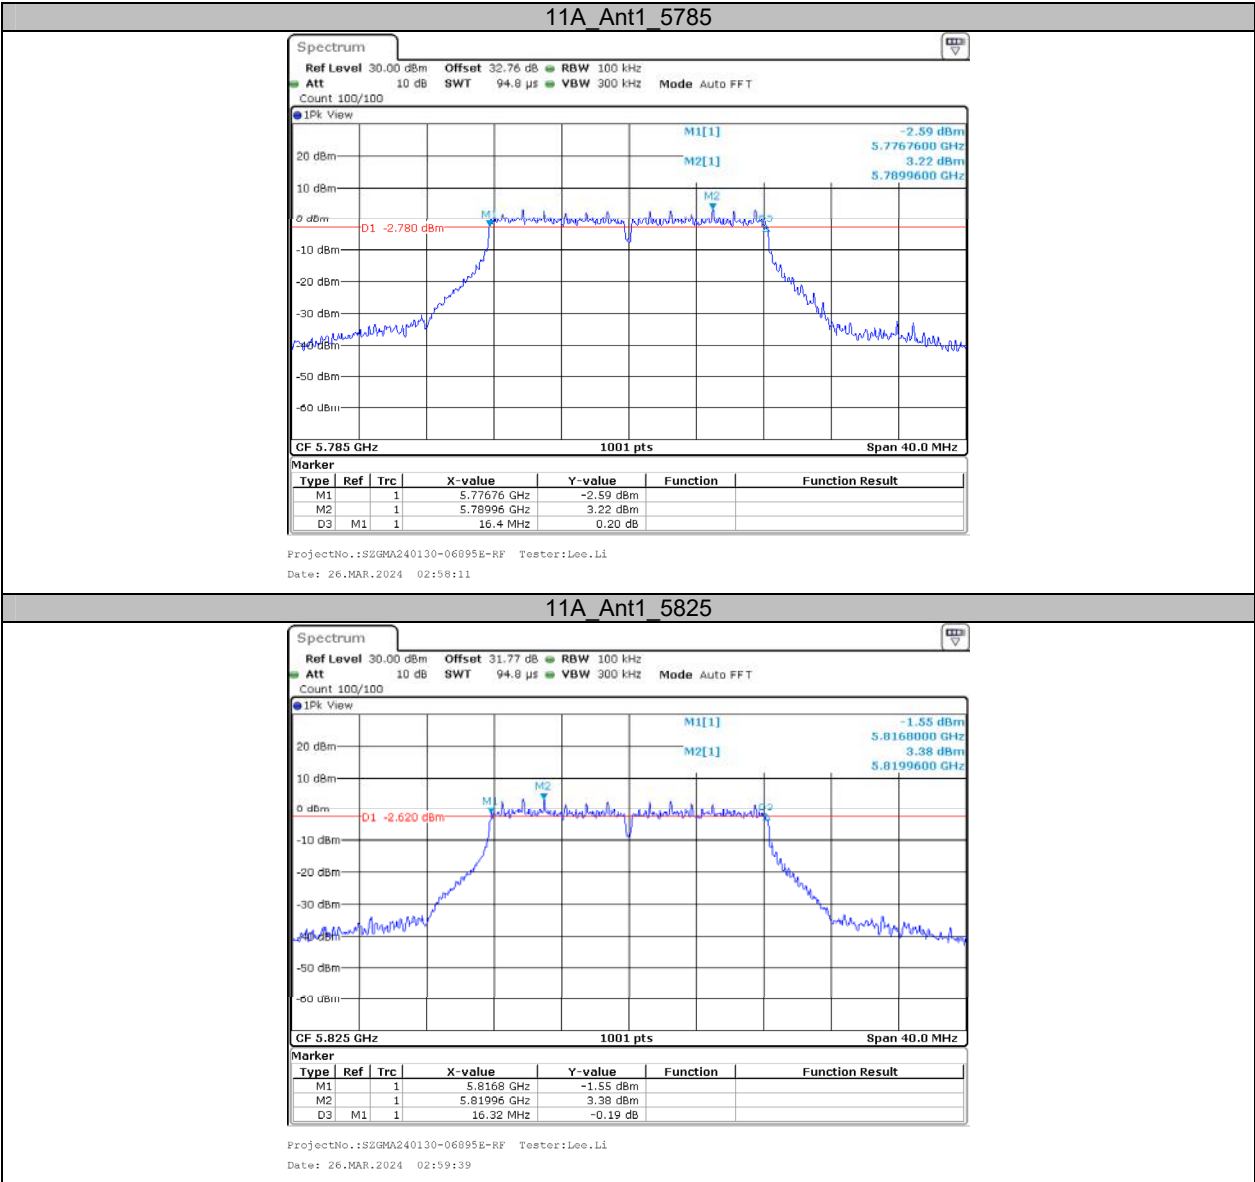


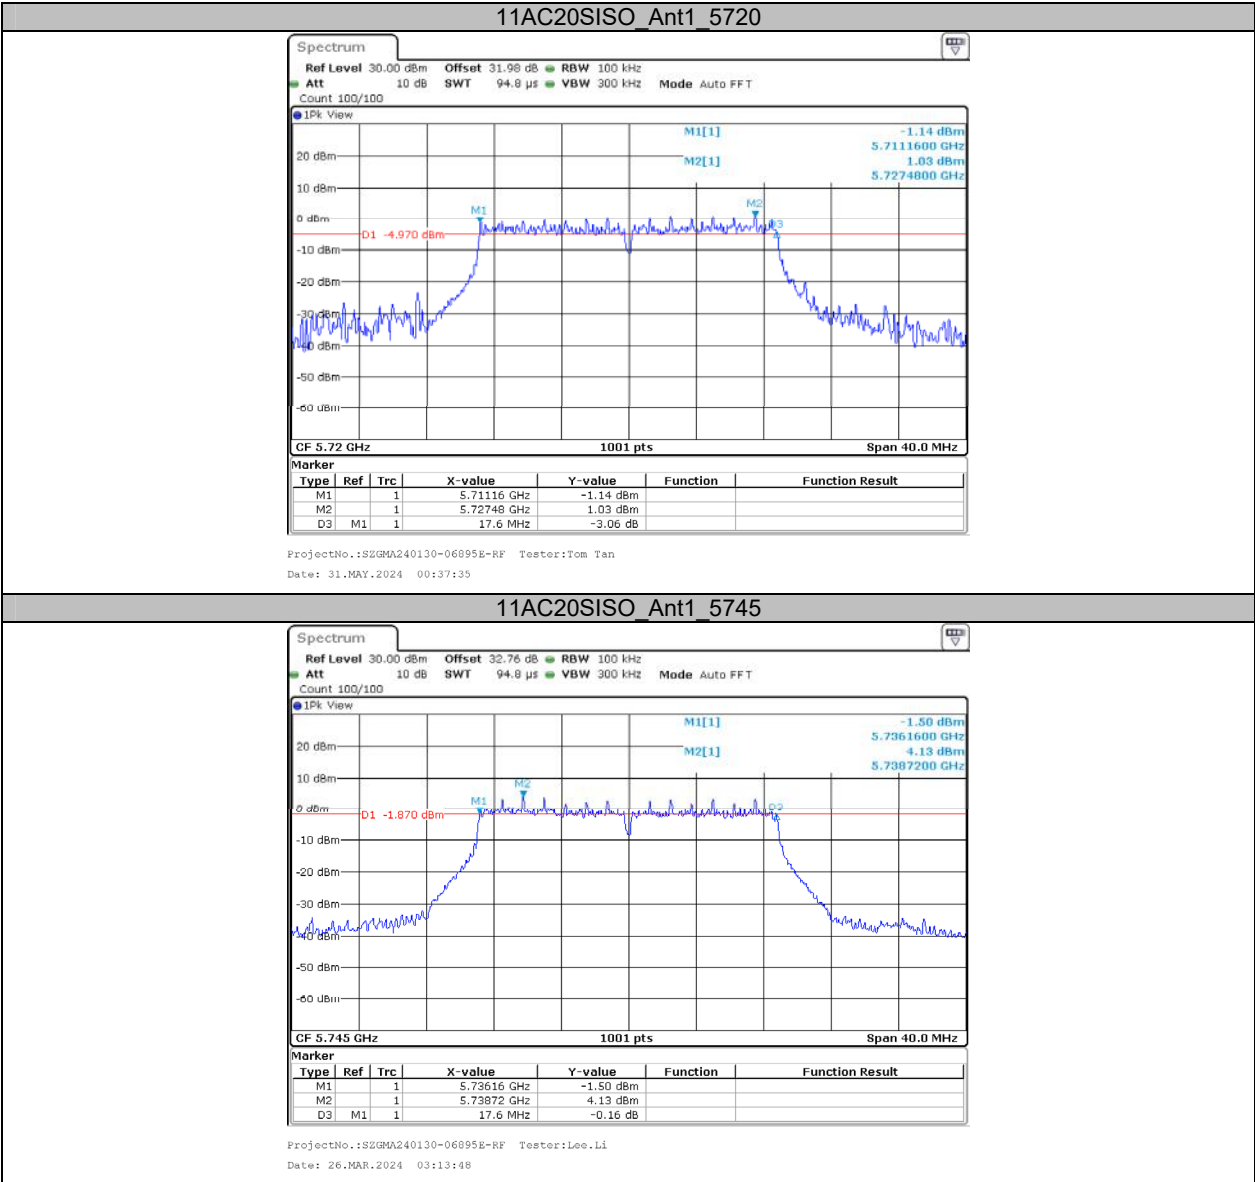

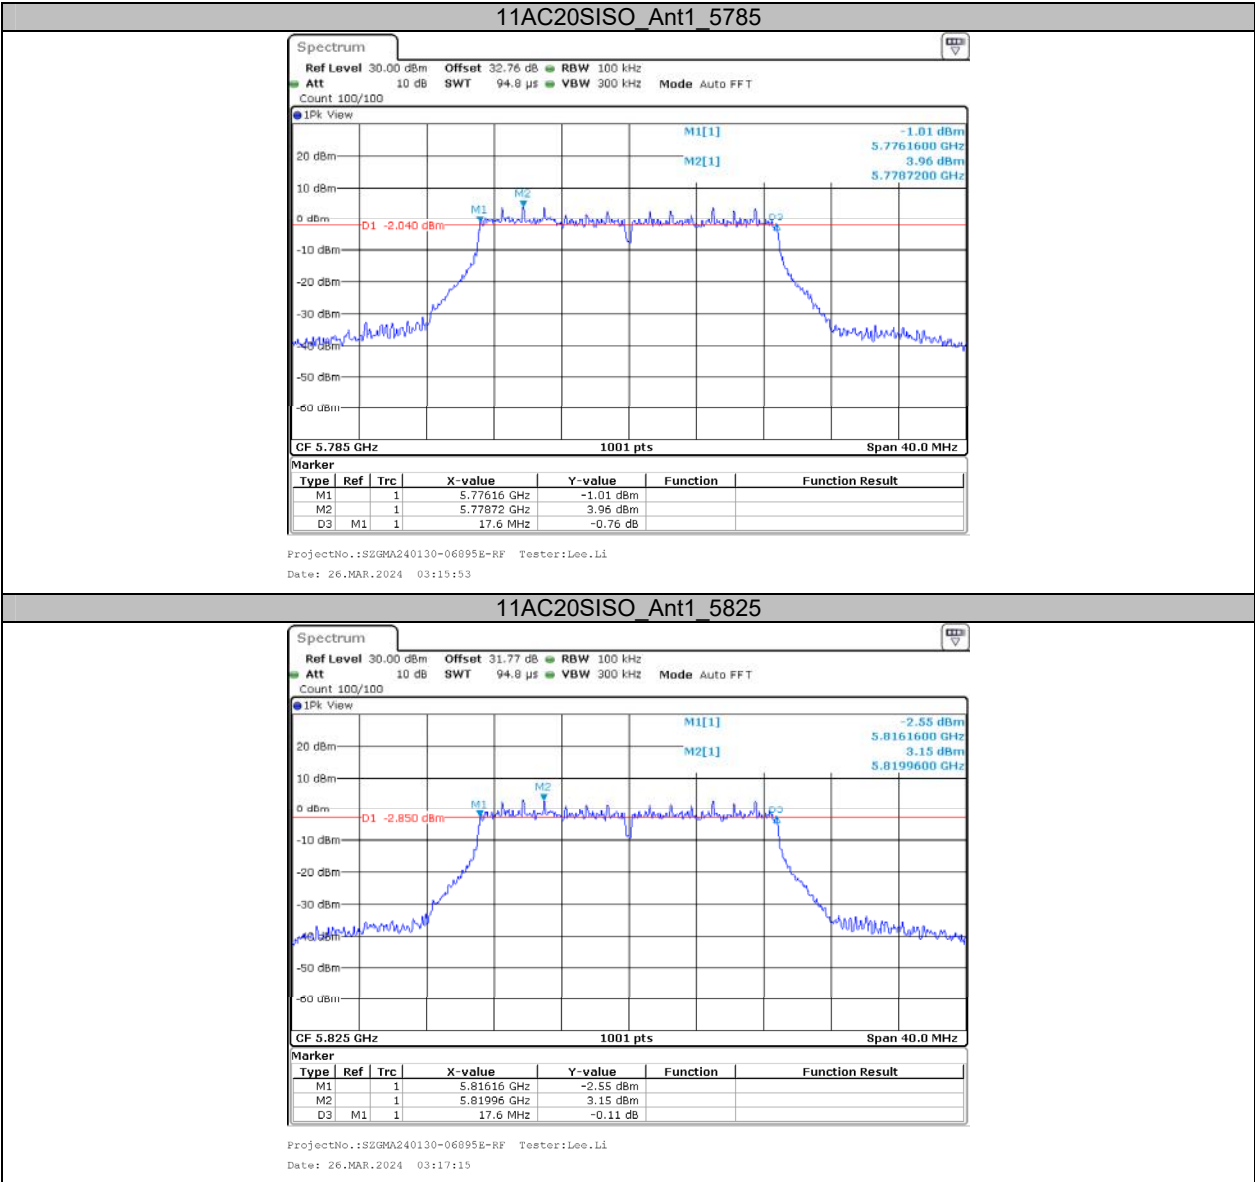

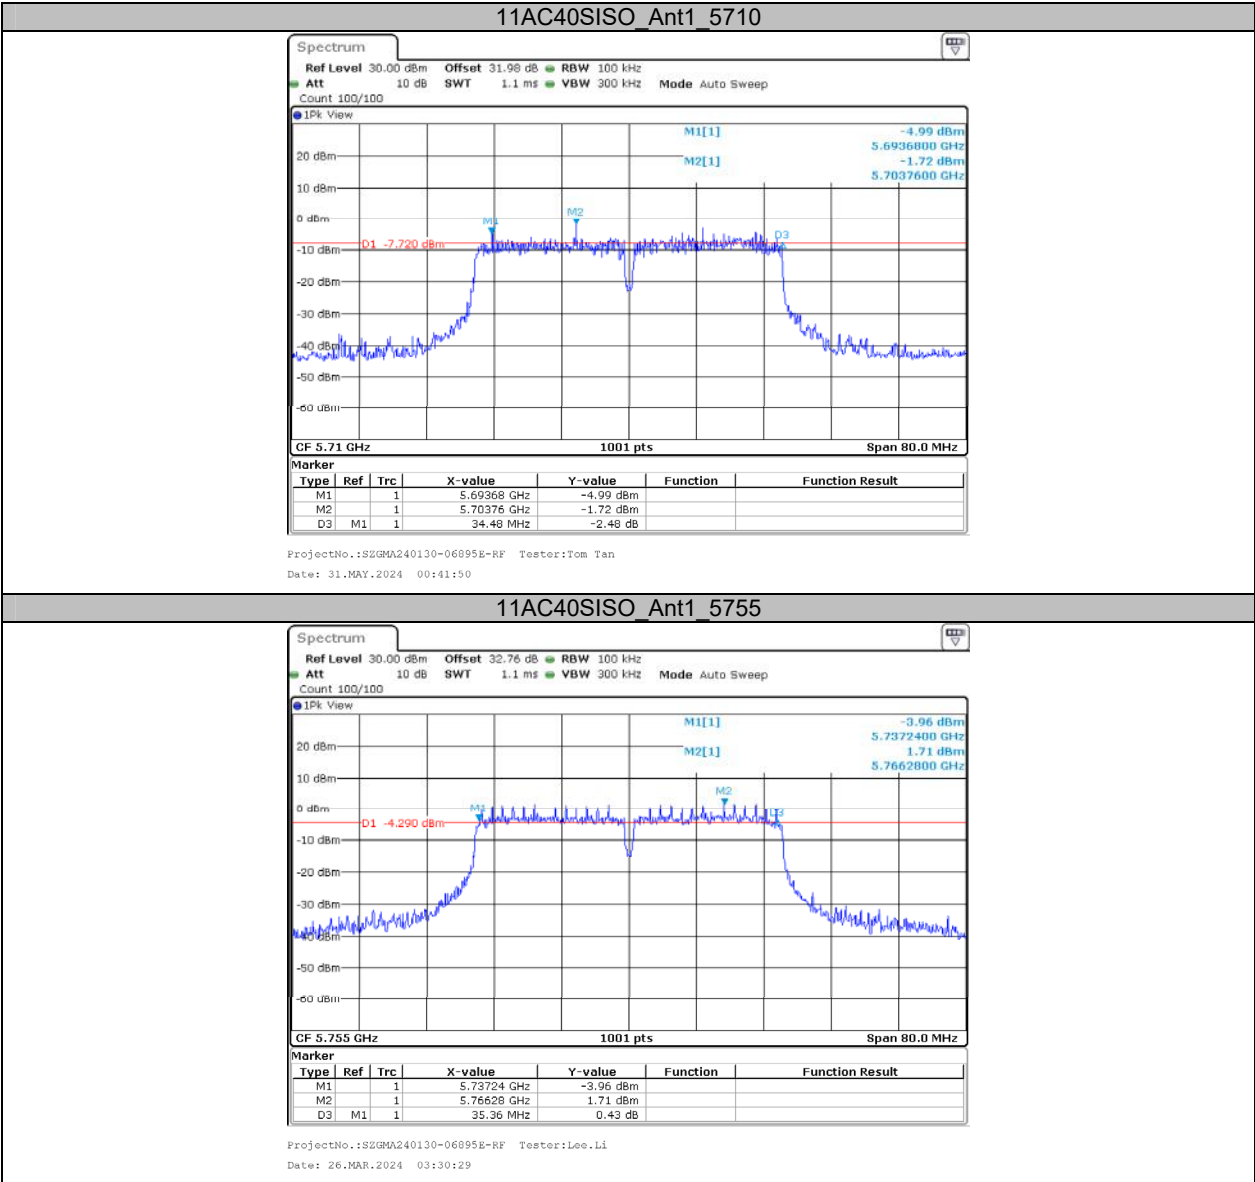

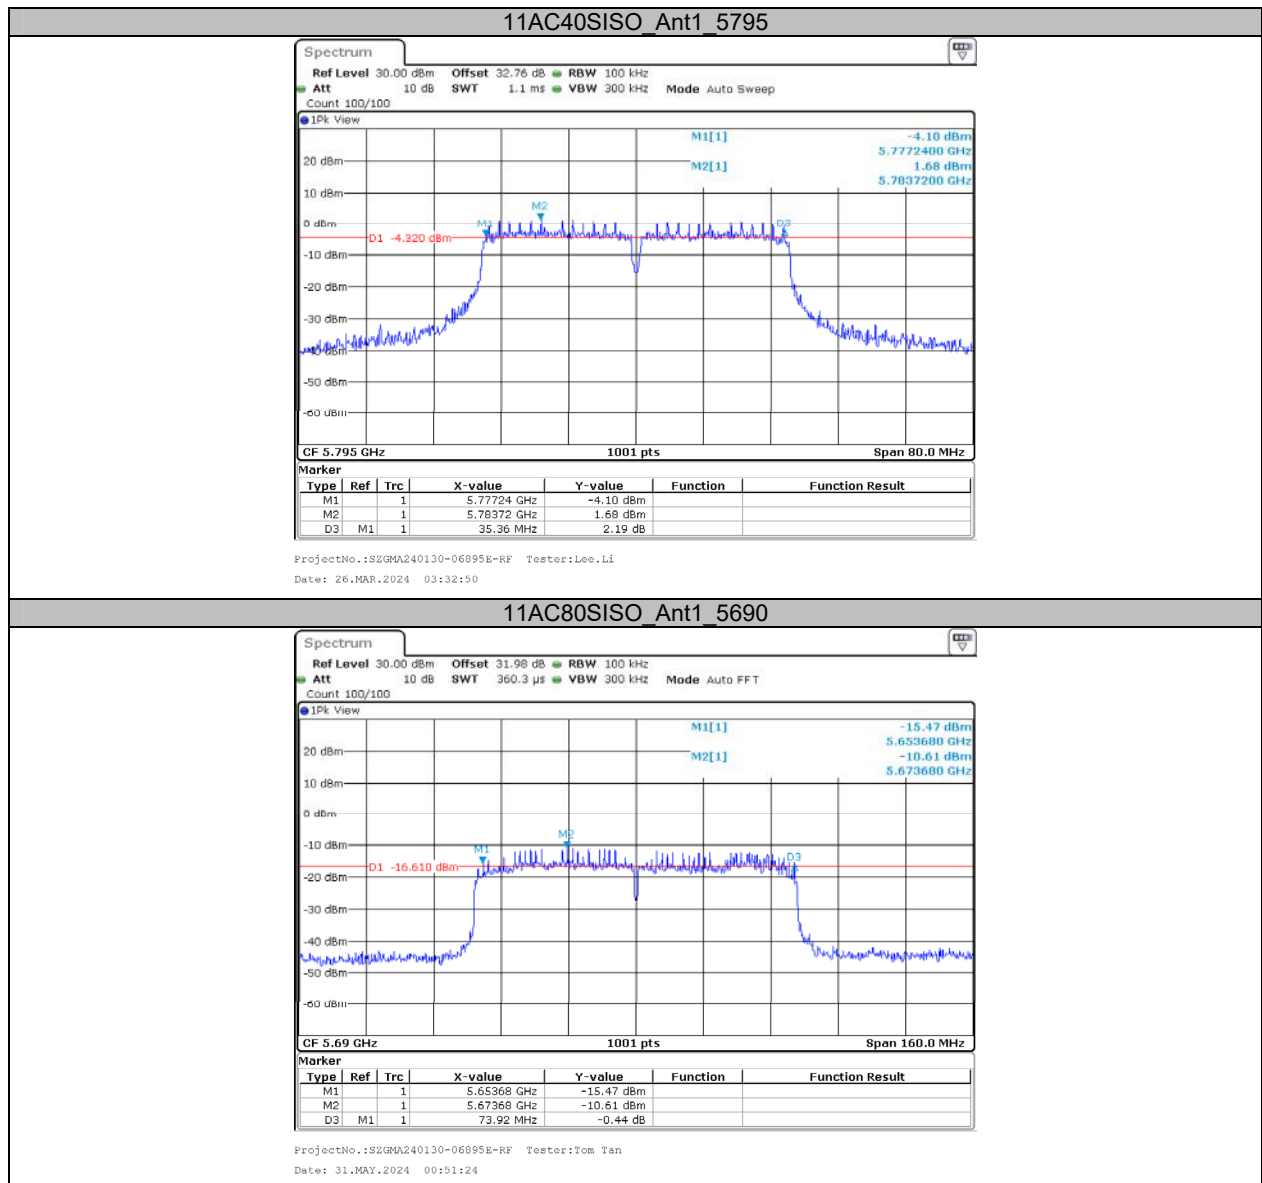


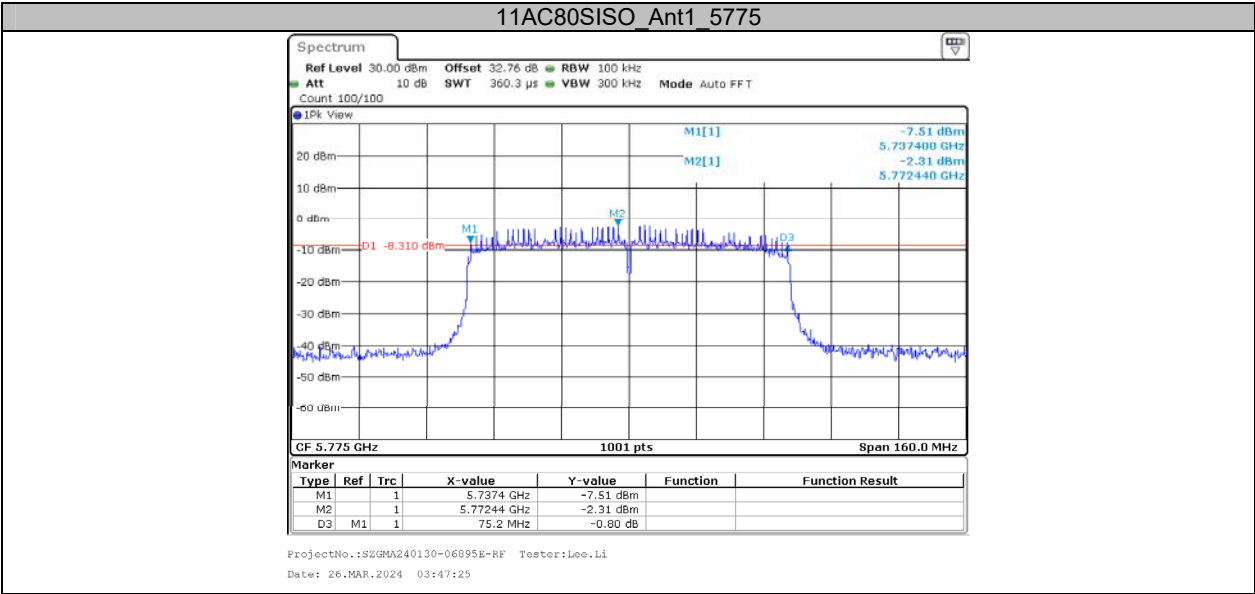

Appendix B: Duty Cycle Test Result

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]	1/T [Hz]	VBW Setting [Hz]
11A	Ant1	5180	1.36	1.56	87.18	0.60	735	1000
		5200	1.36	1.56	87.18	0.60	735	1000
		5240	1.36	1.56	87.18	0.60	735	1000
		5260	1.36	1.56	87.18	0.60	735	1000
		5280	1.36	1.56	87.18	0.60	735	1000
		5320	1.36	1.56	87.18	0.60	735	1000
		5500	1.36	1.56	87.18	0.60	735	1000
		5580	1.36	1.56	87.18	0.60	735	1000
		5700	1.36	1.56	87.18	0.60	735	1000
		5720	1.36	1.56	87.18	0.60	735	1000
		5745	1.36	1.56	87.18	0.60	735	1000
		5785	1.36	1.56	87.18	0.60	735	1000
		5825	1.36	1.56	87.18	0.60	735	1000
11AC20SISO	Ant1	5180	0.98	1.18	83.05	0.81	1020	2000
		5200	0.97	1.17	82.91	0.81	1031	2000
		5240	0.97	1.17	82.91	0.81	1031	2000
		5260	0.98	1.18	83.05	0.81	1020	2000
		5280	0.97	1.17	82.91	0.81	1031	2000
		5320	0.97	1.17	82.91	0.81	1031	2000
		5500	0.97	1.17	82.91	0.81	1031	2000
		5580	0.97	1.17	82.91	0.81	1031	2000
		5700	0.98	1.18	83.05	0.81	1020	2000
		5720	0.97	1.17	82.91	0.81	1031	2000
		5745	0.97	1.17	82.91	0.81	1031	2000
		5785	0.97	1.17	82.91	0.81	1031	2000
		5825	0.97	1.17	82.91	0.81	1031	2000
11AC40SISO	Ant1	5190	0.49	0.69	71.01	1.49	2041	3000
		5230	0.49	0.69	71.01	1.49	2041	3000
		5270	0.49	0.69	71.01	1.49	2041	3000
		5310	0.49	0.69	71.01	1.49	2041	3000
		5510	0.49	0.69	71.01	1.49	2041	3000
		5550	0.49	0.69	71.01	1.49	2041	3000
		5670	0.49	0.69	71.01	1.49	2041	3000
		5710	0.49	0.69	71.01	1.49	2041	3000
		5755	0.49	0.69	71.01	1.49	2041	3000
		5795	0.49	0.69	71.01	1.49	2041	3000
11AC80SISO	Ant1	5210	0.24	0.44	54.55	2.63	4167	5000
		5290	0.24	0.44	54.55	2.63	4167	5000
		5530	0.24	0.44	54.55	2.63	4167	5000
		5610	0.24	0.44	54.55	2.63	4167	5000
		5690	0.24	0.44	54.55	2.63	4167	5000
		5775	0.24	0.44	54.55	2.63	4167	5000

Test Graphs

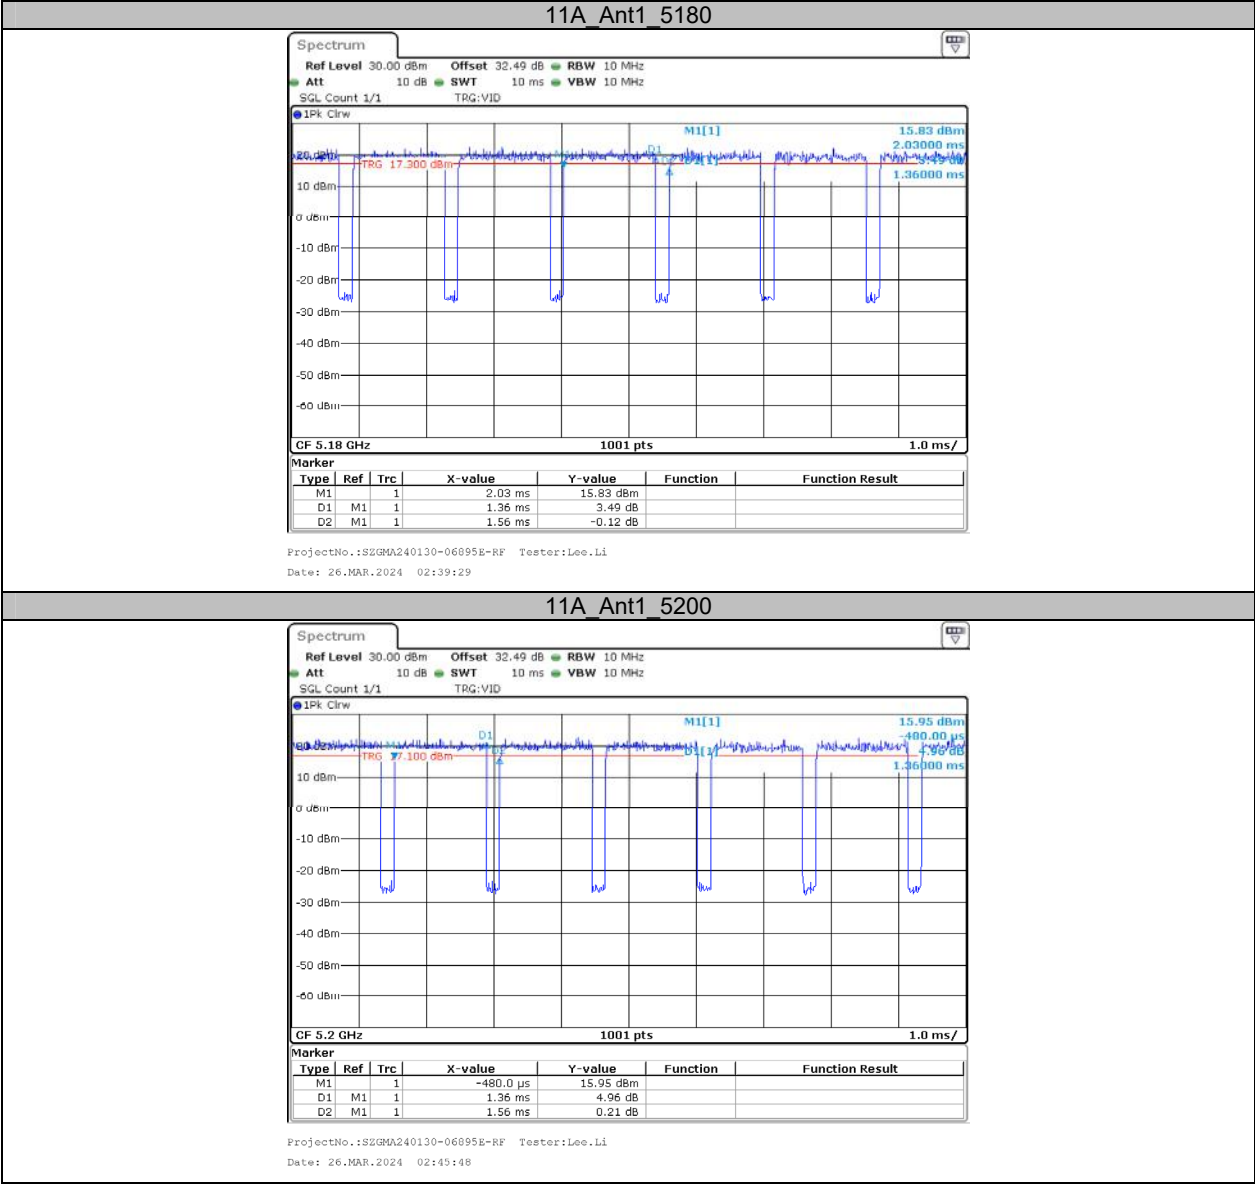











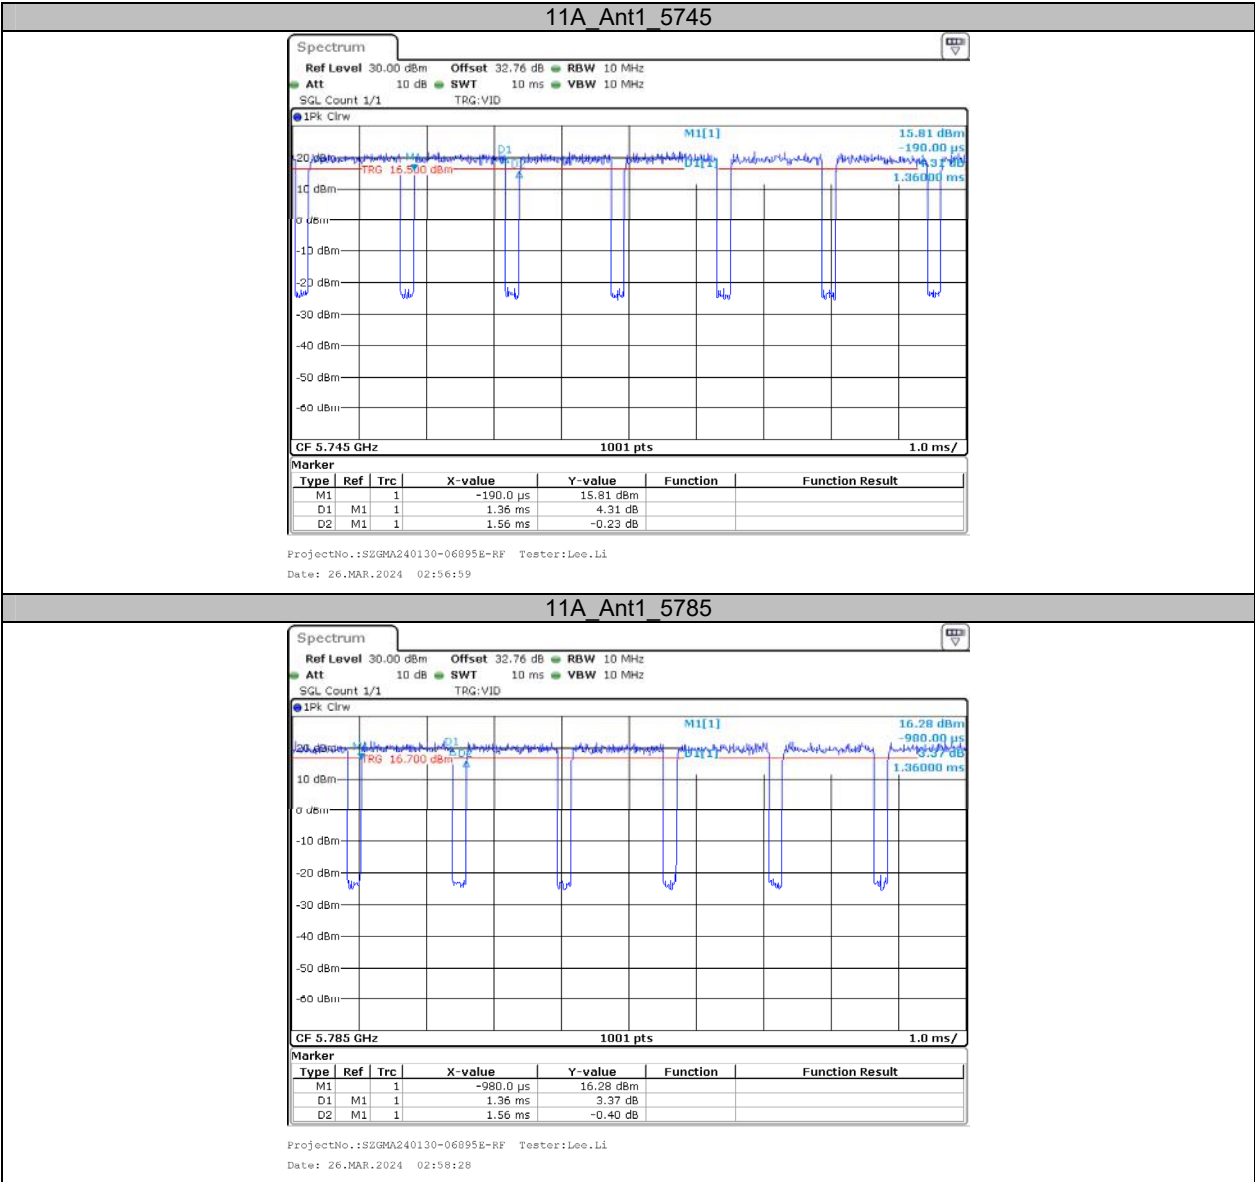


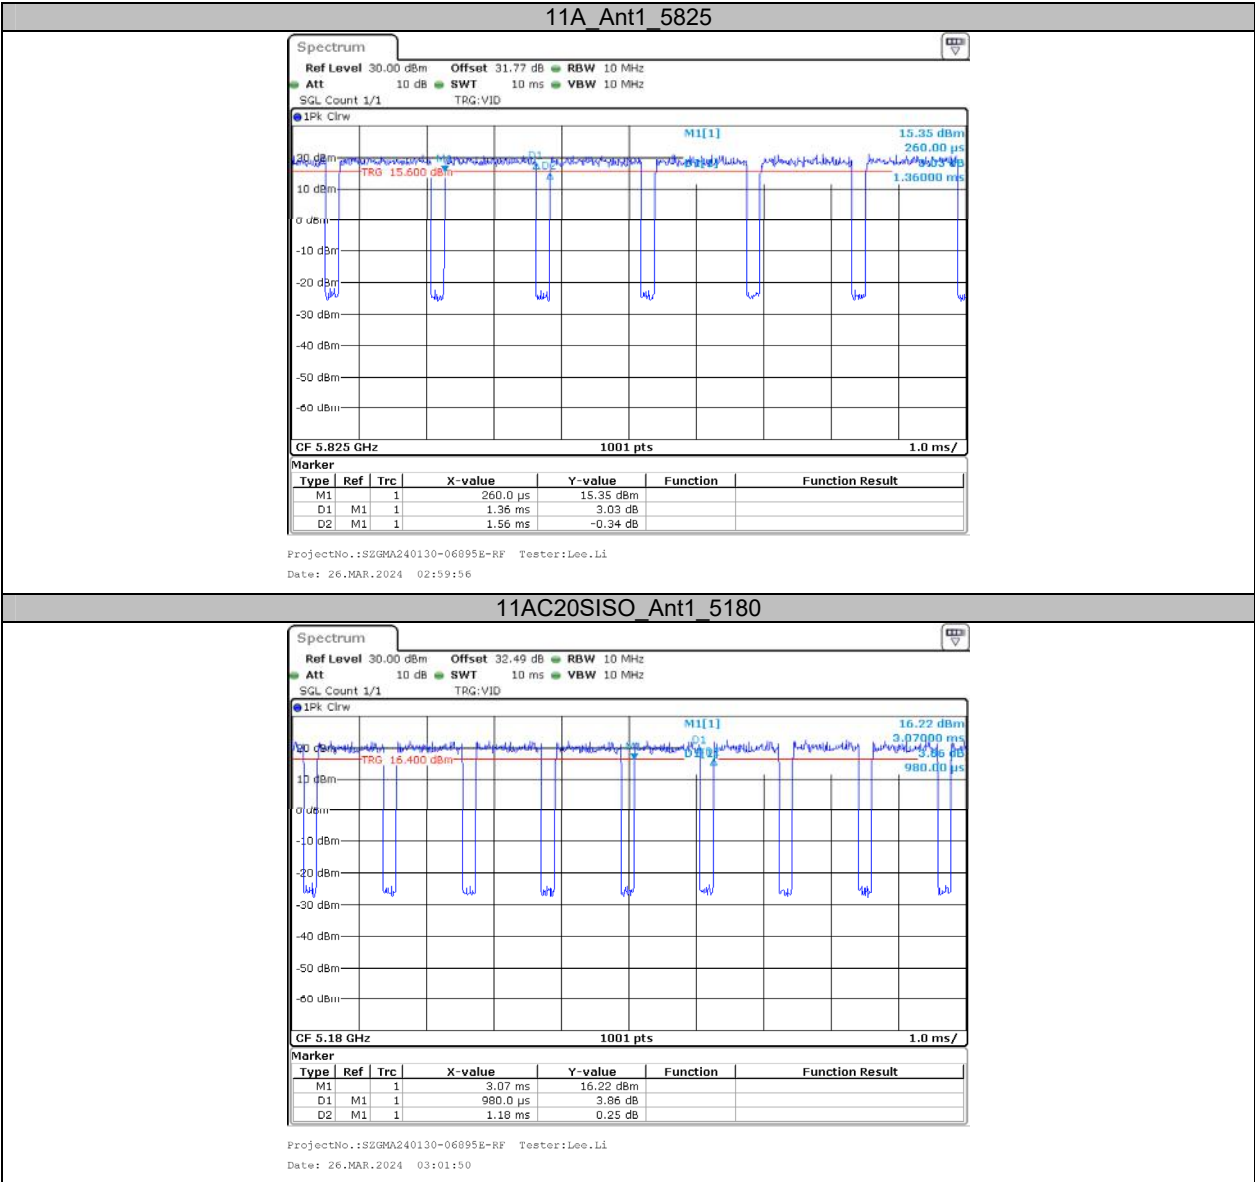











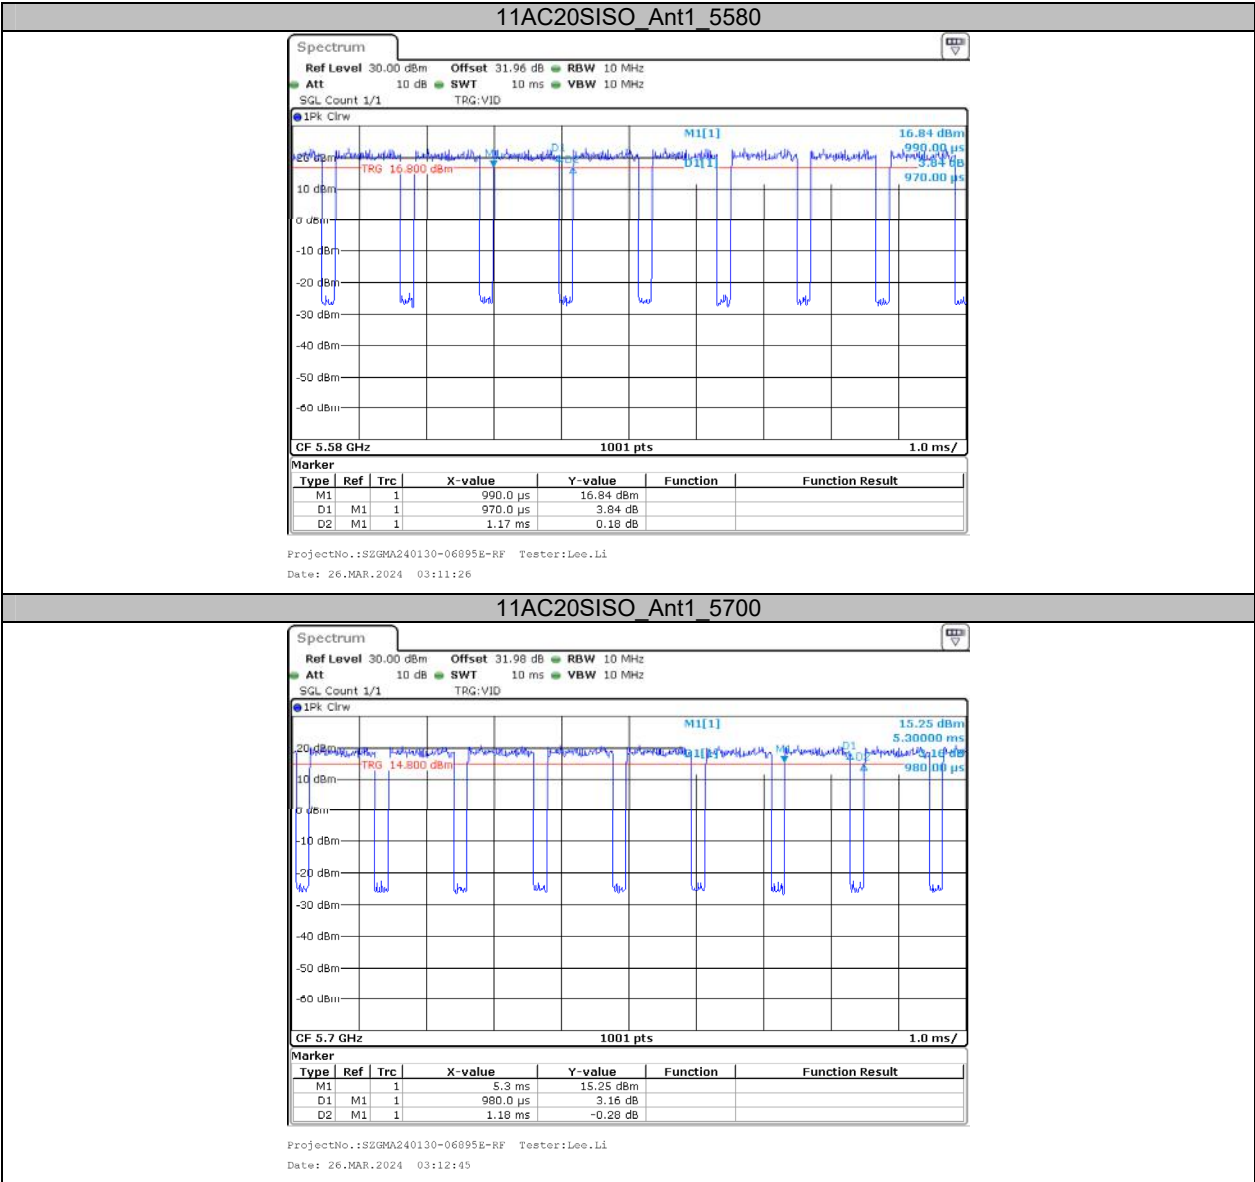


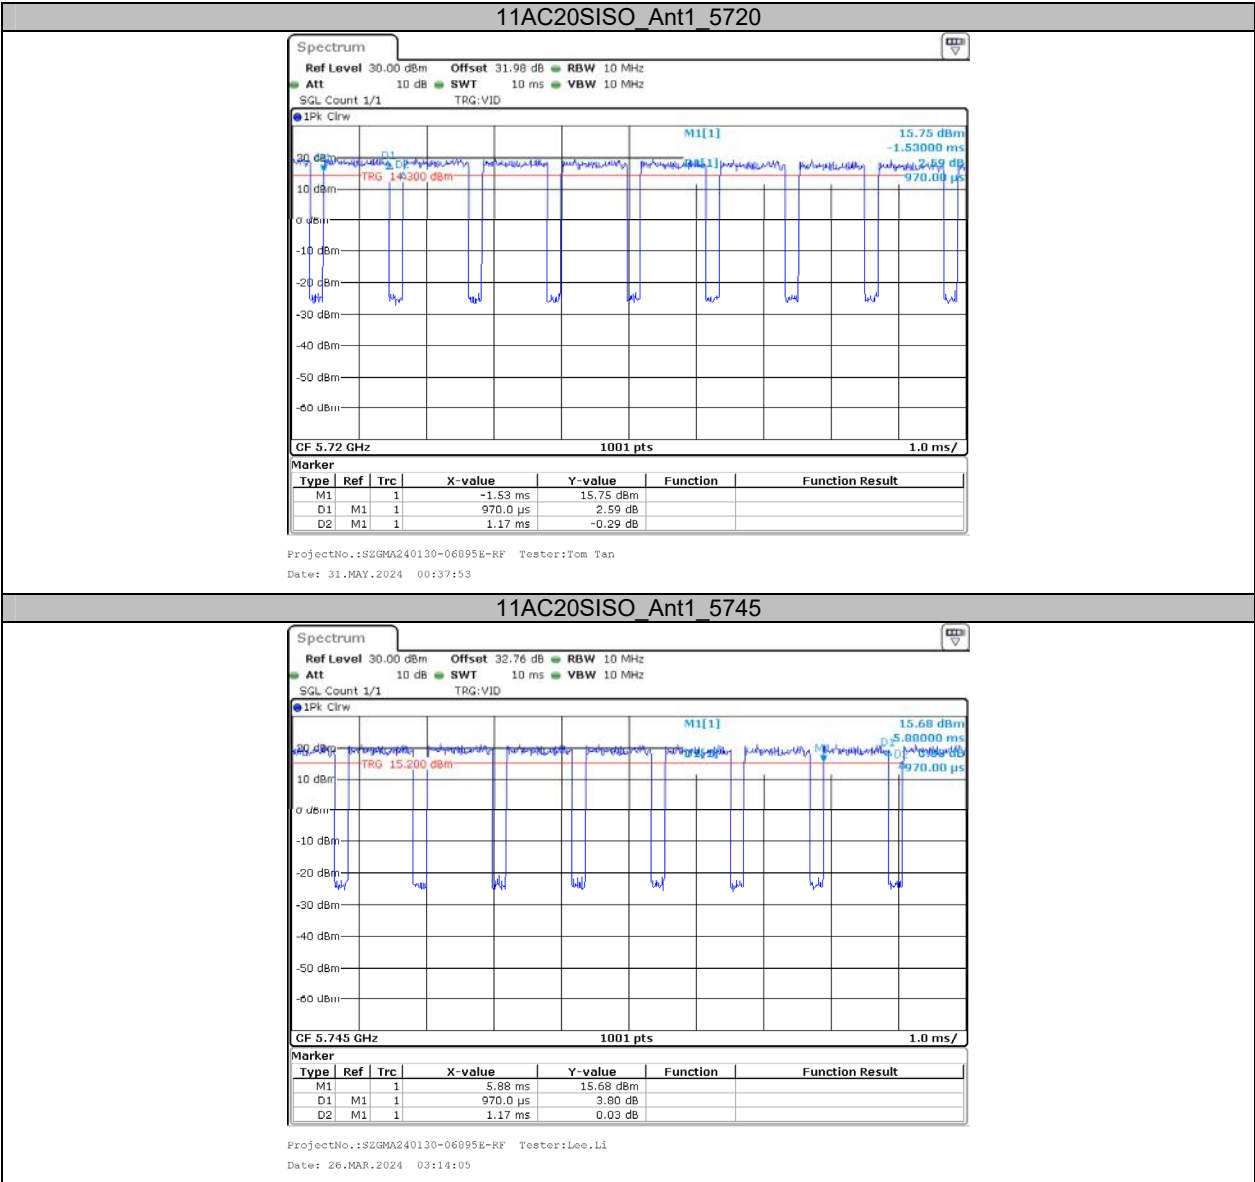

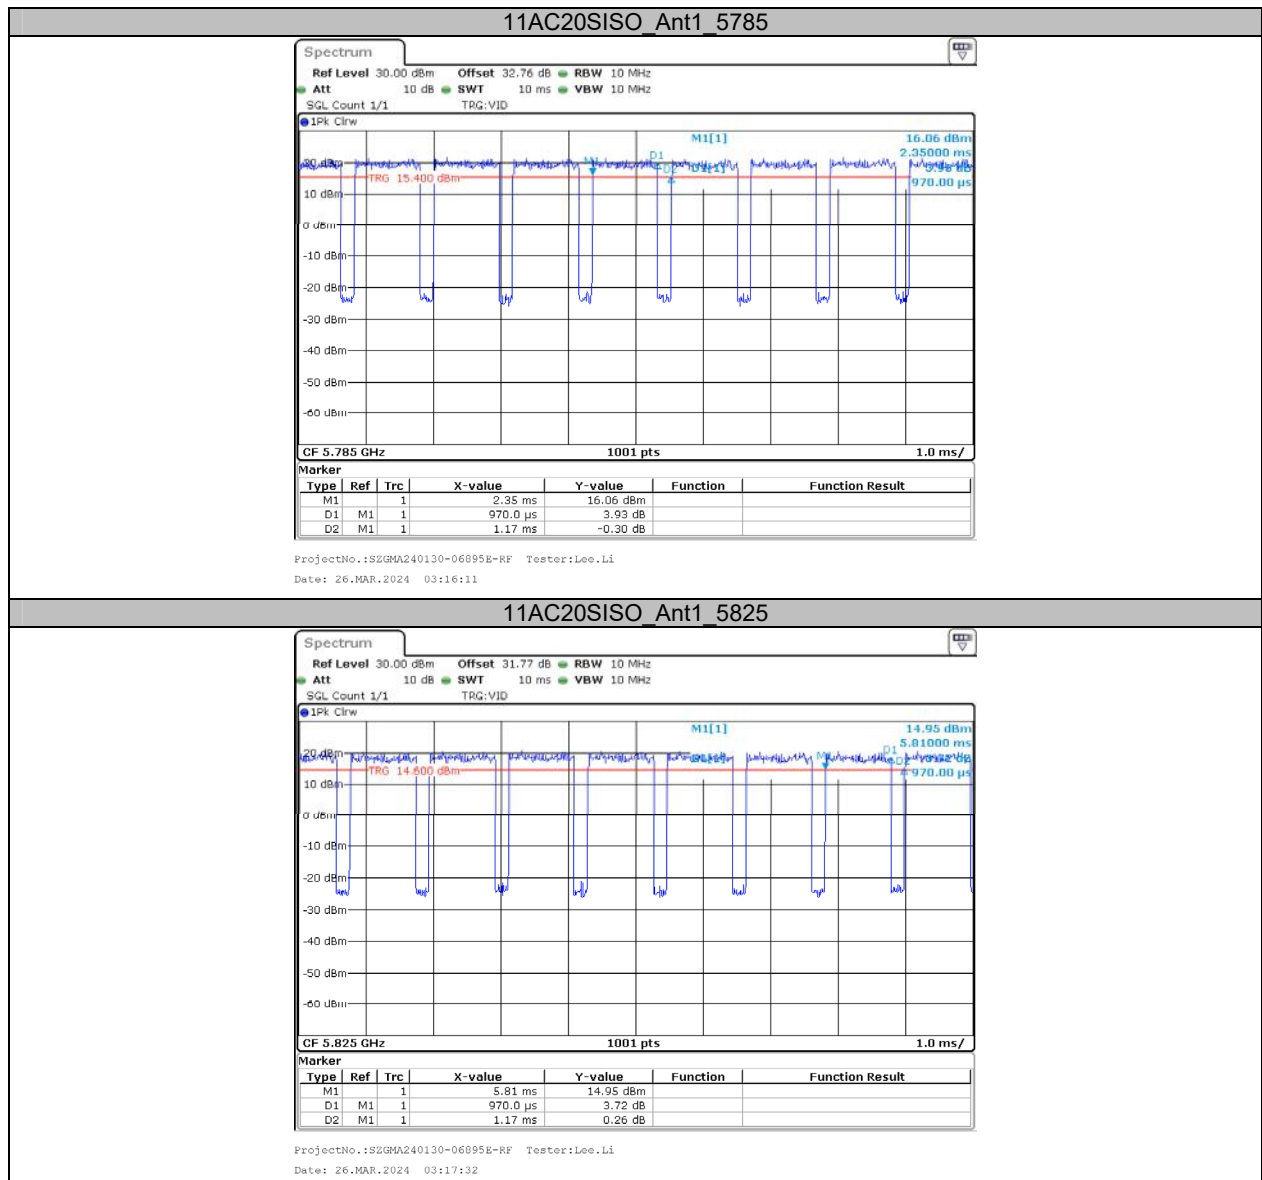


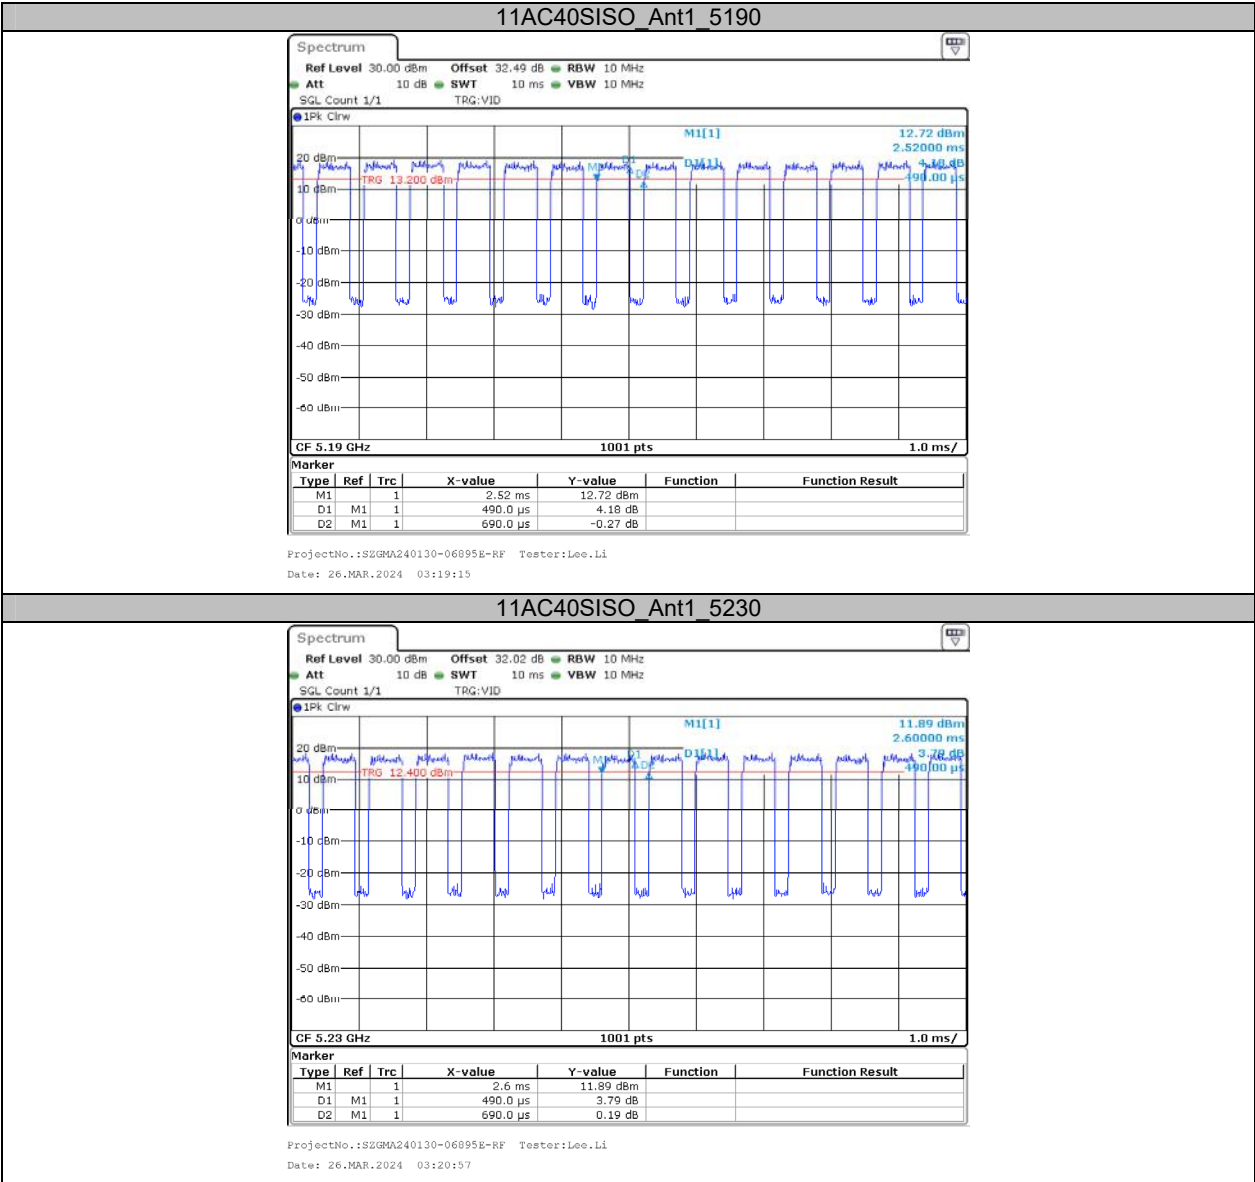


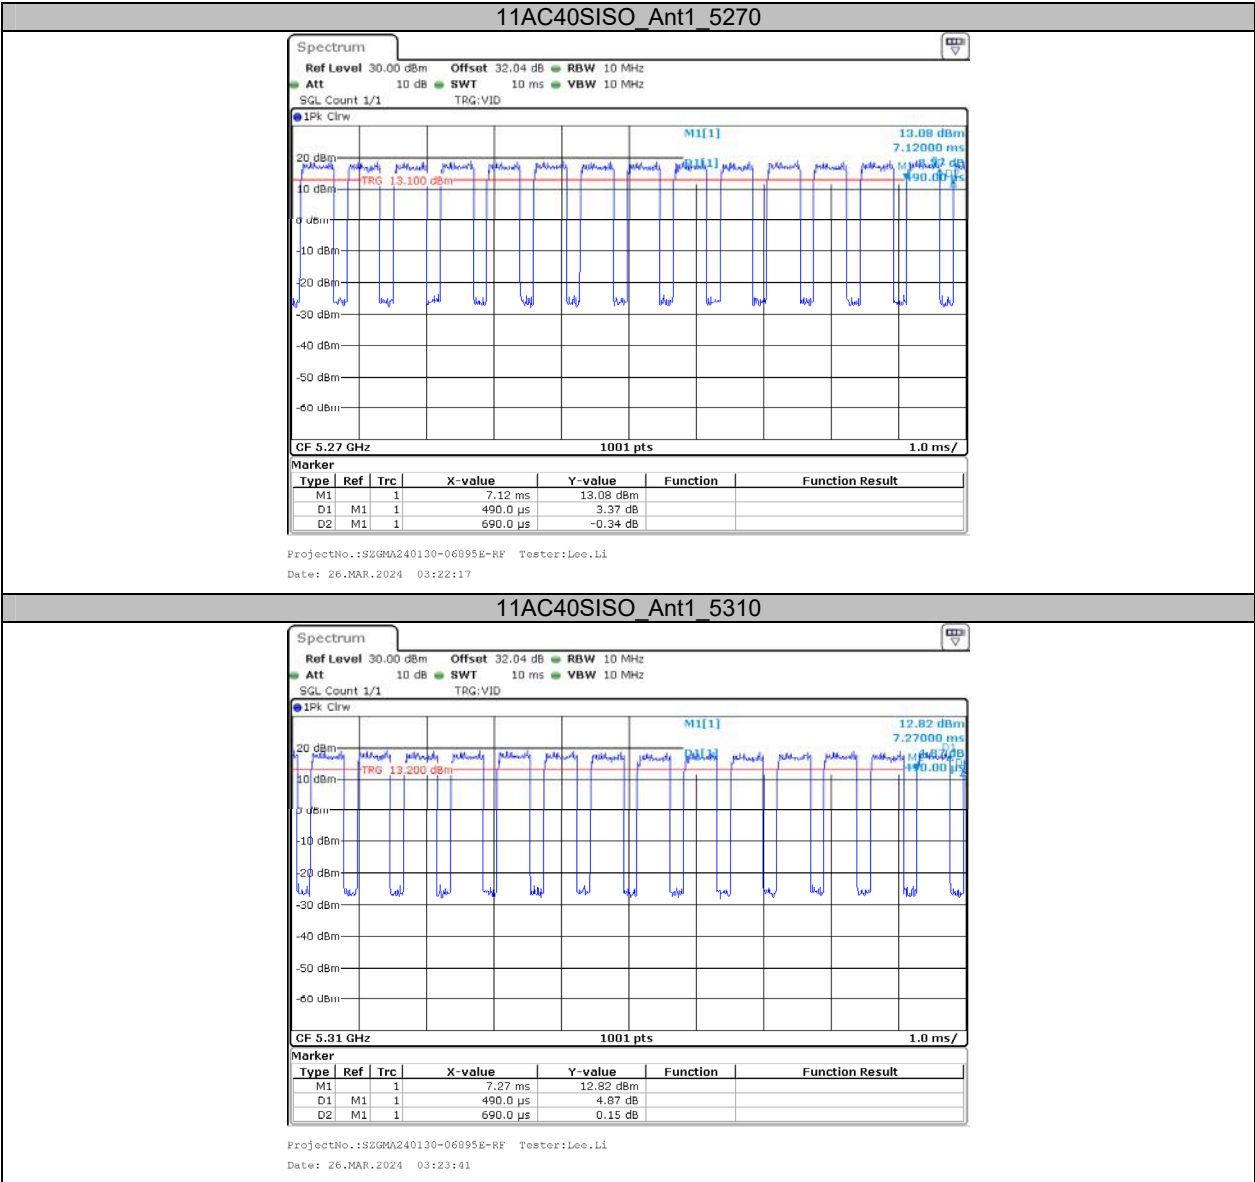


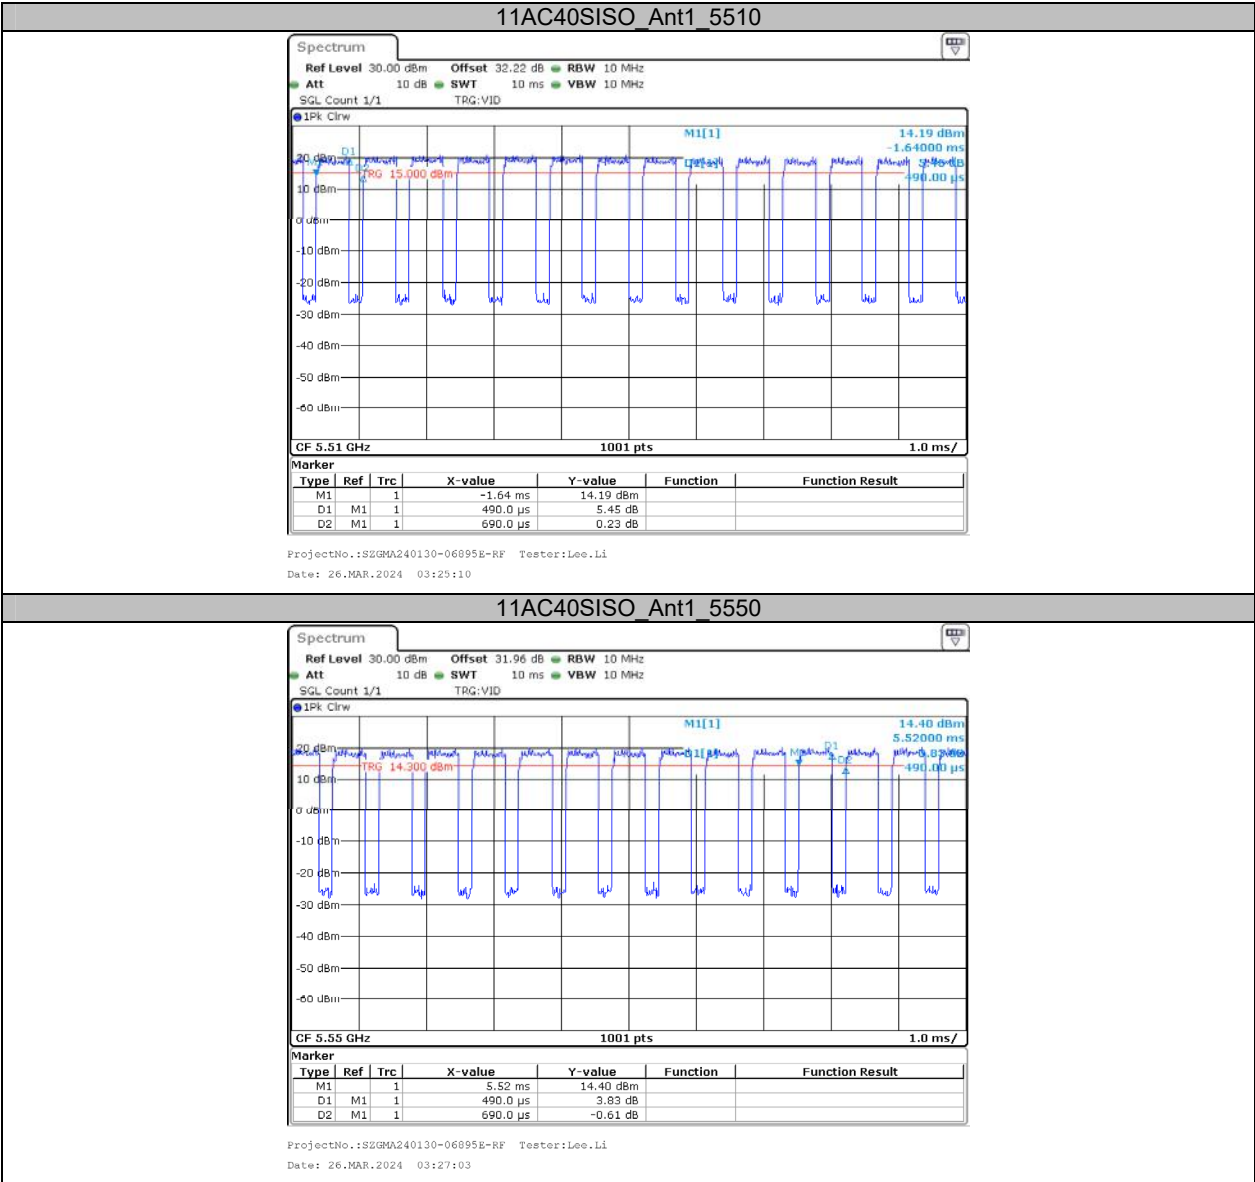




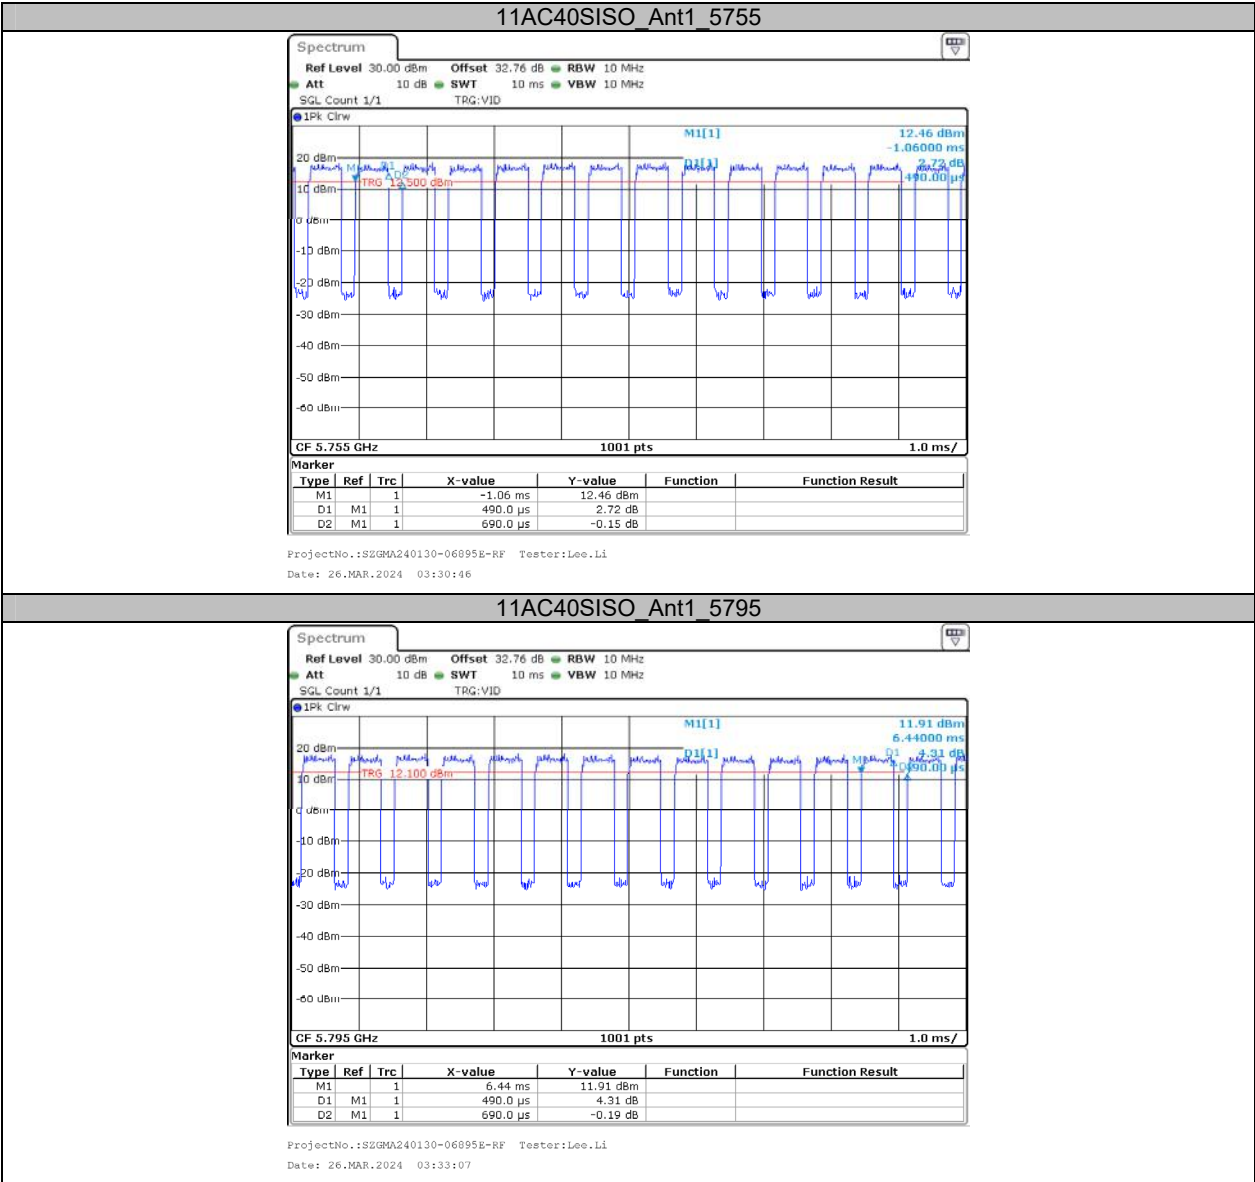

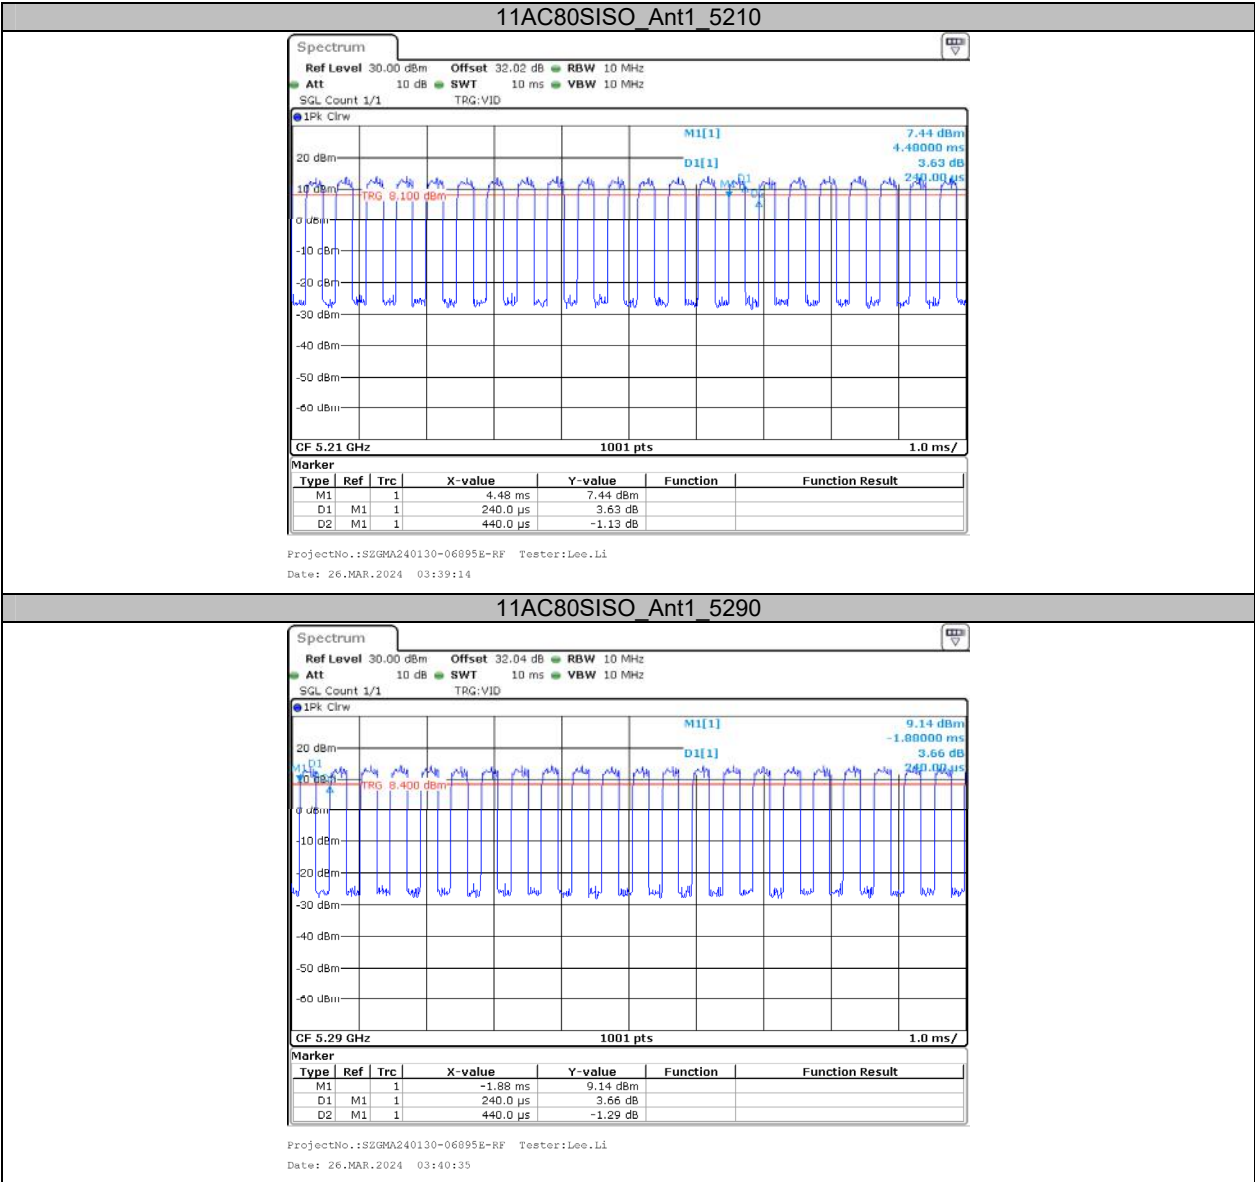

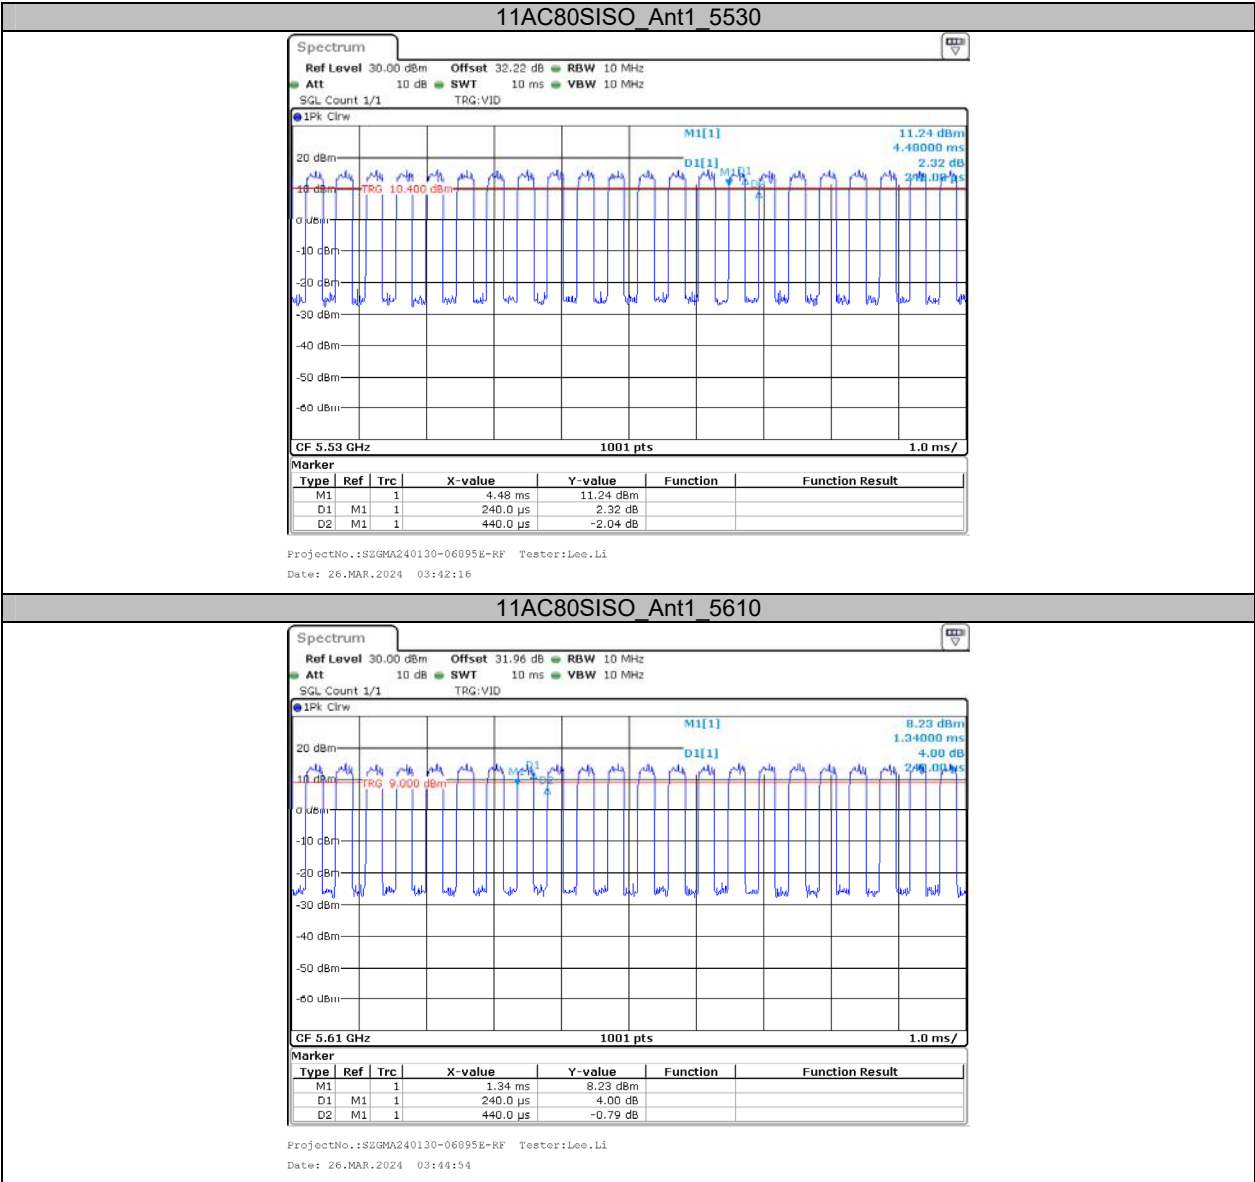

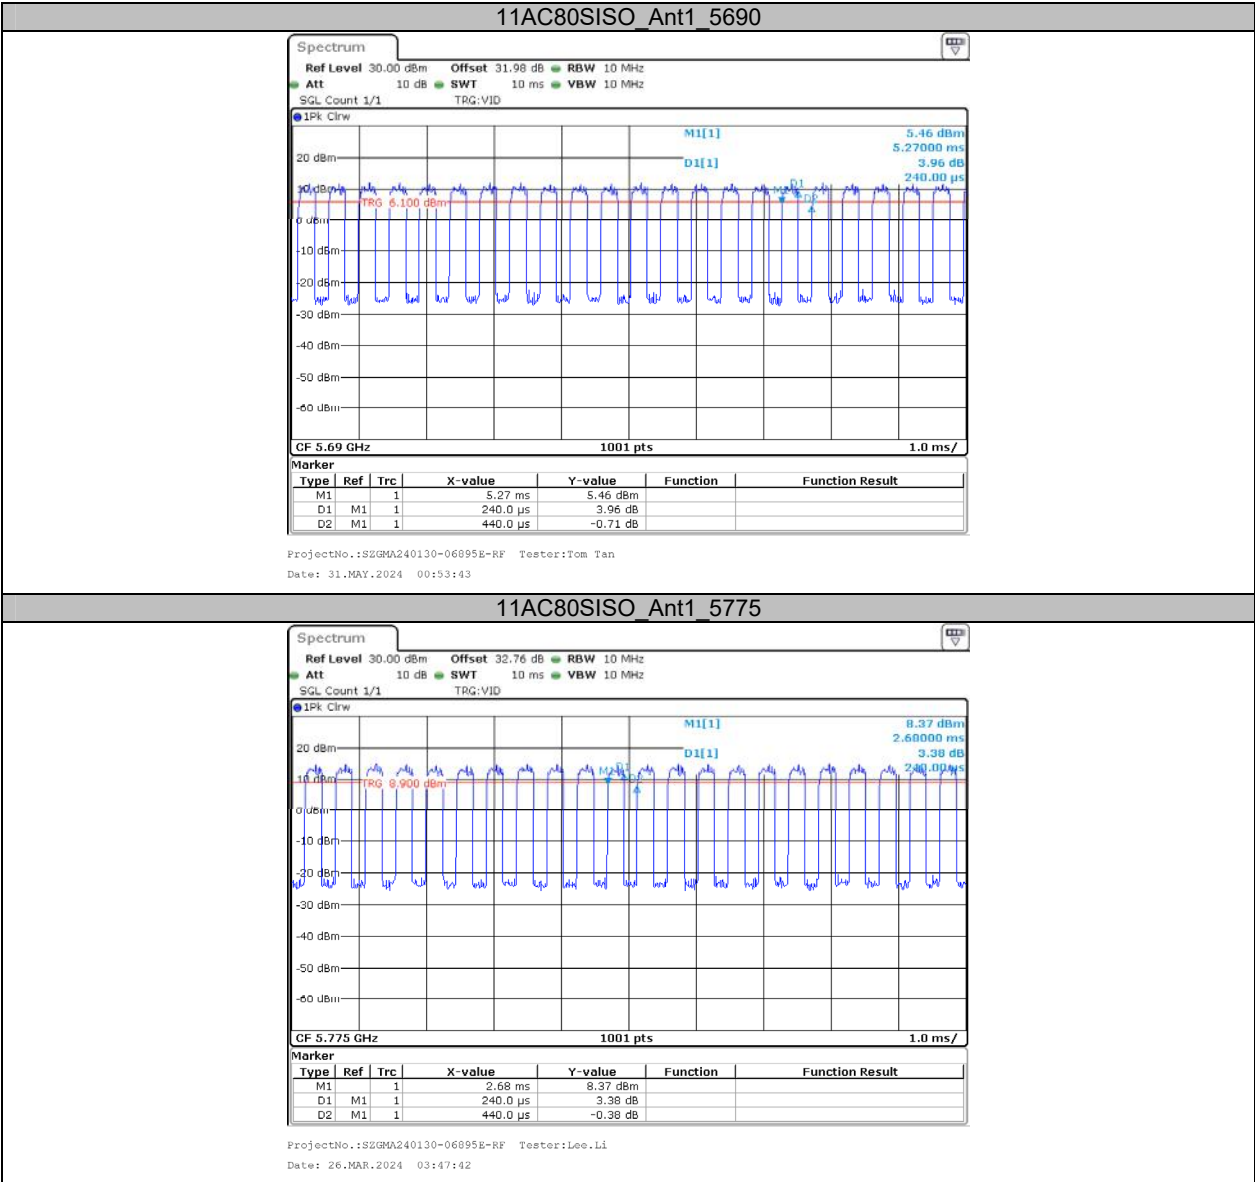

Appendix C: Maximum conducted output power Test Result

Test Mode	Antenna	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	15.77	≤23.98	PASS
		5200	15.31	≤23.98	PASS
		5240	15.05	≤23.98	PASS
		5260	15.17	≤23.98	PASS
		5280	15.42	≤23.98	PASS
		5320	15.37	≤23.98	PASS
		5500	17.45	≤23.98	PASS
		5580	16.32	≤23.98	PASS
		5700	14.58	≤23.98	PASS
		5720	11.36	≤23.98	PASS
		5745	15.10	≤30.00	PASS
		5785	15.29	≤30.00	PASS
11AC20SISO	Ant1	5825	14.37	≤30.00	PASS
		5180	15.69	≤23.98	PASS
		5200	15.34	≤23.98	PASS
		5240	14.94	≤23.98	PASS
		5260	15.12	≤23.98	PASS
		5280	15.38	≤23.98	PASS
		5320	15.42	≤23.98	PASS
		5500	17.43	≤23.98	PASS
		5580	16.35	≤23.98	PASS
		5700	14.58	≤23.98	PASS
		5720	11.26	≤23.98	PASS
		5745	15.09	≤30.00	PASS
11AC40SISO	Ant1	5785	15.33	≤30.00	PASS
		5825	14.33	≤30.00	PASS
		5190	15.79	≤23.98	PASS
		5230	15.04	≤23.98	PASS
		5270	15.51	≤23.98	PASS
		5310	15.64	≤23.98	PASS
		5510	17.38	≤23.98	PASS
		5550	16.84	≤23.98	PASS
		5670	15.62	≤23.98	PASS
		5710	12.04	≤23.98	PASS
11AC80SISO	Ant1	5755	15.54	≤30.00	PASS
		5795	15.12	≤30.00	PASS
		5210	14.17	≤23.98	PASS
		5290	14.54	≤23.98	PASS
		5530	16.22	≤23.98	PASS
		5610	15.29	≤23.98	PASS
		5690	11.81	≤23.98	PASS
		5775	14.42	≤30.00	PASS

Note:

1. The device is a client device.
2. The Duty Cycle Factor is compensated in the result.
3. Additional channels cross the band 5470-5725MHz and 5725-5850 MHz, Conducted output power test with the additional channel to compliance with stricter limit of the two bands (5470-5725MHz more stricter)


Appendix D: Maximum power spectral density Test Result


Test Mode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	4.60	≤11.00	PASS
		5200	4.03	≤11.00	PASS
		5240	3.67	≤11.00	PASS
		5260	4.00	≤11.00	PASS
		5280	4.33	≤11.00	PASS
		5320	4.09	≤11.00	PASS
		5500	6.17	≤11.00	PASS
		5580	5.02	≤11.00	PASS
		5700	3.33	≤11.00	PASS
		5720 UNII-2C	1.27	≤11.00	PASS
		5720 UNII-3	-1.58	≤30.00	PASS
		5745	1.30	≤30.00	PASS
		5785	1.14	≤30.00	PASS
		5825	0.25	≤30.00	PASS
11AC20SISO	Ant1	5180	4.21	≤11.00	PASS
		5200	3.78	≤11.00	PASS
		5240	3.32	≤11.00	PASS
		5260	3.79	≤11.00	PASS
		5280	3.92	≤11.00	PASS
		5320	3.81	≤11.00	PASS
		5500	5.79	≤11.00	PASS
		5580	4.75	≤11.00	PASS
		5700	3.26	≤11.00	PASS
		5720 UNII-2C	0.86	≤11.00	PASS
		5720 UNII-3	-1.92	≤30.00	PASS
		5745	0.97	≤30.00	PASS
		5785	1.24	≤30.00	PASS
		5825	-0.01	≤30.00	PASS
11AC40SISO	Ant1	5190	1.44	≤11.00	PASS
		5230	0.85	≤11.00	PASS
		5270	1.20	≤11.00	PASS
		5310	1.36	≤11.00	PASS
		5510	3.01	≤11.00	PASS
		5550	2.60	≤11.00	PASS
		5670	1.15	≤11.00	PASS
		5710 UNII-2C	-1.88	≤11.00	PASS
		5710 UNII-3	-5.61	≤30.00	PASS
		5755	-1.66	≤30.00	PASS
		5795	-1.67	≤30.00	PASS
11AC80SISO	Ant1	5210	-2.42	≤11.00	PASS
		5290	-2.83	≤11.00	PASS
		5530	-0.73	≤11.00	PASS
		5610	-1.56	≤11.00	PASS
		5690 UNII-2C	-5.01	≤11.00	PASS
		5690 UNII-3	-11.34	≤30.00	PASS
		5775	-5.16	≤30.00	PASS


Note:


1. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2. The Duty Cycle Factor is compensated in the graph.


Test Graphs

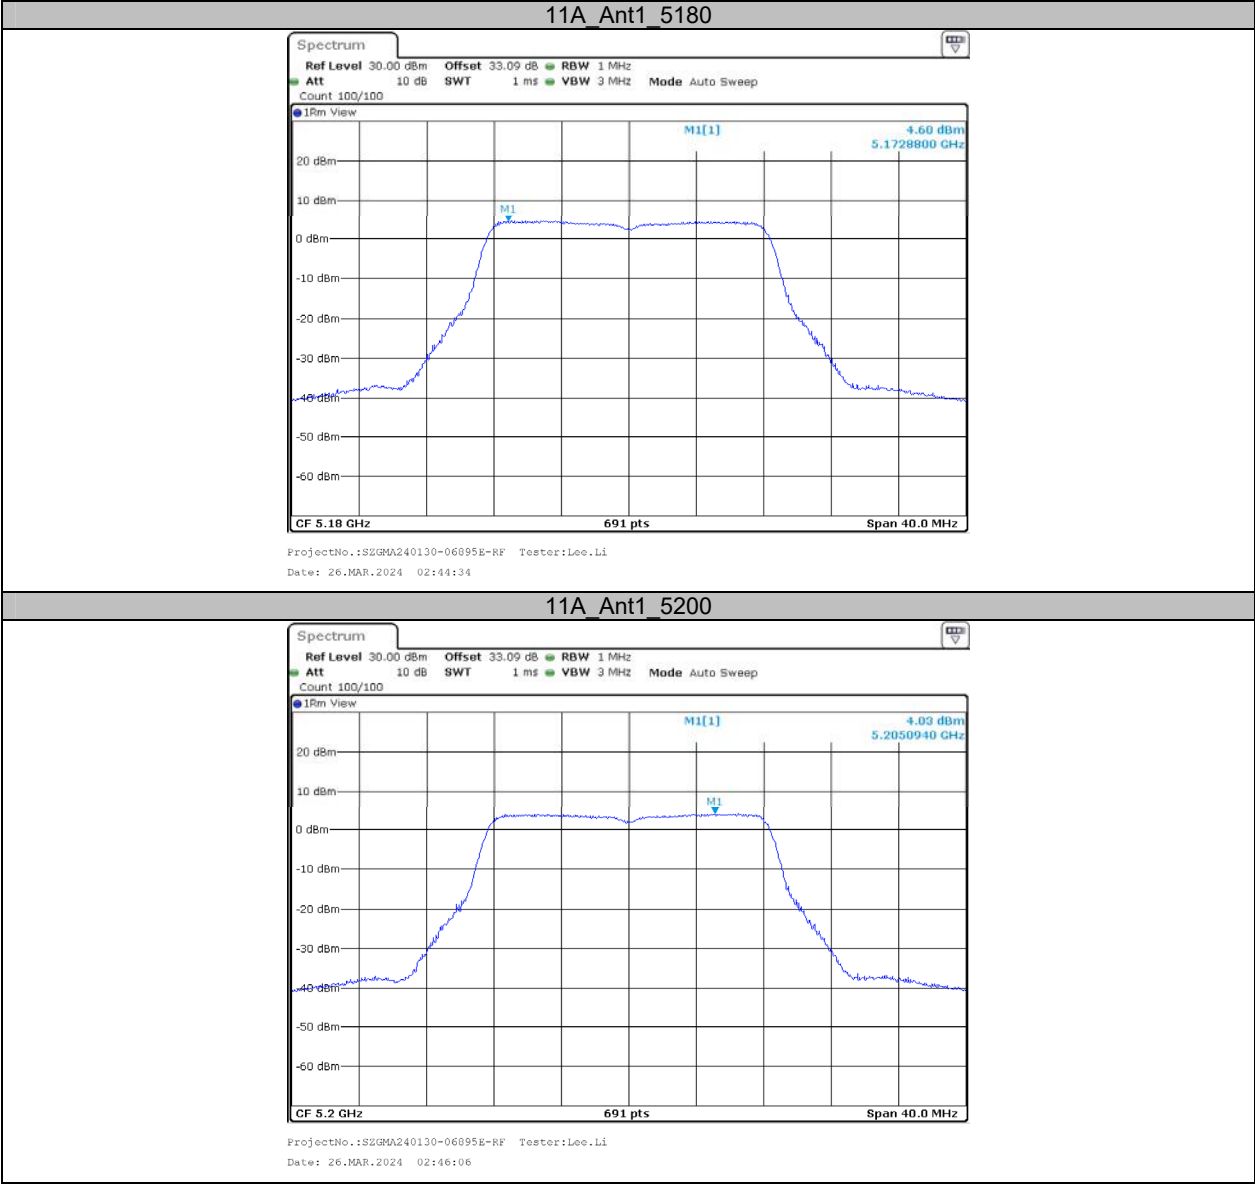


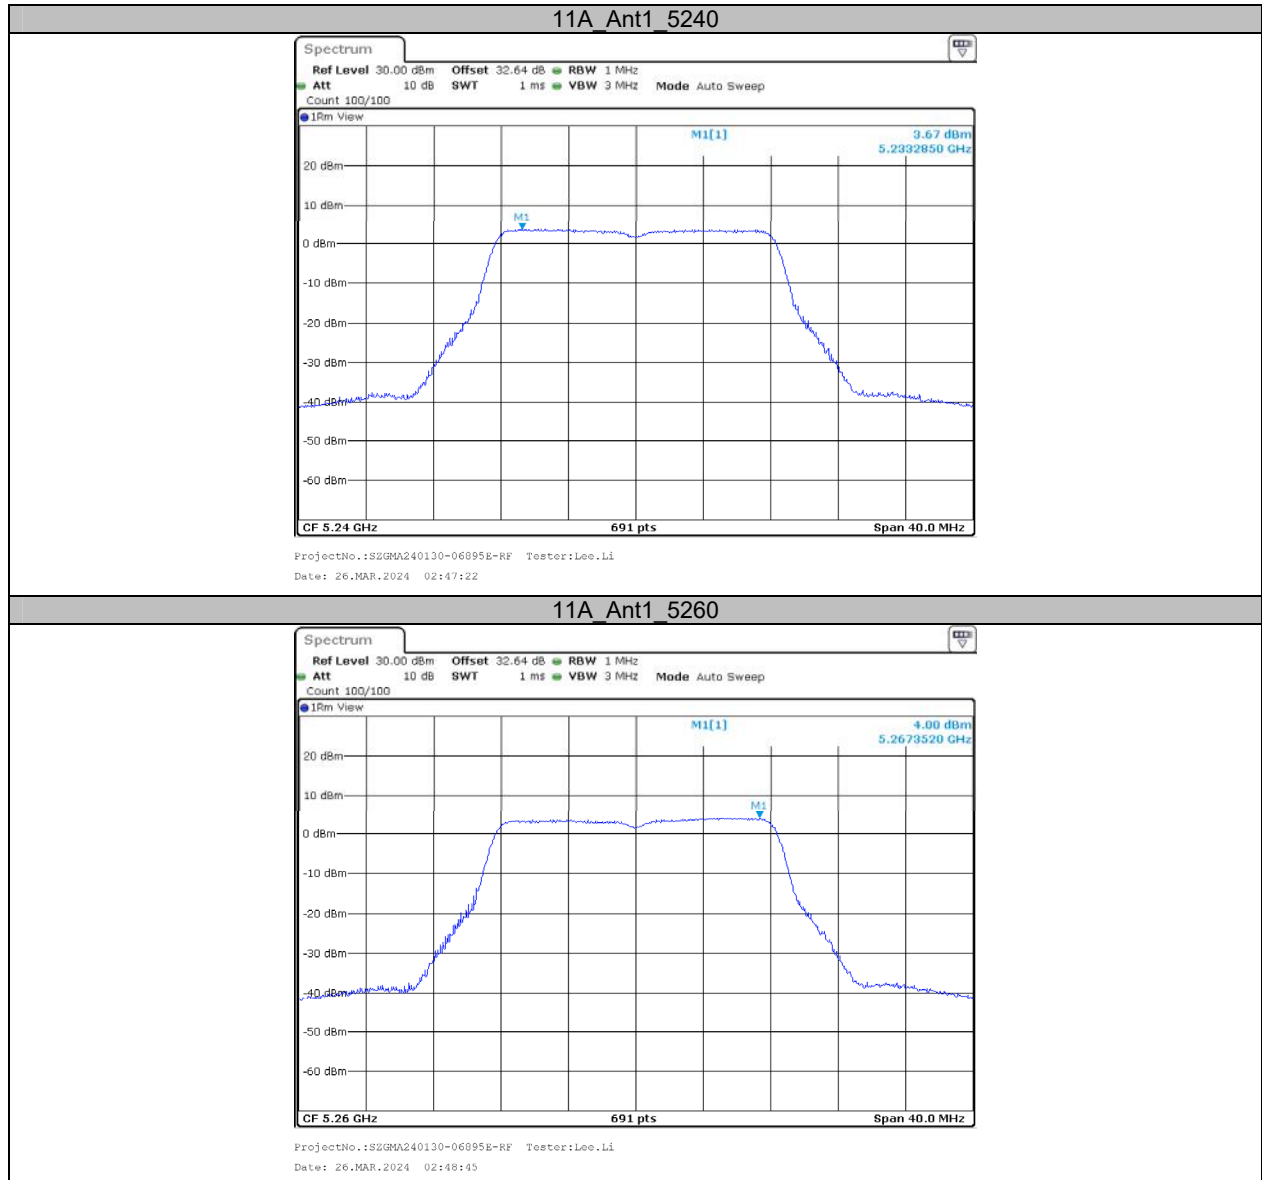


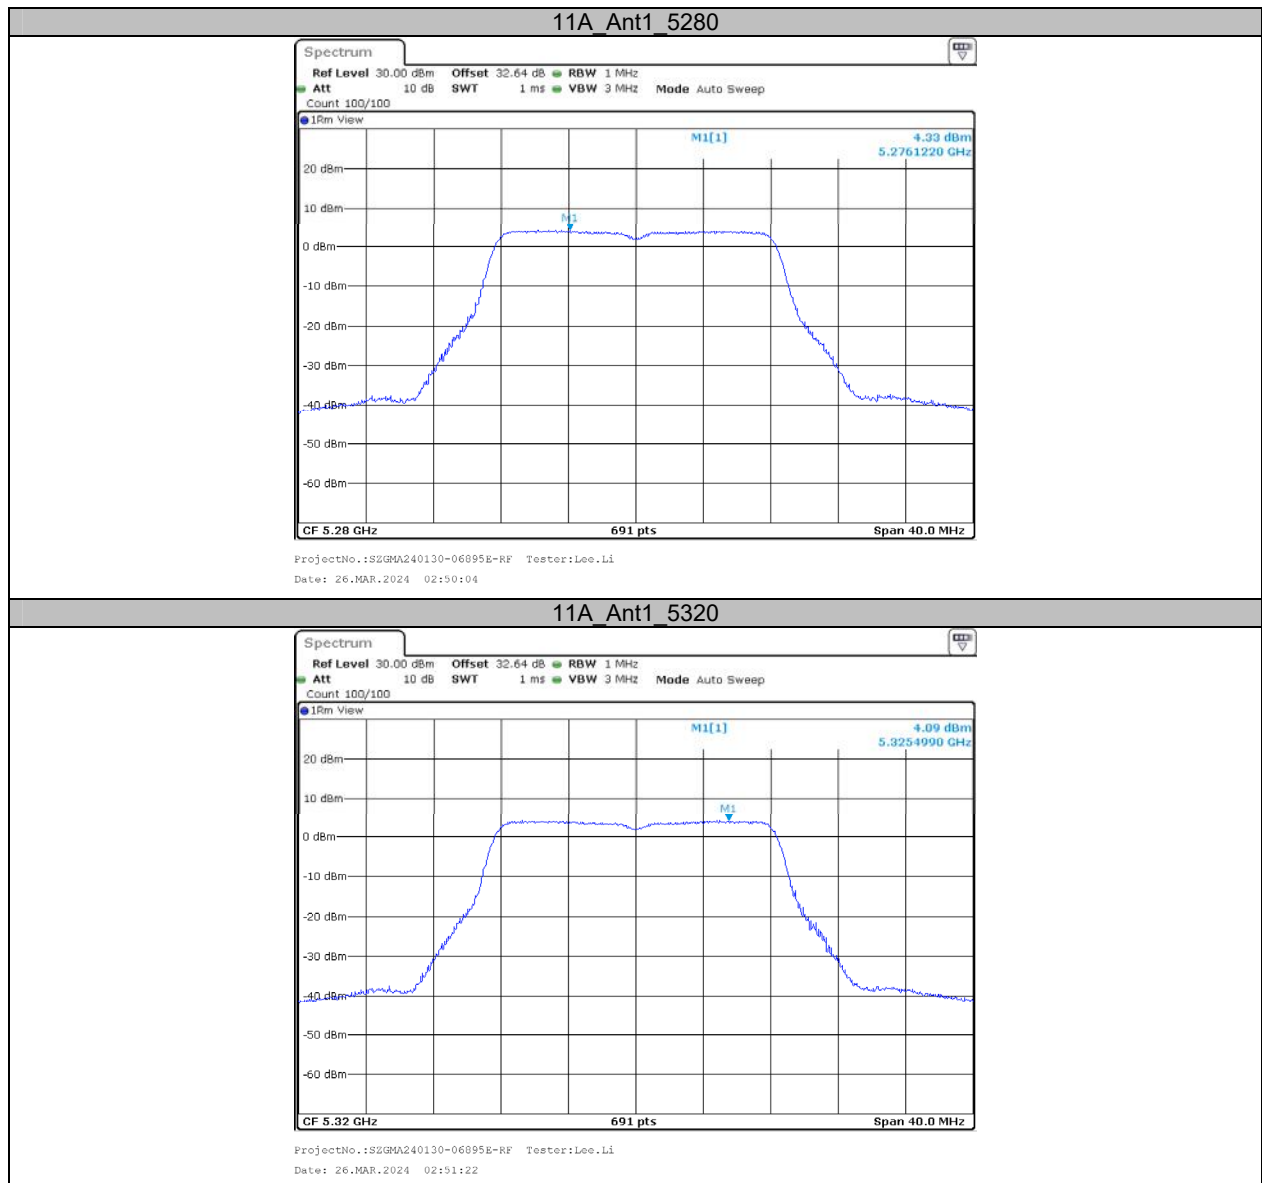


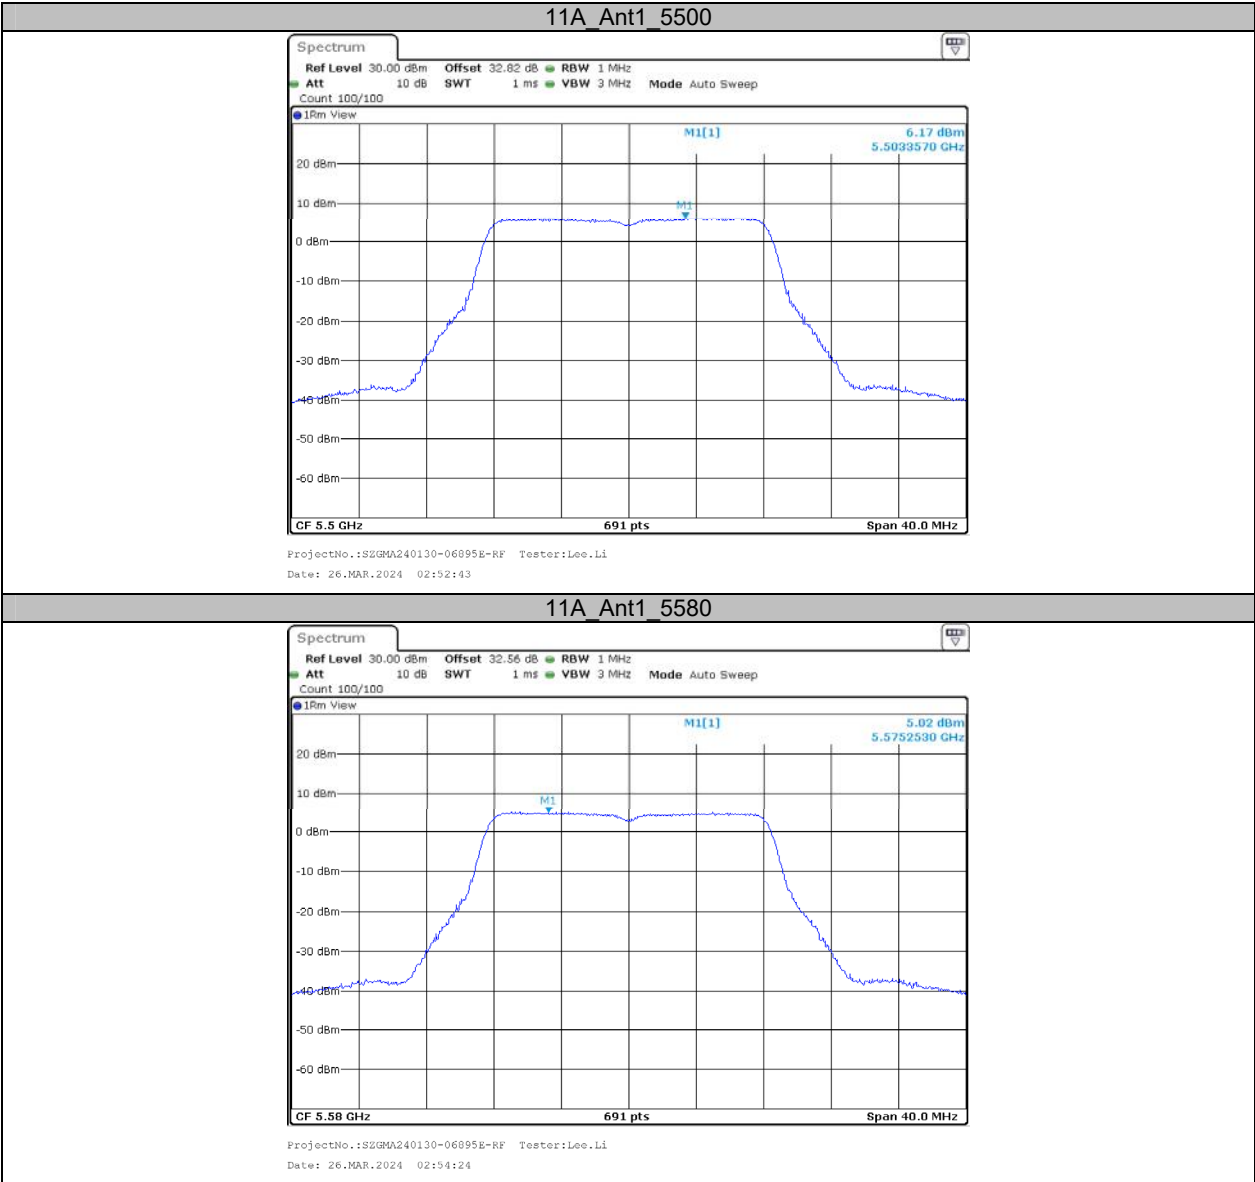


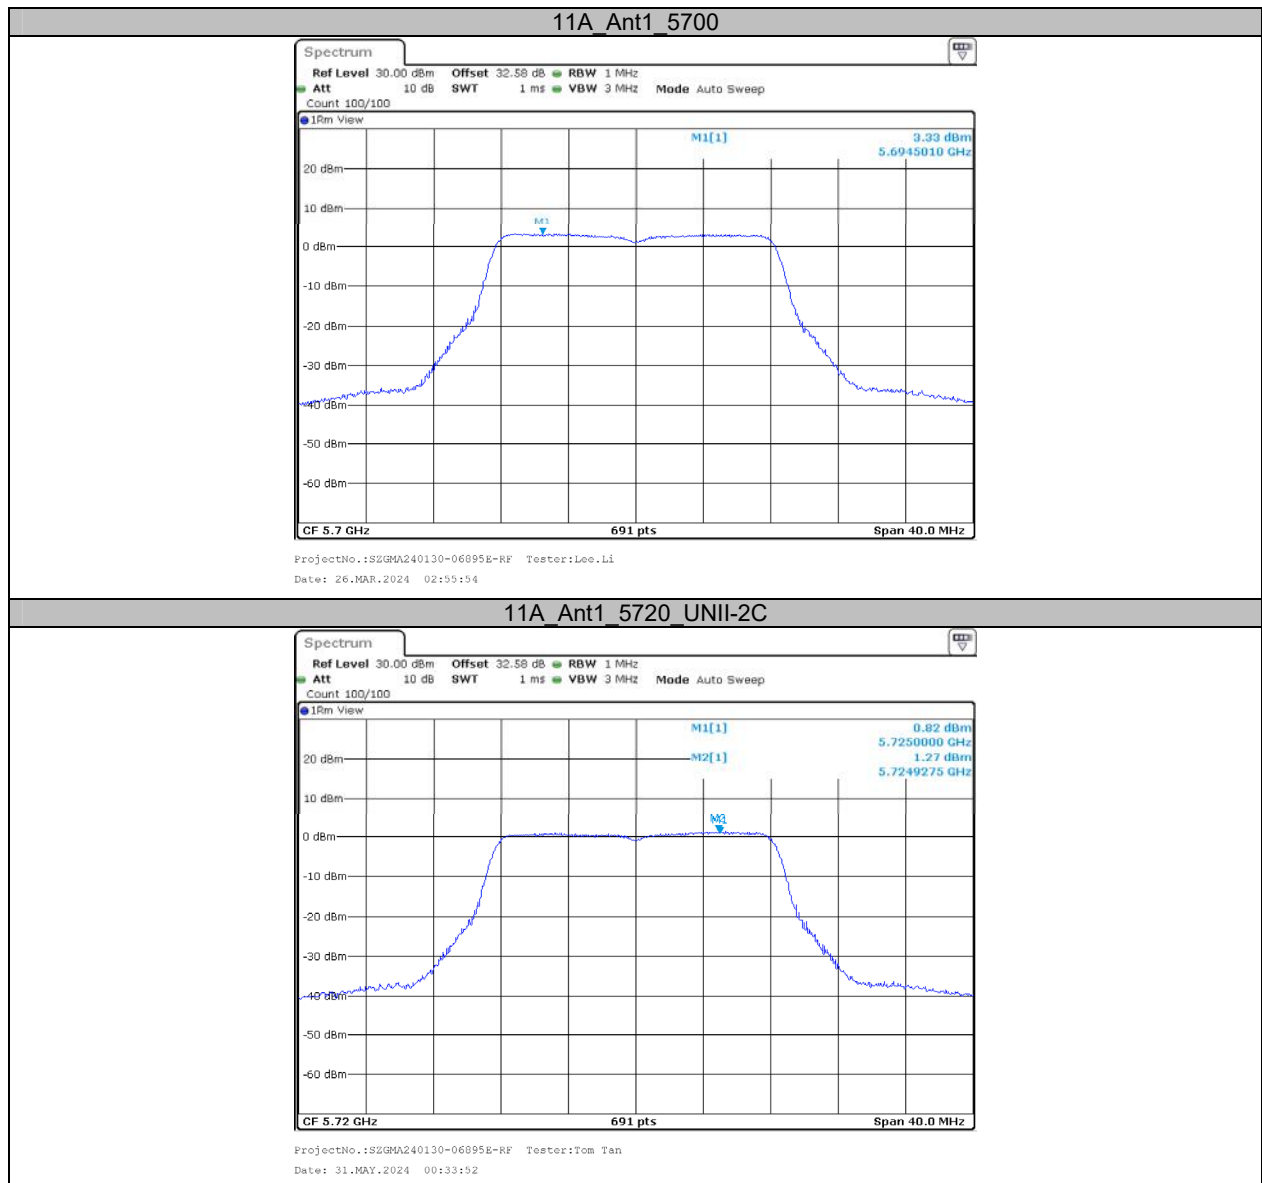


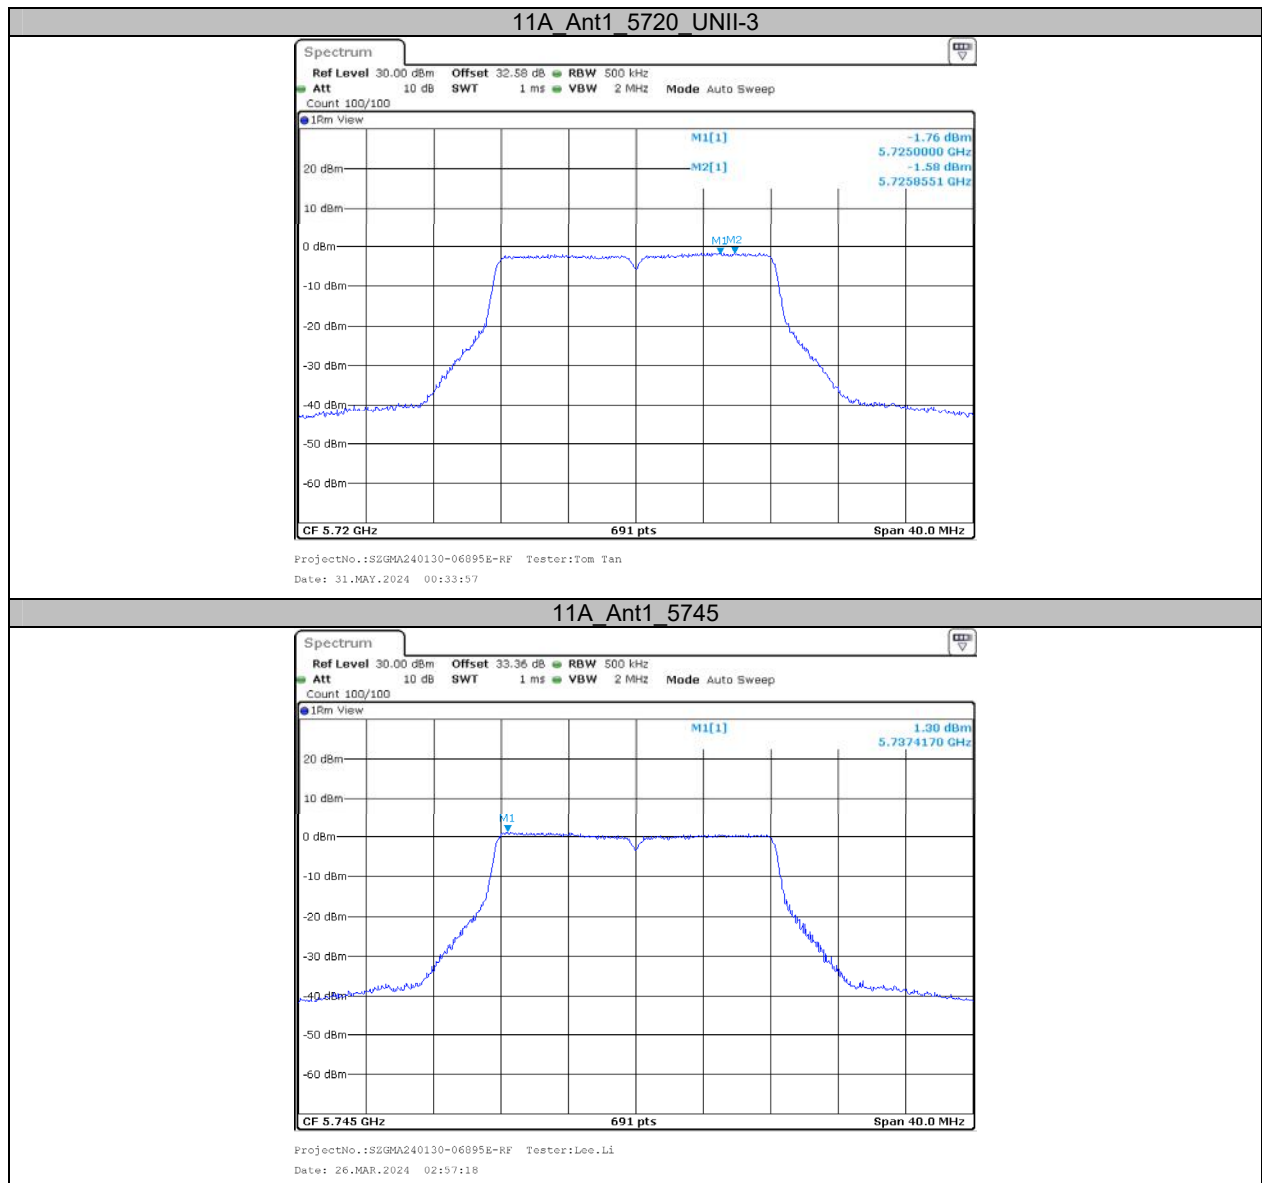



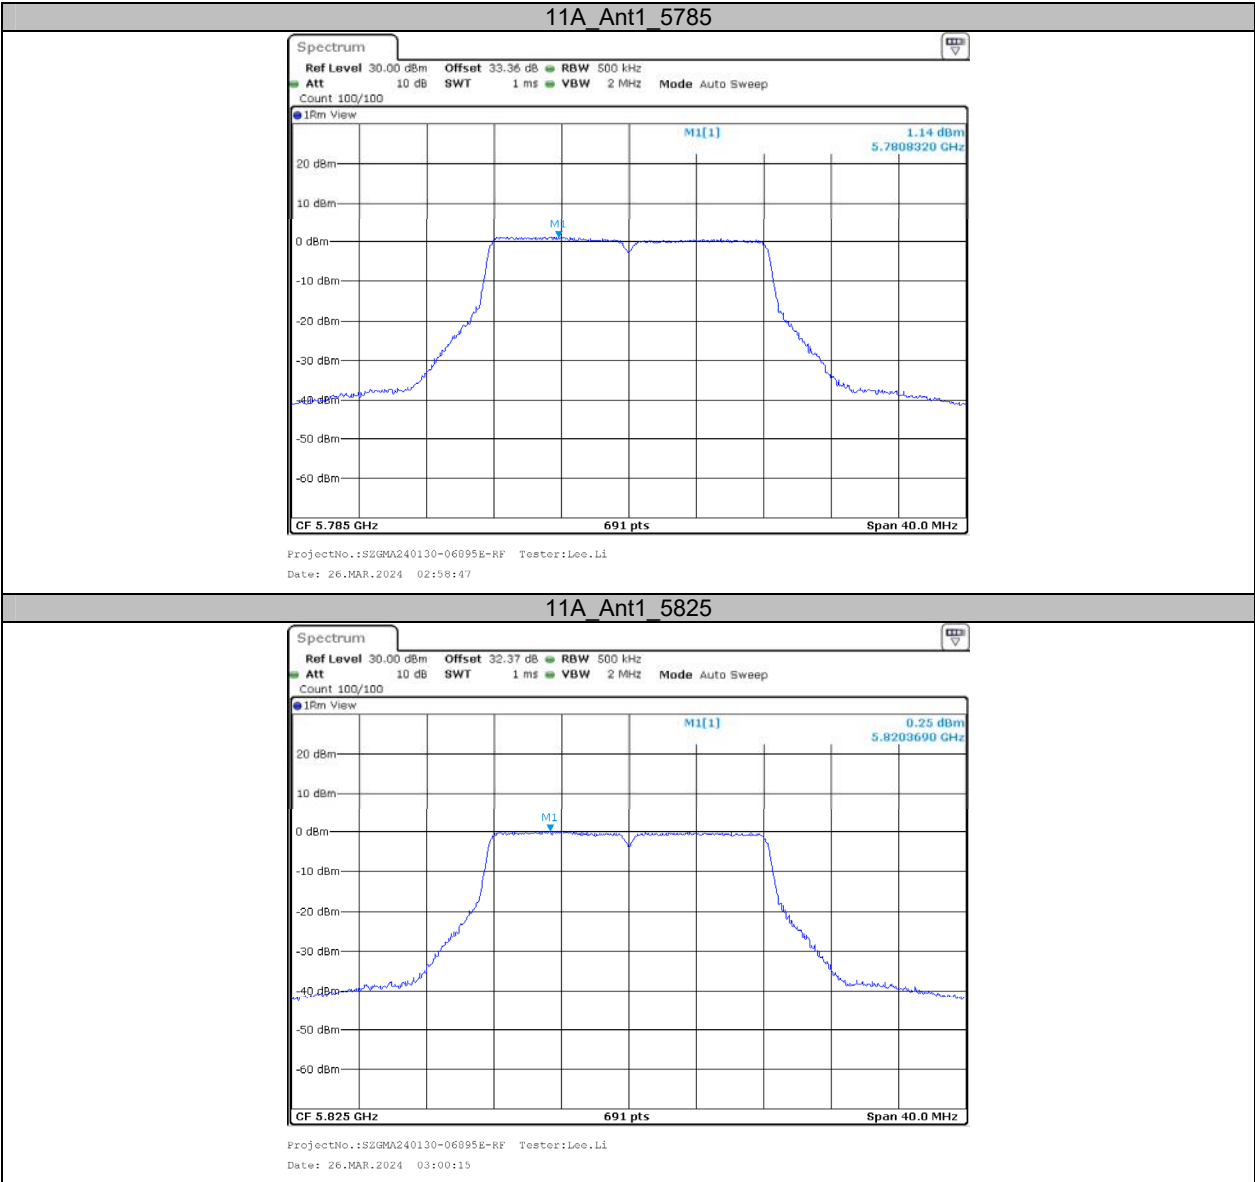


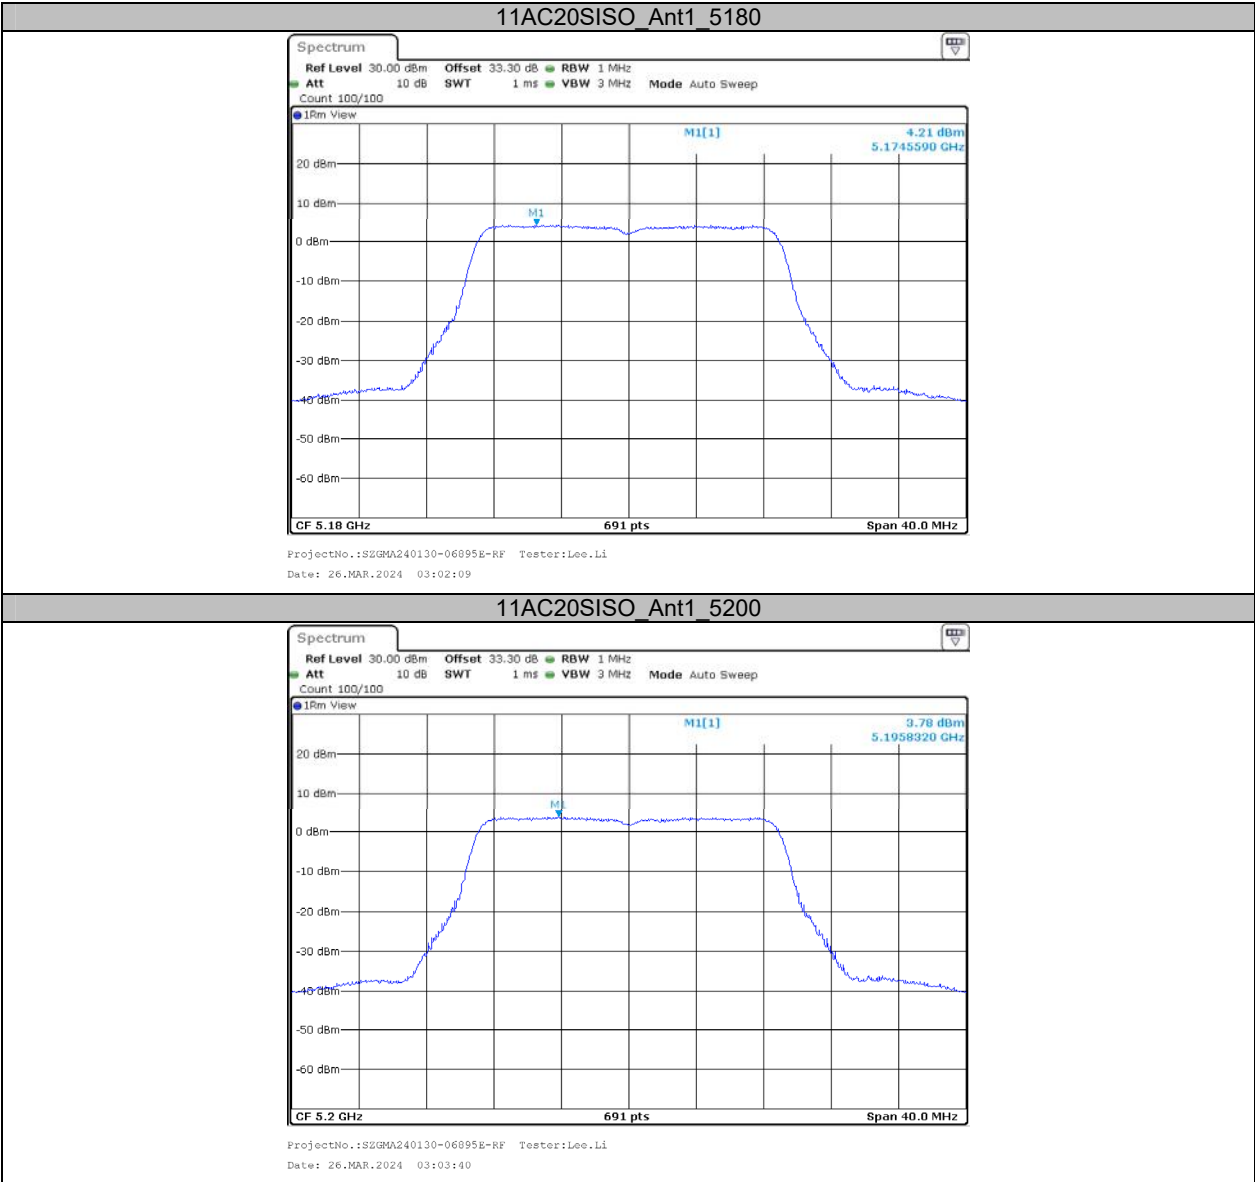


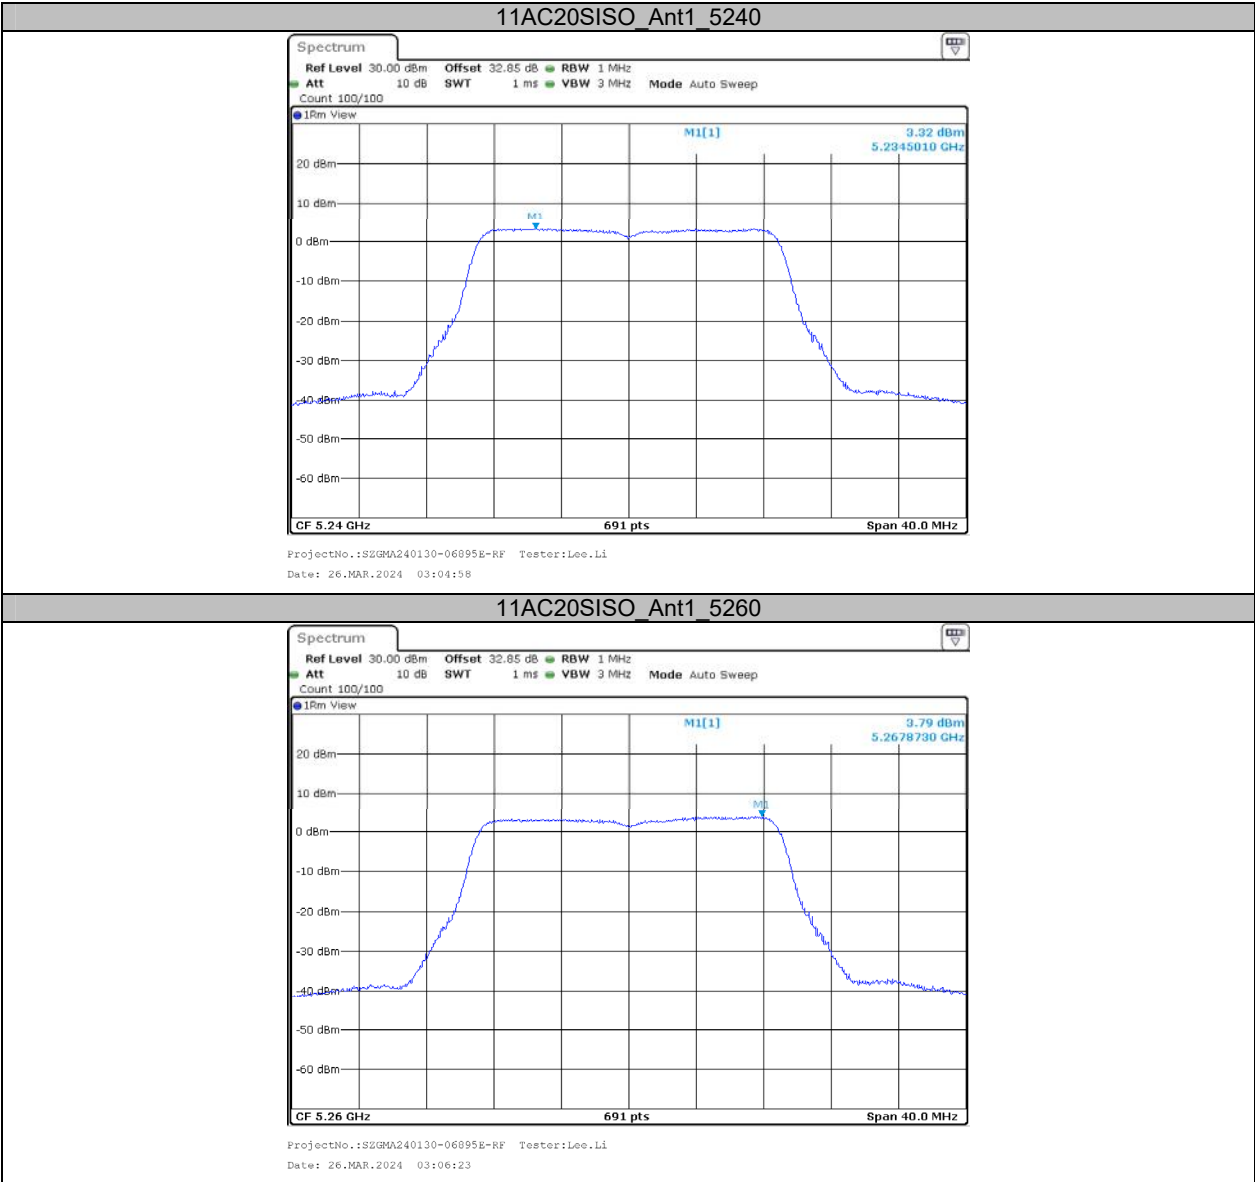


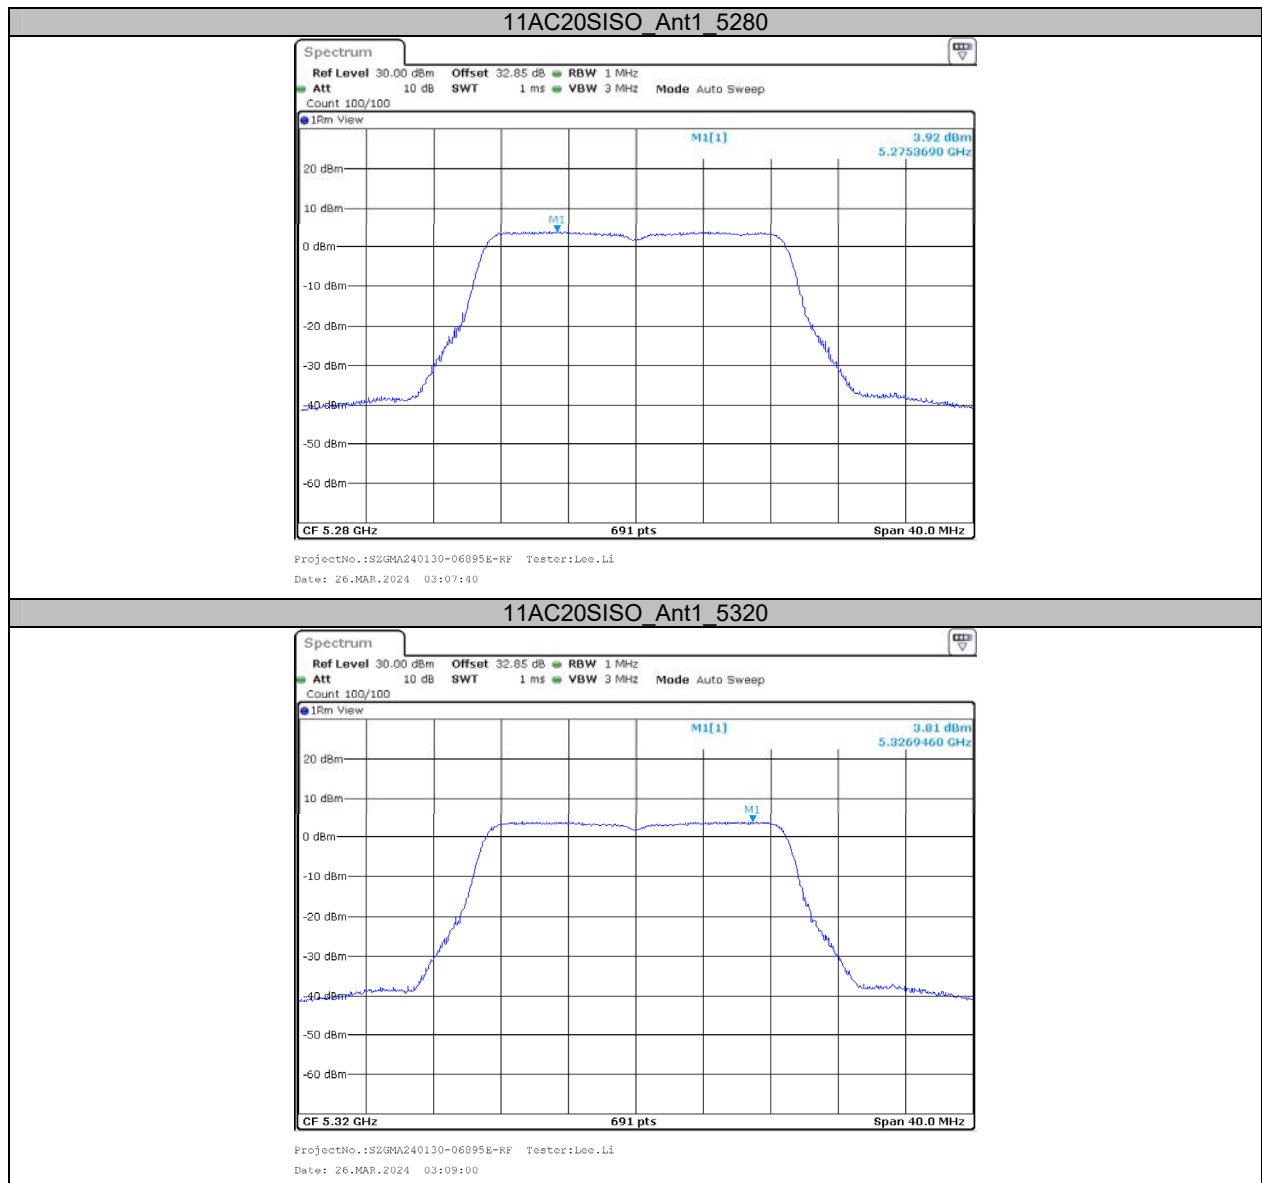


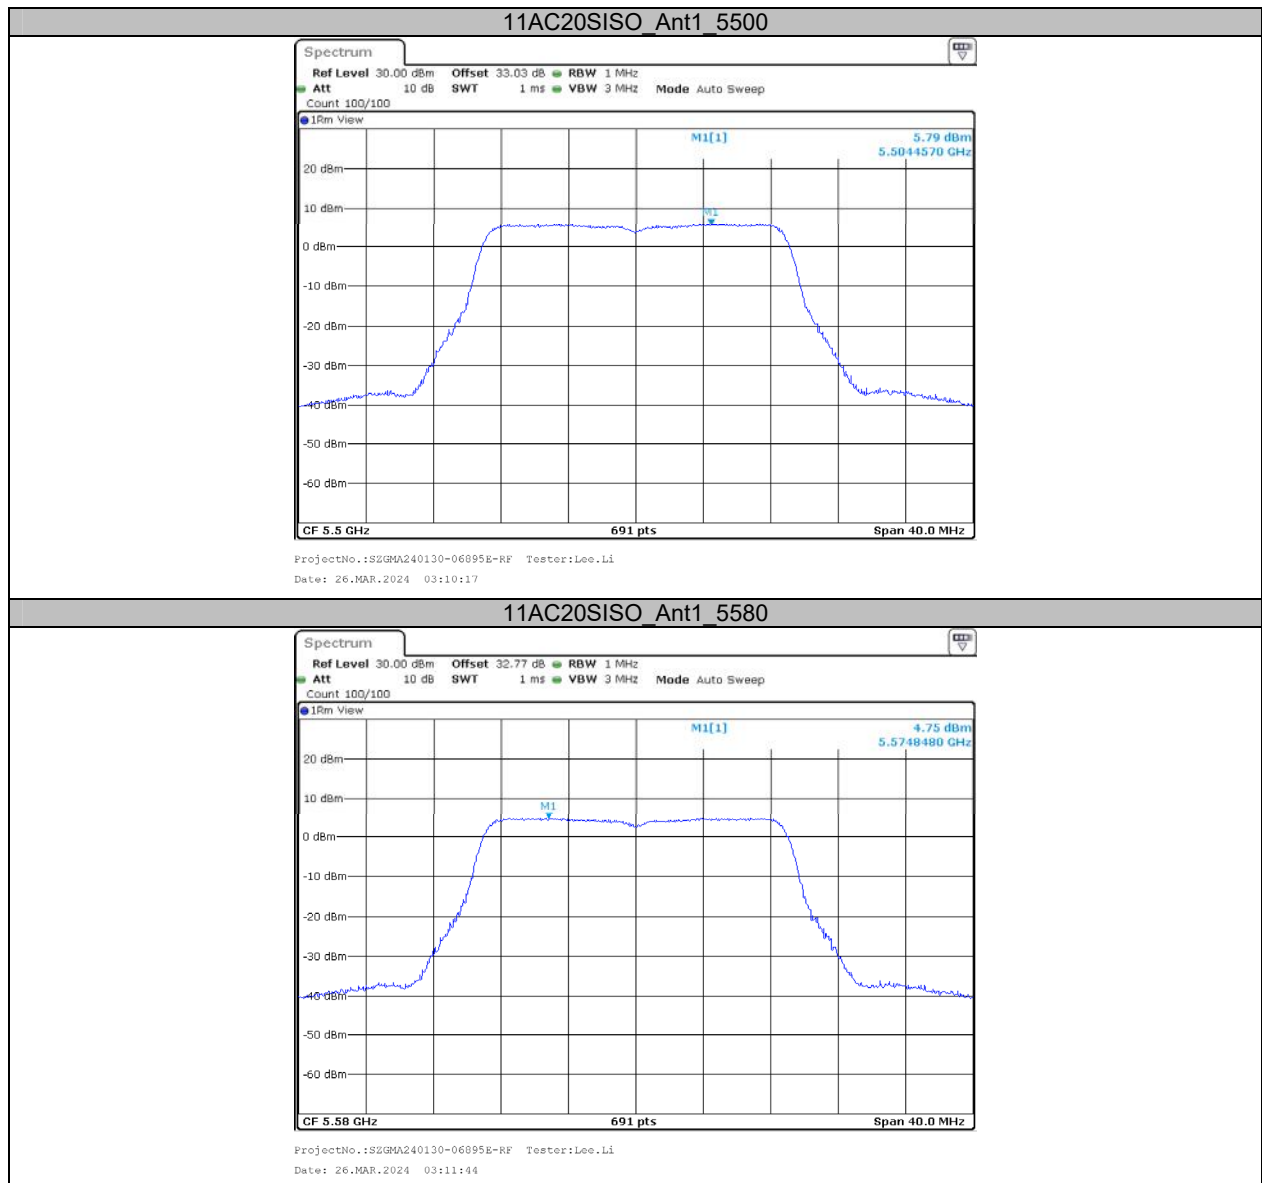


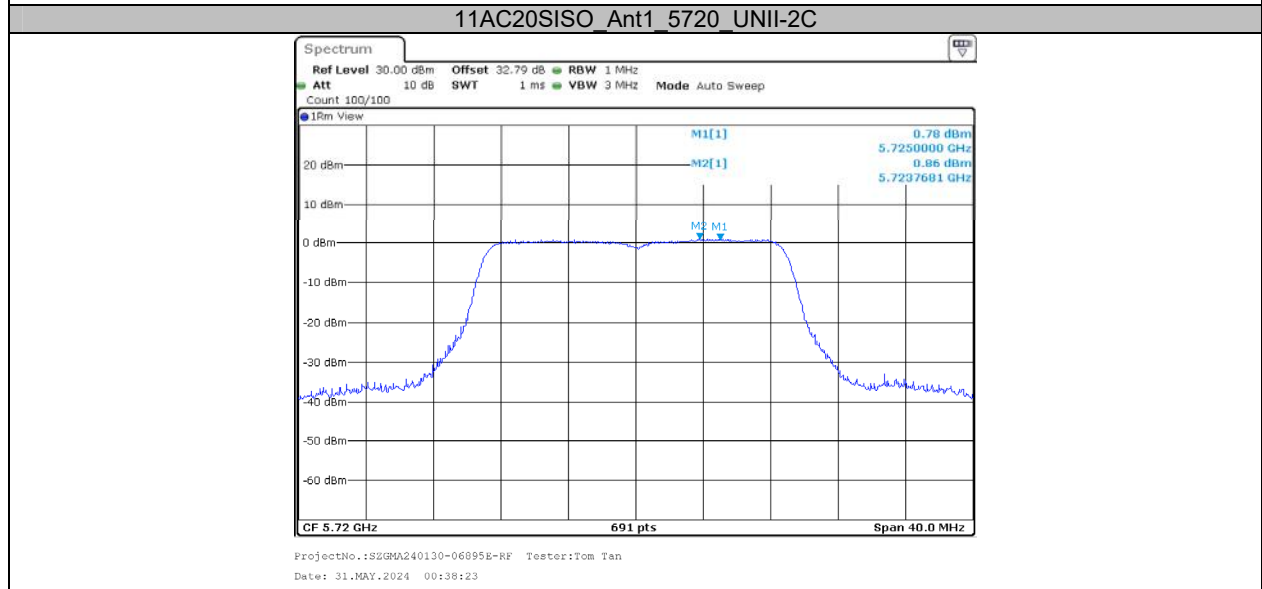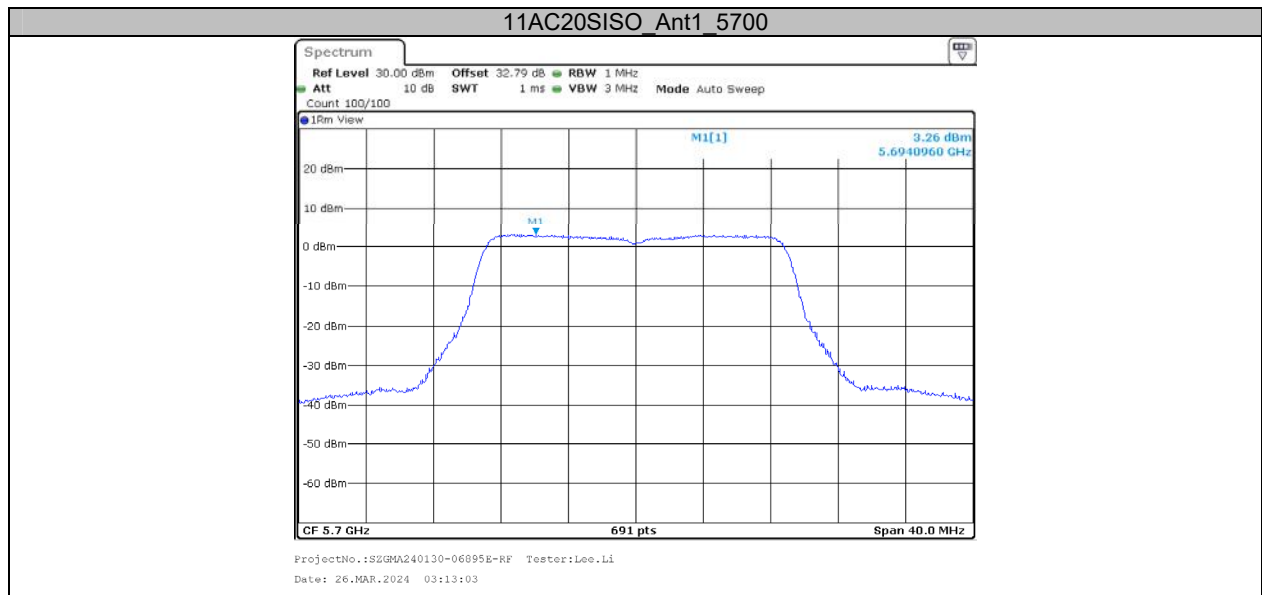


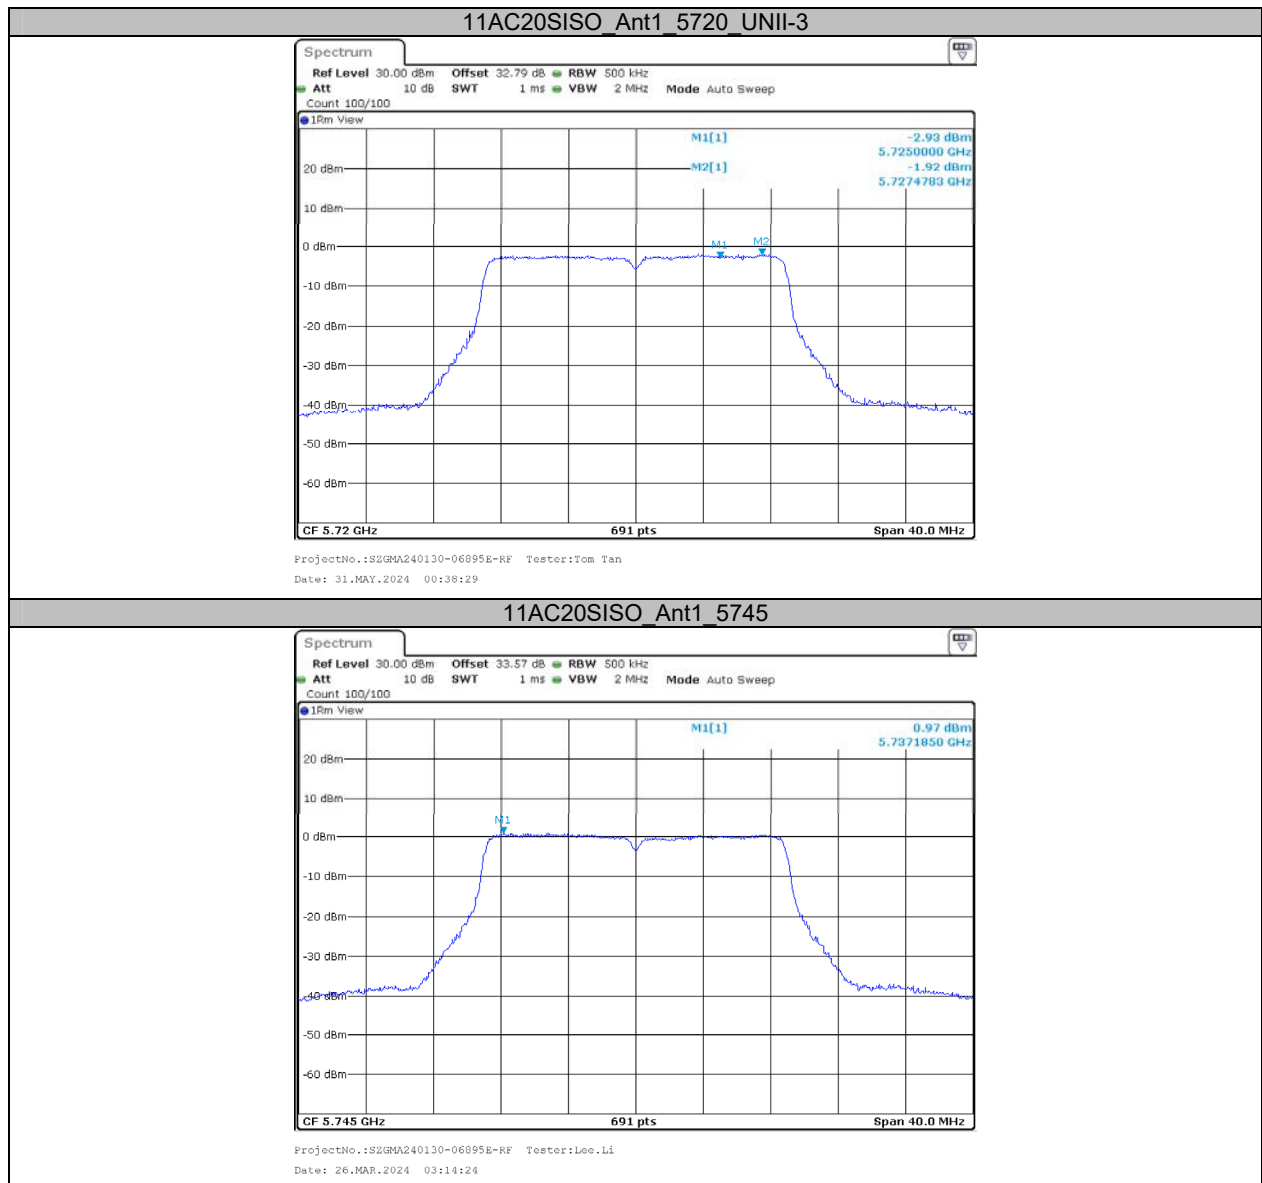


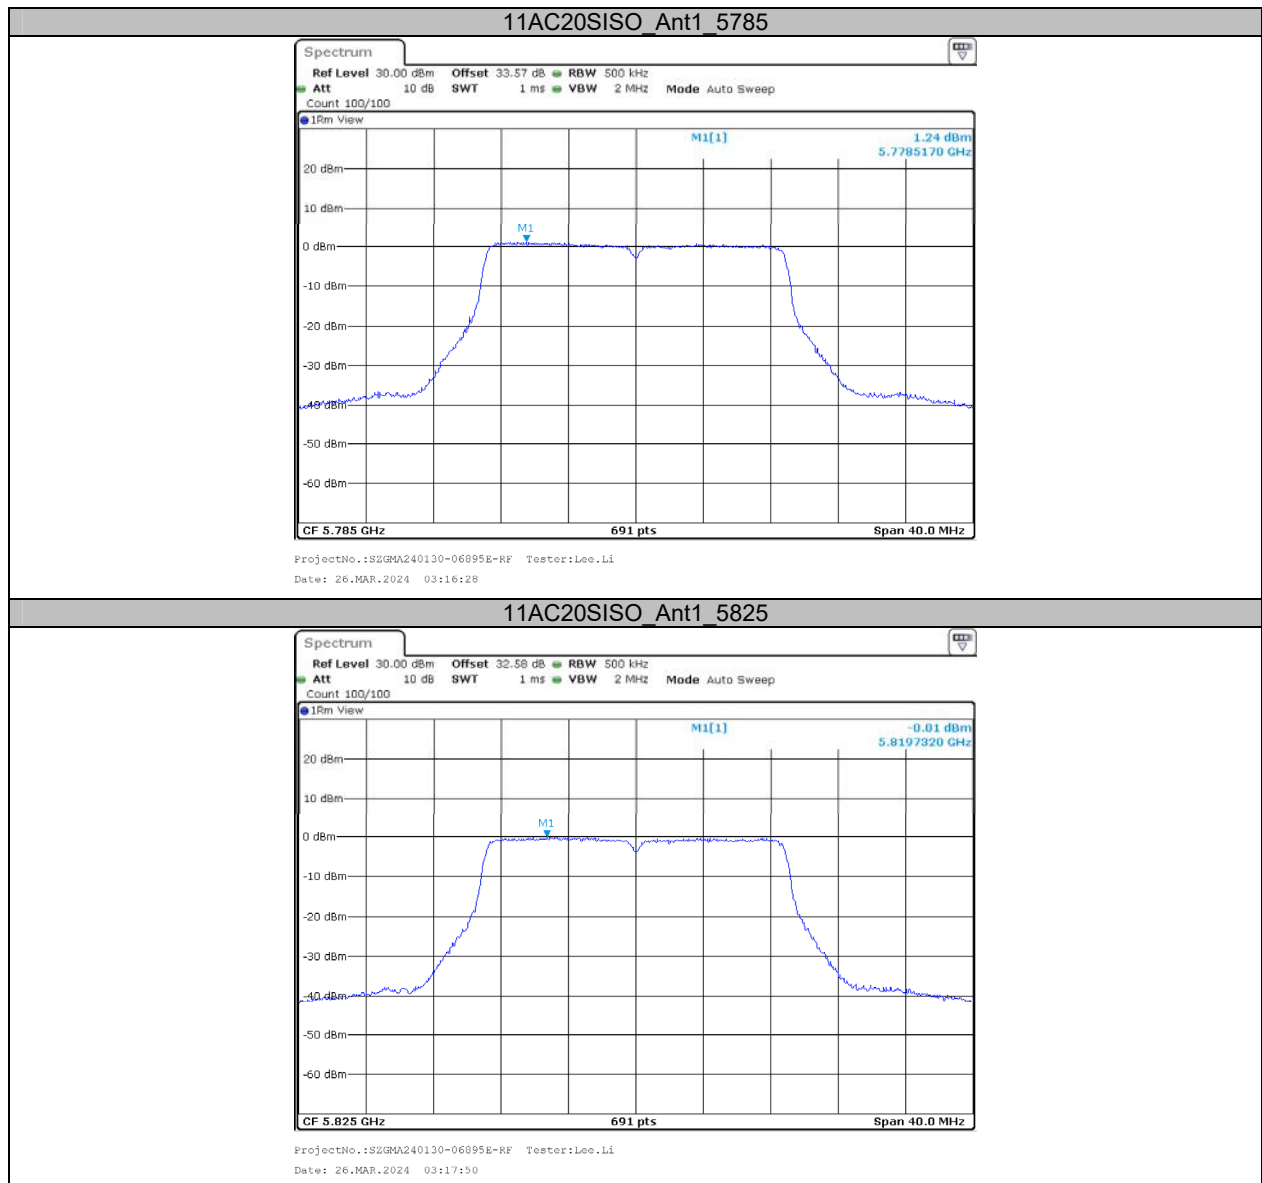


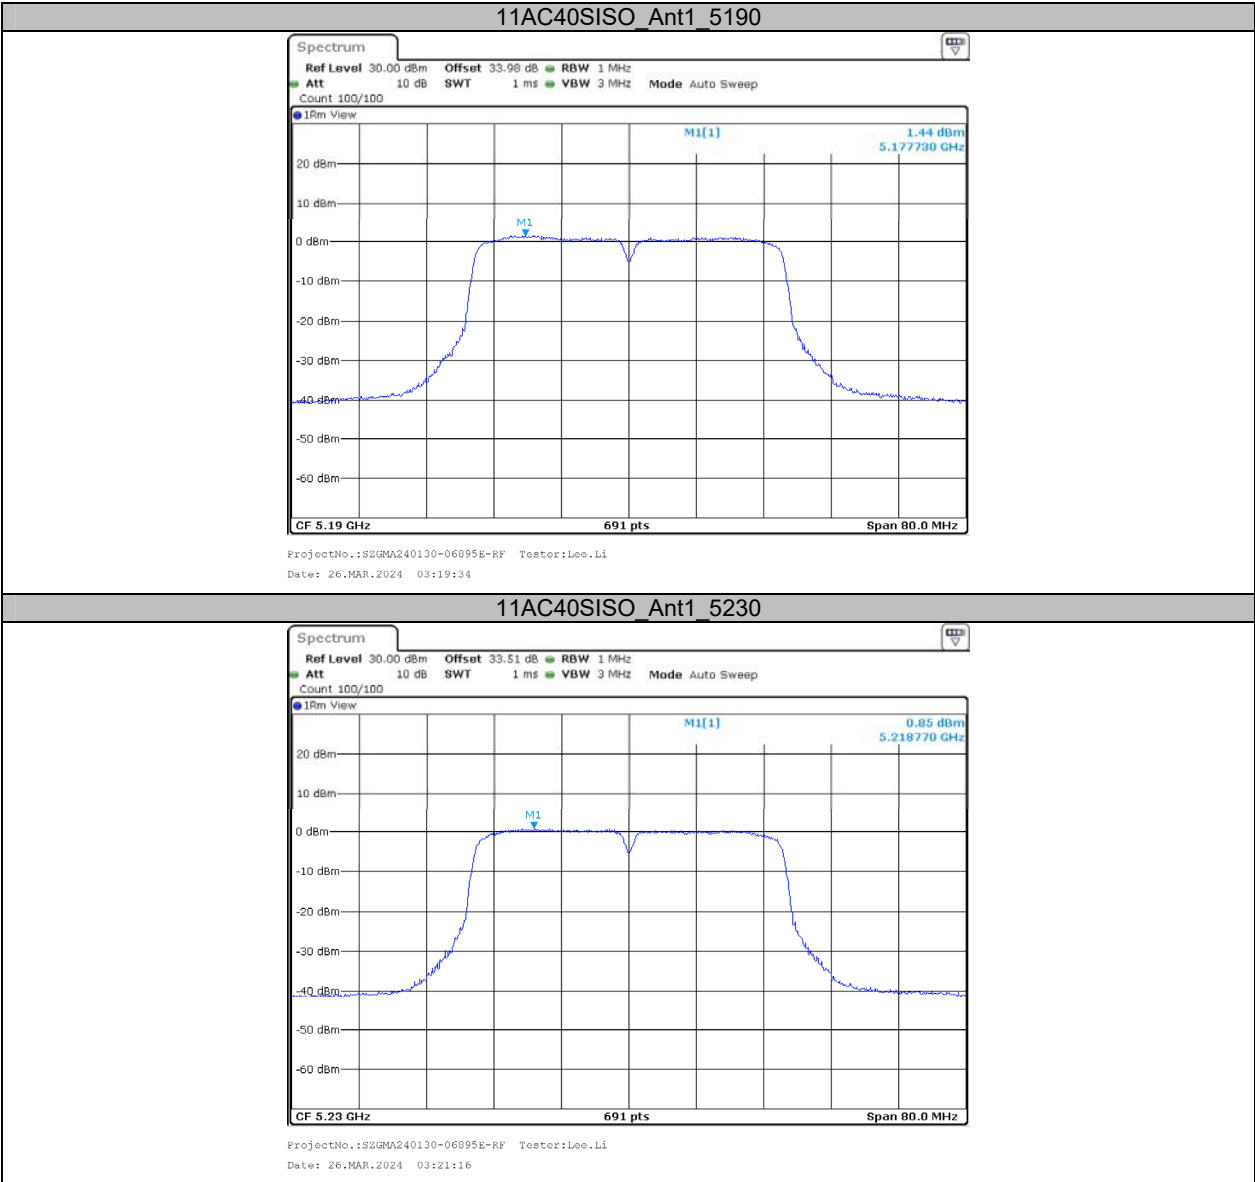


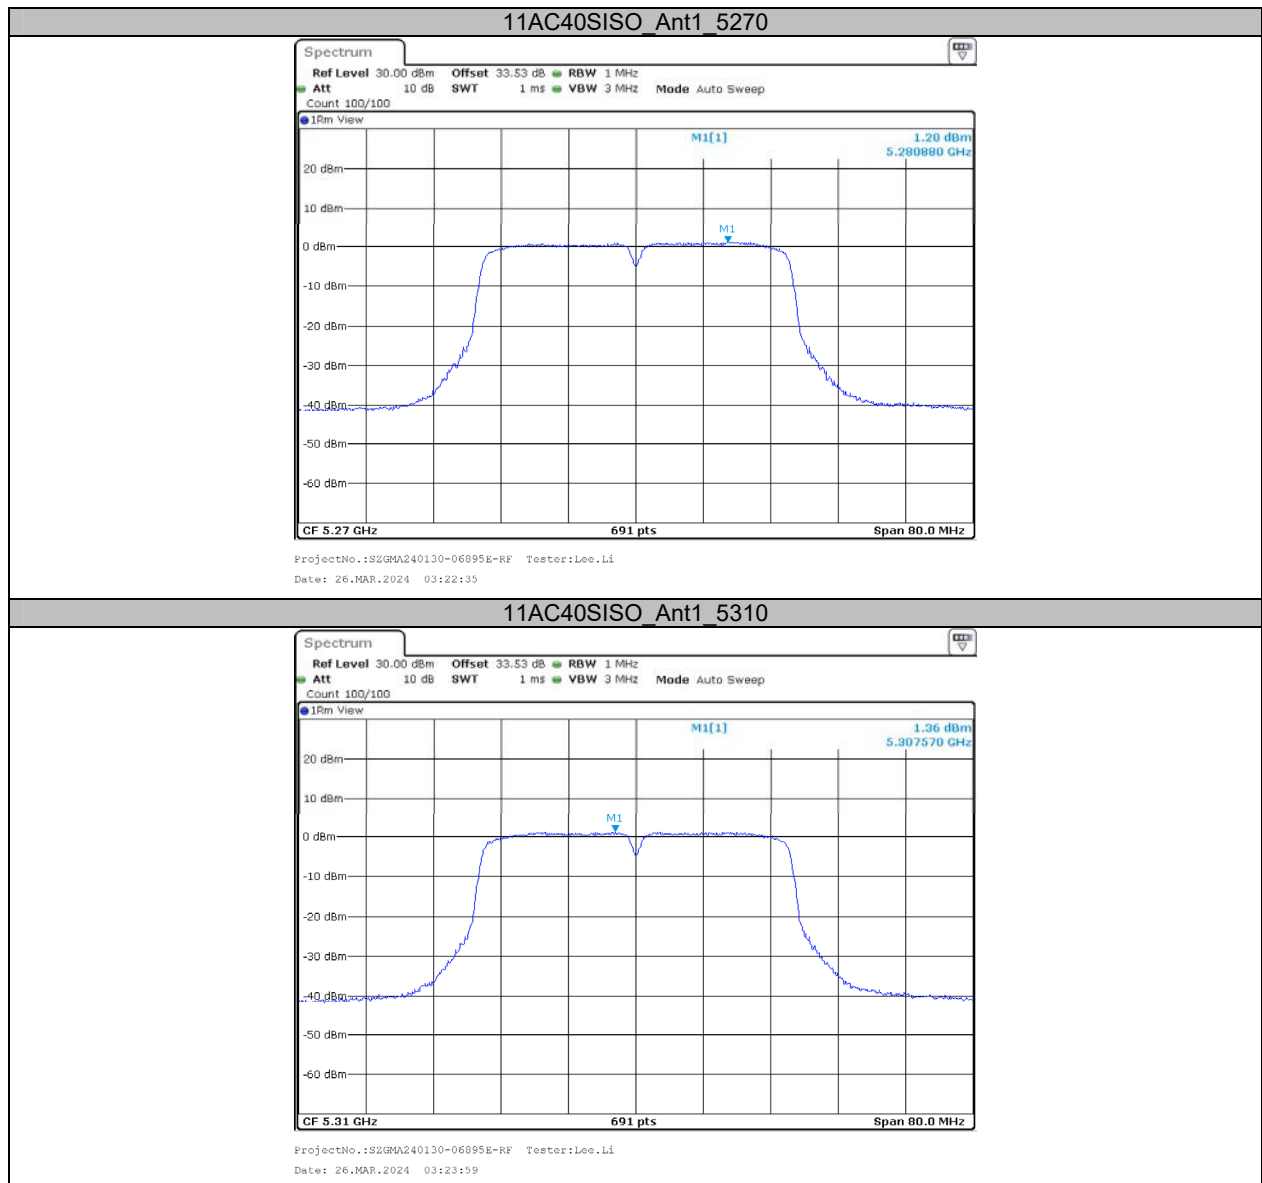


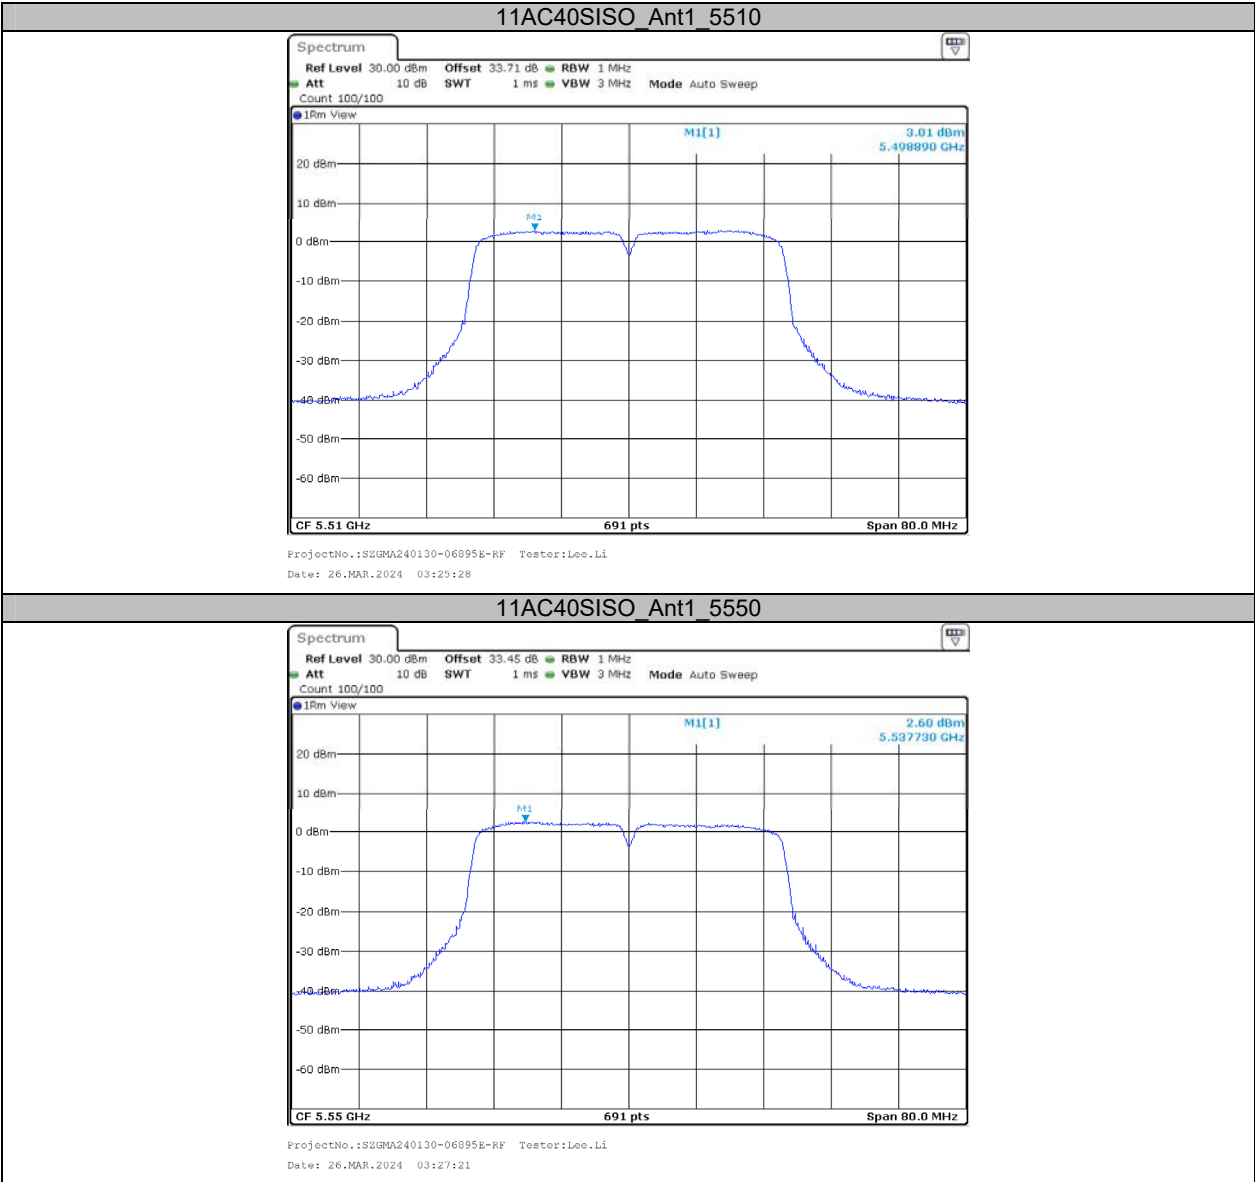


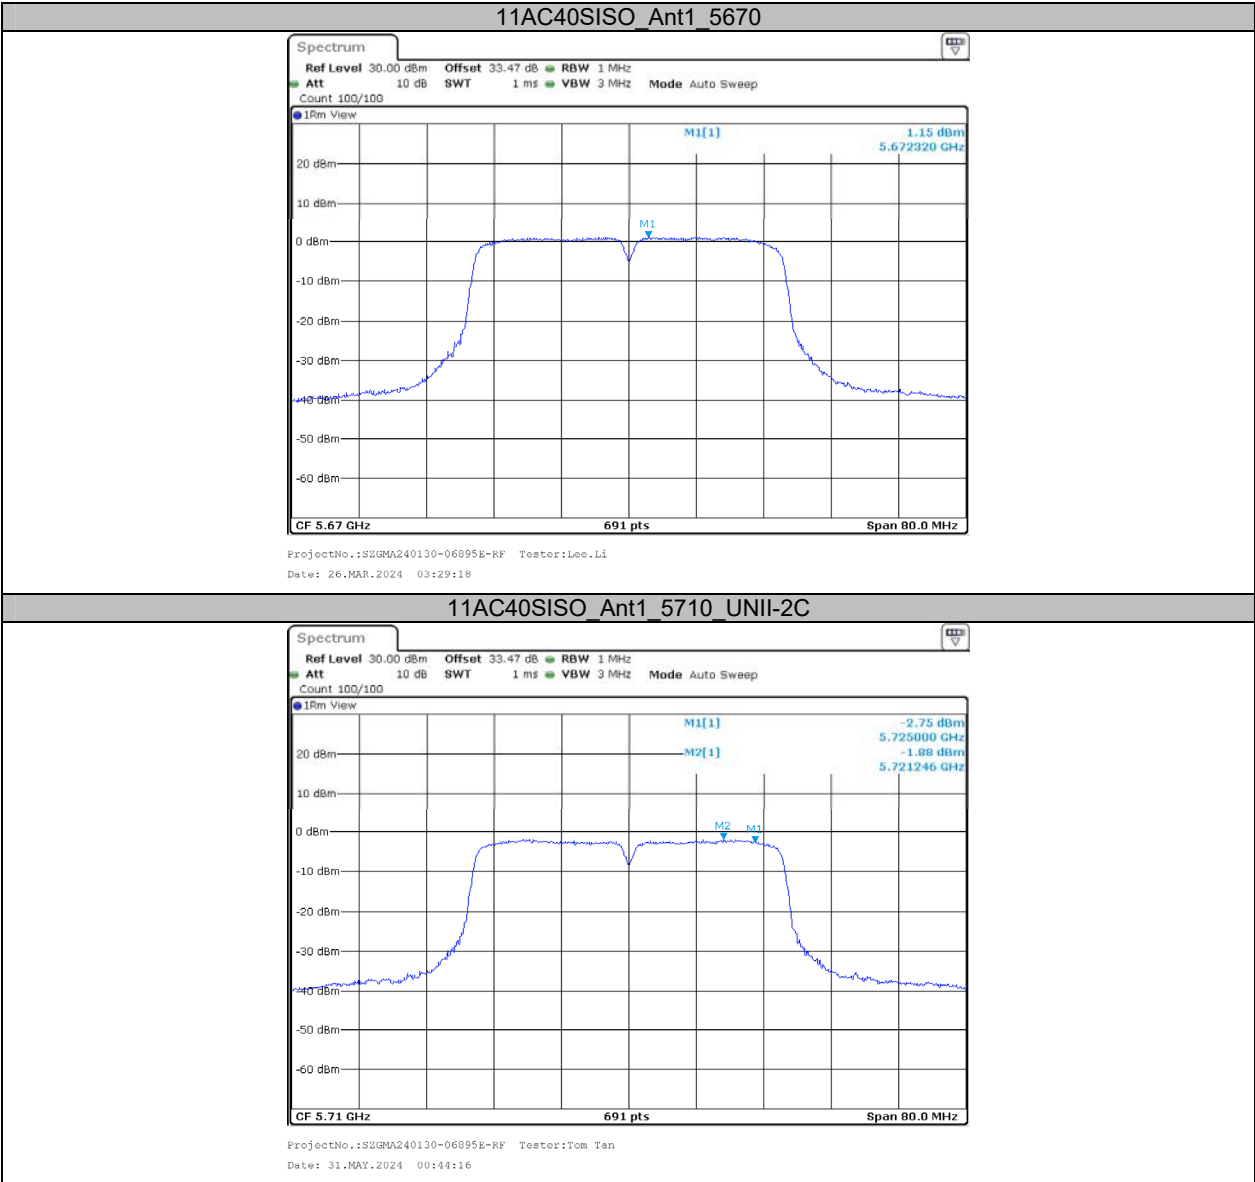


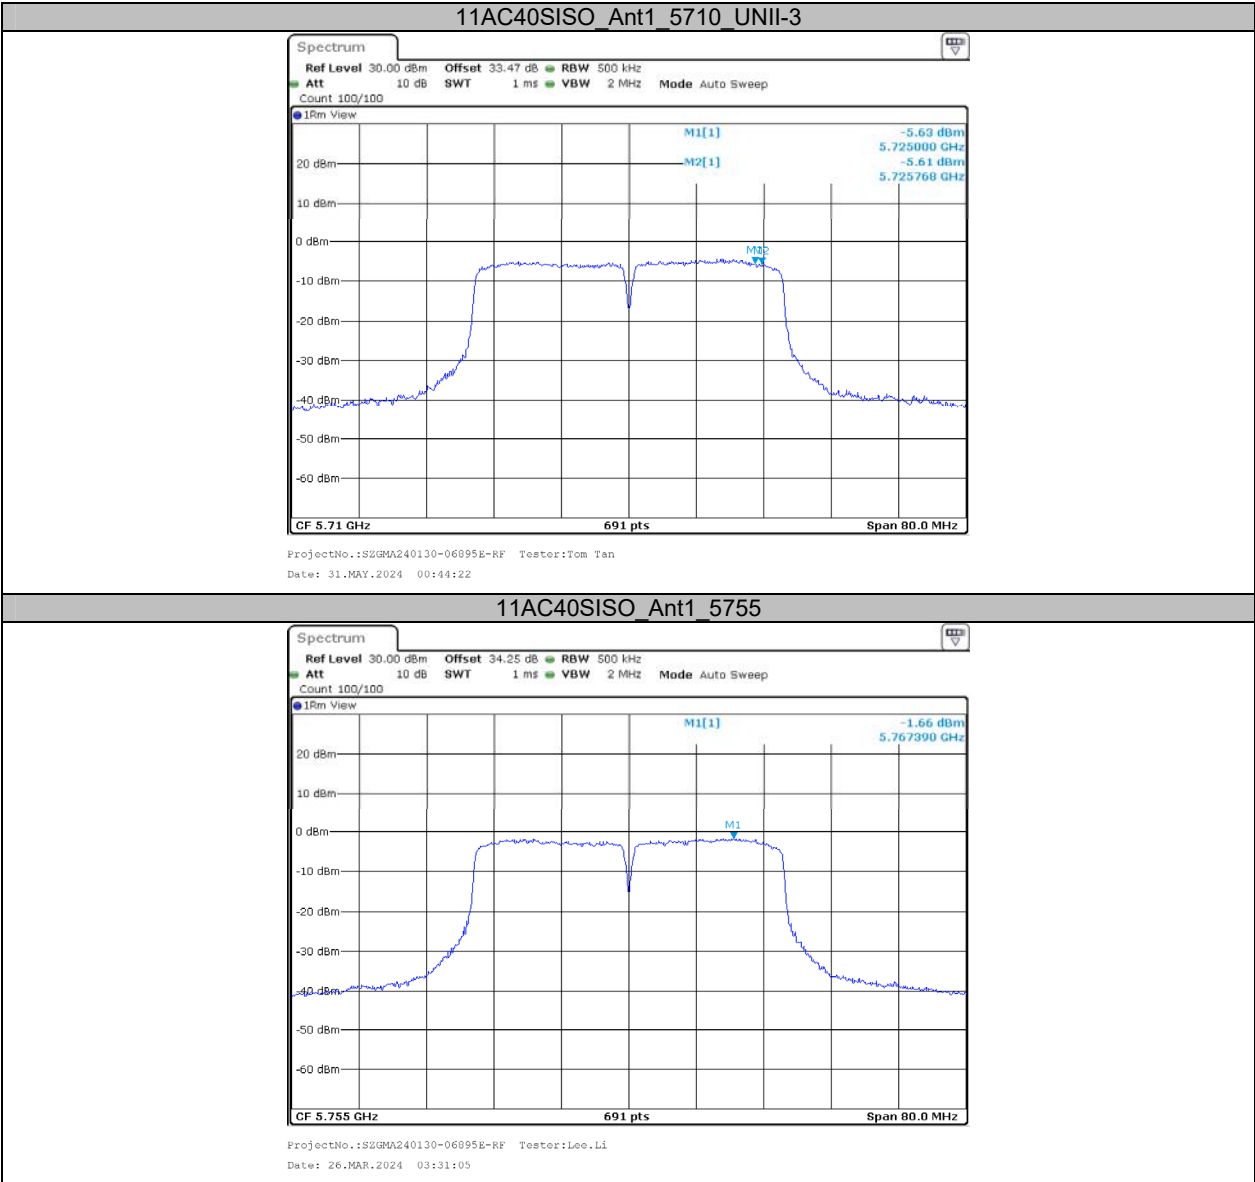

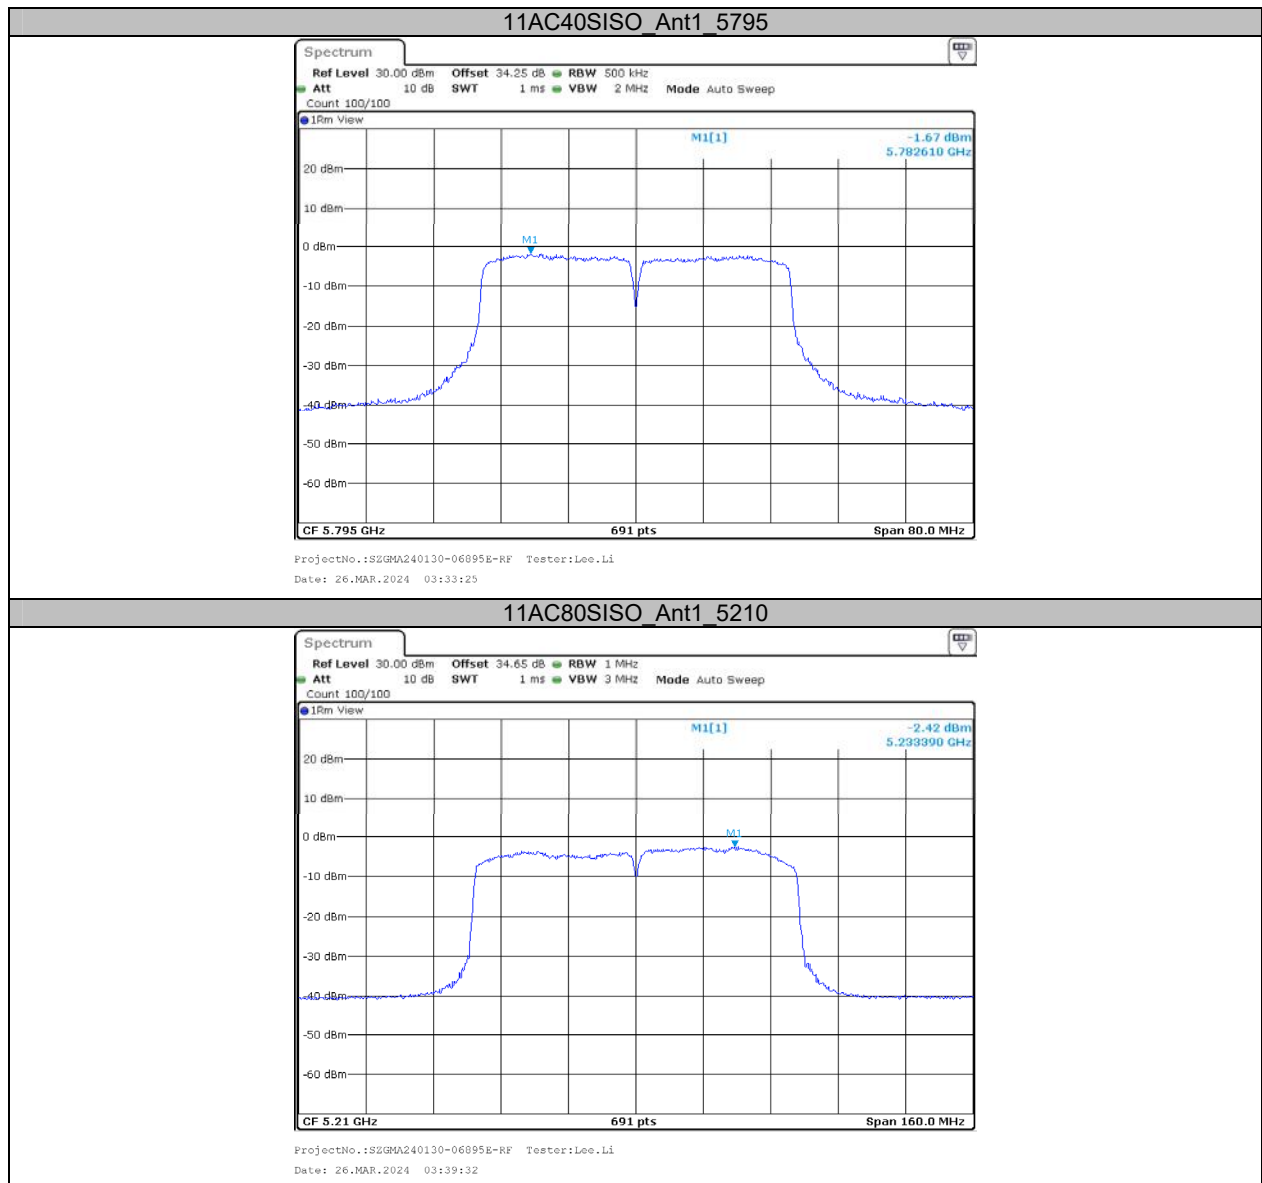

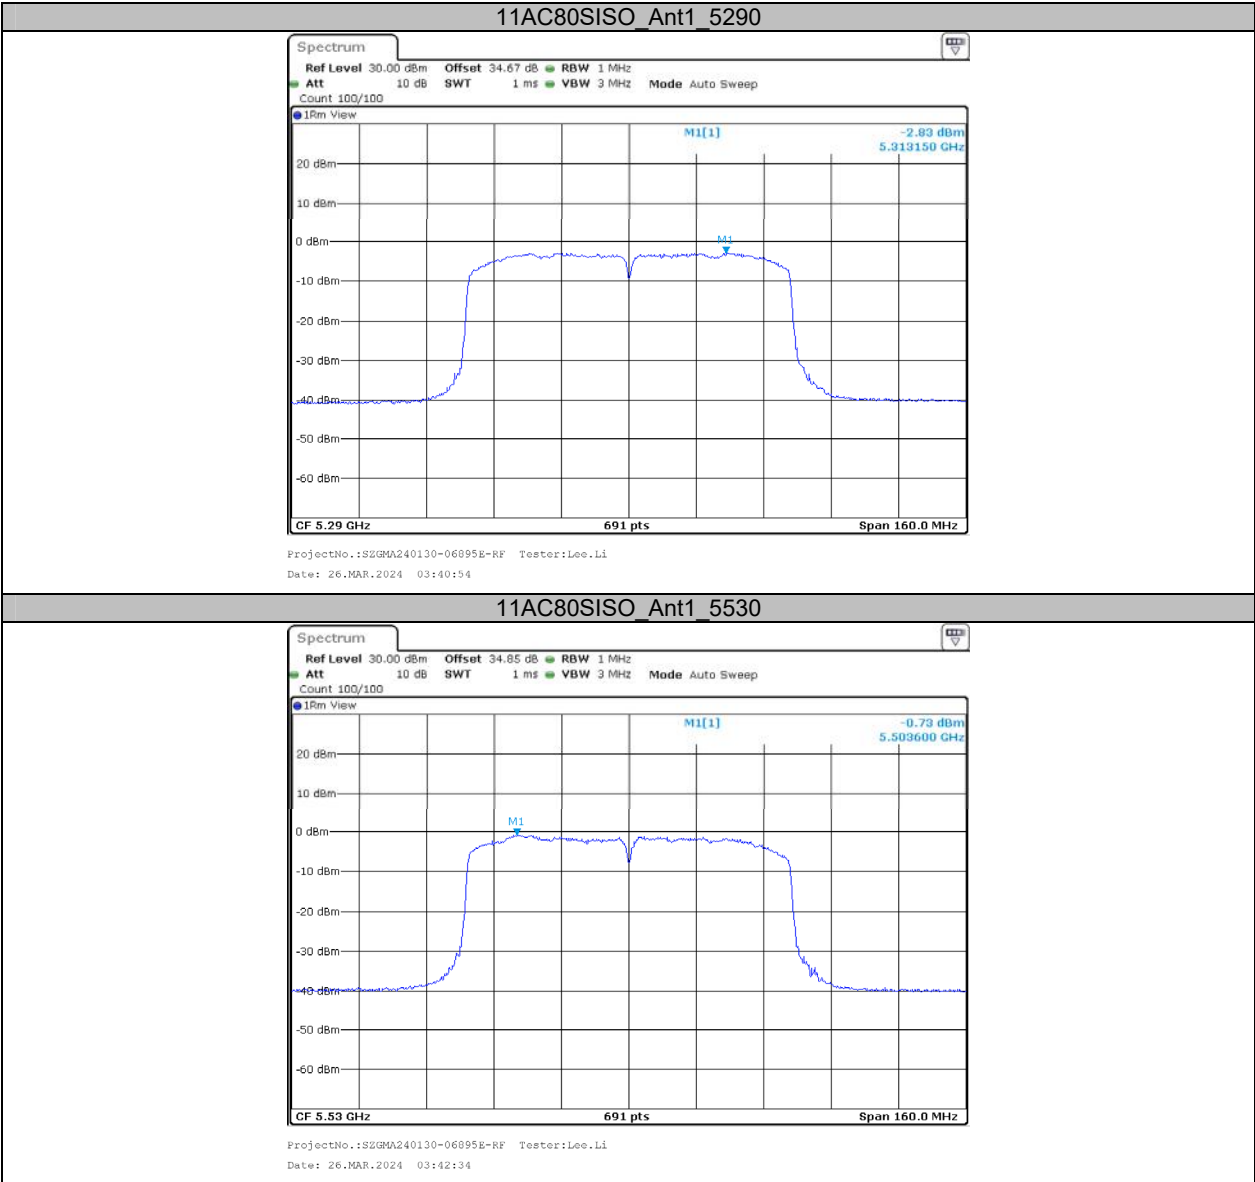

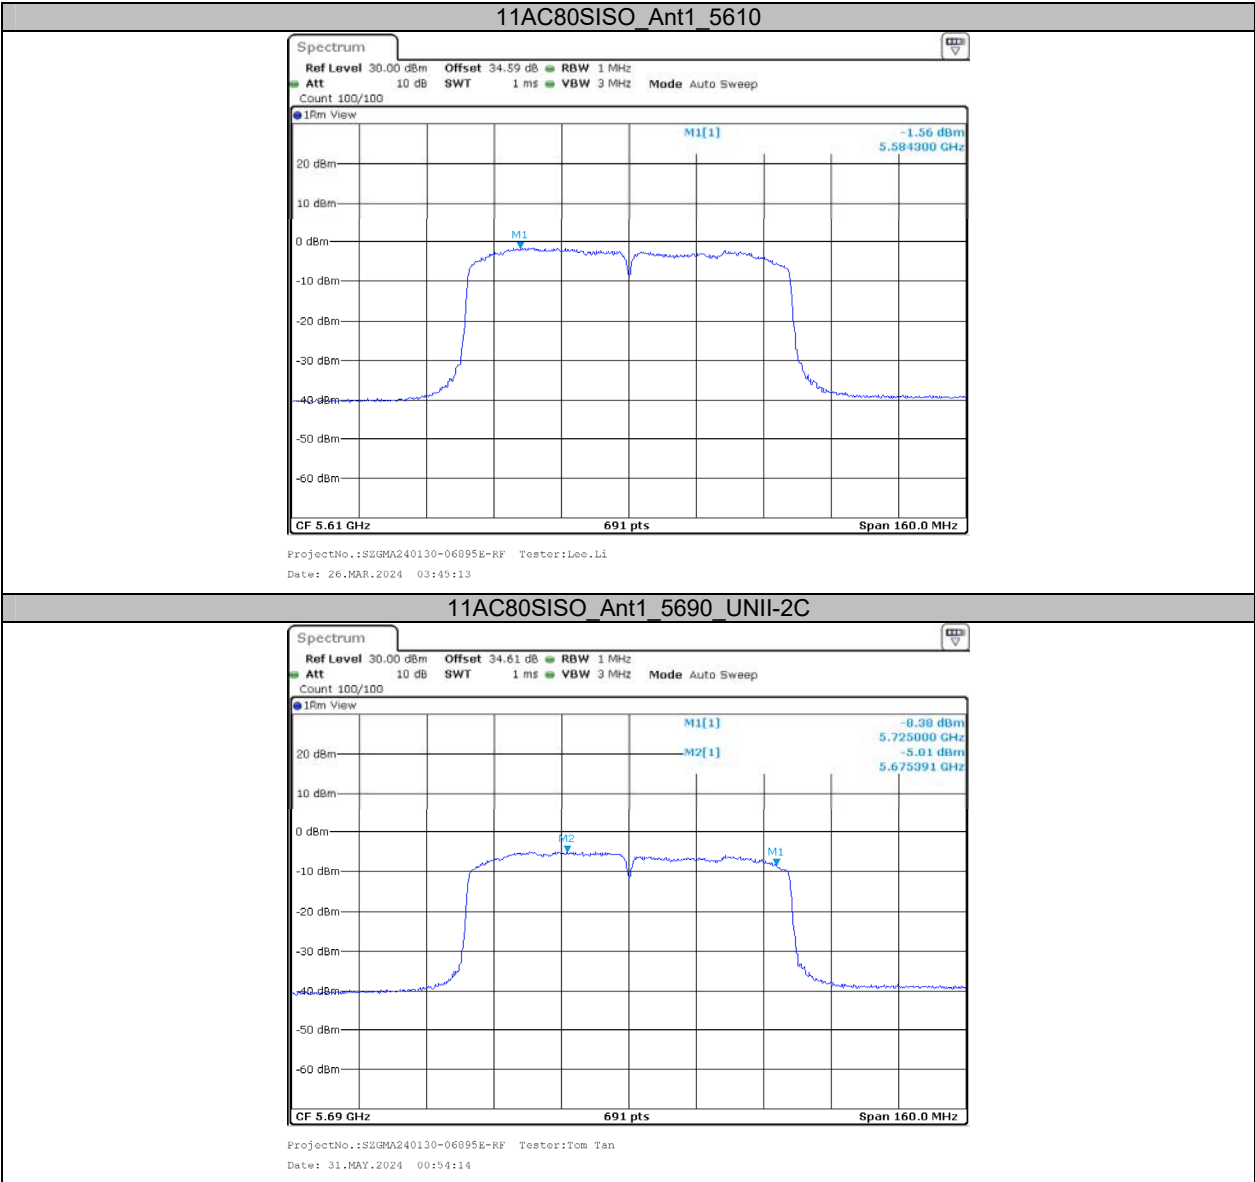

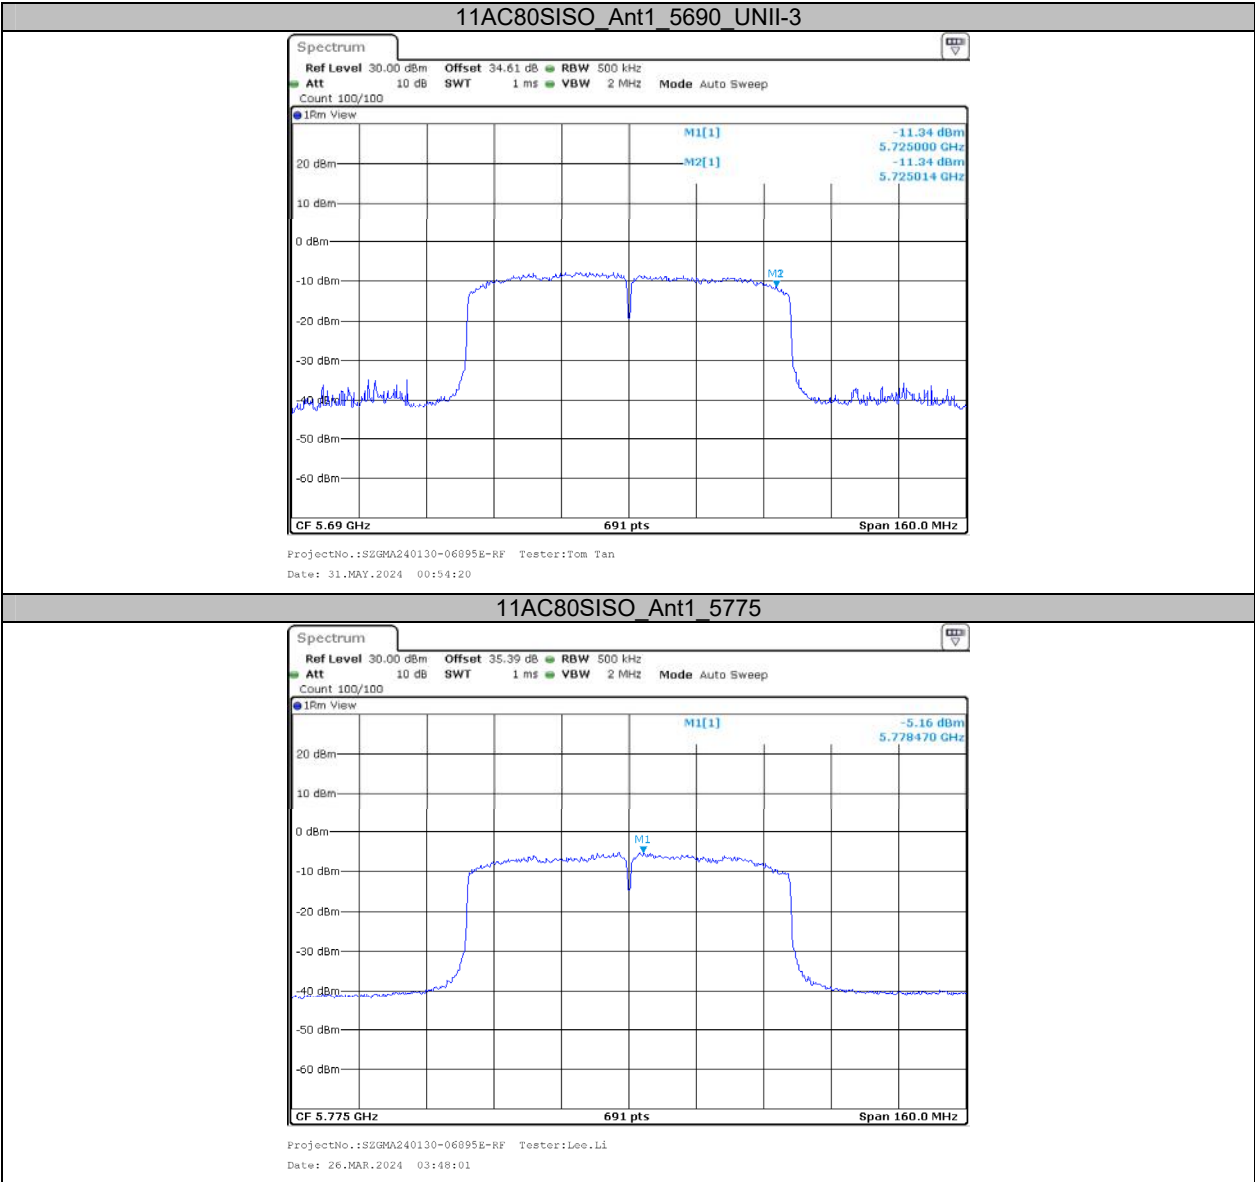

***** END OF REPORT *****