

EXHIBIT E- RADIATED SPURIOUS EMISSION DATA

1 GPRS 850

1.1 GPRS 850 MCH

Test result

Project Number: Certification

Test Time: 2022-10-18_10.11.29

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: ALGIZ RT10

Work Addition: TX


Temp.(oC): 20

Load: full load

Hum.: 54%

Remark: DR-RSE01-E22030040-01#10

RSE Test case: CE_FCC_FCC PART22&24&27_FCC PART 22_850_GSM850<E B5&CDMA BC0&WCDMA B5<E B26

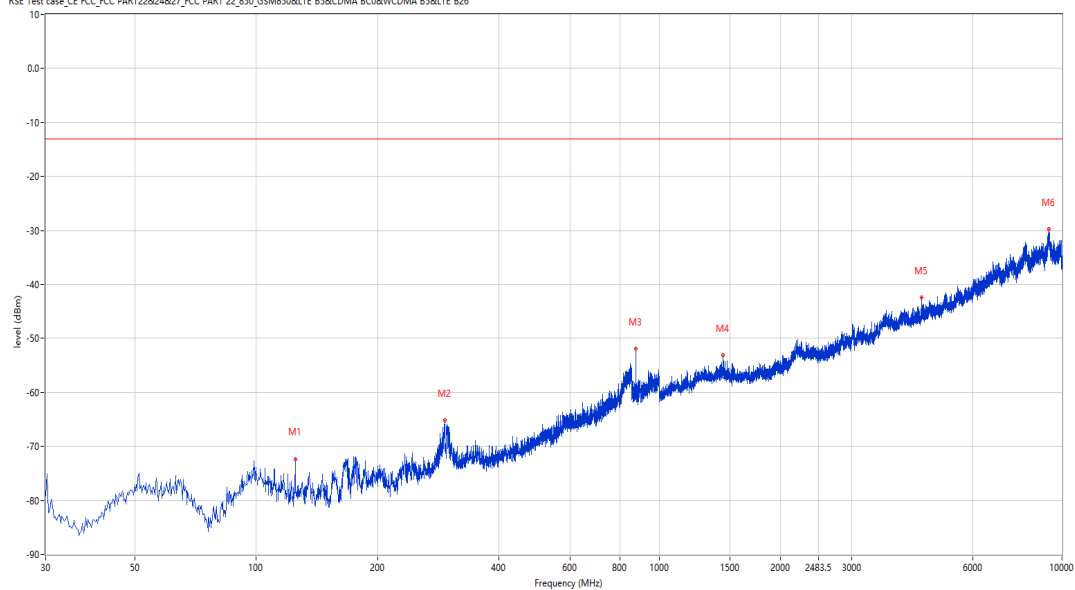

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.817	-72.35	-17.95	-13.0	-59.35	285.90	Horizontal	Vertical	Pass
293.840	-65.18	-12.34	-13.0	-52.18	81.90	Horizontal	Vertical	Pass
876.082	-51.91	-0.09	-13.0	-38.91	0.60	Horizontal	Vertical	Pass
1440.000	-53.16	0.17	-13.0	-40.16	228.00	Horizontal	Vertical	Pass
4489.000	-42.45	12.91	-13.0	-29.45	279.40	Horizontal	Vertical	Pass
9294.250	-29.81	29.23	-13.0	-16.81	132.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-10-18_09.54.53

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: ALGIZ RT10

Work Addition: TX


Temp.(oC): 20

Load: full load

Hum.: 54%

Remark: DR-RSE01-E22030040-01#10

RSE Test case_CE FCC PART22&24&27_FCC PART 22_850_GSM850<E B5&CDMA BC0&WCDMA B5<E B26

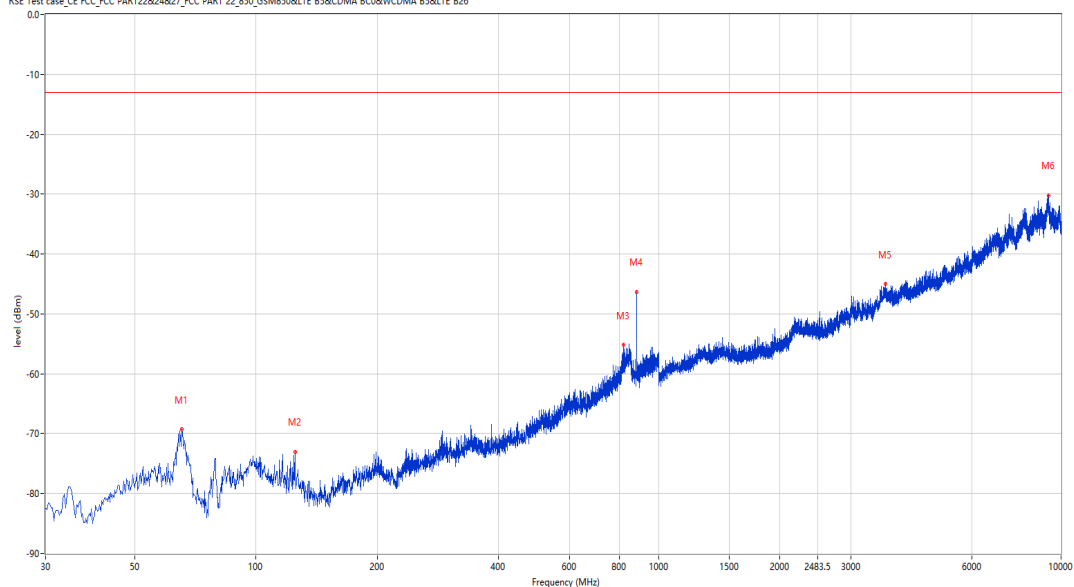

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
65.405	-69.32	-17.66	-13.0	-56.32	270.30	Vertical	Vertical	Pass
124.817	-73.12	-17.95	-13.0	-60.12	223.50	Vertical	Vertical	Pass
818.852	-55.22	1.68	-13.0	-42.22	360.00	Vertical	Vertical	Pass
881.903	-46.35	-0.17	-13.0	-33.35	360.00	Vertical	Vertical	Pass
3666.000	-45.05	12.03	-13.0	-32.05	207.50	Vertical	Vertical	Pass
9304.750	-30.16	29.32	-13.0	-17.16	247.30	Vertical	Vertical	Pass

2 EGPRS 850

2.1 EGPRS 850 MCH

Test result

Project Number: Certification

Test Time: 2022-10-11_17.39.43

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: ALGIZ RT10

Work Addition: TX

Temp.(oC): 23

Load: full load

Hum.: 45%

Remark: DR-RSE01-E22030040-01#10

RSE Test case_CE FCC PART22&24&27_FCC PART 22_850_GSM850<E B5&CDMA BC0&WCDMA B5<E B26



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
238.983	-66.03	-11.72	-13.0	-53.03	274.00	Horizontal	Vertical	Pass
296.926	-60.93	-13.43	-13.0	-47.93	49.20	Horizontal	Vertical	Pass
881.447	-50.42	-0.14	-13.0	-37.42	317.90	Horizontal	Vertical	Pass
1673.332	-53.44	-0.85	-13.0	-40.44	263.30	Horizontal	Vertical	Pass
2509.623	-47.46	4.31	-13.0	-34.46	107.80	Horizontal	Vertical	Pass
9231.442	-30.32	27.34	-13.0	-17.32	195.20	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-10-18_10.02.13

EUT Name: N.A

Manufacturer: N.A

Model: ALGIZ RT10

Temp.(oC): 20

Hum.: 54%

Test Engineer: LS


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-E22030040-01#10

RSE Test case: CE FCC PART22&24&27 FCC PART 22_850_GSM850<E B5&CDMA BC0&WCDMA B5<E B26

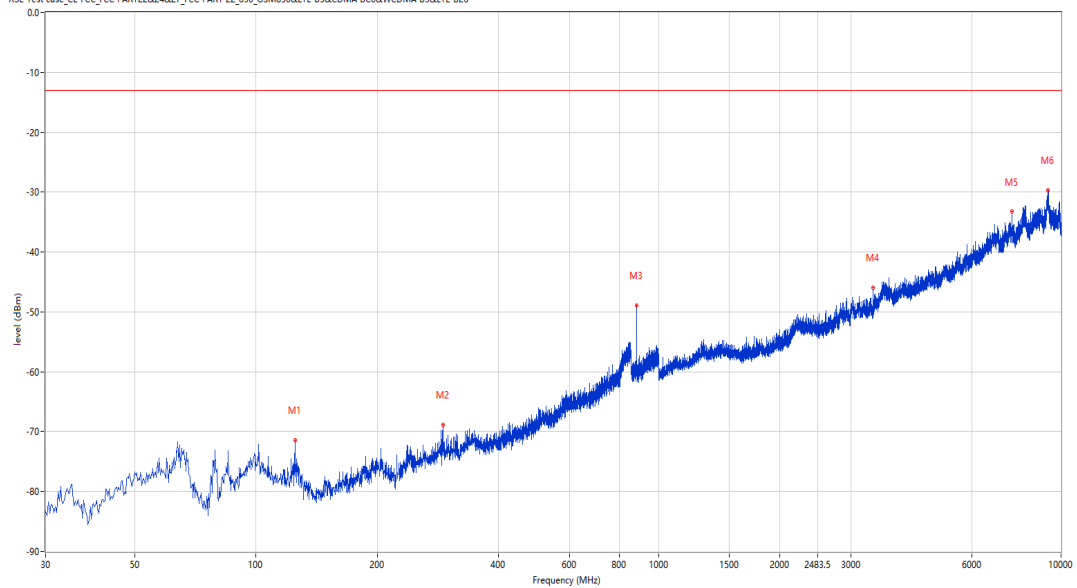

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.817	-71.49	-17.95	-13.0	-58.49	189.50	Vertical	Vertical	Pass
291.415	-68.90	-12.41	-13.0	-55.90	295.60	Vertical	Vertical	Pass
881.660	-48.97	-0.18	-13.0	-35.97	275.90	Vertical	Vertical	Pass
3414.000	-45.99	8.50	-13.0	-32.99	327.10	Vertical	Vertical	Pass
7548.250	-33.26	22.86	-13.0	-20.26	354.70	Vertical	Vertical	Pass
9261.250	-29.72	28.38	-13.0	-16.72	55.30	Vertical	Vertical	Pass

3 GPRS 1900

3.1 GPRS 1900 MCH

Test result

Project Number: Certification

Test Time: 2022-10-12_10.04.00

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: ALGIZ RT10

Work Addition: TX


Temp.(oC): 19

Load: full load

Hum.: 54%

Remark: DR-RSE01-E22030040-01#10

RSE Test case_CE FCC PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

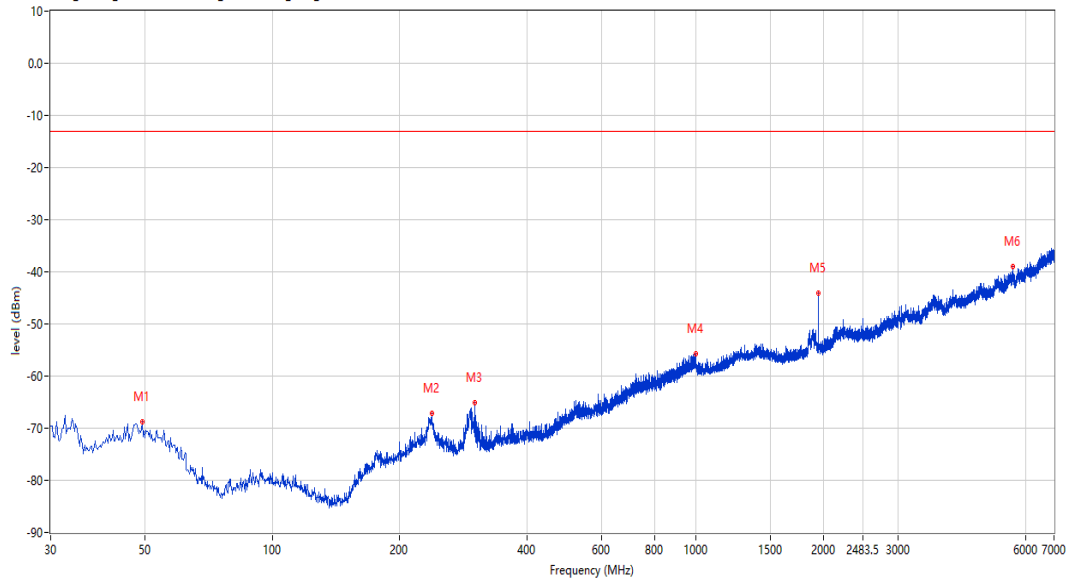

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
49.395	-68.87	-10.37	-13.0	-55.87	339.30	Horizontal	Vertical	Pass
237.771	-67.20	-11.76	-13.0	-54.20	284.20	Horizontal	Vertical	Pass
301.047	-65.18	-13.57	-13.0	-52.18	95.90	Horizontal	Vertical	Pass
1000.000	-55.80	2.30	-13.0	-42.80	305.80	Horizontal	Vertical	Pass
1947.763	-44.12	1.23	-13.0	-31.12	130.50	Horizontal	Vertical	Pass
5590.352	-39.03	15.59	-13.0	-26.03	131.60	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-10-18_10.39.22

EUT Name: N.A

Manufacturer: N.A

Model: ALGIZ RT10

Temp.(oC): 20

Hum.: 54%

Test Engineer: LS


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-E22030040-01#10

RSE Test case_CE FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G

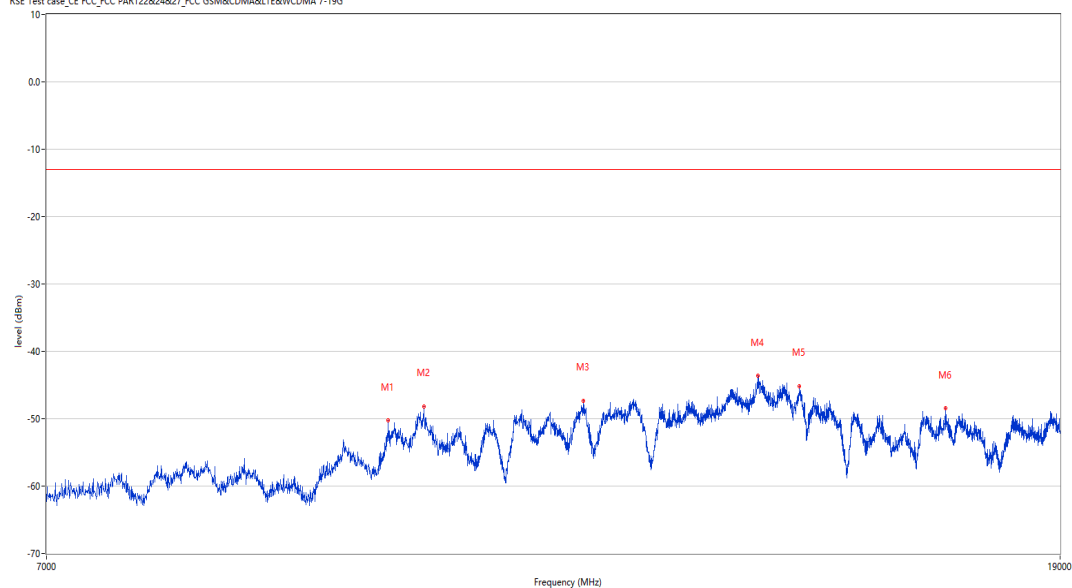

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9802.000	-50.26	22.26	-13.0	-37.26	237.60	Horizontal	Vertical	Pass
10150.000	-48.19	23.58	-13.0	-35.19	29.90	Horizontal	Vertical	Pass
11875.000	-47.32	25.41	-13.0	-34.32	50.00	Horizontal	Vertical	Pass
14104.001	-43.67	29.14	-13.0	-30.67	0.60	Horizontal	Vertical	Pass
14695.000	-45.16	27.93	-13.0	-32.16	114.80	Horizontal	Vertical	Pass
16969.000	-48.48	22.68	-13.0	-35.48	328.00	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-10-18_10.15.41

EUT Name: N.A

Manufacturer: N.A

Model: ALGIZ RT10

Temp.(oC): 20

Hum.: 54%

Test Engineer: LS


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-E22030040-01#10

RSE Test case: CE_FCC_PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

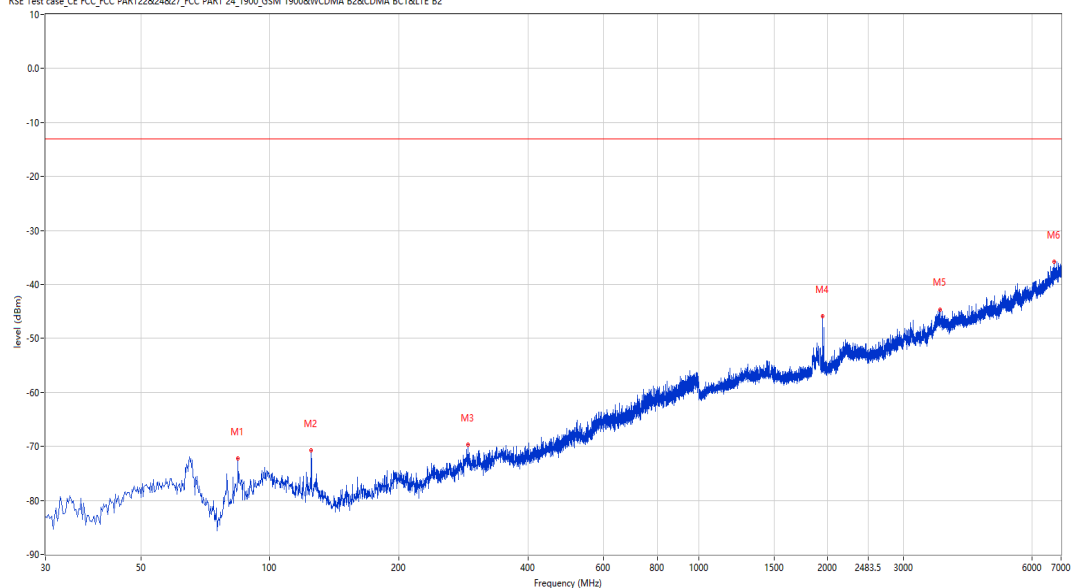

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
84.320	-72.19	-20.04	-13.0	-59.19	168.30	Vertical	Vertical	Pass
124.817	-70.77	-18.01	-13.0	-57.77	168.30	Vertical	Vertical	Pass
289.475	-69.70	-12.47	-13.0	-56.70	104.20	Vertical	Vertical	Pass
1948.000	-45.93	1.04	-13.0	-32.93	317.30	Vertical	Vertical	Pass
3660.000	-44.61	12.08	-13.0	-31.61	285.00	Vertical	Vertical	Pass
6747.000	-35.72	19.18	-13.0	-22.72	360.00	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-10-18_10.40.52

EUT Name: N.A

Manufacturer: N.A

Model: ALGIZ RT10

Temp.(oC): 20

Hum.: 54%

Test Engineer: LS


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-E22030040-01#10

RSE Test case: CE FCC PART22&24&27 FCC GSM&CDMA<E&WCDMA 7-19G

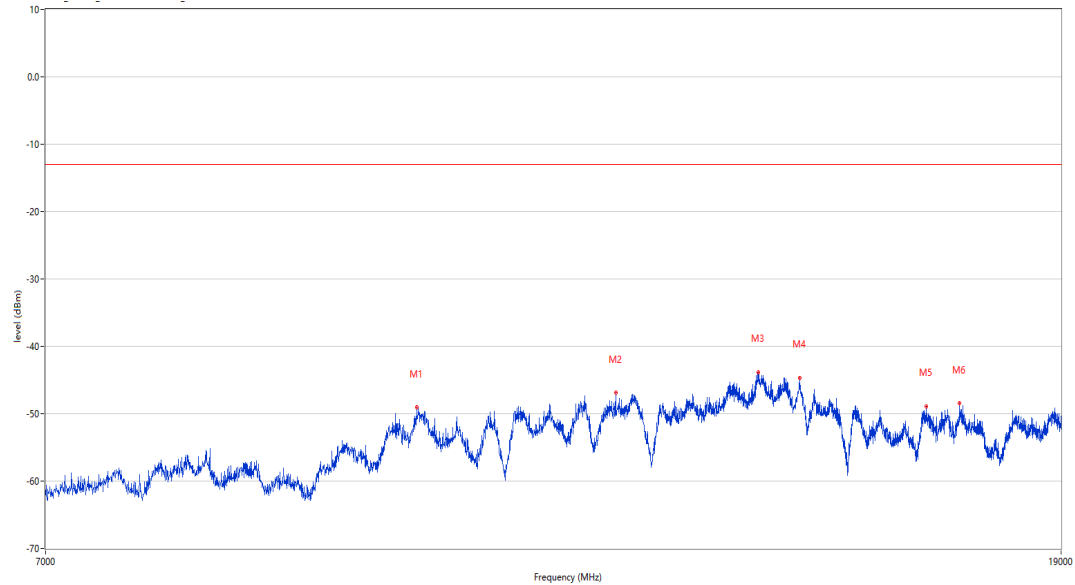

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
10084.000	-49.06	23.76	-13.0	-36.06	3.50	Vertical	Vertical	Pass
12265.000	-46.91	25.03	-13.0	-33.91	360.00	Vertical	Vertical	Pass
14110.000	-43.80	29.11	-13.0	-30.80	219.60	Vertical	Vertical	Pass
14698.000	-44.66	28.05	-13.0	-31.66	93.50	Vertical	Vertical	Pass
16636.000	-48.86	23.02	-13.0	-35.86	0.00	Vertical	Vertical	Pass
17197.001	-48.46	23.02	-13.0	-35.46	34.70	Vertical	Vertical	Pass

4 EGPRS 1900

4.1 EGPRS 1900 MCH

Test result

Project Number: Certification

Test Time: 2022-10-12_09.50.55

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: ALGIZ RT10

Work Addition: TX


Temp.(oC): 19

Load: full load

Hum.: 54%

Remark: DR-RSE01-E22030040-01#10

RSE Test case_CE FCC_PART22&24&27_FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

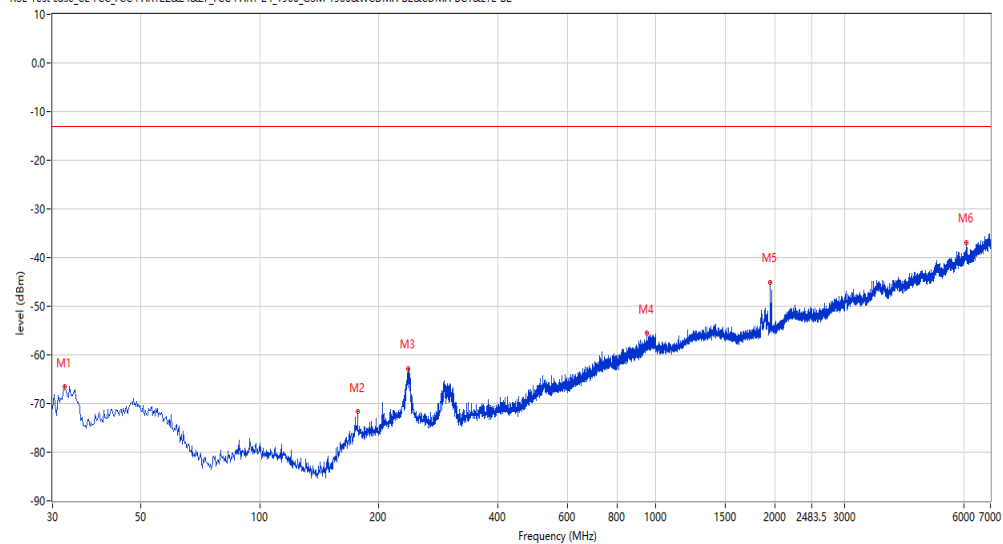

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
32.182	-66.60	-13.42	-13.0	-53.60	248.30	Horizontal	Vertical	Pass
176.918	-71.71	-16.96	-13.0	-58.71	165.70	Horizontal	Vertical	Pass
236.801	-62.83	-11.76	-13.0	-49.83	210.00	Horizontal	Vertical	Pass
951.270	-55.56	1.41	-13.0	-42.56	143.40	Horizontal	Vertical	Pass
1947.763	-45.09	1.23	-13.0	-32.09	85.50	Horizontal	Vertical	Pass
6092.227	-36.88	16.93	-13.0	-23.88	172.50	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-10-18_10.37.54

EUT Name: N.A

Manufacturer: N.A

Model: ALGIZ RT10

Temp.(oC): 20

Hum.: 54%

Test Engineer: LS


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-E22030040-01#10

RSE Test case: CE FCC PART22&24&27 FCC GSM&CDMA<E&WCDMA 7-19G

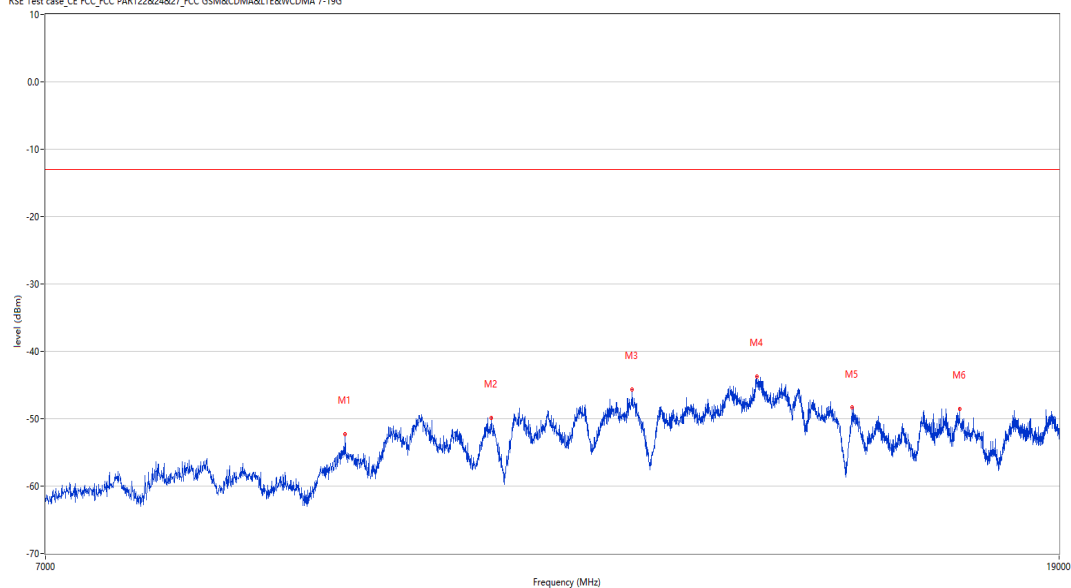

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
9403.000	-52.27	19.95	-13.0	-39.27	131.00	Horizontal	Vertical	Pass
10861.000	-49.88	22.52	-13.0	-36.88	84.90	Horizontal	Vertical	Pass
12478.000	-45.64	25.43	-13.0	-32.64	44.70	Horizontal	Vertical	Pass
14104.001	-43.71	29.14	-13.0	-30.71	131.00	Horizontal	Vertical	Pass
15495.999	-48.36	22.74	-13.0	-35.36	359.50	Horizontal	Vertical	Pass
17230.000	-48.55	22.88	-13.0	-35.55	0.30	Horizontal	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-10-18_10.20.52

EUT Name: N.A

Manufacturer: N.A

Model: ALGIZ RT10

Temp.(oC): 20

Hum.: 54%

Test Engineer: LS


Test Standard: FCC

Work Addition: TX

Load: full load

Remark: DR-RSE01-E22030040-01#10

RSE Test case: CE FCC PART22&24&27 FCC PART 24_1900_GSM 1900&WCDMA B2&CDMA BC1<E B2

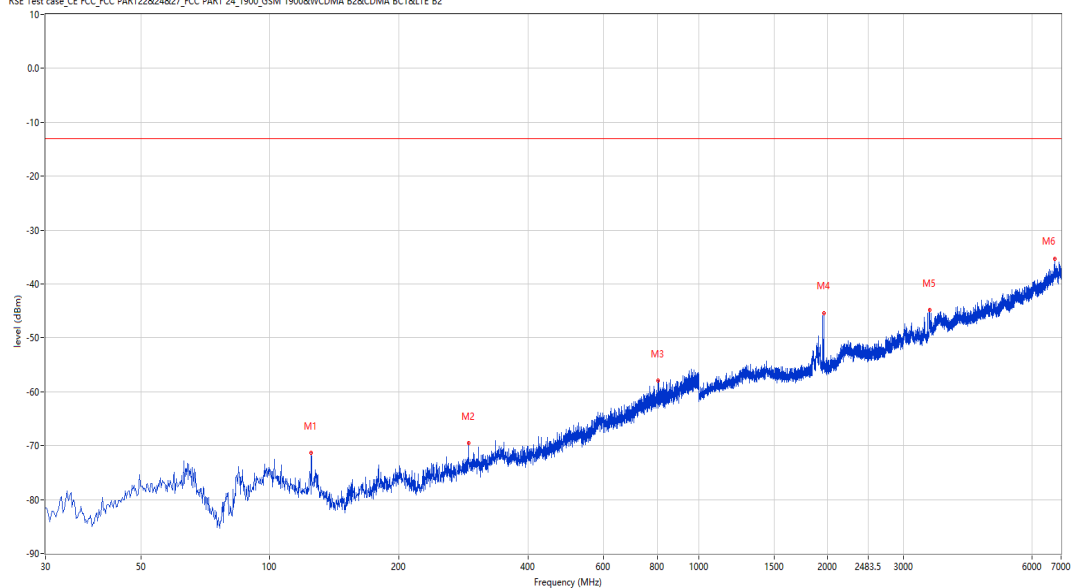

Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
124.817	-71.34	-18.01	-13.0	-58.34	173.00	Vertical	Vertical	Pass
290.445	-69.54	-12.43	-13.0	-56.54	54.30	Vertical	Vertical	Pass
803.575	-57.95	-1.16	-13.0	-44.95	185.60	Vertical	Vertical	Pass
1960.000	-45.35	0.89	-13.0	-32.35	117.50	Vertical	Vertical	Pass
3416.000	-20.48	8.56	-13.0	-7.48	198.20	Vertical	Vertical	Pass
6760.000	-35.37	19.24	-13.0	-22.37	50.80	Vertical	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2022-10-18_10.34.47

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: ALGIZ RT10

Work Addition: TX

Temp.(oC): 20

Load: full load

Hum.: 54%

Remark: DR-RSE01-E22030040-01#10

RSE Test case_CE_FCC_FCC PART22&24&27_FCC GSM&CDMA<E&WCDMA 7-19G



Frequency (MHz)	Result (dBm)	Factor (dB)	PK Limit (dBm)	Over Limit (dB)	Table (o)	ANT	EUT	Verdict
7951.000	-56.02	16.78	-13.0	-43.02	0.80	Vertical	Vertical	Pass
10138.000	-48.76	23.80	-13.0	-35.76	36.20	Vertical	Vertical	Pass
11845.000	-47.47	24.98	-13.0	-34.47	358.70	Vertical	Vertical	Pass
14179.000	-43.15	28.72	-13.0	-30.15	0.80	Vertical	Vertical	Pass
15520.000	-48.19	22.73	-13.0	-35.19	204.70	Vertical	Vertical	Pass
16651.000	-49.37	22.88	-13.0	-36.37	146.30	Vertical	Vertical	Pass