

TEST REPORT

Applicant Name: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: 2401T31849E-EM-00
FCC ID: YZZGRP2613W

Test Standard (s)

FCC Part 15, Subpart B (Class B)

Sample Description

Product Type: IP Phone
Model No.: GRP2613W
Multiple Model(s) No.: N/A
Trade Mark: GRANDSTREAM
Date Received: 2024/05/27
Issue Date: 2024/08/05

Test Result:	Pass [▲]
--------------	-------------------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Jason Xiao

Jason Xiao
EMC Engineer

Approved By:

Alvin Huang

Alvin Huang
Lab Manager

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY3

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 MEASUREMENT UNCERTAINTY4

 TEST FACILITY5

SYSTEM TEST CONFIGURATION6

 DESCRIPTION OF TEST CONFIGURATION6

 EUT EXERCISE SOFTWARE6

 EQUIPMENT MODIFICATIONS6

 SUPPORT EQUIPMENT LIST AND DETAILS6

 EXTERNAL I/O CABLE.....6

 BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS9

TEST EQUIPMENT LIST10

FCC §15.107 - AC LINE CONDUCTED EMISSIONS.....11

 APPLICABLE STANDARD11

 EUT SETUP11

 EMI TEST RECEIVER SETUP.....11

 TEST PROCEDURE12

 LEVEL & OVER LIMIT CALCULATION12

 TEST DATA12

FCC §15.109 - RADIATED EMISSIONS21

 APPLICABLE STANDARD21

 EUT SETUP21

 EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP22

 TEST PROCEDURE22

 LEVEL & OVER LIMIT CALCULATION23

 TEST DATA23

EUT PHOTOGRAPHS.....48

TEST SETUP PHOTOGRAPHS49

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401T31849E-EM-00	Original Report	2024/08/05

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	IP Phone
Tested Model	GRP2613W
Multiple Model(s)	N/A
Voltage Range	DC 44-57V by POE or DC 5V by adapter
Highest operating frequency [#]	5825MHz (Provided by the applicant)
Equipment Class	Class B
Sample number	2M24-1 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model: A318-050060W-US1 Input: 100-240V~50-60Hz 0.15A Output: DC 5.0V, 0.6A Adapter 2 Model: DCT06W050060US-D0 Input: 100-240V~50/60Hz 200mA Output: DC 5.0V, 0.6A Adapter 3 Model: GQ06-050060-ZU Input: 100-240V~50/60Hz 0.3A Max Output: DC 5.0V, 0.6A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15B Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15B.

Measurement Uncertainty

Item	Frequency Range		Expanded Measurement uncertainty
Conducted Emissions	AC Mains	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Disturbance	30MHz~200MHz	Horizontal	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz	Vertical	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Horizontal	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz	Vertical	5.05dB(k=2, 95% level of confidence)
	1GHz~6GHz	/	5.35dB(k=2, 95% level of confidence)
	6GHz~18GHz	/	5.44dB(k=2, 95% level of confidence)
	18GHz~40GHz	/	5.16dB(k=2, 95% level of confidence)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

Each test item follows test standards and with no deviation.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in worst case condition.

Test Mode: Talking

EUT exercise software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	Latitude E7270	1JH13G2
GOSPELL	POE	G0720-480-050	200200019
IMAGITECH	Router	AX1800	YWT0023080000064
Grandstream	IP phone	GXV3450	T11223323B898
SNOM	Headset	A310D	/


External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded detachable RJ45 cable	8.0	EUT	POE
Unshielded detachable RJ45 cable	1.5	POE	Router
Unshielded detachable RJ45 cable	1.5	Router	IP phone
Unshielded detachable RJ45 cable	8.0	EUT	PC
Unshielded Un-detachable headset cable	1.2	EUT	Headset
Unshielded Un-detachable DC cable	1.8	EUT	Adapter
Unshielded Un-detachable AC cable	1.6	Socket	Mains


Block Diagram of Test Setup

Conducted Emissions

Powered by adapter

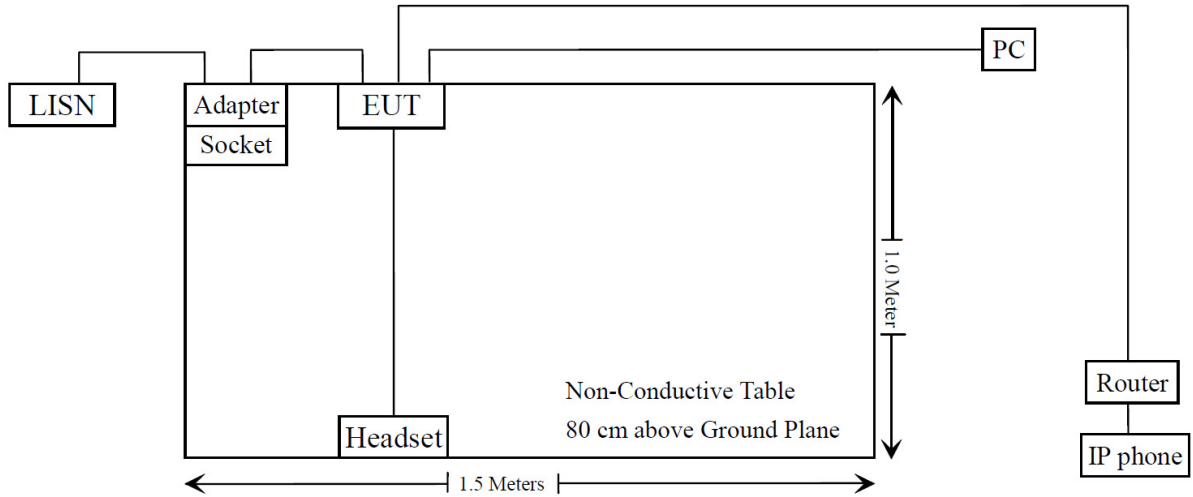


Powered by POE

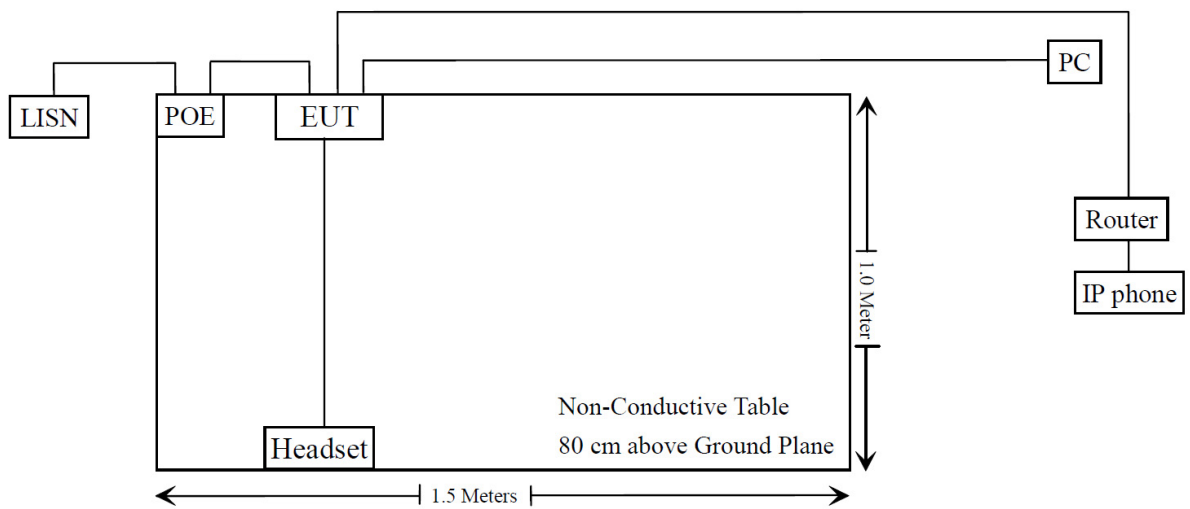


Radiated Emissions

Powered by adapter

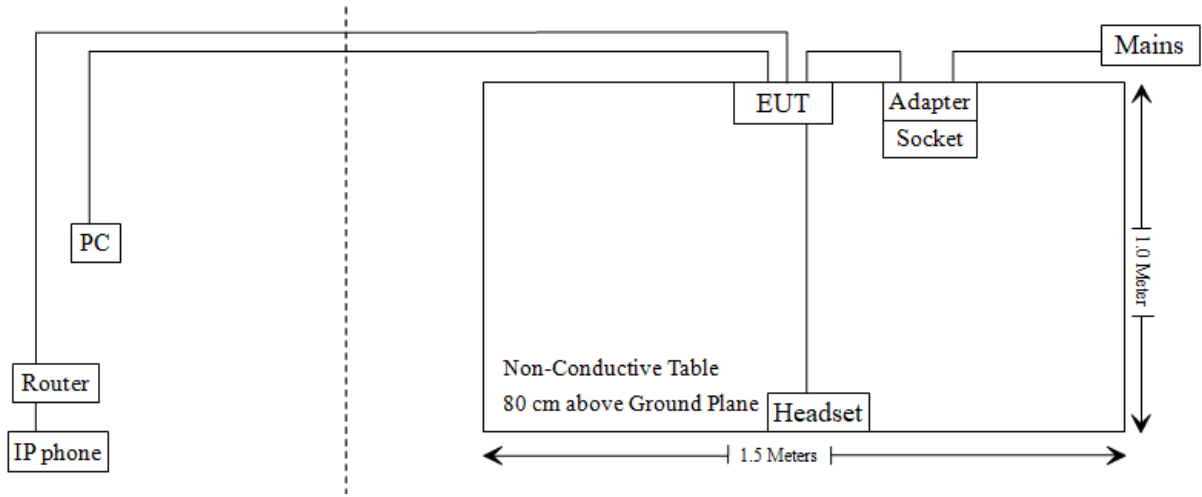

Powered by POE

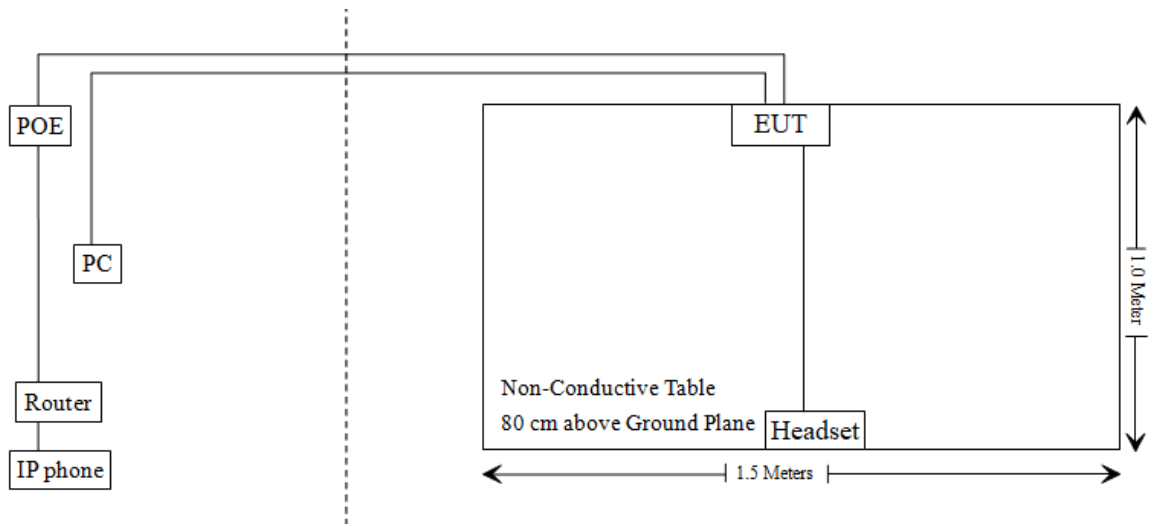

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 - AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107

EUT Setup

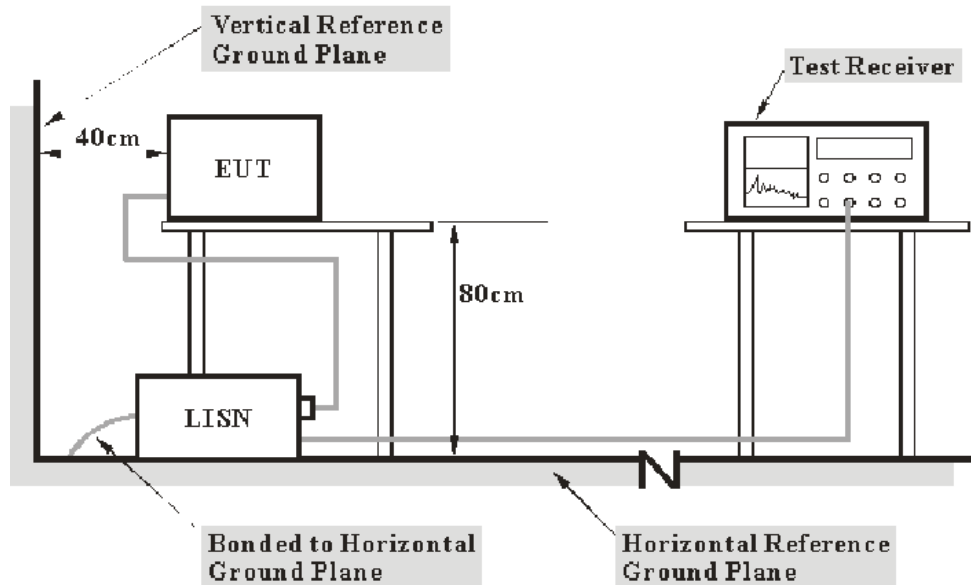

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Level & Over Limit Calculation

The Level is calculated by adding the LISN Factor, Cable Loss and the Read Level. The basic equation is as follows:

$$\text{Level (dBuV)} = \text{Read Level (dBuV)} + \text{LISN Factor} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit.

$$\text{Over Limit (dB)} = \text{Level (dBuV)} - \text{Limit Line (dBuV)}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions


Temperature:	25~26 °C
Relative Humidity:	61~65 %
ATM Pressure:	101.0 kPa

The testing was performed by Macy Shi from 2024-06-20 to 2024-07-02.

For adapter 1

AC 120V/60 Hz, Line

Date: 2024-06-20

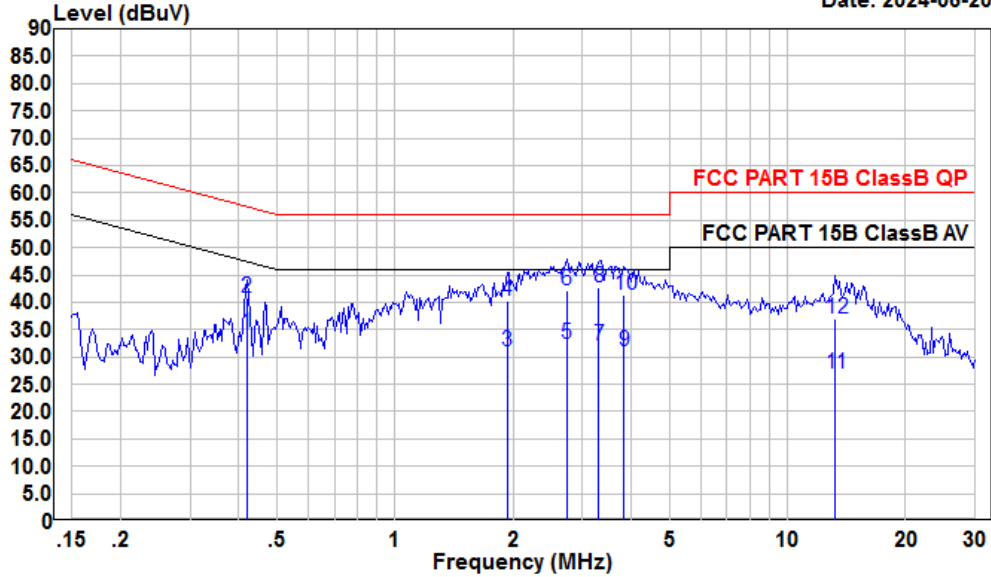


Condition: Line
 Project : 2401T31849E-EM
 test Mode: Talking
 tester : Macy.shi

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.42	13.72	34.39	10.56	10.11	47.46	-13.07	Average
2	0.42	20.00	40.67	10.56	10.11	57.46	-16.79	QP
3	1.93	10.14	30.92	10.59	10.19	46.00	-15.08	Average
4	1.93	19.59	40.37	10.59	10.19	56.00	-15.63	QP
5	2.74	11.67	32.30	10.46	10.17	46.00	-13.70	Average
6	2.74	21.52	42.15	10.46	10.17	56.00	-13.85	QP
7	3.31	11.50	32.07	10.38	10.19	46.00	-13.93	Average
8	3.31	22.10	42.67	10.38	10.19	56.00	-13.33	QP
9	3.84	10.49	31.02	10.32	10.21	46.00	-14.98	Average
10	3.84	20.79	41.32	10.32	10.21	56.00	-14.68	QP
11	13.27	6.04	26.86	10.60	10.22	50.00	-23.14	Average
12	13.27	16.05	36.87	10.60	10.22	60.00	-23.13	QP

AC 120V/60 Hz, Neutral

Date: 2024-06-20

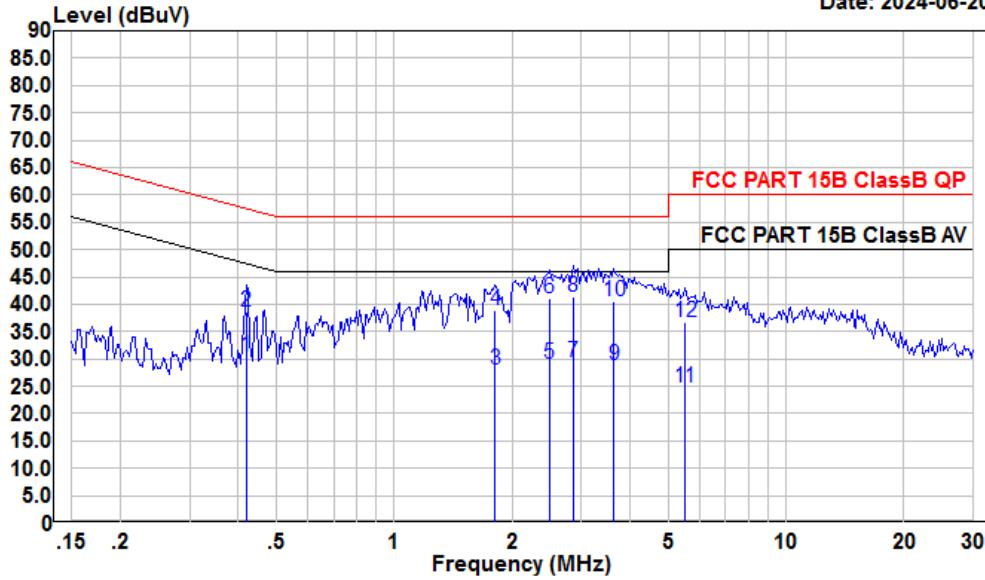


Condition: Neutral
 Project : 2401T31849E-EM
 test Mode: Talking
 tester : Macy.shi

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.42	9.69	30.44	10.64	10.11	47.46	-17.02	Average
2	0.42	17.83	38.58	10.64	10.11	57.46	-18.88	QP
3	1.81	7.33	27.98	10.47	10.18	46.00	-18.02	Average
4	1.81	18.22	38.87	10.47	10.18	56.00	-17.13	QP
5	2.49	8.50	29.07	10.40	10.17	46.00	-16.93	Average
6	2.49	20.40	40.97	10.40	10.17	56.00	-15.03	QP
7	2.85	8.91	29.49	10.40	10.18	46.00	-16.51	Average
8	2.85	20.87	41.45	10.40	10.18	56.00	-14.55	QP
9	3.64	8.30	28.90	10.40	10.20	46.00	-17.10	Average
10	3.64	20.00	40.60	10.40	10.20	56.00	-15.40	QP
11	5.51	3.94	24.69	10.57	10.18	50.00	-25.31	Average
12	5.51	15.93	36.68	10.57	10.18	60.00	-23.32	QP

For adapter 2


AC 120V/60 Hz, Line

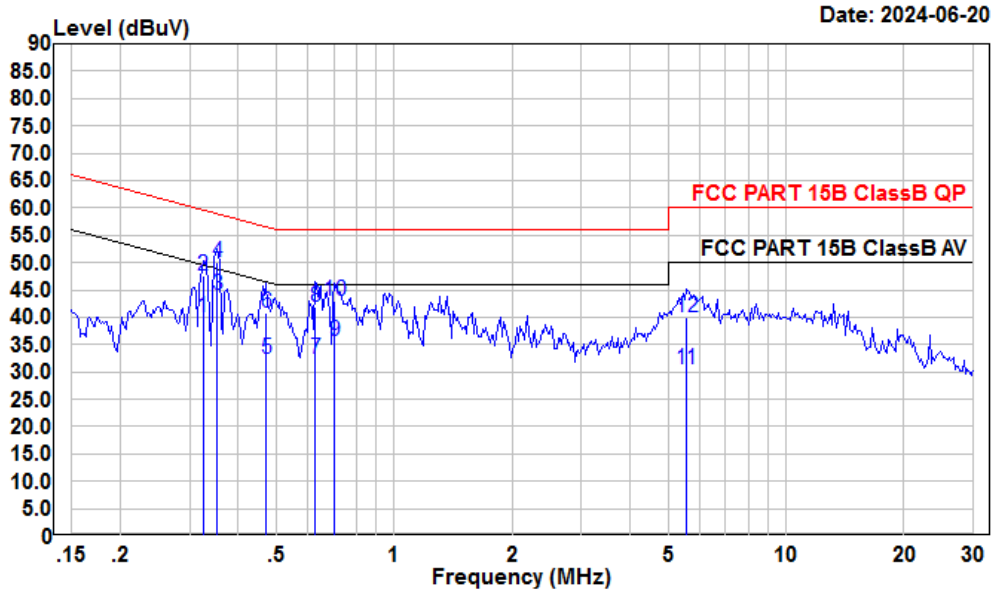

Condition: Line
 Project : 2401T31849E-EM
 test Mode: Talking
 tester : Macy.shi

	Read	LISN	Cable	Limit	Over		
Freq	Level	Level	Factor	Line	Limit	Remark	
MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.33	19.30	40.06	10.64	10.12	49.57	-9.51 Average
2	0.33	26.90	47.66	10.64	10.12	59.57	-11.91 QP
3	0.35	23.40	44.13	10.61	10.12	48.87	-4.74 Average
4	0.35	29.44	50.17	10.61	10.12	58.87	-8.70 QP
5	0.47	11.70	32.35	10.52	10.13	46.49	-14.14 Average
6	0.47	20.10	40.75	10.52	10.13	56.49	-15.74 QP
7	0.63	11.62	32.25	10.50	10.13	46.00	-13.75 Average
8	0.63	21.16	41.79	10.50	10.13	56.00	-14.21 QP
9	0.70	14.90	35.55	10.50	10.15	46.00	-10.45 Average
10	0.70	22.30	42.95	10.50	10.15	56.00	-13.05 QP
11	5.56	9.97	30.57	10.42	10.18	50.00	-19.43 Average
12	5.56	19.30	39.90	10.42	10.18	60.00	-20.10 QP

AC 120V/60 Hz, Neutral

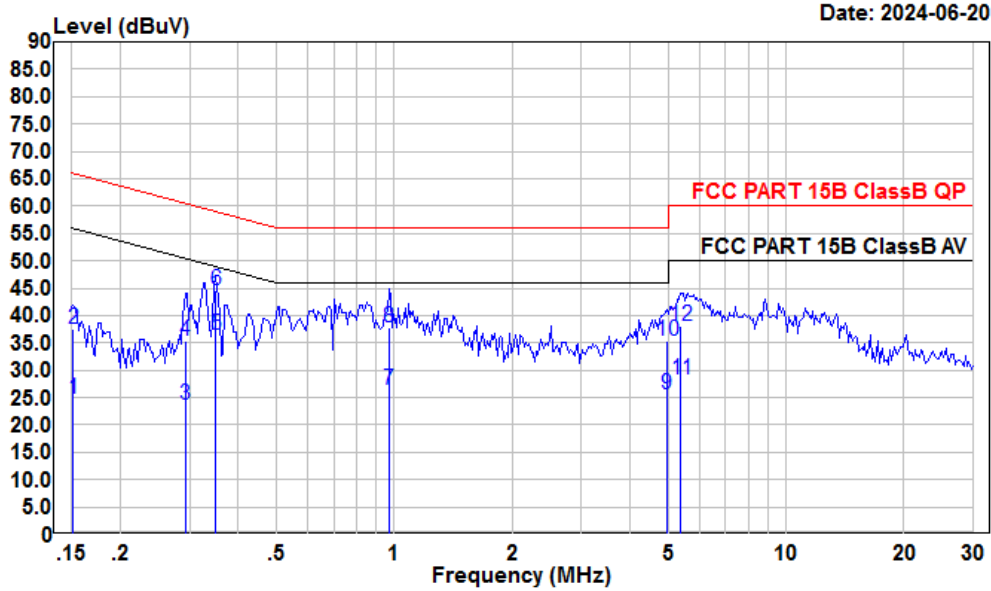


Condition: Neutral
 Project : 2401T31849E-EM
 test Mode: Talking
 tester : Macy.shi

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	4.05	24.77	10.59	10.13	55.91	-31.14	Average
2	0.15	16.69	37.41	10.59	10.13	65.91	-28.50	QP
3	0.29	3.10	23.73	10.52	10.11	50.46	-26.73	Average
4	0.29	14.60	35.23	10.52	10.11	60.46	-25.23	QP
5	0.35	15.70	36.40	10.58	10.12	48.96	-12.56	Average
6	0.35	24.01	44.71	10.58	10.12	58.96	-14.25	QP
7	0.97	5.39	26.38	10.88	10.11	46.00	-19.62	Average
8	0.97	16.86	37.85	10.88	10.11	56.00	-18.15	QP
9	4.95	4.95	25.64	10.51	10.18	46.00	-20.36	Average
10	4.95	14.55	35.24	10.51	10.18	56.00	-20.76	QP
11	5.39	7.61	28.35	10.56	10.18	50.00	-21.65	Average
12	5.39	17.23	37.97	10.56	10.18	60.00	-22.03	QP

For adapter 3

AC 120V/60 Hz, Line

Date: 2024-07-02

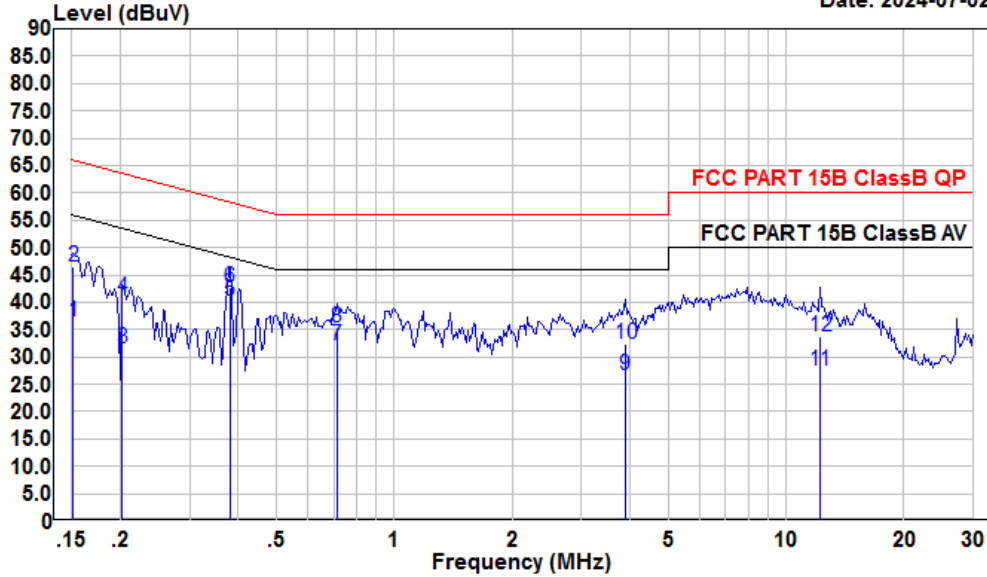


Condition: Line
 Project : 2401T31849E-EM
 test Mode: Talking
 tester : Macy.shi

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	15.55	36.58	10.90	10.13	55.91	-19.33	Average
2	0.15	25.50	46.53	10.90	10.13	65.91	-19.38	QP
3	0.20	10.68	31.57	10.80	10.09	53.54	-21.97	Average
4	0.20	19.83	40.72	10.80	10.09	63.54	-22.82	QP
5	0.38	19.50	40.20	10.59	10.11	48.25	-8.05	Average
6	0.38	22.03	42.73	10.59	10.11	58.25	-15.52	QP
7	0.71	11.36	32.01	10.50	10.15	46.00	-13.99	Average
8	0.71	14.77	35.42	10.50	10.15	56.00	-20.58	QP
9	3.88	6.07	26.59	10.31	10.21	46.00	-19.41	Average
10	3.88	11.88	32.40	10.31	10.21	56.00	-23.60	QP
11	12.19	6.77	27.58	10.60	10.21	50.00	-22.42	Average
12	12.19	12.92	33.73	10.60	10.21	60.00	-26.27	QP

AC 120V/60 Hz, Neutral

Date: 2024-07-02

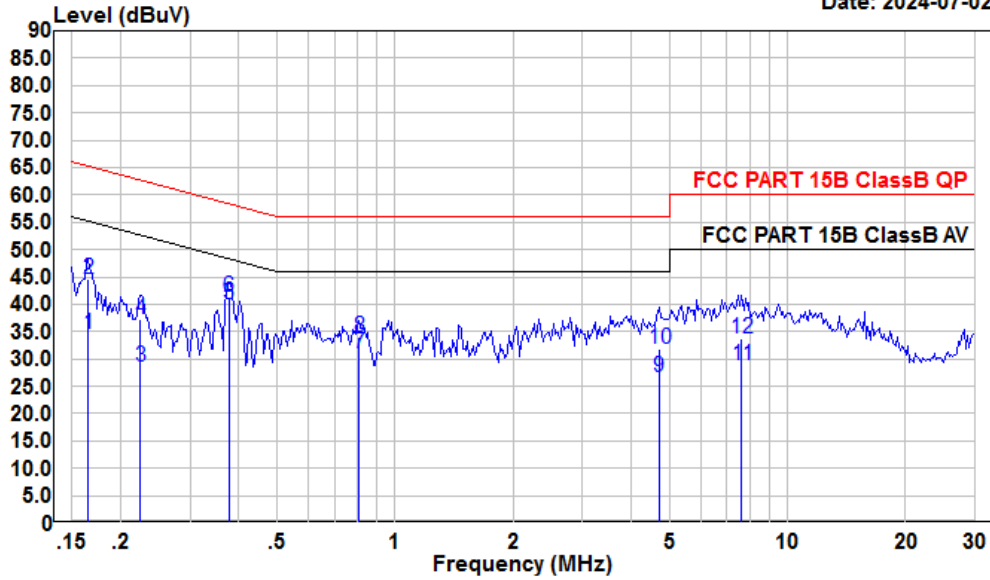


Condition: Neutral
 Project : 2401T31849E-EM
 test Mode: Talking
 tester : Macy.shi

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	13.95	34.59	10.53	10.11	55.21	-20.62	Average
2	0.17	23.97	44.61	10.53	10.11	65.21	-20.60	QP
3	0.22	7.99	28.52	10.44	10.09	52.66	-24.14	Average
4	0.22	16.75	37.28	10.44	10.09	62.66	-25.38	QP
5	0.38	19.23	39.95	10.61	10.11	48.34	-8.39	Average
6	0.38	20.70	41.42	10.61	10.11	58.34	-16.92	QP
7	0.81	10.16	31.06	10.78	10.12	46.00	-14.94	Average
8	0.81	13.04	33.94	10.78	10.12	56.00	-22.06	QP
9	4.70	6.11	26.79	10.49	10.19	46.00	-19.21	Average
10	4.70	11.20	31.88	10.49	10.19	56.00	-24.12	QP
11	7.65	7.89	28.80	10.72	10.19	50.00	-21.20	Average
12	7.65	12.81	33.72	10.72	10.19	60.00	-26.28	QP

For POE

AC 120V/60 Hz, Line

Date: 2024-06-21

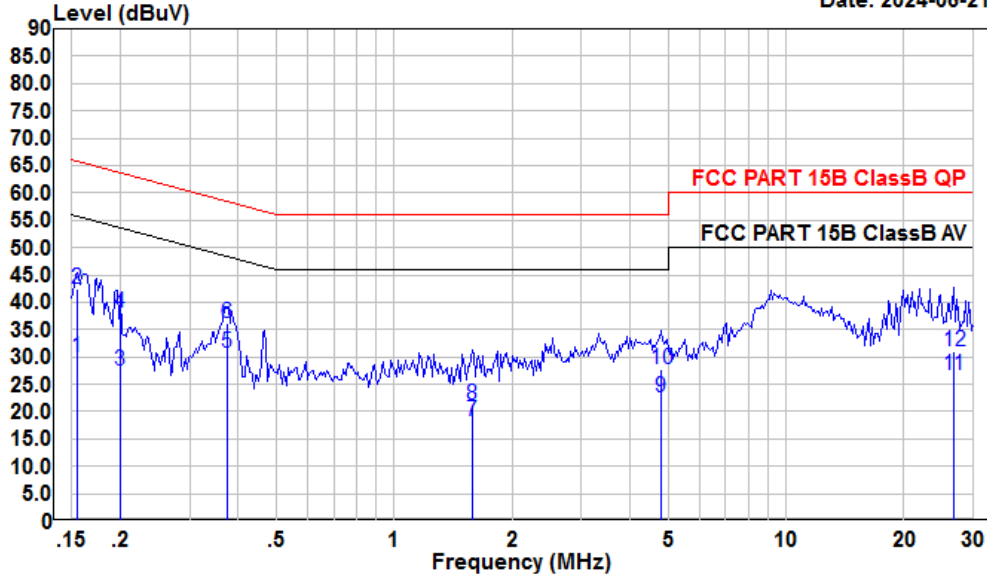


Condition: Line
 Project : 2401T31849E-EM
 test Mode: Talking
 tester : Macy.shi

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	9.53	30.05	10.40	10.12	55.74	-25.69	Average
2	0.15	21.81	42.33	10.40	10.12	65.74	-23.41	QP
3	0.20	6.86	27.35	10.40	10.09	53.62	-26.27	Average
4	0.20	17.49	37.98	10.40	10.09	63.62	-25.64	QP
5	0.37	10.28	30.65	10.26	10.11	48.43	-17.78	Average
6	0.37	15.91	36.28	10.26	10.11	58.43	-22.15	QP
7	1.58	-2.45	18.11	10.40	10.16	46.00	-27.89	Average
8	1.58	0.79	21.35	10.40	10.16	56.00	-34.65	QP
9	4.80	1.80	22.45	10.46	10.19	46.00	-23.55	Average
10	4.80	7.20	27.85	10.46	10.19	56.00	-28.15	QP
11	26.70	5.72	26.55	10.63	10.20	50.00	-23.45	Average
12	26.70	10.16	30.99	10.63	10.20	60.00	-29.01	QP

AC 120V/60 Hz, Neutral

Date: 2024-06-21

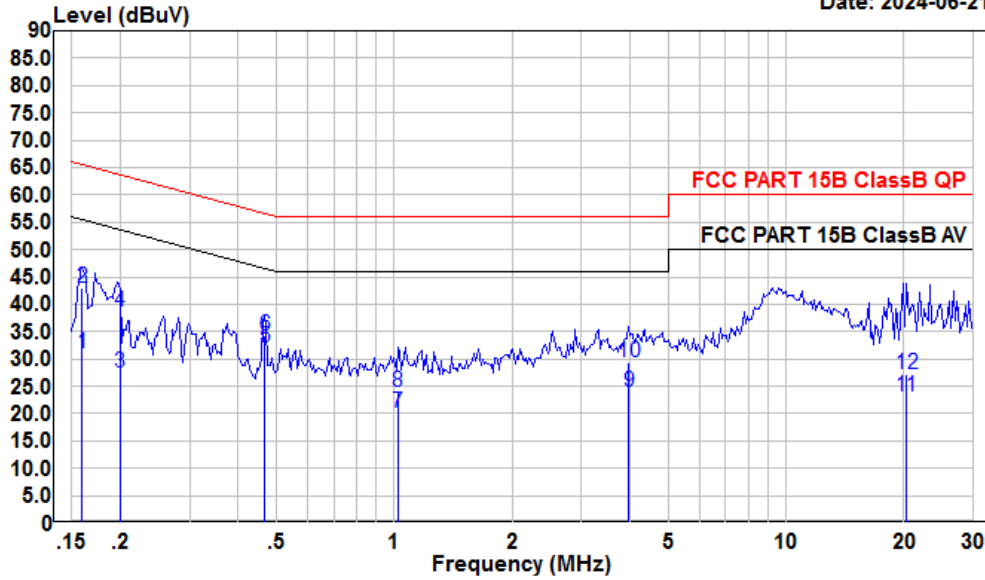

Condition: Neutral
 Project : 2401T31849E-EM
 test Mode: Talking
 tester : Macy.shi

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	10.70	31.11	10.29	10.12	55.47	-24.36	Average
2	0.16	22.46	42.87	10.29	10.12	65.47	-22.60	QP
3	0.20	6.69	27.38	10.60	10.09	53.62	-26.24	Average
4	0.20	17.82	38.51	10.60	10.09	63.62	-25.11	QP
5	0.47	11.31	32.22	10.78	10.13	46.58	-14.36	Average
6	0.47	13.43	34.34	10.78	10.13	56.58	-22.24	QP
7	1.02	-0.20	20.20	10.29	10.11	46.00	-25.80	Average
8	1.02	3.44	23.84	10.29	10.11	56.00	-32.16	QP
9	3.96	3.38	23.99	10.40	10.21	46.00	-22.01	Average
10	3.96	8.70	29.31	10.40	10.21	56.00	-26.69	QP
11	20.27	2.70	23.07	10.20	10.17	50.00	-26.93	Average
12	20.27	6.71	27.08	10.20	10.17	60.00	-32.92	QP


FCC §15.109 - RADIATED EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup


Below 1GHz for Radiated Emissions

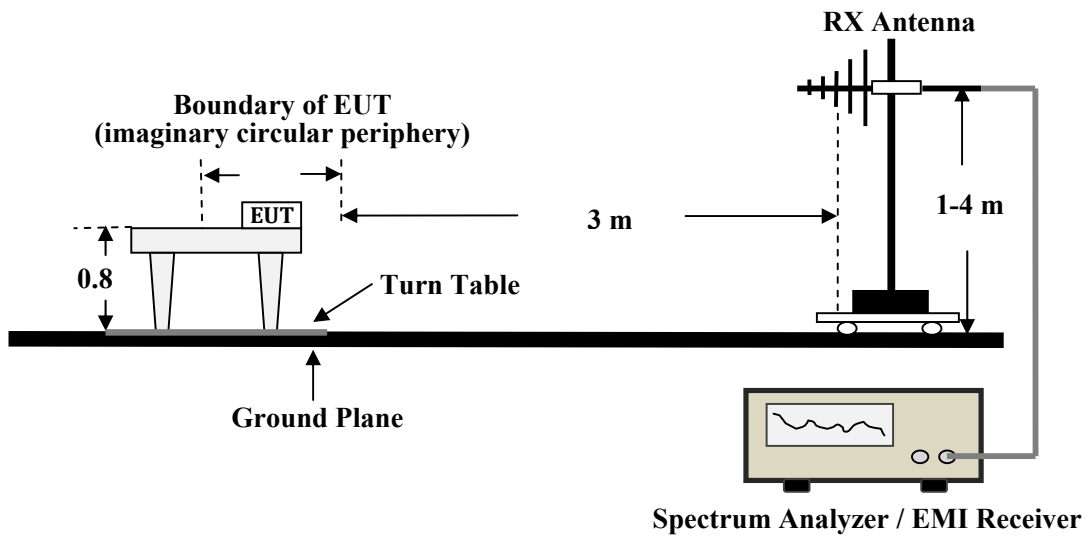

Above 1GHz for Radiated Emissions

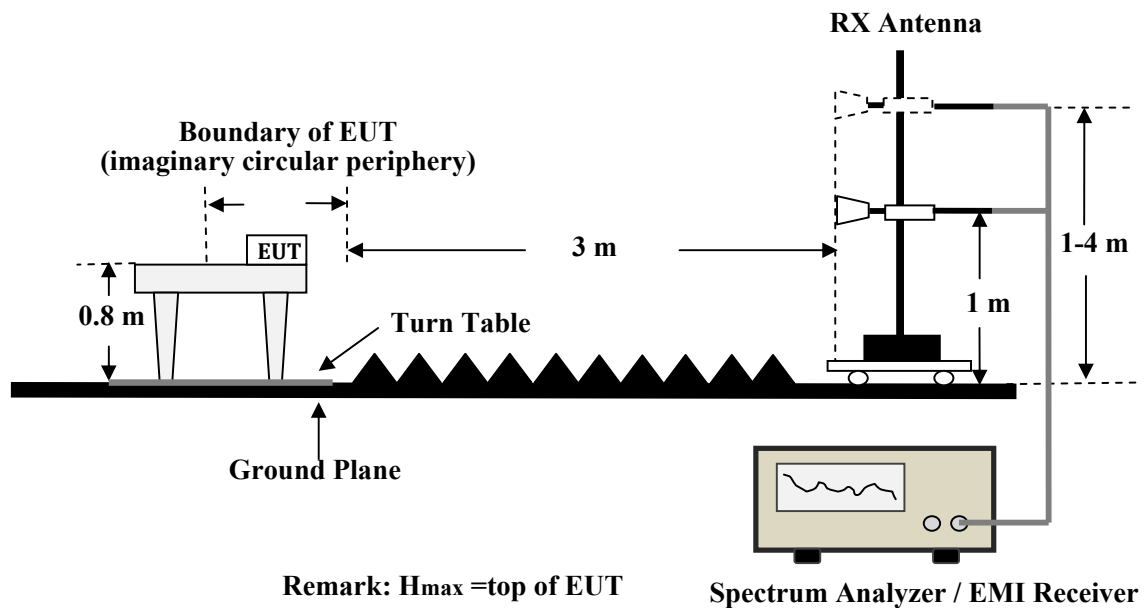

Radiated Emissions Setup Configuration

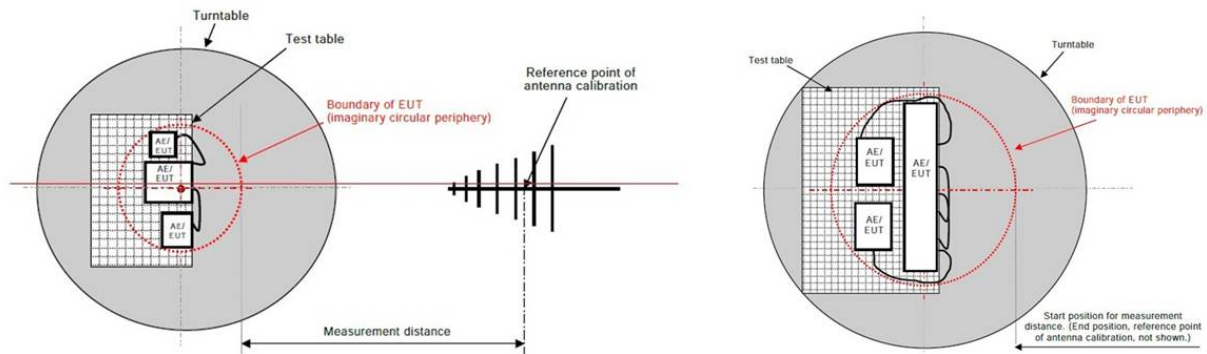

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The related limit was specified in FCC Part 15B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If emission level of the EUT in Peak measurement mode is 20dB lower than peak limit line (that means the emission level in Peak measurement mode complies with both Peak and average limit lines) then only Peak measurement result is reported .Otherwise, Emission in average measurement mode shall be measured, and reported for frequency range above 1GHz.

Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6dB below the limit for Class B. The equation for Over Limit calculation is as follows:

$$\text{Over limit} = \text{Level} - \text{Limit}$$

Test Data

Environmental Conditions


Temperature:	24~26 °C
Relative Humidity:	51~56%
ATM Pressure:	101.0~101.2 kPa

The testing was performed by Shy Jiang on 2024-07-09 for below 1GHz and Dylan Yang on 2024-07-12 for above 1GHz.

For adapter 1

30 MHz~1 GHz


Horizontal

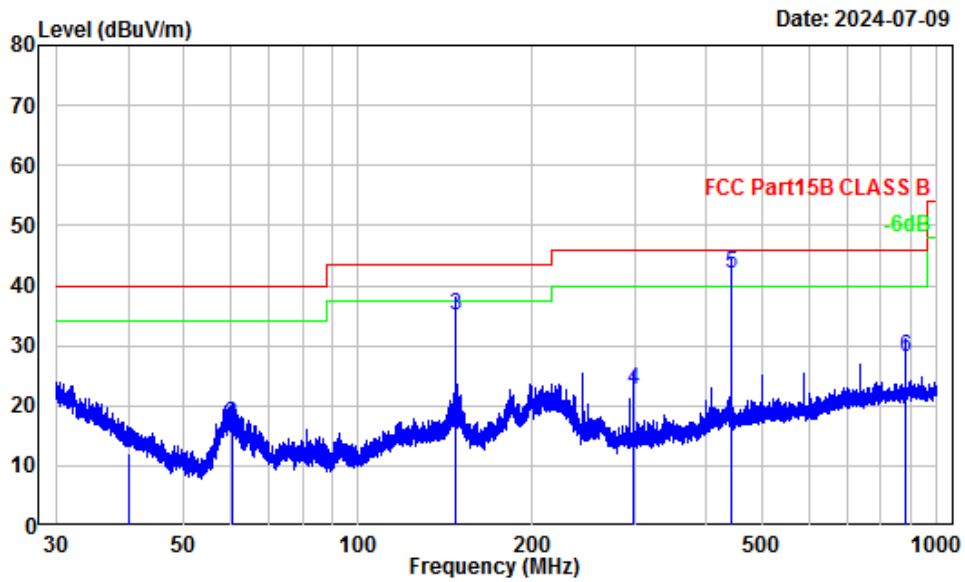

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Shy Jiang

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.10	-11.58	23.80	12.22	40.00	-27.78	QP
2	60.36	-17.75	34.80	17.05	40.00	-22.95	QP
3	147.47	-13.34	48.36	35.02	43.50	-8.48	QP
4	298.01	-12.84	35.56	22.72	46.00	-23.28	QP
5	442.52	-9.74	51.58	41.84	46.00	-4.16	QP
6	884.89	-4.55	32.62	28.07	46.00	-17.93	QP

Vertical

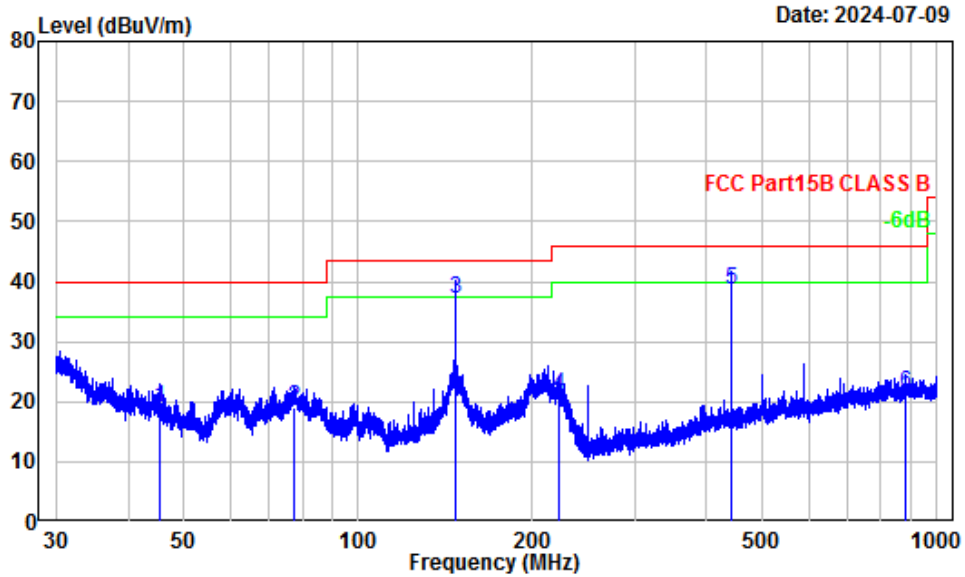


Site : Chamber A
 Condition : 3m Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Shy Jiang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.44	-16.09	35.07	18.98	40.00	-21.02	QP
2	77.25	-18.70	37.60	18.90	40.00	-21.10	QP
3	147.47	-13.72	50.72	37.00	43.50	-6.50	QP
4	222.27	-14.80	35.89	21.09	46.00	-24.91	QP
5	442.52	-10.20	48.90	38.70	46.00	-7.30	QP
6	884.89	-4.92	26.22	21.30	46.00	-24.70	QP

1 ~ 18 GHz

Horizontal

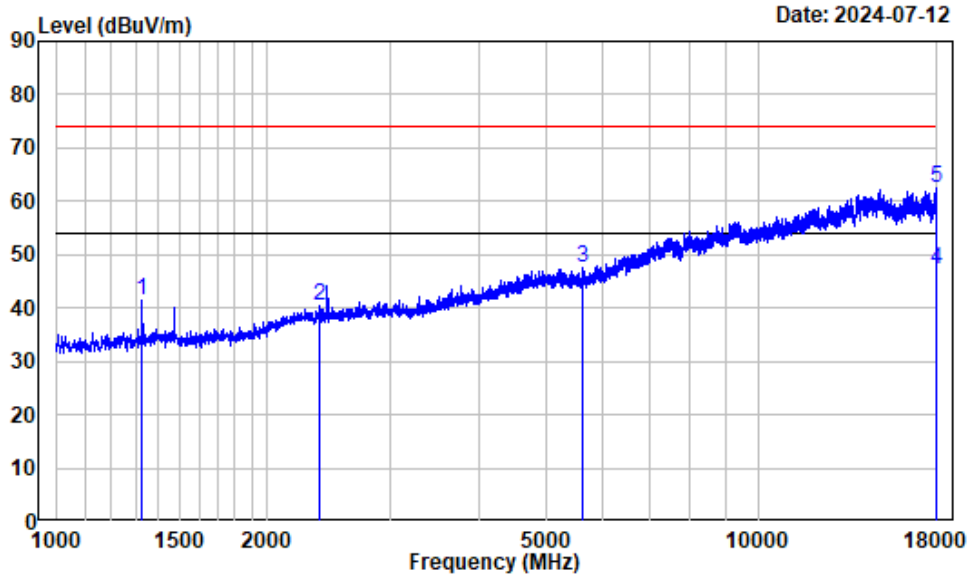


Date: 2024-07-12

Site : chamber B
 Condition : Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1327.250	-7.29	48.80	41.51	74.00	-32.49	Peak
2	2379.125	-3.19	43.45	40.26	74.00	-33.74	Peak
3	5628.250	3.11	44.43	47.54	74.00	-26.46	Peak
4	17983.000	24.49	22.75	47.24	54.00	-6.76	Average
5	17983.000	24.49	38.07	62.56	74.00	-11.44	Peak

Vertical

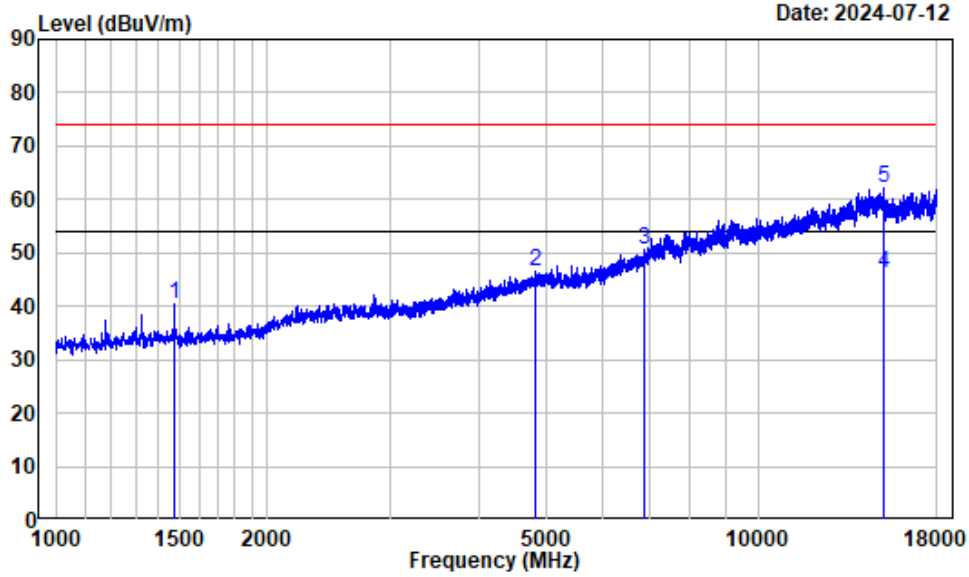


Site : chamber B
 Condition : Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1473.875	-7.13	47.59	40.46	74.00	-33.54	Peak
2	4825.000	2.45	44.02	46.47	74.00	-27.53	Peak
3	6882.000	8.00	42.62	50.62	74.00	-23.38	Peak
4	15097.250	15.86	30.19	46.05	54.00	-7.95	Average
5	15097.250	15.86	46.26	62.12	74.00	-11.88	Peak

18 ~ 30 GHz


Horizontal

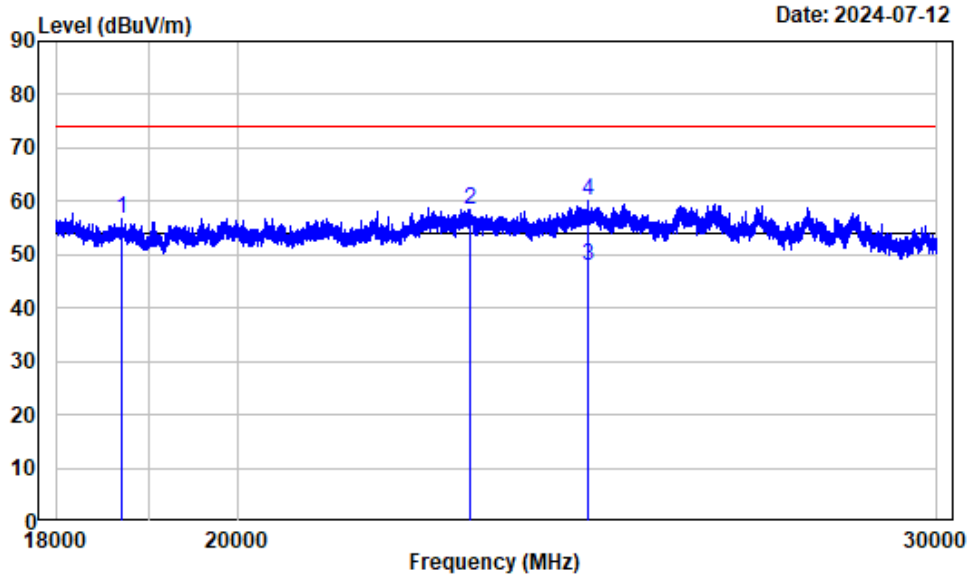

Site : chamber B
 Condition : Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	18699.000	13.19	43.41	56.60	74.00	-17.40	Peak
2	22896.000	17.25	41.20	58.45	74.00	-15.55	Peak
3	24499.500	19.00	28.96	47.96	54.00	-6.04	Average
4	24499.500	19.00	41.06	60.06	74.00	-13.94	peak

Vertical

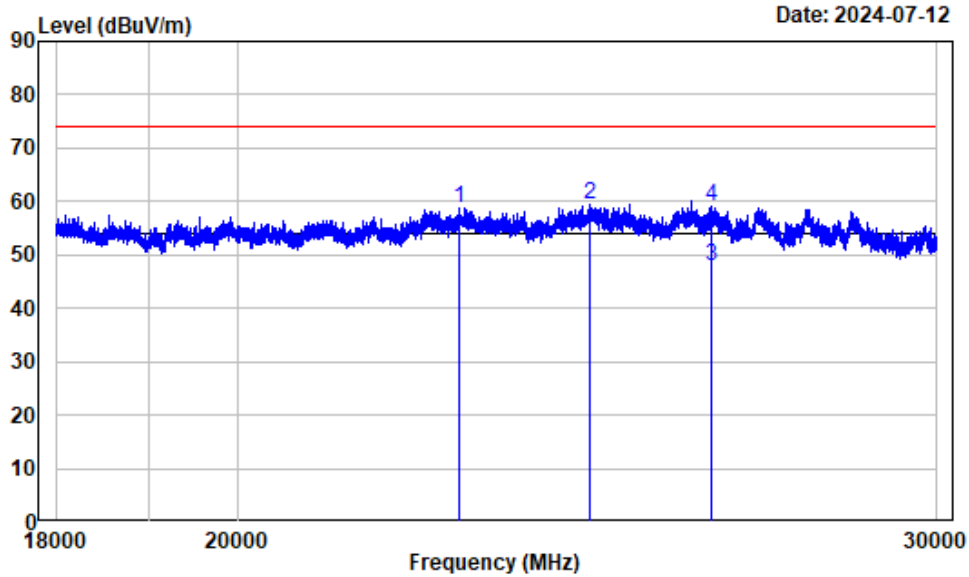


Site : chamber B
 Condition : Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	22741.500	17.21	41.68	58.89	74.00	-15.11	Peak
2	24538.500	18.95	40.38	59.33	74.00	-14.67	peak
3	26326.500	20.05	27.68	47.73	54.00	-6.27	Average
4	26326.500	20.05	38.98	59.03	74.00	-14.97	Peak

For adapter 2

30 MHz~1 GHz


Horizontal

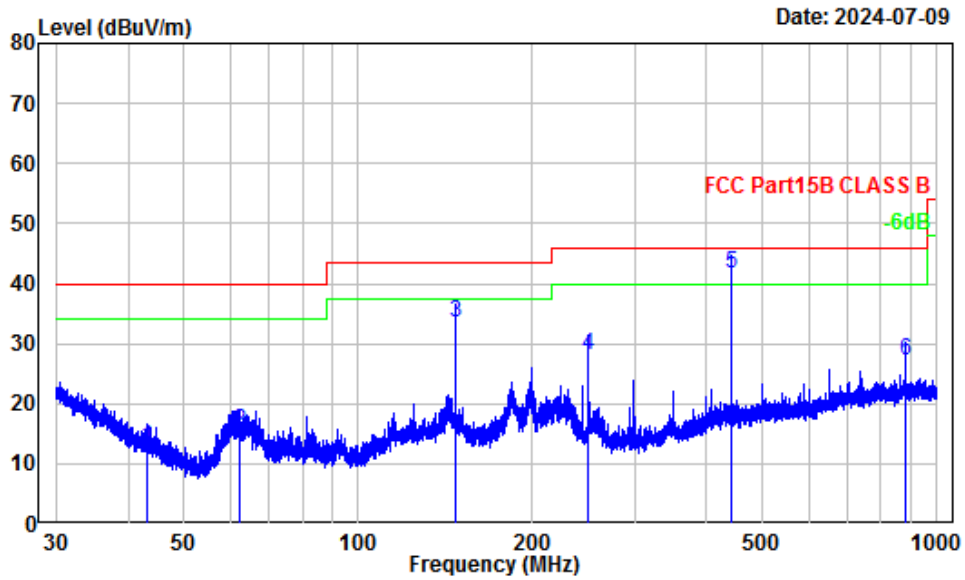

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Shy Jiang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	43.07	-13.47	26.05	12.58	40.00	-27.42	QP
2	62.35	-17.71	33.21	15.50	40.00	-24.50	QP
3	147.47	-13.34	46.76	33.42	43.50	-10.08	QP
4	249.97	-14.53	42.72	28.19	46.00	-17.81	QP
5	442.52	-9.74	51.49	41.75	46.00	-4.25	QP
6	884.89	-4.55	31.74	27.19	46.00	-18.81	QP

Vertical

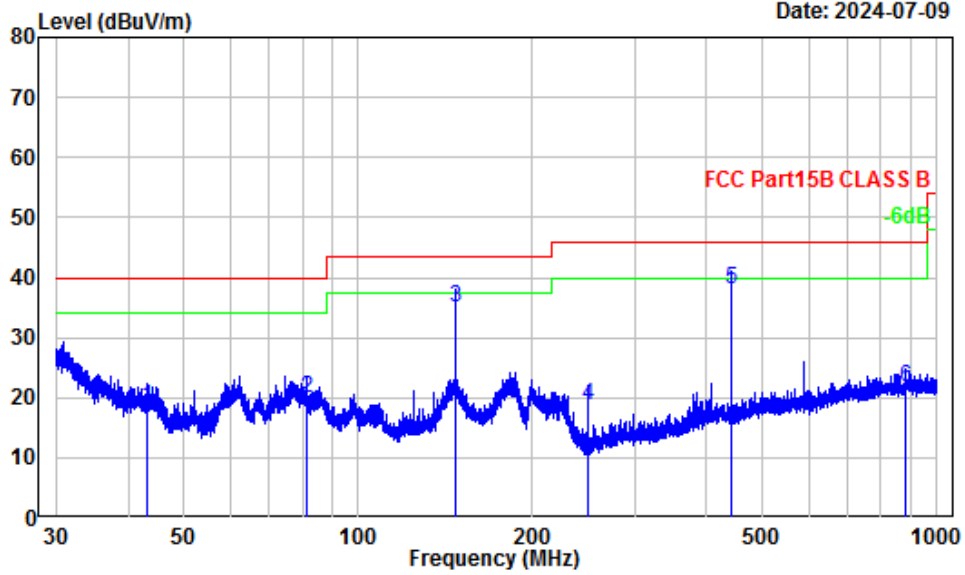


Site : Chamber A
 Condition : 3m Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Shy Jiang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.99	-14.72	33.06	18.34	40.00	-21.66	QP
2	81.25	-18.74	38.80	20.06	40.00	-19.94	QP
3	147.47	-13.72	48.62	34.90	43.50	-8.60	QP
4	249.97	-14.93	33.79	18.86	46.00	-27.14	QP
5	442.52	-10.20	48.32	38.12	46.00	-7.88	QP
6	884.89	-4.92	26.67	21.75	46.00	-24.25	QP

1 ~ 18 GHz


Horizontal

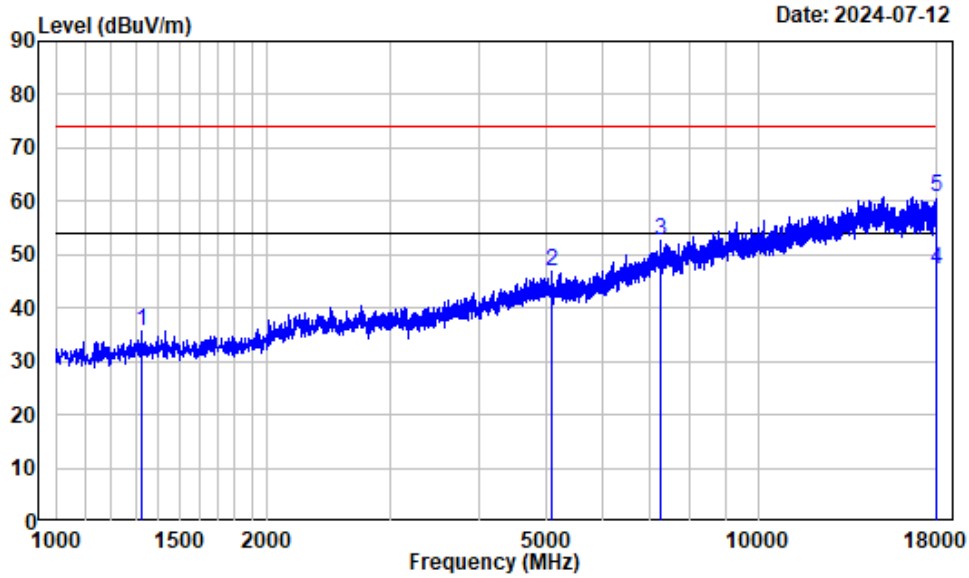

Site : chamber B
 Condition : Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1327.250	-7.29	43.06	35.77	74.00	-38.23	Peak
2	5075.750	2.84	43.90	46.74	74.00	-27.26	Peak
3	7262.375	9.49	43.32	52.81	74.00	-21.19	Peak
4	18000.000	24.62	22.48	47.10	54.00	-6.90	Average
5	18000.000	24.62	36.17	60.79	74.00	-13.21	Peak

Vertical

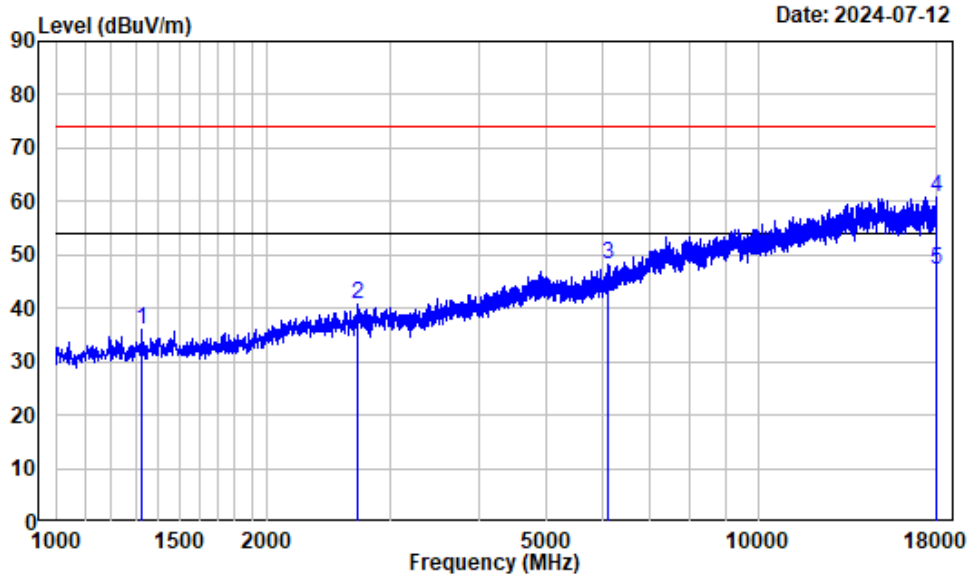


Site : chamber B
 Condition : Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1325.125	-7.30	43.25	35.95	74.00	-38.05	Peak
2	2687.250	-2.79	43.57	40.78	74.00	-33.22	Peak
3	6114.875	4.37	43.81	48.18	74.00	-25.82	Peak
4	17972.380	24.43	36.46	60.89	74.00	-13.11	Peak
5	17972.380	24.43	22.73	47.16	54.00	-6.84	Average

18 ~ 30 GHz


Horizontal

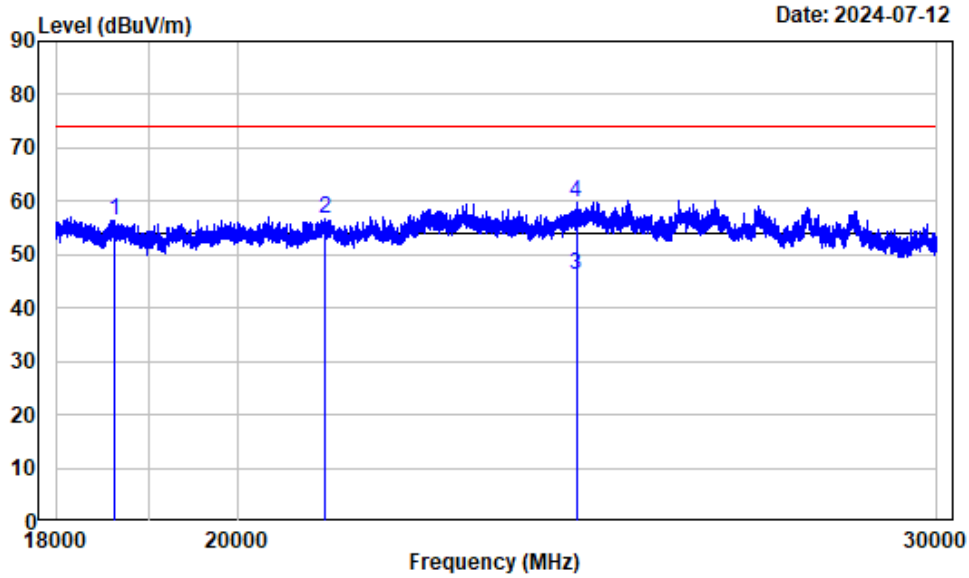

Site : chamber B
 Condition : Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	18622.500	13.24	43.28	56.52	74.00	-17.48	Peak
2	21033.000	14.49	42.10	56.59	74.00	-17.41	Peak
3	24339.000	18.62	27.69	46.31	54.00	-7.69	Average
4	24339.000	18.62	41.14	59.76	74.00	-14.24	peak

Vertical

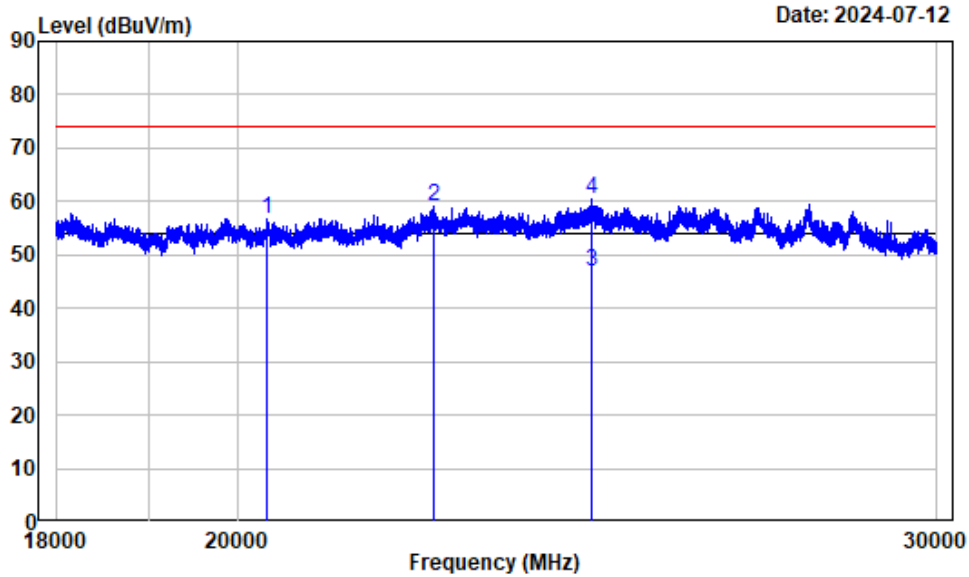


Site : chamber B
 Condition : Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	20343.000	13.93	42.91	56.84	74.00	-17.16	Peak
2	22405.500	16.90	42.35	59.25	74.00	-14.75	Peak
3	24556.500	18.93	27.82	46.75	54.00	-7.25	Average
4	24556.500	18.93	41.48	60.41	74.00	-13.59	peak

For adapter 3

30 MHz~1 GHz


Horizontal

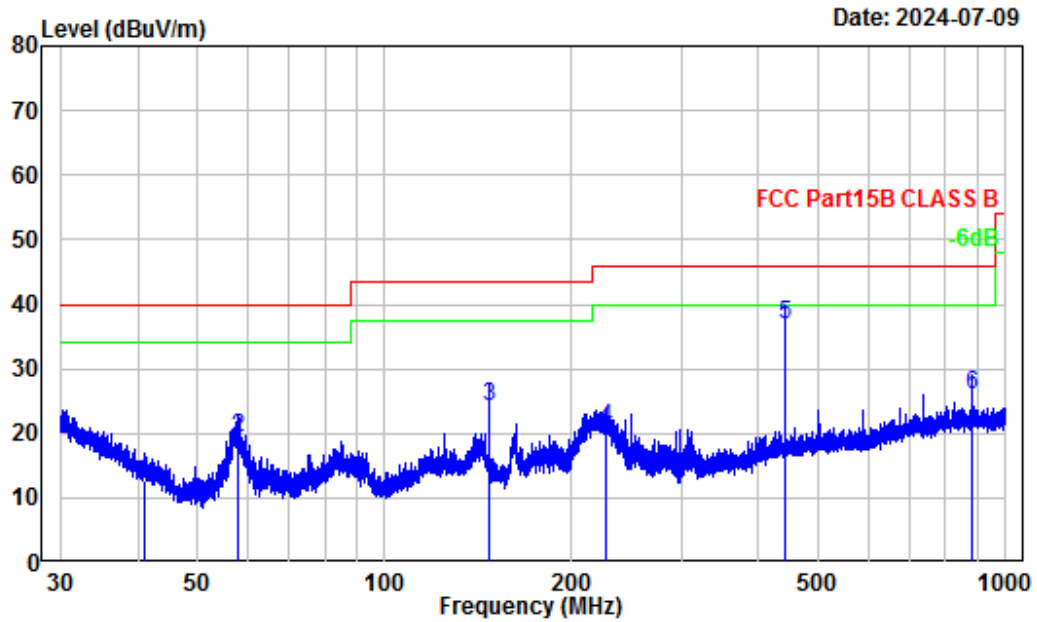

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Shy Jiang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.92	-12.11	24.94	12.83	40.00	-27.17	QP
2	58.20	-17.77	37.12	19.35	40.00	-20.65	QP
3	147.47	-13.34	37.53	24.19	43.50	-19.31	QP
4	226.99	-14.05	34.80	20.75	46.00	-25.25	QP
5	442.52	-9.74	46.65	36.91	46.00	-9.09	QP
6	884.89	-4.55	30.47	25.92	46.00	-20.08	QP

Vertical

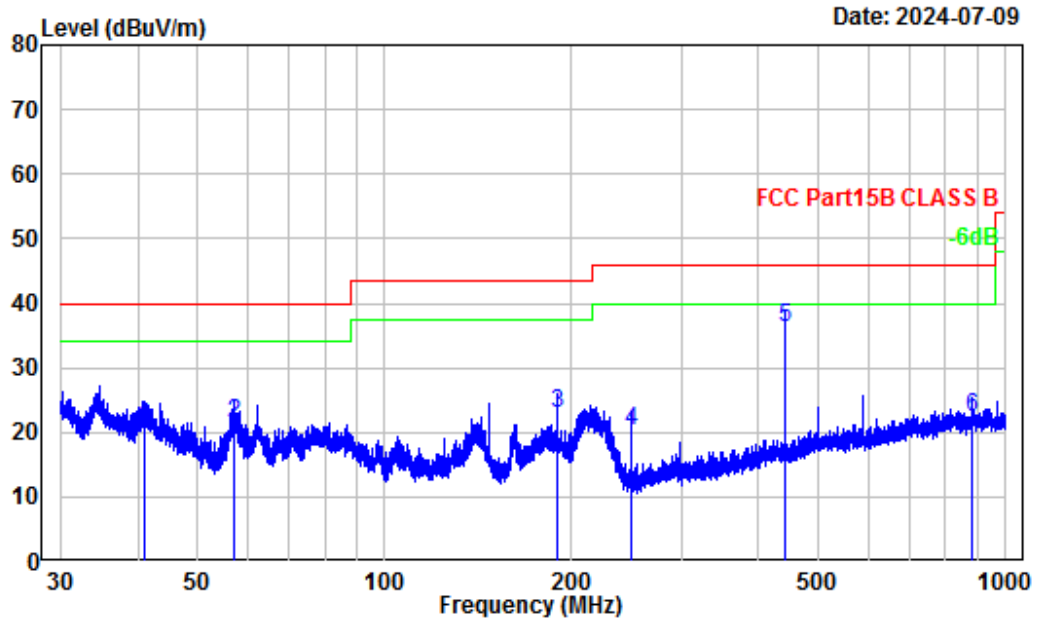


Site : Chamber A
 Condition : 3m Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Shy Jiang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.90	-13.53	34.35	20.82	40.00	-19.18	QP
2	56.99	-18.78	40.31	21.53	40.00	-18.47	QP
3	189.57	-15.28	38.18	22.90	43.50	-20.60	QP
4	249.97	-14.93	35.23	20.30	46.00	-25.70	QP
5	442.52	-10.20	46.41	36.21	46.00	-9.79	QP
6	884.89	-4.92	27.15	22.23	46.00	-23.77	QP

1 ~ 18 GHz

Horizontal

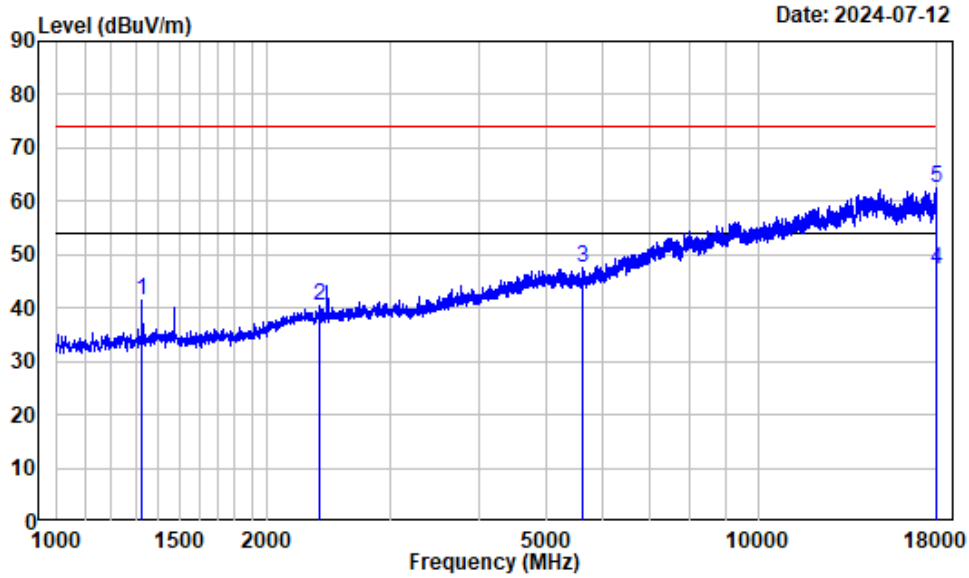


Date: 2024-07-12

Site : chamber B
 Condition : Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1327.250	-7.29	48.80	41.51	74.00	-32.49	Peak
2	2379.125	-3.19	43.45	40.26	74.00	-33.74	Peak
3	5628.250	3.11	44.43	47.54	74.00	-26.46	Peak
4	17983.000	24.49	22.75	47.24	54.00	-6.76	Average
5	17983.000	24.49	38.07	62.56	74.00	-11.44	Peak

Vertical

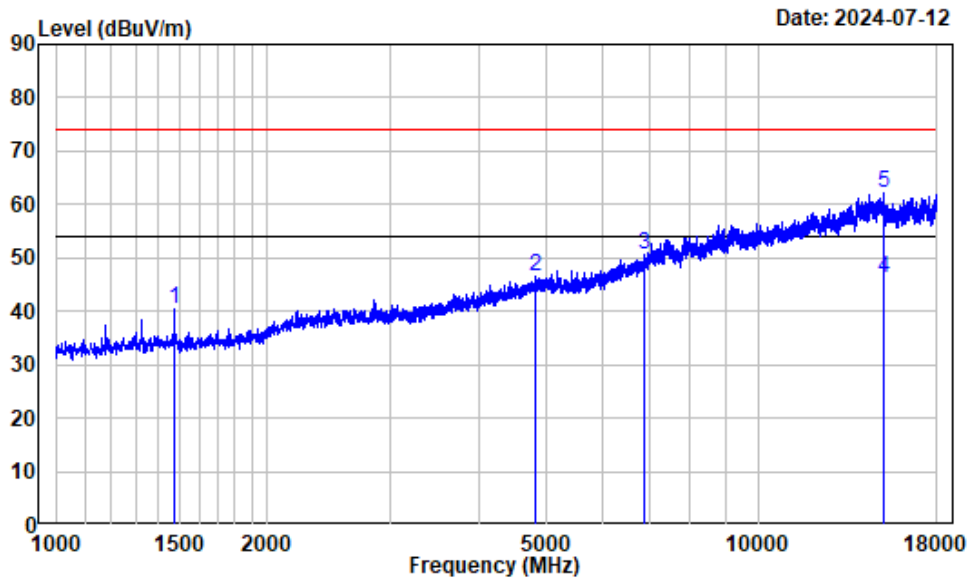


Site : chamber B
 Condition : Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1473.875	-7.13	47.59	40.46	74.00	-33.54	Peak
2	4825.000	2.45	44.02	46.47	74.00	-27.53	Peak
3	6882.000	8.00	42.62	50.62	74.00	-23.38	Peak
4	15097.250	15.86	30.19	46.05	54.00	-7.95	Average
5	15097.250	15.86	46.26	62.12	74.00	-11.88	Peak

18 ~ 30 GHz


Horizontal

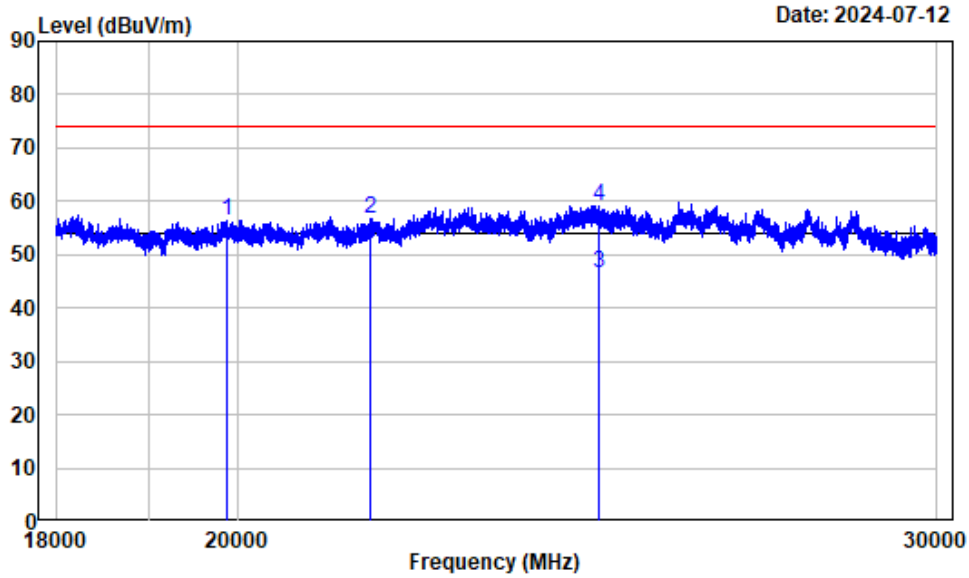

Site : chamber B
 Condition : Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19882.500	13.84	42.66	56.50	74.00	-17.50	Peak
2	21606.000	16.04	40.77	56.81	74.00	-17.19	Peak
3	24649.500	18.81	27.85	46.66	54.00	-7.34	Average
4	24649.500	18.81	40.43	59.24	74.00	-14.76	peak

Vertical

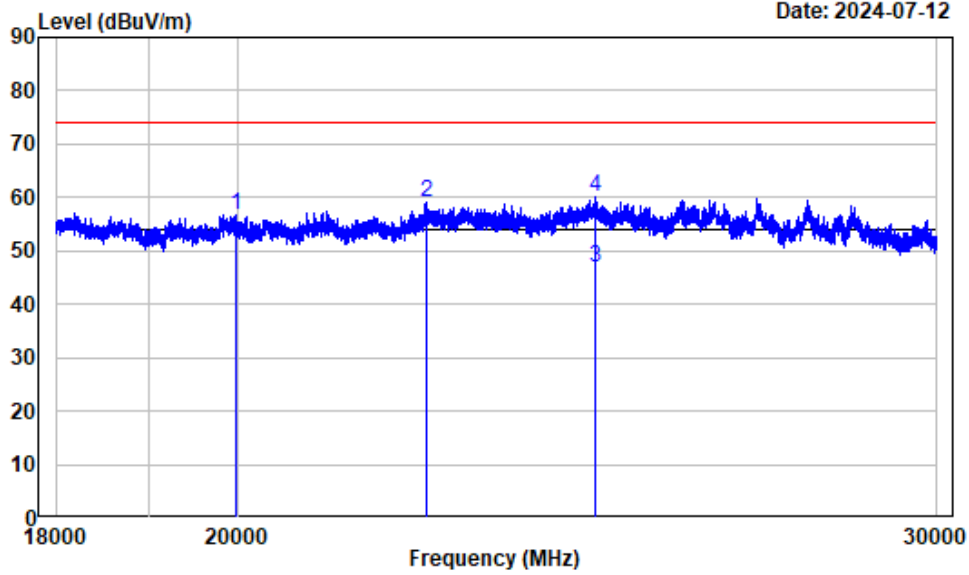


Site : chamber B
 Condition : Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19986.000	13.82	43.02	56.84	74.00	-17.16	Peak
2	22323.000	16.67	42.29	58.96	74.00	-15.04	Peak
3	24615.000	18.85	27.94	46.79	54.00	-7.21	Average
4	24615.000	18.85	41.27	60.12	74.00	-13.88	peak

For POE

30 MHz~1 GHz


Horizontal

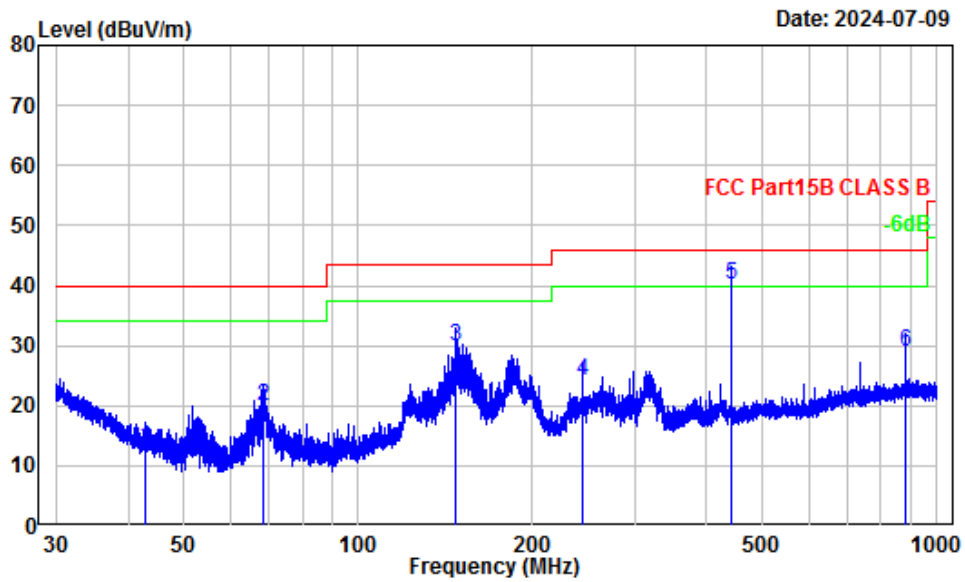

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Shy Jiang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.92	-13.38	26.46	13.08	40.00	-26.92	QP
2	68.45	-17.58	37.39	19.81	40.00	-20.19	QP
3	147.47	-13.34	43.18	29.84	43.50	-13.66	QP
4	243.70	-14.39	38.41	24.02	46.00	-21.98	QP
5	442.52	-9.74	50.00	40.26	46.00	-5.74	QP
6	884.89	-4.55	33.55	29.00	46.00	-17.00	QP

Vertical

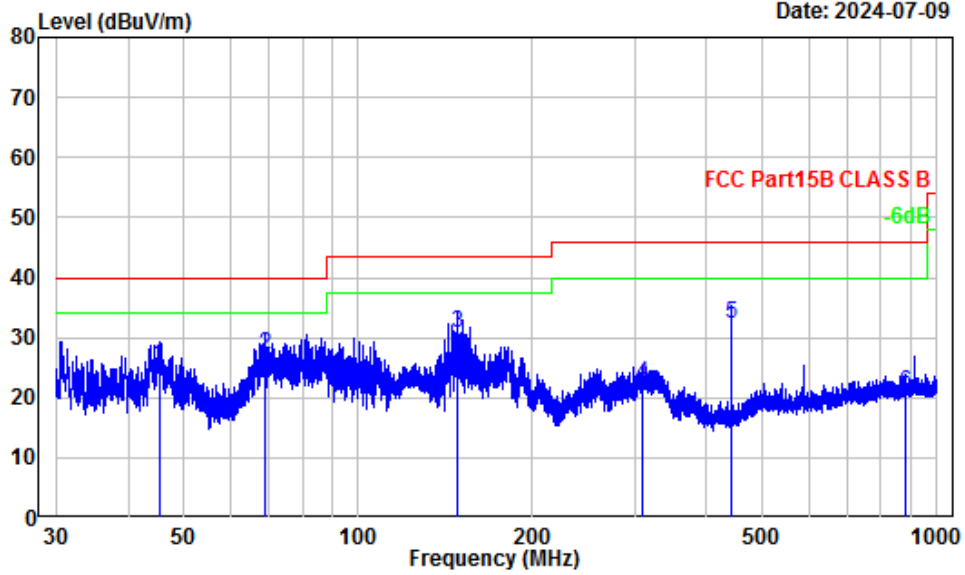


Site : Chamber A
 Condition : 3m Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Shy Jiang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.22	-15.97	41.28	25.31	40.00	-14.69	QP
2	69.08	-18.67	45.90	27.23	40.00	-12.77	QP
3	148.12	-13.76	44.68	30.92	43.50	-12.58	QP
4	309.86	-12.99	35.32	22.33	46.00	-23.67	QP
5	442.52	-10.20	42.53	32.33	46.00	-13.67	QP
6	884.89	-4.92	25.66	20.74	46.00	-25.26	QP

1 ~ 18 GHz


Horizontal

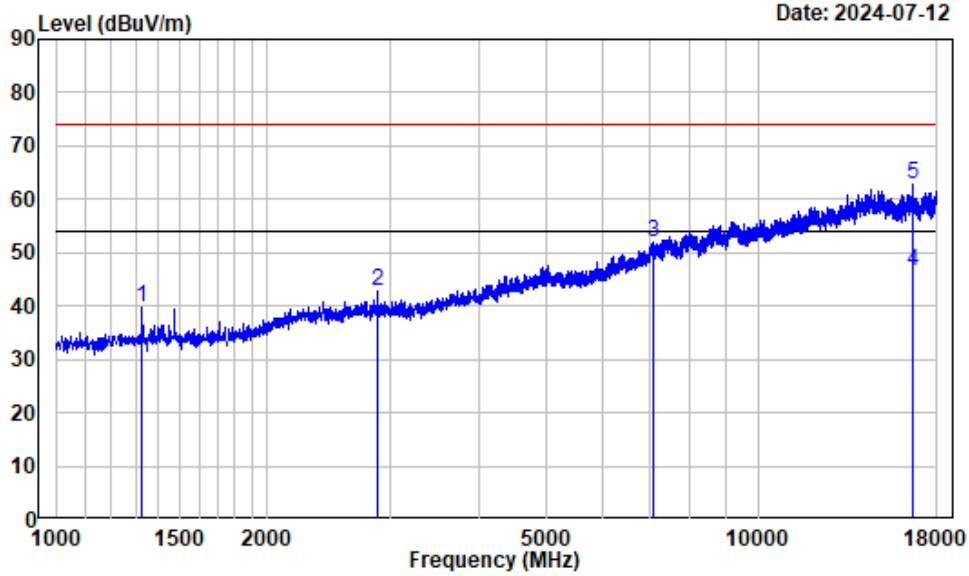

Site : chamber B
 Condition : Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1325.125	-7.30	47.06	39.76	74.00	-34.24	Peak
2	2867.875	-2.66	45.34	42.68	74.00	-31.32	Peak
3	7094.500	9.41	42.49	51.90	74.00	-22.10	Peak
4	16610.250	16.08	30.45	46.53	54.00	-7.47	Average
5	16610.250	16.08	46.62	62.70	74.00	-11.30	Peak

Vertical

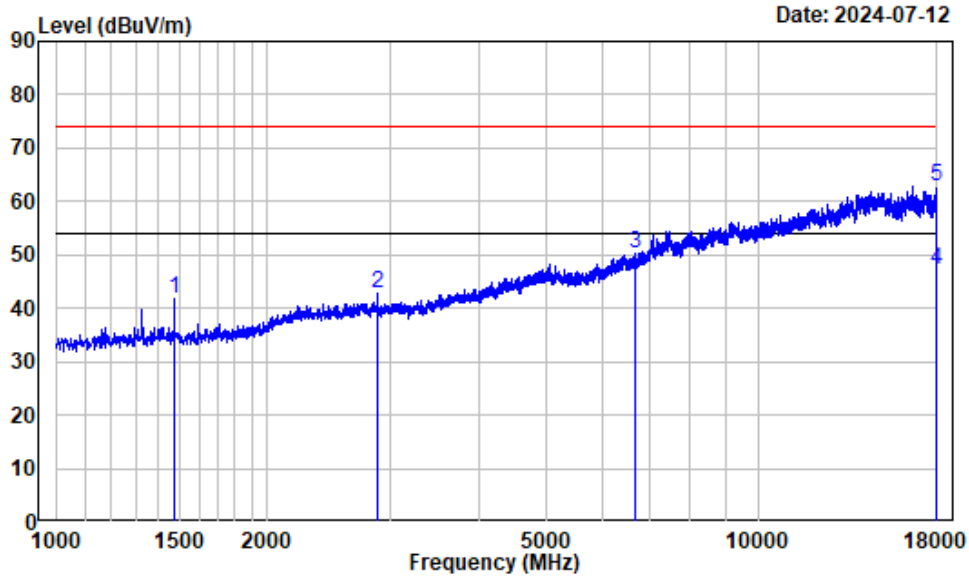


Date: 2024-07-12

Site : chamber B
 Condition : Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1473.875	-7.13	49.02	41.89	74.00	-32.11	Peak
2	2867.875	-2.66	45.34	42.68	74.00	-31.32	Peak
3	6673.750	7.07	43.31	50.38	74.00	-23.62	Peak
4	18000.000	24.62	22.48	47.10	54.00	-6.90	Average
5	18000.000	24.62	38.07	62.69	74.00	-11.31	Peak

18 ~ 30 GHz


Horizontal

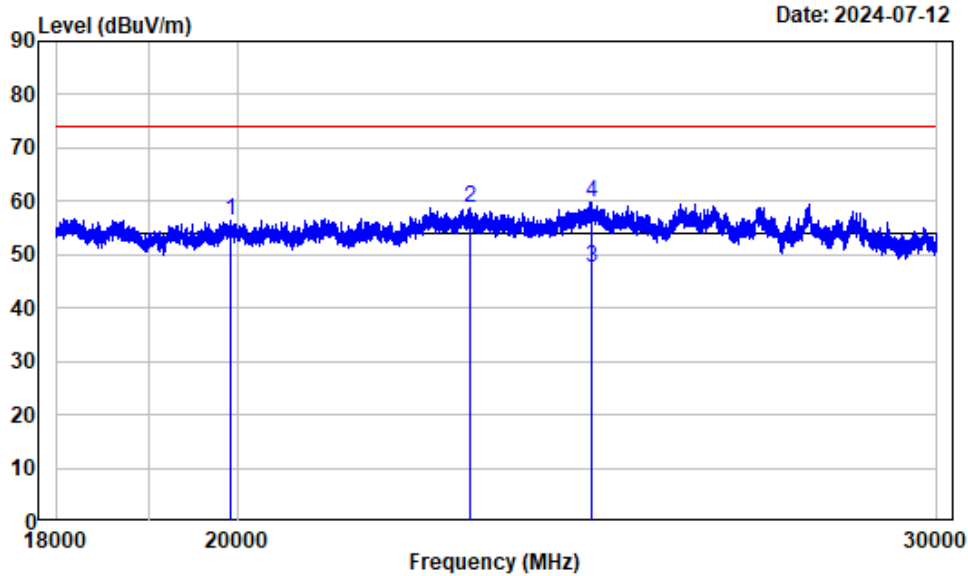

Site : chamber B
 Condition : Horizontal
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19918.500	13.83	42.60	56.43	74.00	-17.57	Peak
2	22893.000	17.25	41.65	58.90	74.00	-15.10	Peak
3	24550.500	18.94	28.59	47.53	54.00	-6.47	Average
4	24550.500	18.94	40.95	59.89	74.00	-14.11	peak

Vertical

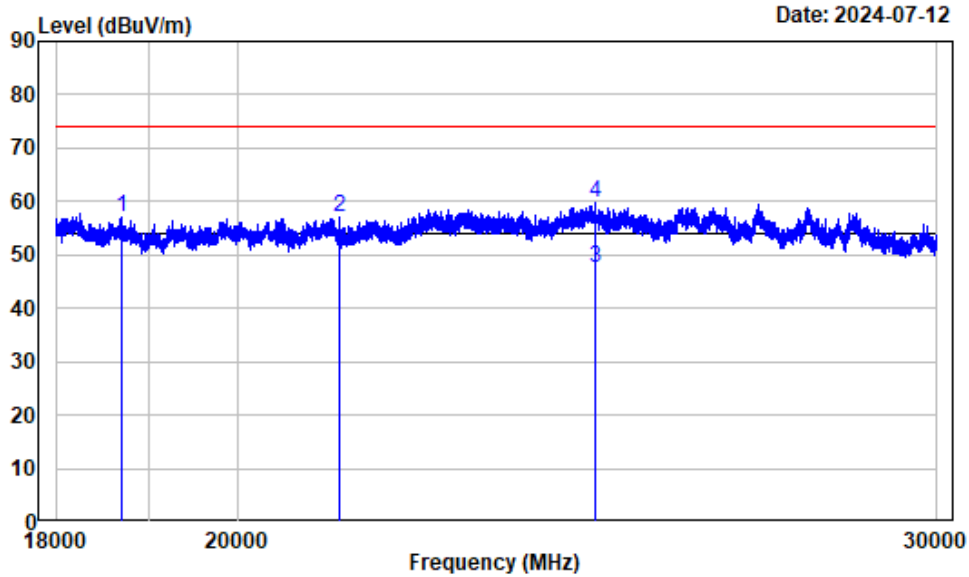

Site : chamber B
 Condition : Vertical
 Project Number: 2401T31849E-EM
 Test Mode : Talking
 Tester : Dylan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	18697.500	13.19	43.95	57.14	74.00	-16.86	Peak
2	21216.000	15.13	42.01	57.14	74.00	-16.86	Peak
3	24618.000	18.86	28.66	47.52	54.00	-6.48	Average
4	24618.000	18.86	40.84	59.70	74.00	-14.30	peak

EUT PHOTOGRAPHS

Please refer to the attachment 2401T31849E-RF External photo and 2401T31849E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401T31849E-EM Test Setup photo.

******* END OF REPORT *******