

Appendix B

RF Test Data for BT V4.2(BDR/EDR) (Conducted Measurement)

Product Name: Bluetooth headphones

Trade Mark: N/A


Test Model: AZ10012

Environmental Conditions

Temperature:	21.3 °C
Relative Humidity:	53.2%
ATM Pressure:	100.0 kPa
Test Engineer:	WANGCHUANG
Supervised by:	Jayden.Zhuo


B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

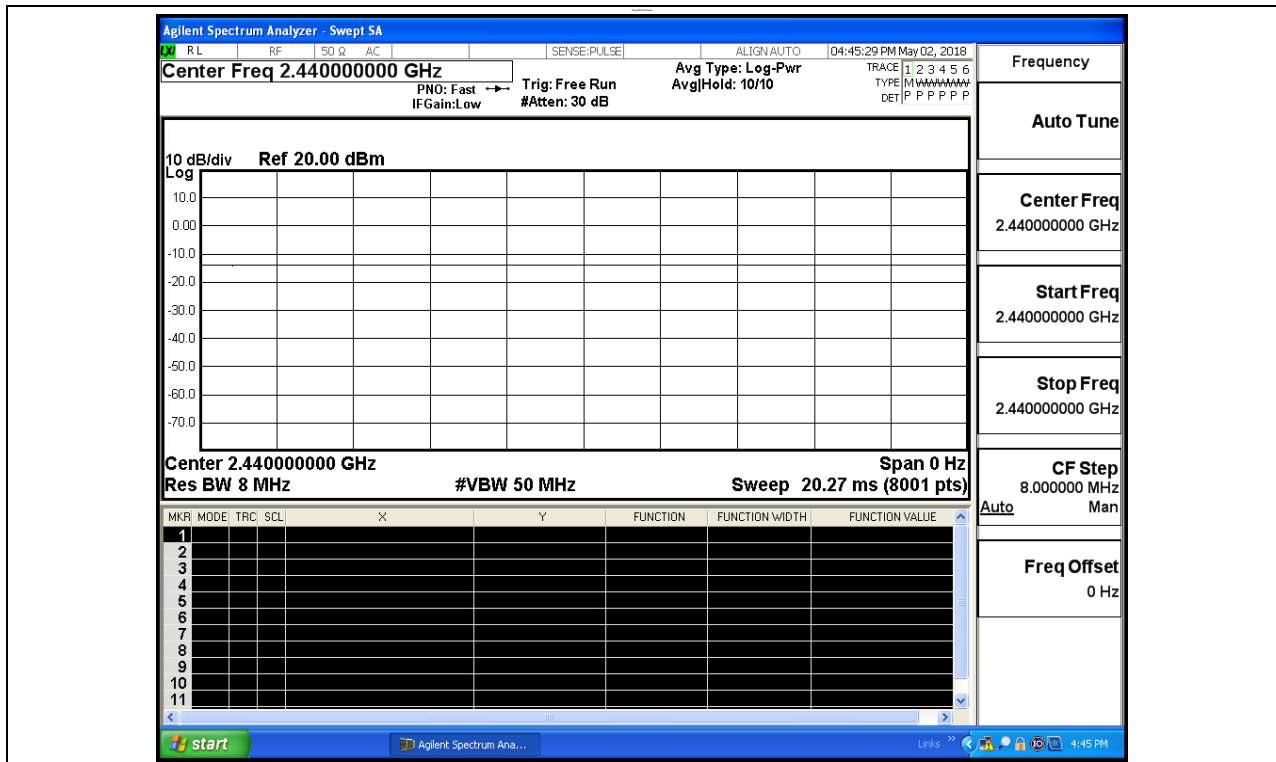


B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-6.168	30	PASS
BT LE	MCH	-7.022	30	PASS
BT LE	HCH	-7.777	30	PASS

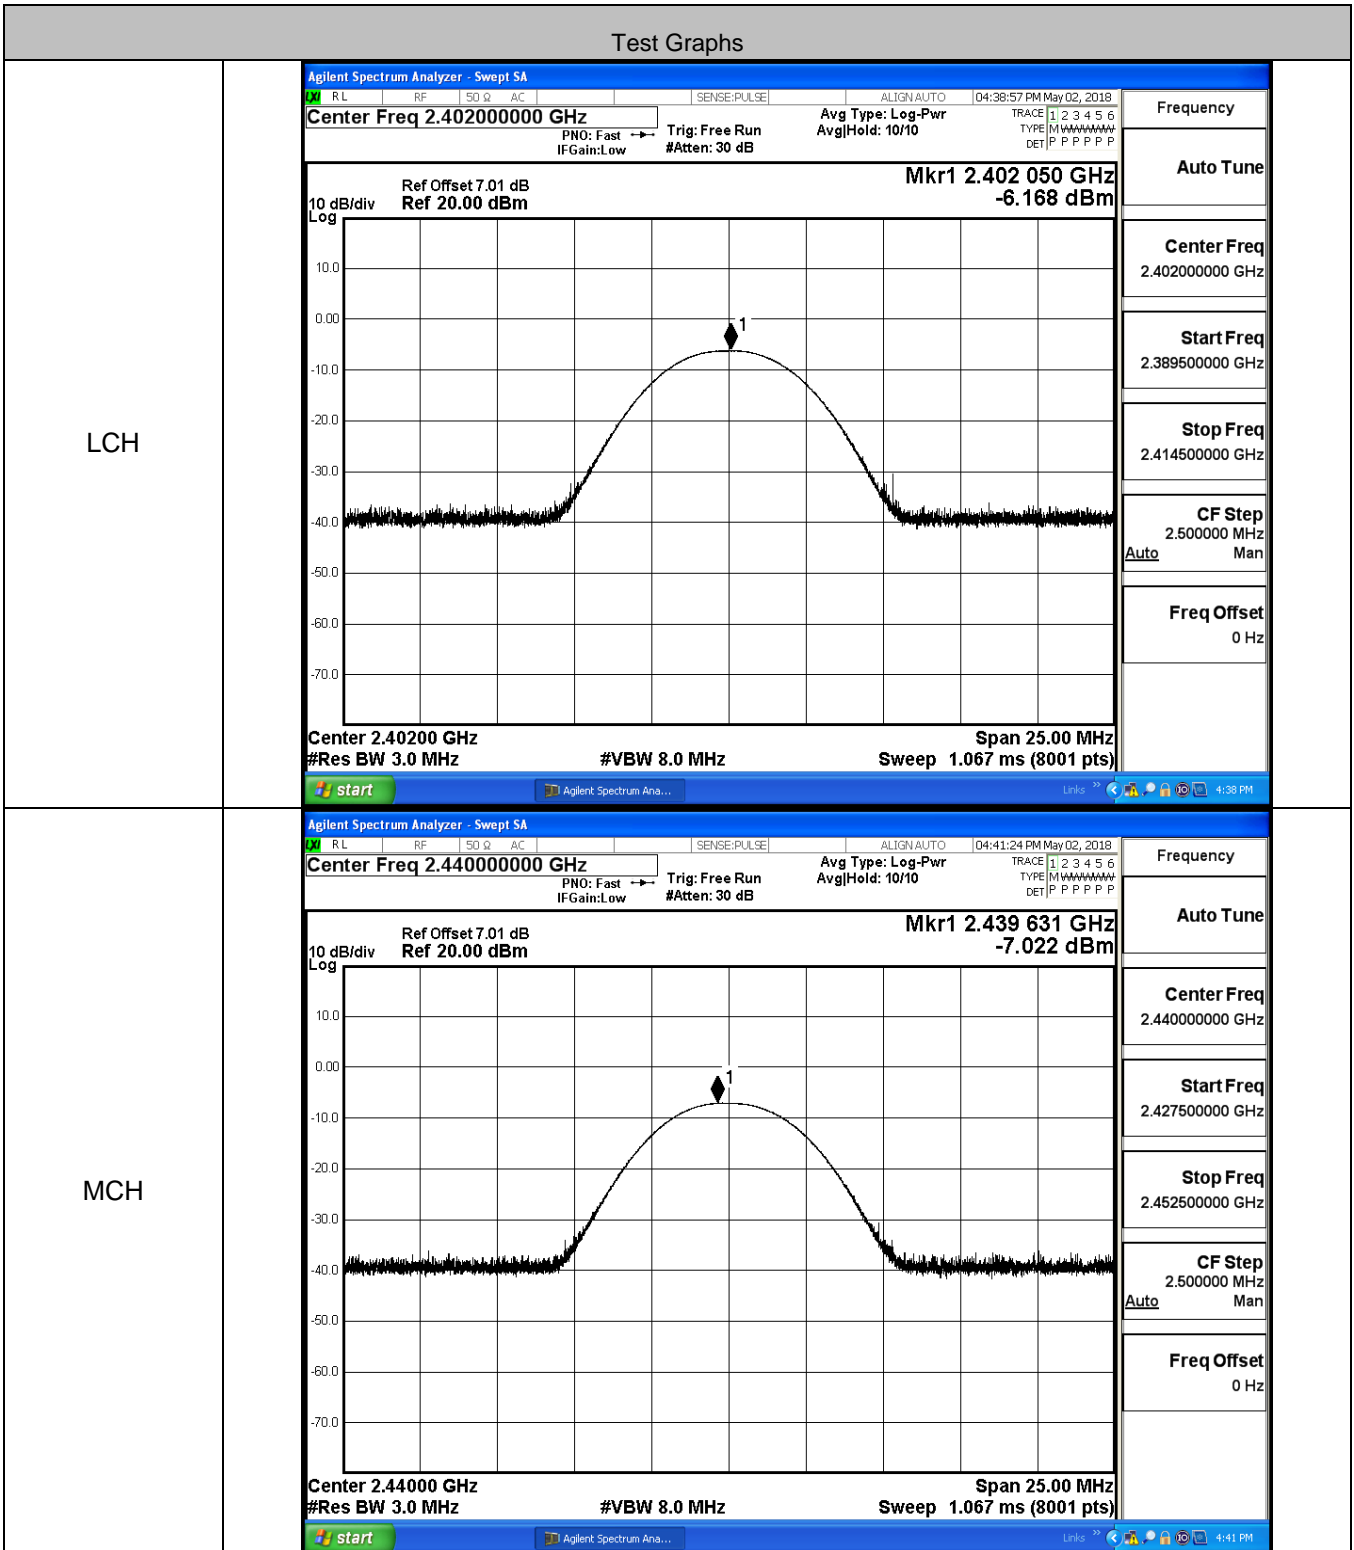



HCH

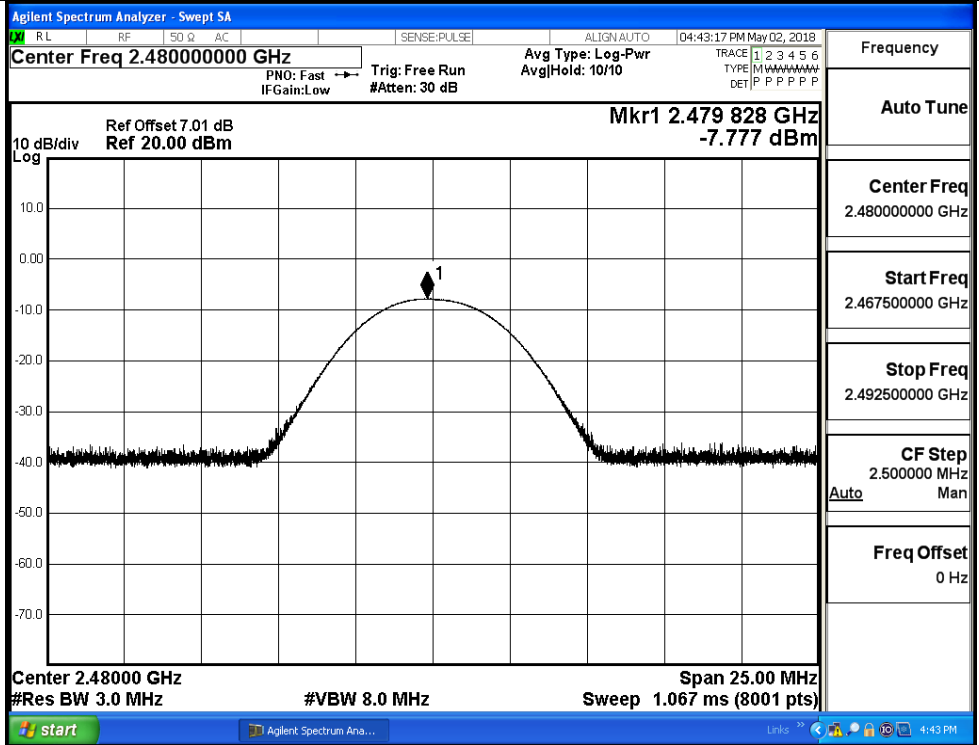


B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-21.593	8	PASS
BT LE	MCH	-22.545	8	PASS
BT LE	HCH	-23.327	8	PASS

Test Graphs

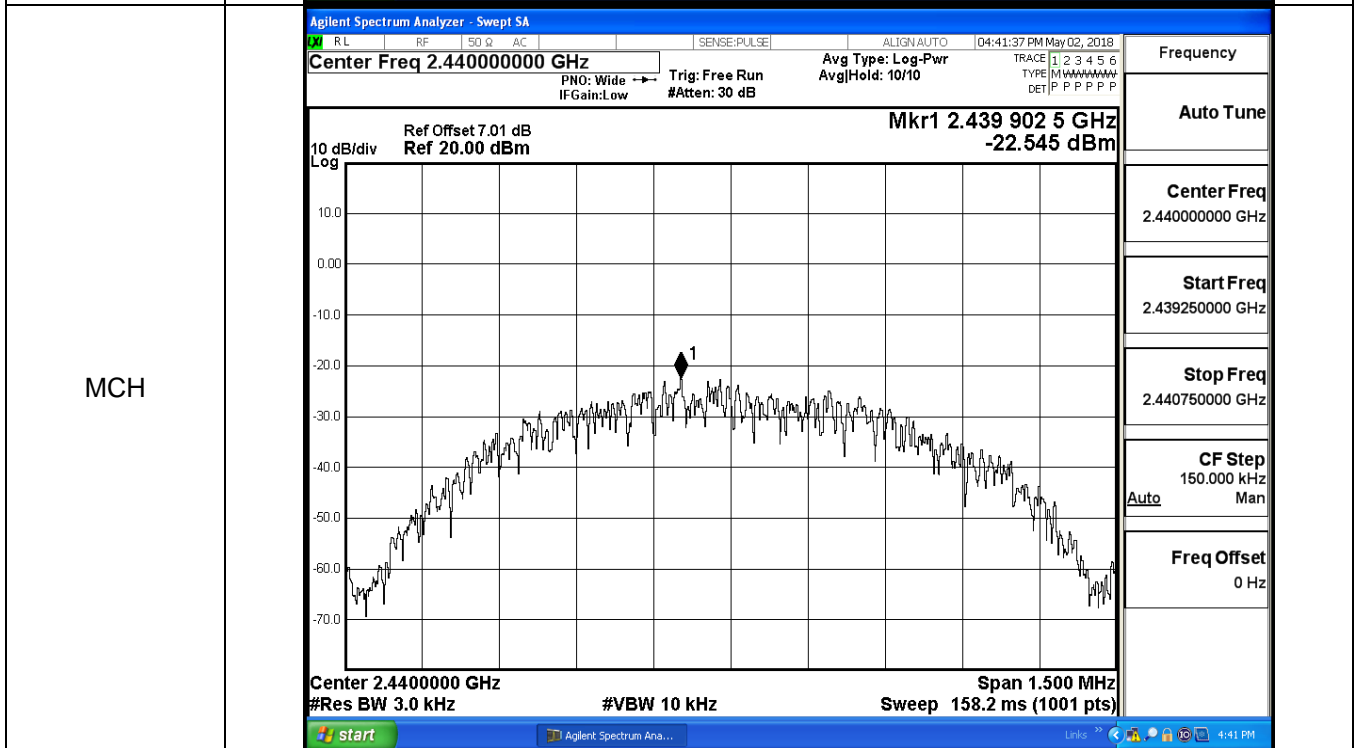
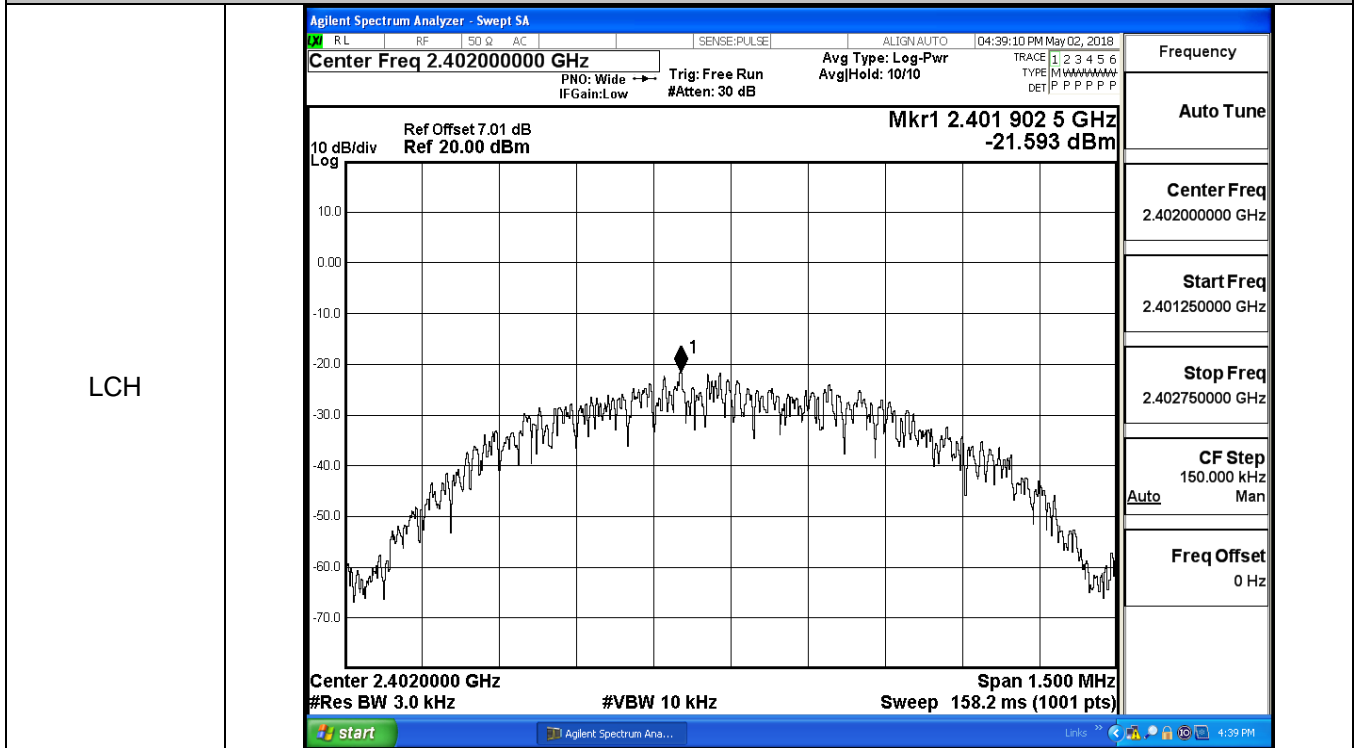


HCH

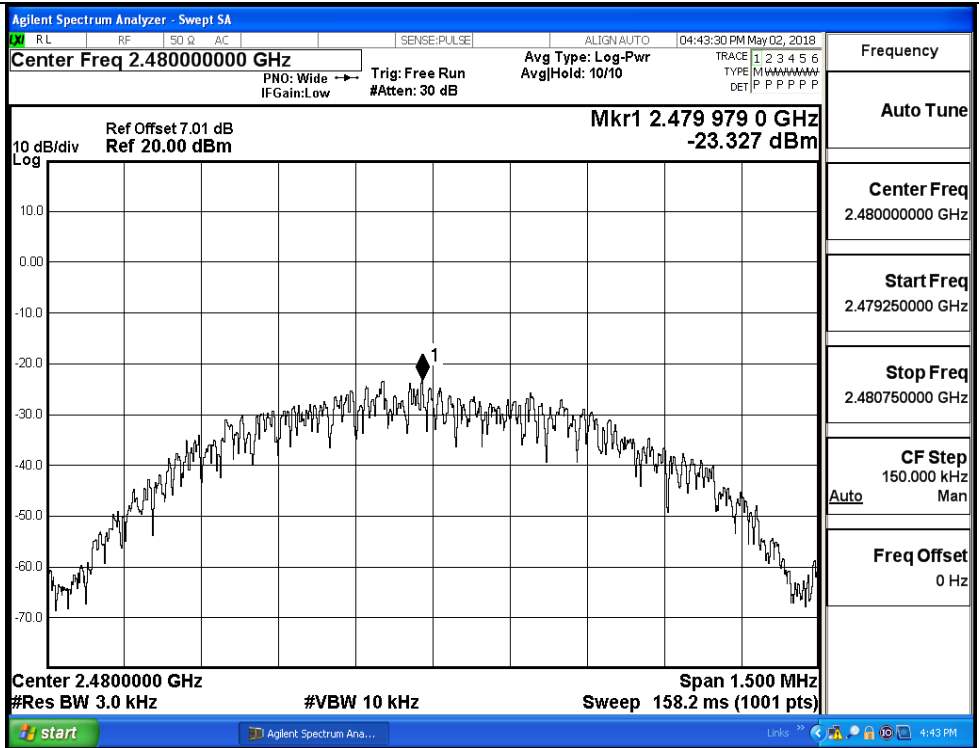

B.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6683	≥0.5	PASS
BT LE	MCH	0.6696	≥0.5	PASS
BT LE	HCH	0.6788	≥0.5	PASS

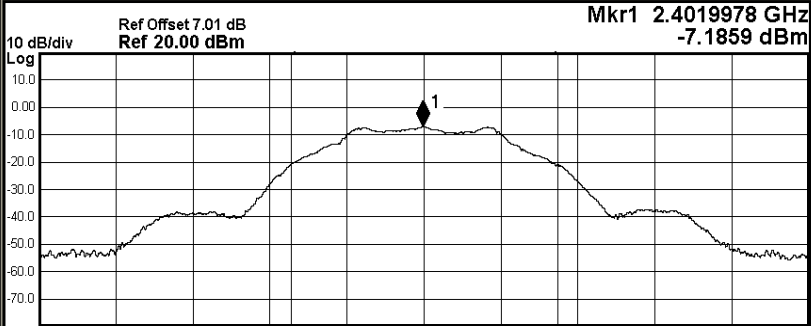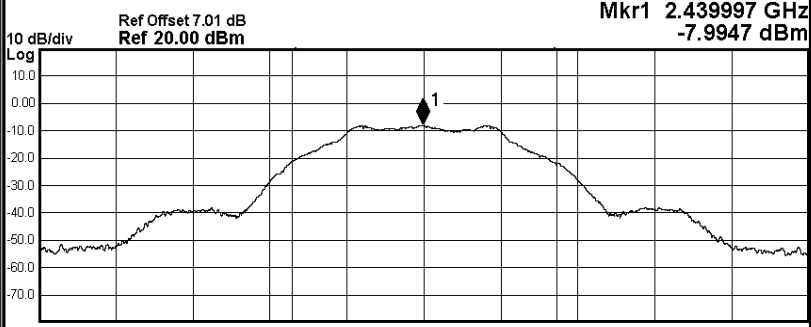Test Graphs													
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 04:38:47 PM May 02, 2018</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="text-align: right; margin: 0;">Mkr1 2.4019978 GHz -7.1859 dBm</p>  </div> <p style="font-size: small; margin: 0;">Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <table style="width: 100%; border-collapse: collapse; font-size: small;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">-0.12 dBm</td> </tr> <tr> <td style="text-align: center;">1.0283 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">start Agilent Spectrum Ana... Links 4:38 PM</p> </div>	Occupied Bandwidth	Total Power	-0.12 dBm	1.0283 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	-0.12 dBm											
1.0283 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 04:41:13 PM May 02, 2018</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="text-align: right; margin: 0;">Mkr1 2.439997 GHz -7.9947 dBm</p>  </div> <p style="font-size: small; margin: 0;">Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <table style="width: 100%; border-collapse: collapse; font-size: small;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">-0.94 dBm</td> </tr> <tr> <td style="text-align: center;">1.0273 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">start Agilent Spectrum Ana... Links 4:41 PM</p> </div>	Occupied Bandwidth	Total Power	-0.94 dBm	1.0273 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	-0.94 dBm											
1.0273 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

HCH

Agilent Spectrum Analyzer - Occupied BW

RL	RF	50 Ω	AC	SENSE:PULSE	ALIGN:AUTO	04:43:06 PM May 02, 2018
Center Freq 2.480000000 GHz			Center Freq: 2.480000000 GHz		Radio Std: None	
			Trig: Free Run		AvgHold>1/1	
#IFGain:Low			#Atten: 30 dB		Radio Device: BTS	

10 dB/div	Ref Offset 7.01 dB	Mkr1 2.4799966 GHz
Log	Ref 20.00 dBm	-8.8732 dBm

Center 2.48 GHz	#VBW 300 kHz	Span 3 MHz
#Res BW 100 kHz		Sweep 1.067 ms

Occupied Bandwidth	Total Power	-1.78 dBm
1.0244 MHz		
Transmit Freq Error	92 Hz	OBW Power
x dB Bandwidth	678.8 kHz	x dB
		99.00 %
		-6.00 dB

Frequency	2.480000000 GHz
Center Freq	2.480000000 GHz
CF Step	300.000 kHz
	Auto Man
Freq Offset	0 Hz



Frequency	2.480000000 GHz
Center Freq	2.480000000 GHz
CF Step	300.000 kHz
	Auto Man
Freq Offset	0 Hz

start
Links >>

B.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-7.178	-44.696	-27.178	PASS
BT LE	MCH	-8.055	-44.976	-28.055	PASS
BT LE	HCH	-8.875	-44.720	-28.875	PASS

BT LE_LCH_Graphs

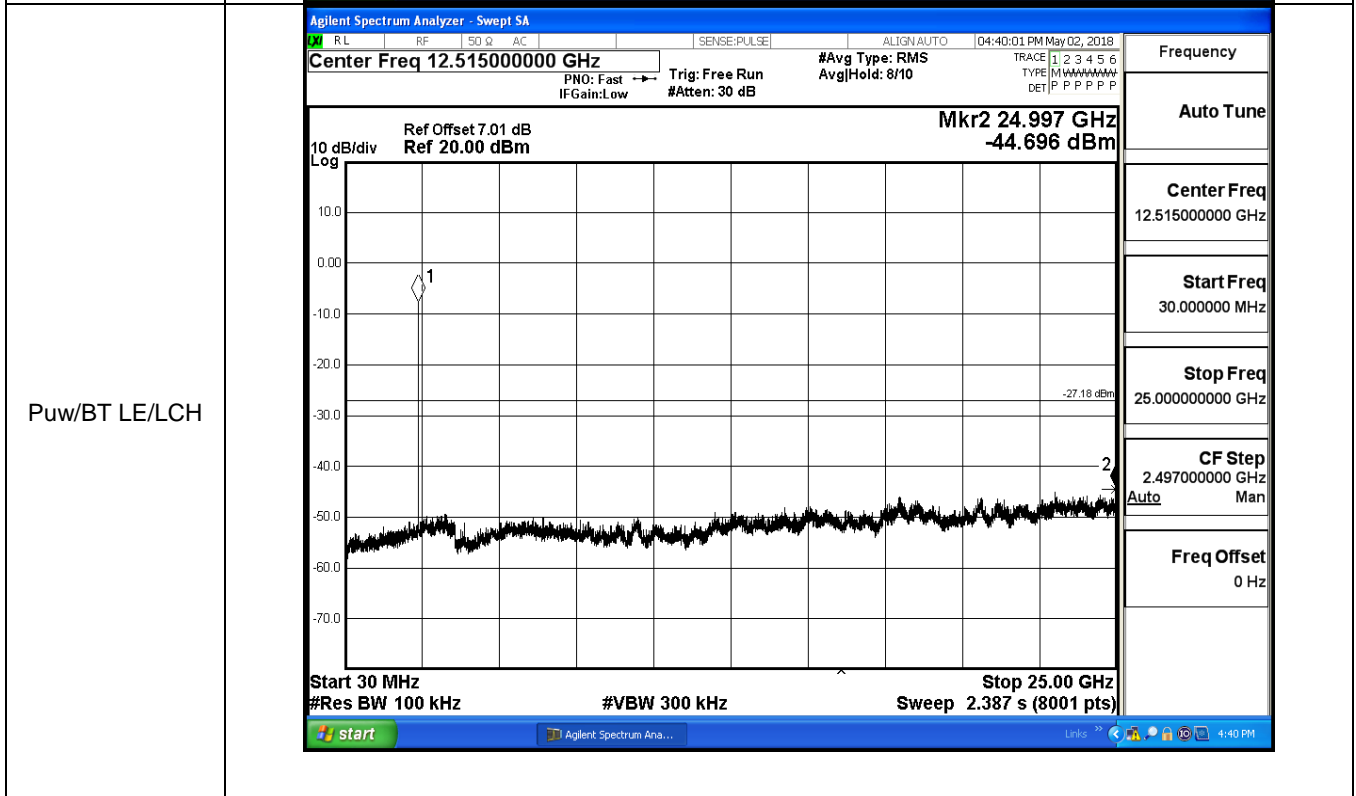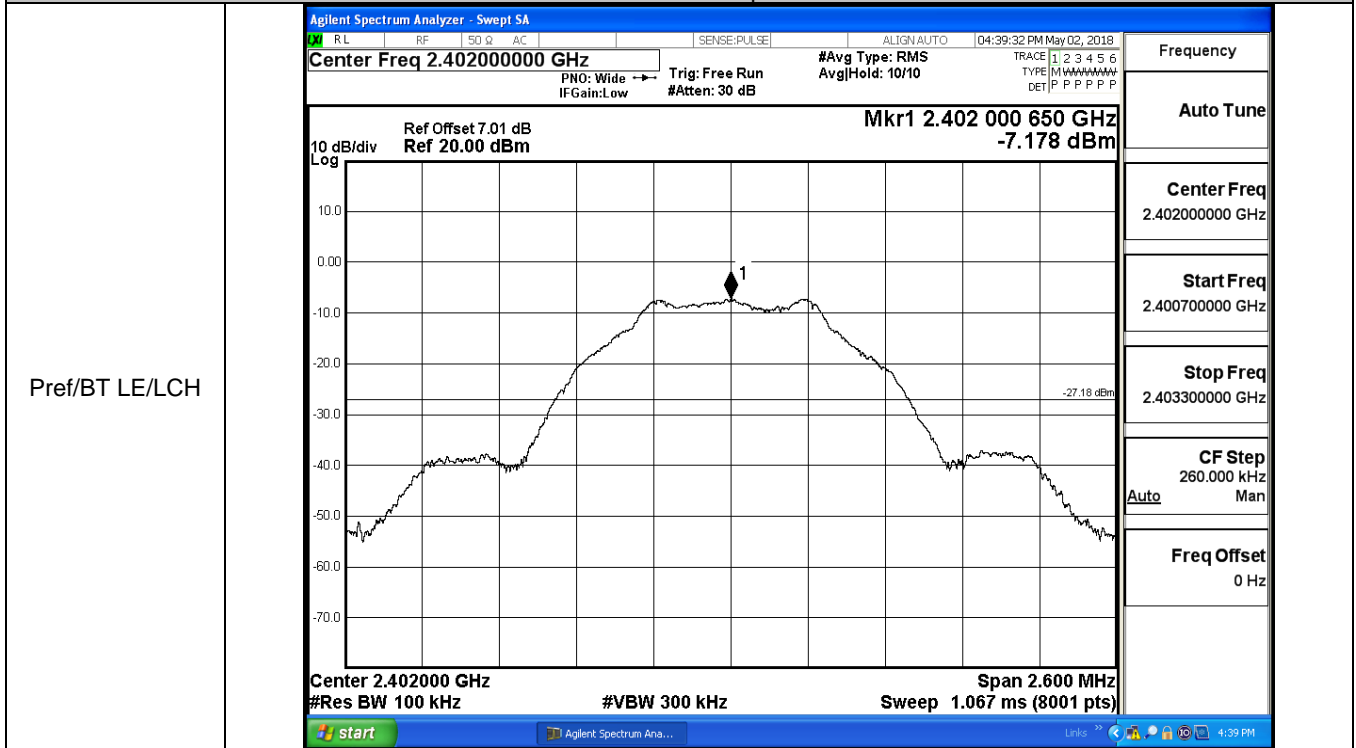


BT LE_MCH_Graphs

Pref/BT LE/MCH

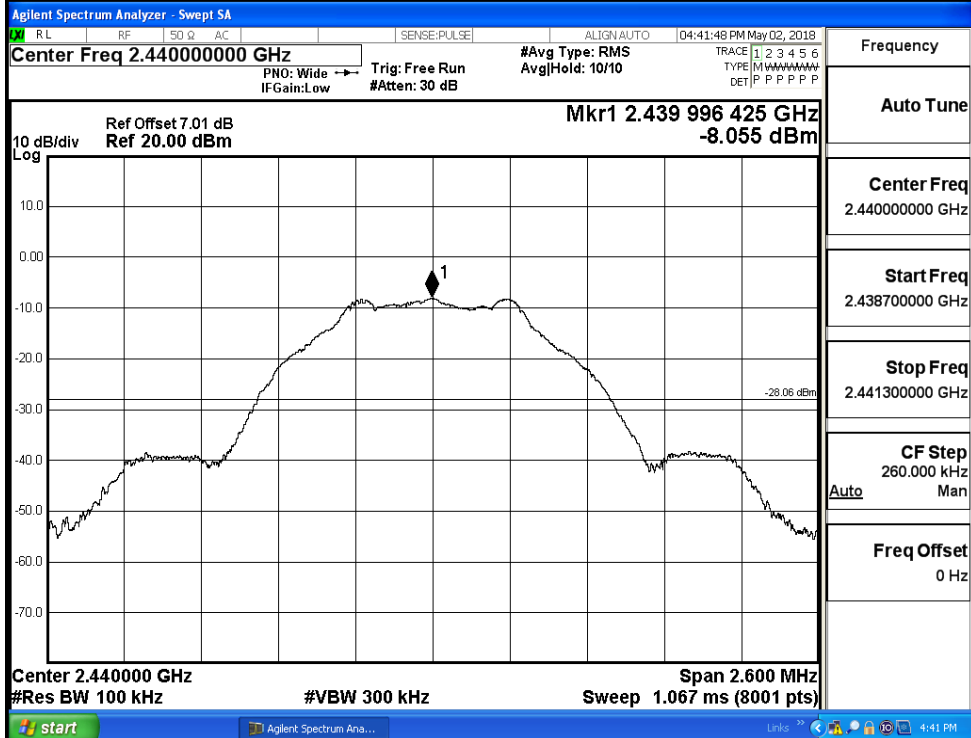

Frequency	
Auto Tune	
Center Freq	2.440000000 GHz
Start Freq	2.438700000 GHz
Stop Freq	2.441300000 GHz
CF Step	260.000 kHz
Auto	Man
Freq Offset	0 Hz


Puw/BT LE/MCH

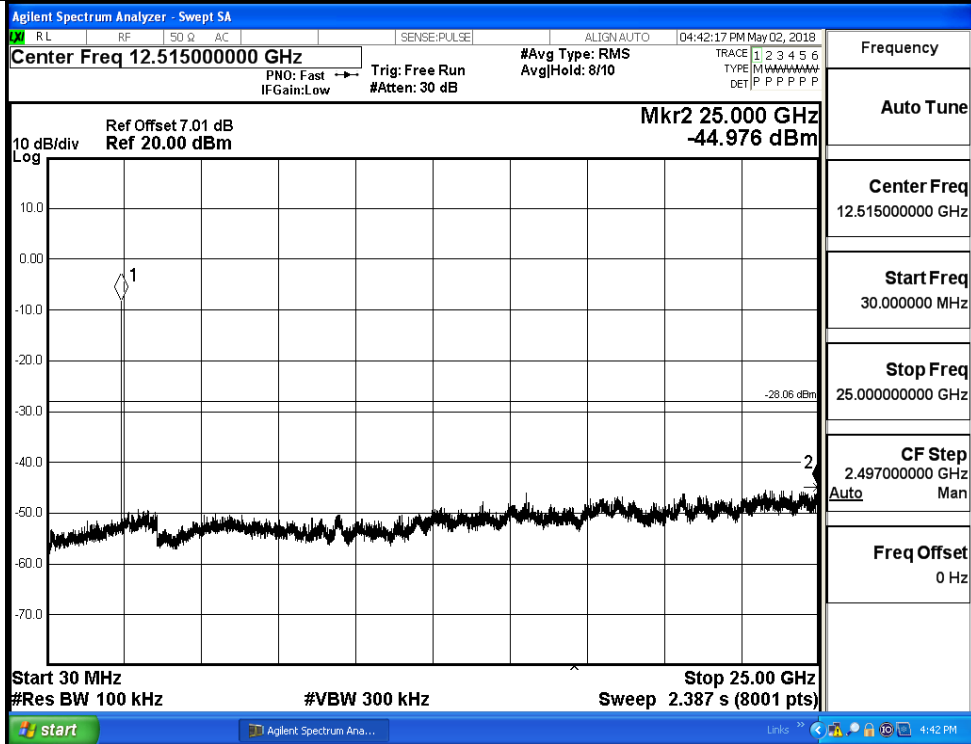

Frequency	
Auto Tune	
Center Freq	12.515000000 GHz
Start Freq	30.0000000 MHz
Stop Freq	25.000000000 GHz
CF Step	2.497000000 GHz
Auto	Man
Freq Offset	0 Hz


BT LE_HCH_Graphs

Pref/BT LE/HCH

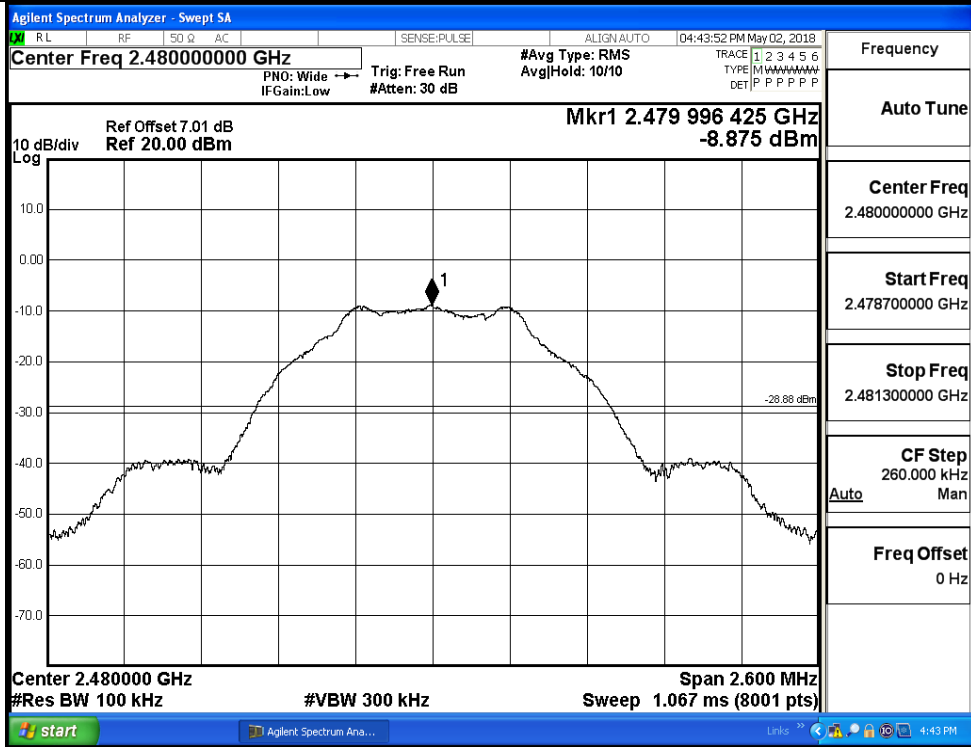

Frequency
Auto Tune
Center Freq 2.48000000 GHz
Start Freq 2.478700000 GHz
Stop Freq 2.481300000 GHz
CF Step 260.000 kHz Auto Man
Freq Offset 0 Hz

Puw/BT LE/HCH


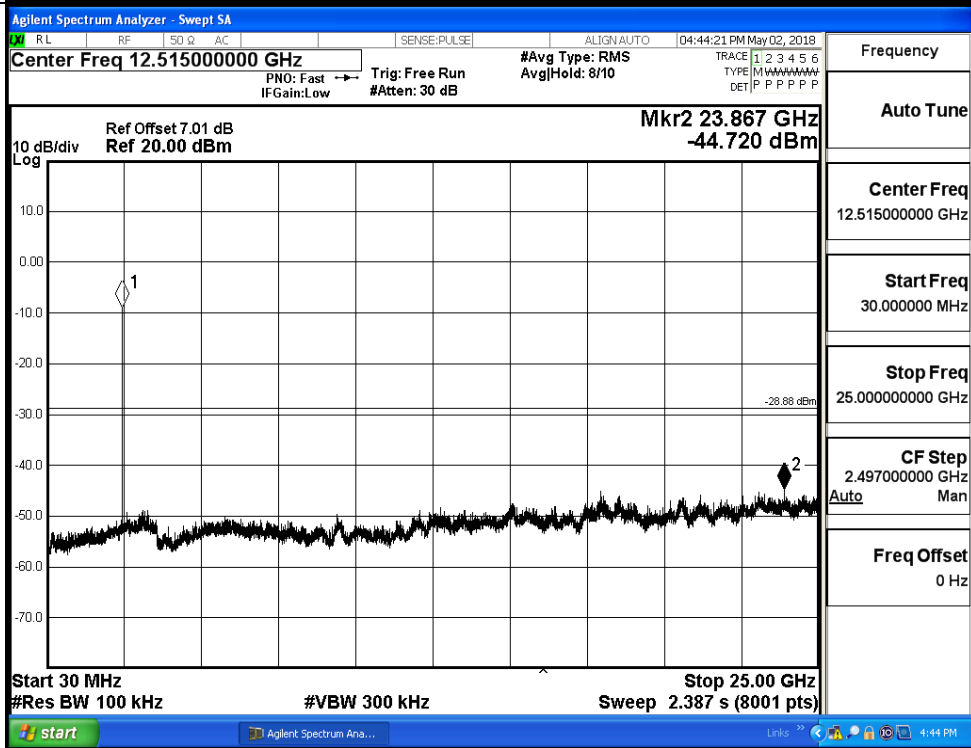


Frequency
Auto Tune
Center Freq 12.51500000 GHz
Start Freq 30.000000 MHz
Stop Freq 25.00000000 GHz
CF Step 2.497000000 GHz Auto Man
Freq Offset 0 Hz

B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-7.035	-50.800	-27.04	PASS
BT LE	HCH	-8.695	-50.503	-28.7	PASS


Test Graphs

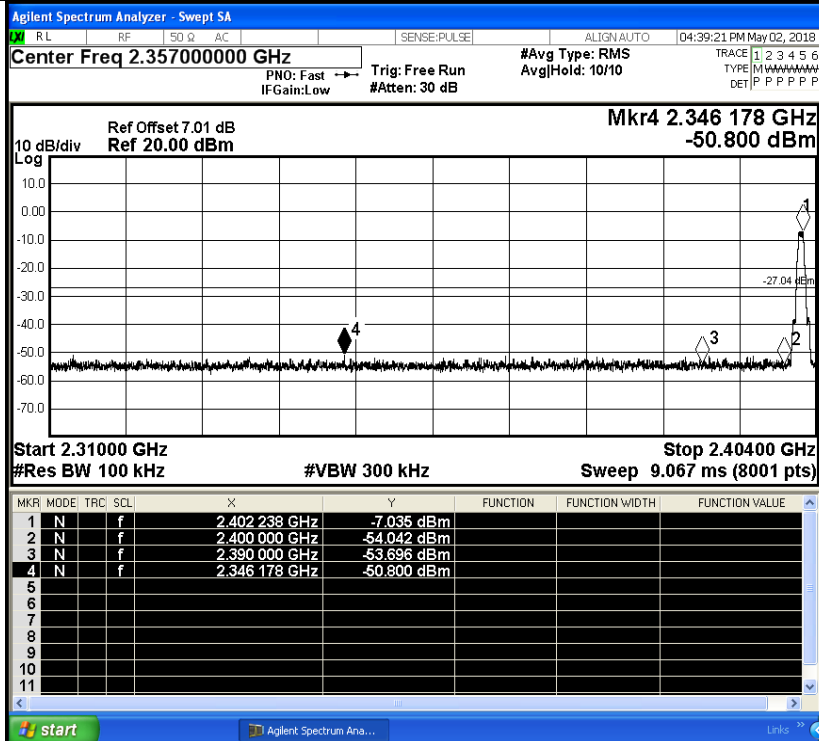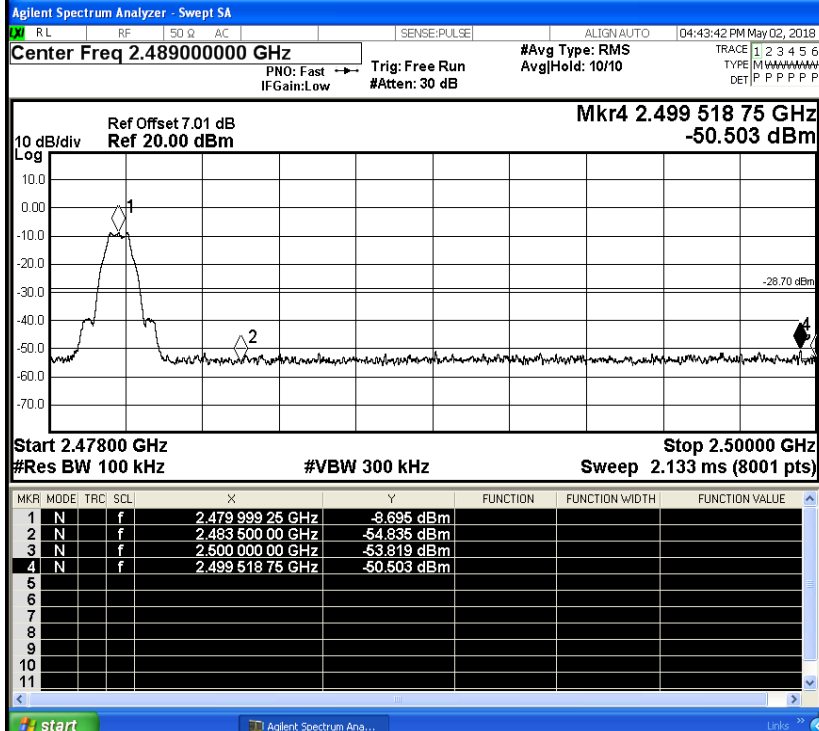LCH		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.35700000 GHz</p> <p>Start Freq 2.31000000 GHz</p> <p>Stop Freq 2.40400000 GHz</p> <p>CF Step 9.400000 MHz</p> <p>Freq Offset 0 Hz</p>
HCH		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48900000 GHz</p> <p>Start Freq 2.47800000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-45.29	2.0	0	49.97	PEAK	74	PASS
		Ant1	2310.0	-54.90	2.0	0	40.36	AV	54	PASS
		Ant1	2390.0	-43.62	2.0	0	51.64	PEAK	74	PASS
		Ant1	2390.0	-54.69	2.0	0	40.57	AV	54	PASS
	2480	Ant1	2483.5	-44.33	2.0	0	50.92	PEAK	74	PASS
		Ant1	2483.5	-54.50	2.0	0	40.76	AV	54	PASS
		Ant1	2500.0	-43.60	2.0	0	51.66	PEAK	74	PASS
		Ant1	2500.0	-54.33	2.0	0	40.92	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

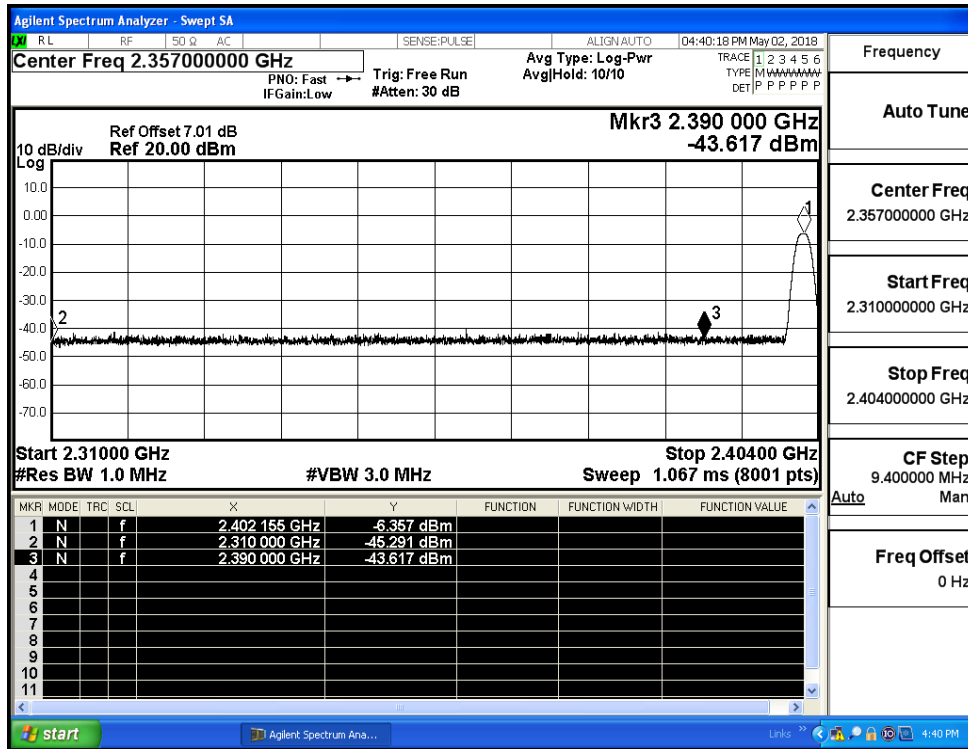

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

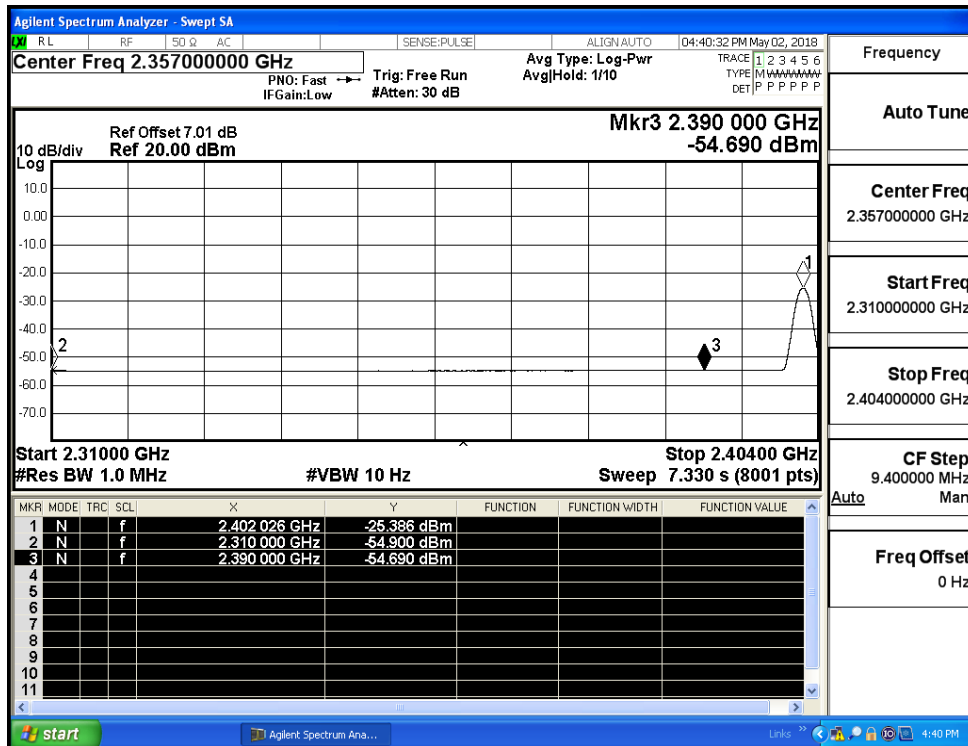

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

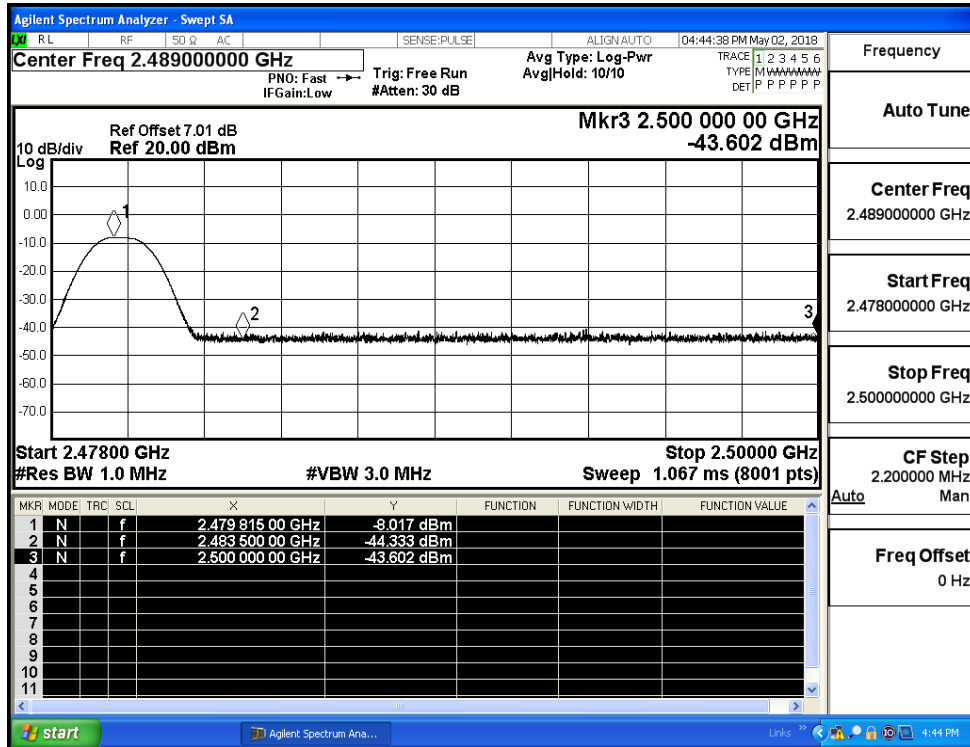

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

