


(Optional) Wiring your video doorbell


This section should be followed **ONLY** if you are using existing doorbell wiring, and only after completing steps 1 through 3 in the “Install your video doorbell and chime” section




ENSURE THAT YOU HAVE TURNED OFF ALL POWER TO DOORBELL WIRING AT YOUR BREAKER BOX




Pull a few inches of doorbell wiring through mounting plate




Twist ends of each doorbell wire together with the wire end of a connector



Place a wire nut over each pair of twisted wires, turn nut clockwise to tighten



Slide the U-shaped ends of the connectors under the screws in the back of the doorbell. Tighten screws so that connectors do not slip out.



Push excess wires back into the wall

Return to Step 4 in the section “Install your video doorbell and chime”

For detailed setup procedure, please refer to Toucan website www.ToucanSolution.com

Regulations & Compliance

Fcc Statement

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

ISED Regulatory Compliance

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.


L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

1. *L'appareil ne doit pas produire de brouillage;*
2. *L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*

RF Exposure Compliance

This equipment complies with FCC/IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. *Cet équipement est conforme aux limites d'exposition aux radiations FCC/IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.*

 For additional info, visit our website at ToucanSolution.com

VuPoint Solutions, Inc. (USA):
710 Nogales Street, City of Industry, CA 91748

 facebook.com/toucansmarthome

 instagram.com/toucansmarthome

 youtube.com/c/toucansmarthome



©2022 VUPOINT SOLUTIONS, INC. All Rights Reserved.

The Toucan logo and Toucan are trademarks or registered trademarks of VuPoint Solutions Inc. in the United States and other countries. App Store is a registered trademark of Apple Inc. iOS is a registered trademark of Cisco Technology, Inc. in the U.S. and other countries and is under license. Android and Google Play are registered trademarks of Google LLC. Product names, logos, brands and other trademarks referred to herein are the property of their respective trademark holders. All trademarks remain the property of their respective holders, and are used only to describe the products or services being provided. These trademark holders are not affiliated with VuPoint Solutions, Inc. They do not sponsor or endorse VuPoint Solutions, Inc's products or services.



We Make Security Easy

Wireless Video Doorbell PRO MANUAL



TVDP05GR

Items Included



USB Charging Cable



AA Batteries



Mounting Tape



Wireless Chime



Wireless Video Doorbell PRO

Thank You Card

Warranty Card

Manual



Screwdriver



Screws



Wall Anchors



Mounting Plate




Doorbell Wiring Kit

Get to know your video doorbell and chime


Doorbell

1. Camera lens
2. Microphone
3. Light sensor
4. Doorbell button
5. Speaker
6. SET / Power ON button
7. RST / Power OFF pinhole button
8. Charging port
9. (Optional) Power Terminals

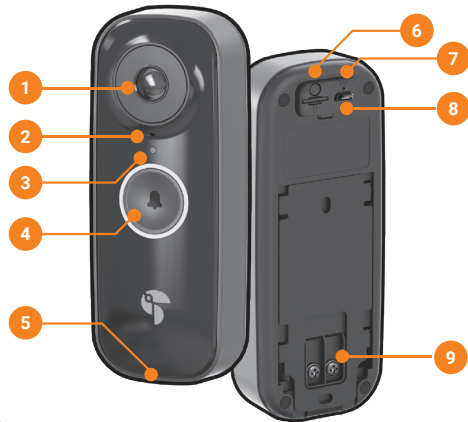


Chime

10. LED indicator
11. SET button
12. Speaker



Charge your video doorbell

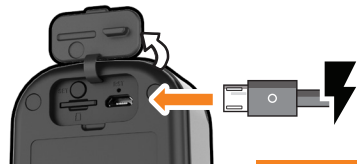

Open the back cover, plug in micro usb cable to charge the video doorbell.

Recommend to fully charge the device before 1st use.

LED Description

Solid Red	Charging Battery
Solid Blue	Battery Fully Charged

Setup your video doorbell

1. Download the Toucan App for Android or IOS

Scan QR code or visit www.toucanolution.com/pages/toucan-smart-home-app



2. Open the app and create a free account



3. Tap the '+' in the upper right to add a device



4. Press and hold the SET button until LED light blinks to enter the setup mode



5. Follow the instructions on the Toucan App to complete the setup

	LED Description
Flashing BLUE	Setup Mode
Flashing PURPLE	Connecting to cloud server
Flashing RED	Connection Failed

Pairing your chime with your video doorbell

The chime and doorbell come pre-paired, but if you need to pair it again, follow the instructions in this section.



Press and hold the SET button on the Chime until the LED blinks, about 3 seconds




Press and hold the doorbell button for about 3 seconds to complete pairing with the chime

Chime LED Description

Flashing BLUE	Pairing Mode
BLUE Flashes Once	Select Next Chime Sound

Install your video doorbell and chime



1. Drill holes for wall anchor placement. If installing to use existing doorbell wiring, the hole in the center of the mounting plate should be over the old doorbell wiring hole.
2. Insert wall anchors
3. Attach the mounting plate with included screws

If connecting the Wireless Video Doorbell Pro to your existing doorbell wiring, proceed to the "(Optional) Wiring your video doorbell" section on the next page. Otherwise, continue with step 4



4. Place the doorbell on mounting plate



5. Tighten the securing screw by turning it clockwise

6. If using the "(Optional) Wiring your video doorbell", you may now turn the power back on for the doorbell wiring.
7. Place the adhesive tape on the back of the chime and stick it to the wall in a suitable location inside your home.



- * If using the adhesive to mount the doorbell, please adhere to the surface and wait 24-48 hours to enable maximum bond strength before adding the doorbell. Apply 3M adhesive to dry surfaces only.
- ** You can mount the doorbell using just the adhesive on UPVC, wooden or smooth surface door frames (not suitable for brick or stone)
- *** The Chime can be placed up to 50m from the doorbell