
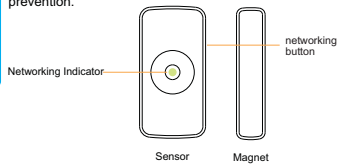

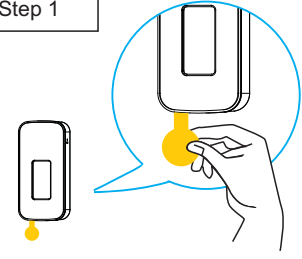
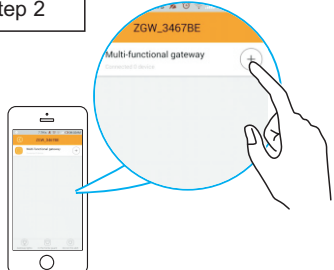
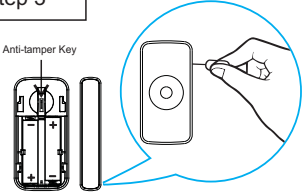
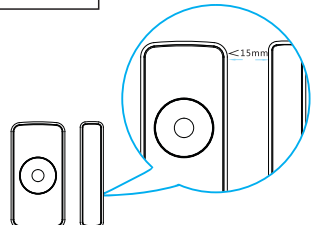
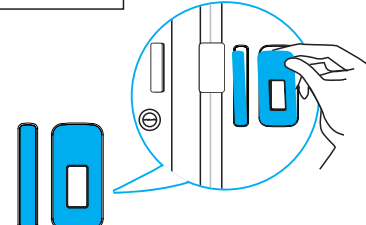
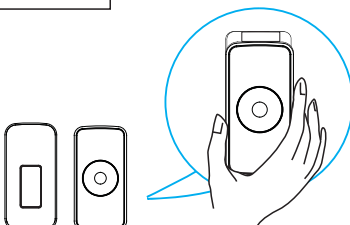
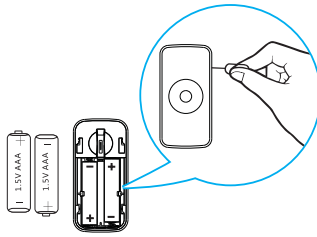



<h3>Smart Door Sensor User Manual HS1DS-Z</h3>  <p>*Please read the user manual carefully before operation. The guide picture is for reference only, please in kind prevail.</p>	<p>This is a intelligent door sensor, adopts super low power Z-Wave wireless networking technology, makes a longer battery life-span, Feel open or close state of the door or window through the near and separation between sensor and magnetic. Dual sensor design, makes the installation more flexible and adaptable. Products are suitable for home, villas, factories, shops, warehouses, office buildings, banks, room and other places of safety prevention.</p> <p>Product Description</p> 	<p>Technical Parameters</p> <p>Function renderings</p> <ol style="list-style-type: none"> 1. Working Voltage: DC3V (2×AAA battery) 2. Static Current: ≤5uA 3. Alarm Current: ≤35mA 4. Detecting Distance: >15mm 5. Networking: Z-Wave Ad-Hoc Network 6. Wireless Networking Distance: ≥70 metres (in the open area) 7. Working Environment: -10°C ~ +50°C 8. Working Humidity: Maximum 95%RH 9. Detector Dimension: 76×36.6×16.5 mm 10. Magnet dimension: 76×13.9×16.5 mm 		<p>Step 1</p>  <p>• Remove insulator make device on power.</p>	<p>Step 2</p>  <p>• Click the "add" button to enter the networking mode.</p>
<p>Step 3</p>  <p>• Connecting network: According to the APP tip, press the device networking hole for 3 times in 1.5 seconds, then the green LED flashes quickly (connecting network within 30 seconds), and "networking succeed" will be displayed on app interface.</p> <p>• Disconnecting network: Click the "delete device" button on APP, then quick press networking hole for 3 times in 1.5 seconds, green LED flashes for 6 times, disconnecting network succeed.</p>	<p>Step 4</p>  <p>• Align the installation, the installation distance is less than 15mm. (The magnet part can be installed both sides of detector part)</p>	<p>Step 5</p>  <p>• Tear off the gummed film, stick the equipment on the required area. Sensor should be installed in fixed area like door frame, magnet can be installed in active area like door plank, this picture for reference only.</p>	<p>Step 6</p>  <p>• Install sensors into the bracket.</p>	 <p>• Long press the networking button, then power on (put into battery), ID code is clear and recover to factory setting.</p>	<p>Battery replacement</p>  <p>• Please change the battery according to negative and positive of the battery.</p> <p>• Please deal with waste batteries correctly for environmental protection.</p> <p>Restore factory settings</p> <p>Statement *Instruction is for reference only, please prevail in kind. *Because of the updating of the technology, the final interpretation right owned by factory, if there are any inconformities when using this products under this instruction.</p>

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.