

# Welcome

EN

## Specifications

Model No.	HB305+MB167	
Product name	Bluetooth keyboard and mouse combo	
Operation distance	10 meters (no obstacle)	
Lithium Battery Capacity	Keyboard: 300mAh	Mouse: 500mAh
Working current	Keyboard: ≤8mA	Mouse: ≤8mA
Charging time	2h	
Lithium battery life	3 years	
Material	ABS	
Dimensions	Keyboard: 284.86*116.55*21.37mm Mouse: 107.41*69.14*41.09mm	
Charging interface	Type-C	
Mouse DPI	800-1200-1600-2000-2400	

## Indicator lights Description



- 1 Charging indicator (Red/charging; Green/fully charged) / Battery low indicator (Red)
- 2 Capslock indicator (Green)
- 3 Power indicator (Green) / Pairing indicator (Blue)
- 4 Type-C charging port
- 5 Power switch (ON/OFF)

## Keyboard Pairing Steps

1. **Power on the keyboard.** Slide the power switch to "ON" side, power indicator turns on green for 3 seconds, then turns off.
2. **Keyboard enters pairing mode.** Press and hold Fn+**3** keys for 3-5 seconds. The LED indicator flashes blue rapidly, keyboard enters into pairing mode.
3. **Connected with device.** Turn on the device's bluetooth function, it searches the keyboard's pairing name "Bluetooth Keyboard" automatically. Click the pairing name, the LED indicator keeps on 3s, then turns off. Connection successfully.
4. **Change the device's language to English(US),** ensure every character can be implemented.

## Language Switching Guide


- Samsung/Android: Shift +Space (Hold "Shift" key always, and click "Space" key, every clicking can change to next language selection.)
- Google/Android: Ctrl+Space
- Windows: Win+Space
- iOS15 and above: Ctrl+Space

## Note:

If your device does not have English(US) language selection, please check the following steps.

- 1 **For iOS devices:**  
Settings > General > Keyboard > Keyboards > Add new keyboard > Select "English(US)"
- 2 **For Samsung Android devices:**  
Settings > Controls > Language and input > Samsung Keyboard > Select "Input languages" > Select "English(US)"
- 3 **For Google Android devices:**  
Settings > Language & input > Physical Keyboard > Set up keyboard layouts > Select "English(US)"
- 3 **For Windows devices:**  
Control Panel > Clock, Language and Region > Select "English(US)"

## Mouse Pairing Steps

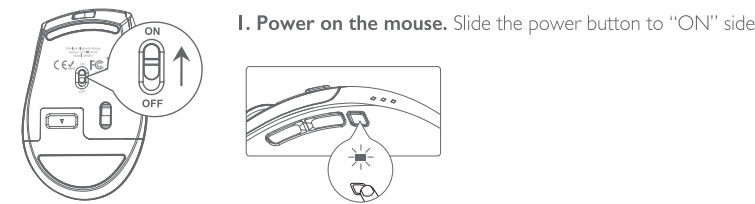


2. **Mouse enters pairing mode.** Press and hold the side small button for 3-5 seconds until the LED flash blue rapidly.



3. **Connected with device.** Turn on the device's bluetooth function, it searches the keyboard's pairing name "Bluetooth Mouse" automatically. Click the pairing name, the LED indicator keeps on 3s, then turns off. Connection successfully.

## Charging

1. If the keyboard is flashing RED light, it's time to charge it. Once fully charged, the LED turns green.
2. When the battery is low, the charging indicator will flash 10 times per second, please charge the mouse.

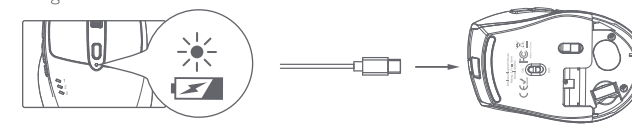

## Keys Function

keys	Function in iOS	Function in Android	Function in Windows	Function in Mac
Fn+	Fn lock	Fn lock	Fn lock	Fn lock
Fn+ *	Brightness -	Brightness -	Brightness -	Brightness -
Fn+	Brightness +	Brightness +	Brightness +	Brightness +
Fn+	Mute	Mute	Mute	Mute
Fn+	Volume -	Volume -	Volume -	Volume -
Fn+	Volume +	Volume +	Volume +	Volume +
Fn+	Last track	Last track	Last track	Last track
Fn+	Play/Pause	Play/Pause	Play/Pause	Play/Pause
Fn+	Next track	Next track	Next track	Next track
Fn+	Home	Home	Web	Task center
Fn+	Search	Search	Search	Search
Fn+ Home	Line head	Line head	Line head	Line head
Fn+ End	Line end	Line end	Line end	Line end
Fn+ PgUp	Page up	Page up	Page up	Page up
Fn+ PgDn	Page down	Page down	Page down	Page down

**Fn lock function:** Press Fn+ to activate the fn lock function, no need to combine with "Fn" key always.

For example, when use the keyboard with Android device, when do not activate the fn lock function, need to press Fn+\* to implement Brightness decrease. After activate the fn lock function, just need to press \* key directly.

# Bienvenue

FR

## Caractéristiques

Numéro de modèle	HB305+MB167	
Nom du produit	Combinaison clavier et souris Bluetooth	
Distance de fonctionnement	10 mètres (aucun obstacle)	
Capacité de la batterie au lithium	Clavier : 300mAh	Souris : 500mAh
Courant de fonctionnement	Clavier : ≤8mA	Souris : ≤8mA
Temps de charge	2h	
Autonomie de la batterie au lithium	3 années	
Matériau	ABS	
Dimensions	Clavier: 284,86*116,55*21,37mm Souris: 107,41*69,14*41,09mm	
Interface de chargement	Type-C	
PPP de la souris	800-1200-1600-2000-2400	

## Description des indicateurs lumineux



- 1 Indicateur de charge (rouge : en charge ; vert : complètement chargé) / Indicateur de batterie faible (rouge)
- 2 Indicateur de verrouillage des majuscules (vert)
- 3 Indicateur d'alimentation (vert)/indicateur de jumelage (bleu)
- 4 Port de chargement de type C
- 5 Interrupteur d'alimentation (marche/arrêt)

## Procédure de jumelage du clavier

1. **Allumez le clavier.** Faites glisser l'interrupteur d'alimentation sur le côté « ON », le voyant d'alimentation s'allume en vert pendant 3 secondes, puis s'éteint.
2. **Le clavier entre en mode de jumelage.** Appuyez sur les touches Fn+**3** et maintenez-les enfoncées pendant 3 à 5 secondes. Le voyant LED clignote rapidement en bleu : le clavier entre en mode de jumelage.
3. **Connecté à l'appareil.** Activez la fonction Bluetooth de l'appareil, il recherche automatiquement le nom de jumelage du clavier « Clavier Bluetooth ». Cliquez sur le nom de jumelage, le voyant LED reste allumé 3 secondes, puis s'éteint. Connexion réussie.
4. **Changer la langue de l'appareil en français(FR),** s'assurer que chaque caractère peut être Mis en œuvre.

## Guide de changement de langue

- Samsung/Android : Shift + Espace (maintenez toujours la touche "Shift" et cliquez sur la touche "Espace", Chaque clic peut passer à la sélection de langue suivante.)
- Google-Android : Ctrl+Espace
- Windows : Win+Espace
- iOS15 et supérieur : Ctrl+Espace

## Note :

Si votre appareil ne permet pas de sélectionner la langue française (FR), veuillez suivre les étapes

- 1 **Pour les appareils iOS :**  
Réglages > Général > Clavier > Ajouter un nouveau clavier > Sélectionnez « Français (FR) »
- 2 **Pour les appareils Android Samsung :**  
Réglages > Contrôles > Langue et saisie > Clavier Samsung > Sélectionnez « Langues de saisie » > Sélectionnez « Français (FR) »
- 3 **Pour les appareils Google Android :**  
Réglages > Langue et saisie > Clavier physique > Configurer la disposition des touches du clavier > Sélectionnez « Français (FR) »

- 3 **Pour les appareils Windows :**  
Panneau de configuration > horloge, langue et région > sélectionnez "Français (FR) »

## Étapes de couplage de la souris




2. **La souris passe en mode couplage.** Appuyez sur le petit bouton latéral et maintenez-le enfoncé pendant 3 à 5 secondes jusqu'à ce que le la LED clignote en bleu.



3. **Connecté à l'appareil.** Activez la fonction Bluetooth de l'appareil, Celui-ci recherchera automatiquement le nom de jumelage du clavier « Souris Bluetooth ». Cliquez sur le nom de jumelage, le voyant LED reste allumé 3 secondes, puis s'éteint, Connexion réussie.

## Charge en cours

1. Si le clavier clignote en ROUGE, il est temps de le charger. Une fois complètement chargé, la LED devient verte.
2. Lorsque la batterie est faible, l'indicateur de charge clignote 10 fois par seconde, veuillez charger la souris.

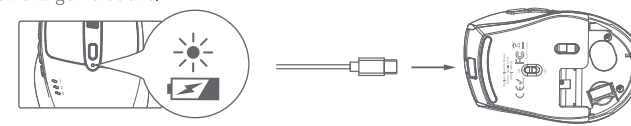

## Fonction des touches

touches	Fonction dans iOS	Fonction dans Android	Fonction sous Windows	Fonction sous Mac
Fn+	Verrouillage Fn	Verrouillage Fn	Verrouillage Fn	Verrouillage Fn
Fn+ *	Luminosité -	Luminosité -	Luminosité -	Luminosité -
Fn+	Luminosité +	Luminosité +	Luminosité +	Luminosité +
Fn+	Muet	Muet	Muet	Muet
Fn+	Volume -	Volume -	Volume -	Volume -
Fn+	Volume +	Volume +	Volume +	Volume +
Fn+	Dernière piste	Dernière piste	Dernière piste	Dernière piste
Fn+	Lecture/Pause	Lecture/Pause	Lecture/Pause	Lecture/Pause
Fn+	Piste suivante	Piste suivante	Piste suivante	Piste suivante
Fn+	Accueil	Accueil	Web	Centre de tâches
Fn+	Recherche	Recherche	Recherche	Recherche
Fn+ Home	Début de ligne	Début de ligne	Début de ligne	Début de ligne
Fn+ End	Fin de ligne	Fin de ligne	Fin de ligne	Fin de ligne
Fn+ PgUp	Page haut	Page haut	Page haut	Page haut
Fn+ PgDn	Page bas	Page bas	Page bas	Page bas

**Fonction de verrouillage Fn :** Appuyez sur Fn+ pour activer la fonction de verrouillage Fn, ce qui élimine la nécessité d'utiliser la touche « Fn » à chaque fois. Par exemple, si vous utilisez le clavier avec un appareil Android et que vous n'avez pas activé la fonction de verrouillage Fn, vous devez appuyer sur Fn+\* pour diminuer la luminosité. Après avoir activé la fonction de verrouillage Fn, il vous suffira d'appuyer directement sur la touche \*.


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

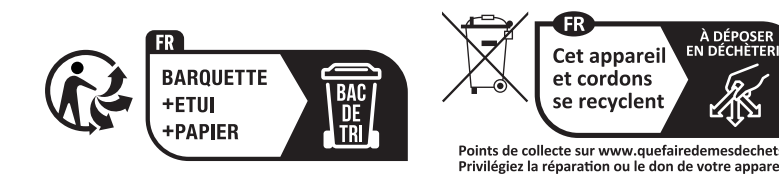

314-01136-A