



ANT-2009

S-Band 120° Spatial Diversity/Cross Polarized MIMO Sector Antenna

Features

- ▶ Two independent cross polarized (X-Pol) antenna arrays within one enclosure
- ▶ Spatial diversity
- ▶ All weather operation
- ▶ Heavy duty steel mounting bracket with easy elevation and tilt adjustment
- ▶ Spatial diversity/X-Pol feed system - (4) N-Female connectors



Specifications

Frequency	2.4 - 2.5 GHz
Gain	12 dBi
VSWR	< 1.5:1 avg.
Polarization	±45°
Horizontal Beam Width	120°
Vertical Beam Width	16.5°
Impedance	50 Ohm
Front to Back Ratio	> 23 dB
Port to Port Isolation	> 28 dB
Upper Sidelobe Suppression	> 15 dB
Max. Input Power	100W
Lightning Protection	DC Ground
Connectors	(4) N-Female (2 for each X-Pol antenna array)
Weight (Including Bracket)	9.2 lbs. 4.2 kg
Dimensions	20.1 x 11.2 x 3.3 in. 51.2 x 28.5 x 8.5 mm
Radome Material	UV-inhibited Polymer
Radome Color	Light Grey
Mount Mast Size (Dia.)	1.6 - 2.4 in. 4 - 6 cm
Operating Temperature	-40°C to +60°C -40°F to 140°F
RoHS Compliant	Yes

ONE SOLUTION. INFINITE POSSIBILITIES.

© 2016 Persistent Systems, LLC. All rights reserved. The Wave Relay® logo, the Persistent Systems, LLC logo and other designated trademarks and trade names are the property of Persistent Systems, LLC or their respective owners. Product specifications are subject to change without notice. This material is provided for informational purposes only; Persistent Systems, LLC assumes no liability related to its use and expressly disclaims any implied warranties of merchantability or fitness for any particular purpose.

ISO 9001:
2008

MADE IN USA






ANT-2009

S-Band 120° Spatial Diversity/Cross Polarized MIMO Sector Antenna


Wind Loading Data

Wind Speed (MPH)	Loading – Front	Loading – Side
100	80 lbs.	23 lbs.
125	126 lbs.	37 lbs.


Antenna Patterns

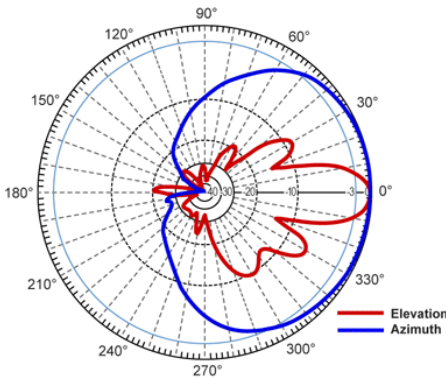


+45° - 2400 MHz

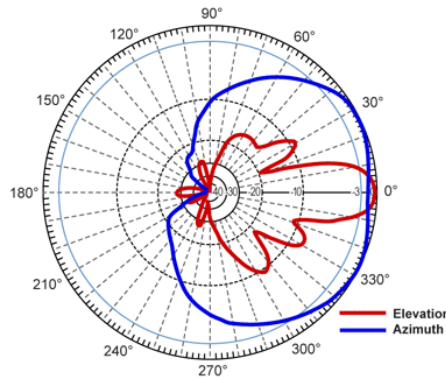


+45° - 2450 MHz

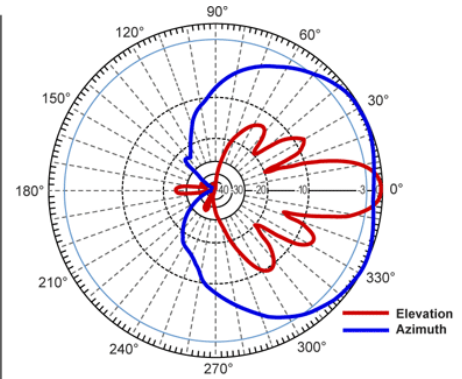


+45° - 2500 MHz

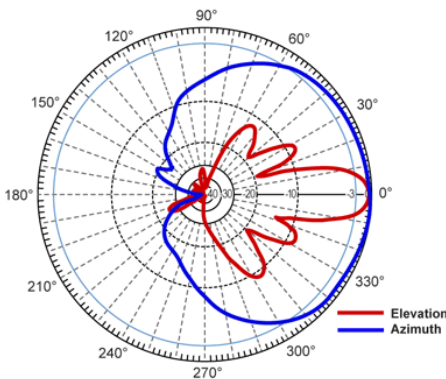

-45° - 2400 MHz

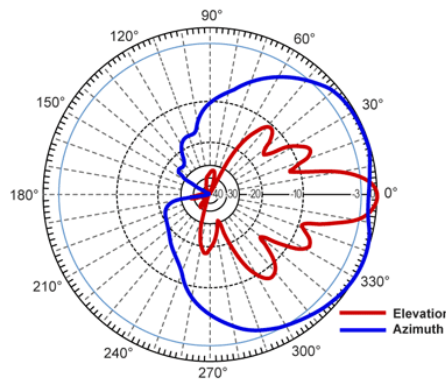

-45° - 2450 MHz

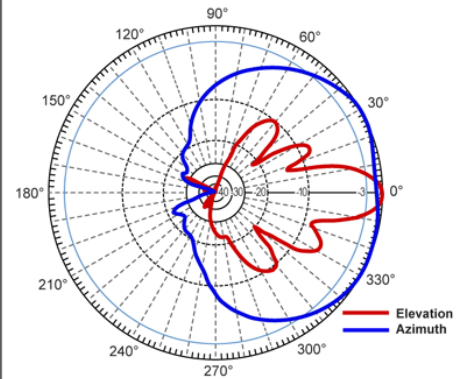

-45° - 2500 MHz

ONE SOLUTION. INFINITE POSSIBILITIES.

© 2016 Persistent Systems, LLC. All rights reserved. The Wave Relay® logo, the Persistent Systems, LLC logo and other designated trademarks and trade names are the property of Persistent Systems, LLC or their respective owners. Product specifications are subject to change without notice. This material is provided for informational purposes only; Persistent Systems, LLC assumes no liability related to its use and expressly disclaims any implied warranties of merchantability or fitness for any particular purpose.

ISO 9001:2008

MADE IN USA

