


Orbital Debris Assessment Report

ThinSat-2

per NASA-STD 8719.14A

Signature Page

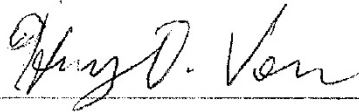


10-22-20

Hank Voss, NSL President and Chief Scientist,
NearSpace Launch, Inc.



10-22-20

Matt Orvis, Project Manager,
NearSpace Launch, Inc.




10-22-2020

Matt Craft, VP and Managing Member,
Twiggs Space Lab, LLC



10-22-20

Mike L. Miller, Licensing Coordinator,
Sterk Solutions Corporation



10-22-20

Mike H. Miller, Licensing Analyst,
Sterk Solutions Corporation

REFERENCES:

- A. *NASA Procedural Requirements for Limiting Orbital Debris Generation*, NPR 8715.6A, 5 February 2008
- B. *Process for Limiting Orbital Debris*, NAS A-STD-8719.14A, 25 May 2012
- C. International Space Station Reference Trajectory, delivered May 2017
- D. McKissock, Barbara, Patricia Loyselle, and Elisa Vogel. *Guidelines on Lithium-ion Battery Use in Space Applications*. Tech. no. RP-08-75. NASA Glenn Research Center Cleveland, Ohio
- E. *UL Standard for Safety for Lithium Batteries, UL 1642*. 1JL Standard. 4th ed. Northbrook, IL, Underwriters Laboratories, 2007
- F. Kwas, Robert. Thermal Analysis of ELaN_a-4 CubeSat Batteries, ELVL-2012-0043254; Nov 2012
- G. Range Safety User Requirements Manual Volume 3- Launch Vehicles, Payloads, and Ground Support Systems Requirements, AFSCM 91-710 V3.
- H. HQ OSMA Policy Memo/Email to 8719.14: CubeSat Battery Non-Passivation, Suzanne Aleman to Justin Treptow, 10, March 2014
- I. HQ OSMA Email: 6U CubeSat Battery Non Passivation Suzanne Aleman to Justin Treptow, 8 August 2017

This report is intended to satisfy the orbital debris requirements listed in *NASA Procedural Requirements for Limiting Orbital Debris Generation*, NPR 8715.6A, 5 February 2008, for the ThinSat-2 mission.

Sections 1 through 8 of *Process for Limiting Orbital Debris*, NAS A-STD-8719.14A, 25 May 2012, are addressed in this document; sections 9 through 14 are in the domain of the launch provider and are addressed by others.

RECORD OF REVISIONS		
REV	DESCRIPTION	DATE
0	Original submission	October 2020

The following table summarizes the compliance status of the ThinSat-2A through ThinSat-2L spacecraft. They all are fully compliant with all applicable requirements.

Requirements	Compliance Assessment	Comments
4.3-1a	Not Applicable	No planned debris release
4.3-1b	Not Applicable	No planned debris release
4.3-2	Not Applicable	No planned debris release
4.4-1	Compliant	Batteries incapable of debris producing failure
4.4-2	Compliant	Batteries incapable of debris producing failure
4.4-3	Not Applicable	No planned breakups
4.4-4	Not Applicable	No planned breakups
4.5-1	Compliant	

Table 1 Compliance Assessment per Requirement

Section 1: Mission Overview


The overall goal of the ThinSat-2 mission, is to orbit 9 spacecraft collectively holding 30 small experiments, to advance STEM education, and promote space science research and systems engineering for grades 4 – 12 and universities. It includes approximately 65 schools from 15 states and the District of Columbia. Each student team will analyze the data collected by their experiment and submit a report detailing their findings. The students will track their experiment and receive data in near real time through the Globalstar network, feeding data to the Space Data Dashboard website. Online content and resources will enhance the educational experience.

The 9 satellites, ThinSat-2A through ThinSat-2I, will be launched as a secondary payload aboard the NG-15 on the Antares second stage, from the mid-Atlantic Regional Spaceport, Wallops Island, Virginia, Q1 2021. The satellites will be inserted into Extremely Low Earth Orbit (ELEO), at 260 km apogee and 180 km perigee, on an inclination from the equator of 51.6 degrees. They will be deployed from 2 Canisterized Satellite Dispensers (CSD) mounted externally on the second stage of the launcher; the spacecraft will deploy after the solar activated burn-wire is effectuated, then these satellites will unfold accordion style. The nominal operation plan is that transmission will begin upon deployment, and cease about a week later, when de-orbiting occurs.


Section 2: Spacecraft Description

Each spacecraft is comprised of one or multiple ThinSat units, one or more units per experiment. Each spacecraft will deploy a drag instead of a foldout panel, from the “end” unit. The drag will provide aerodynamic stabilization of the spacecraft, to maintain the long axis in the RAM direction.

Figure 1 shows a typical single unit. Some of the units have two or more frames layered together containing a single payload, as in Figures 3 and 9. Figures 2, 3, 4, 5, 6, 7, 8 and 9 show the composition and dimensions in mm of each spacecraft type, and identify the spacecraft associated with the type.

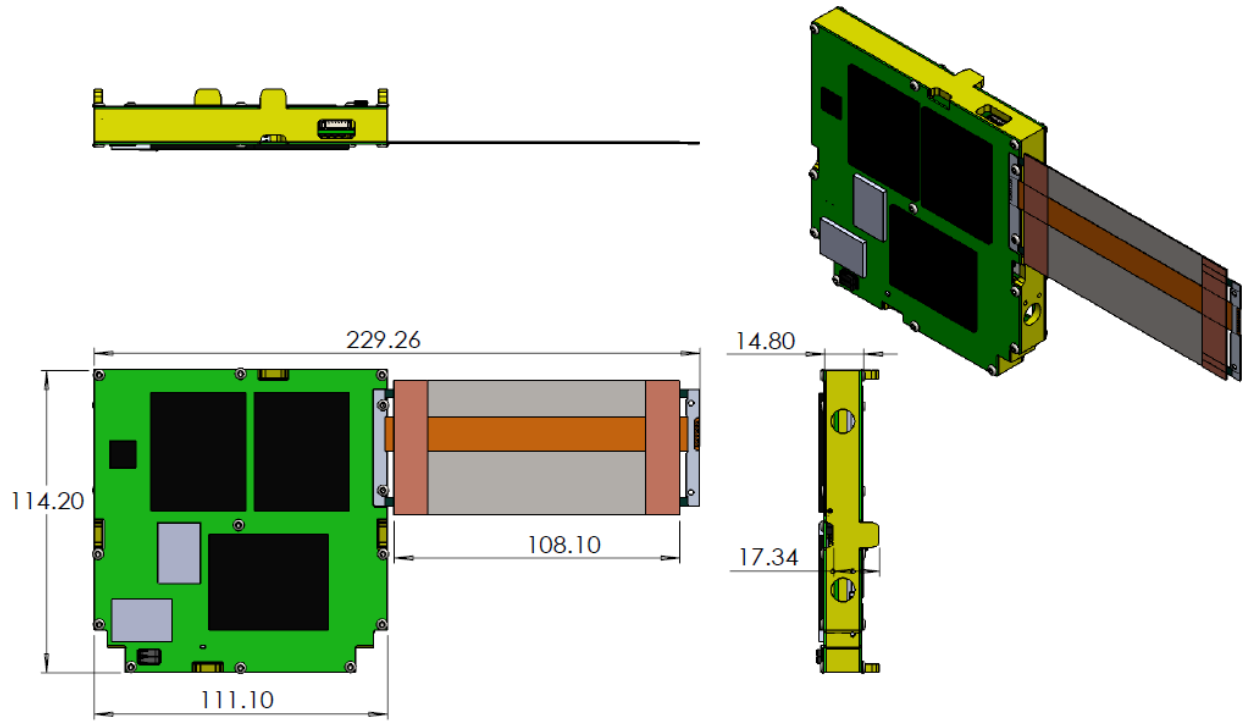

**Figure 1 Single Frame 1 Unit, Showing Foldout Detail
Max Mass 285g**

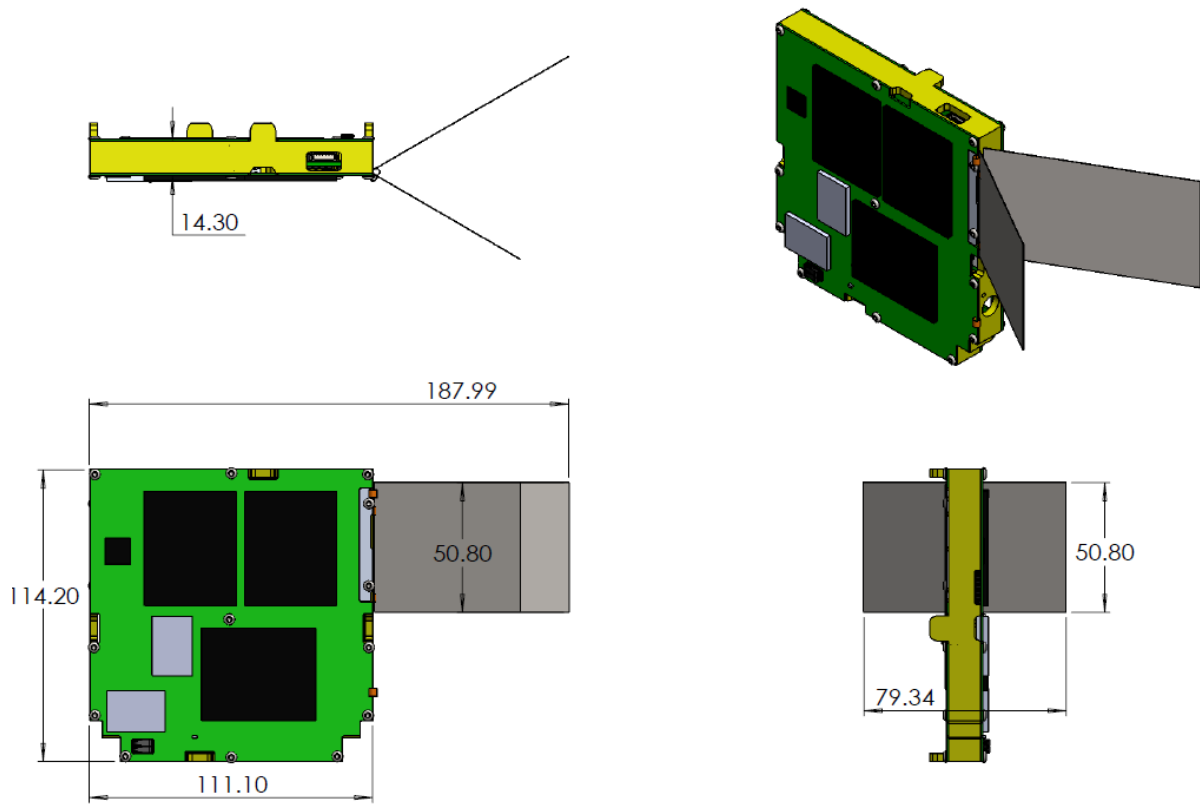

**Figure 2 Single Frame Showing Drag Detail
ThinSat 2G, 2H and 2I**

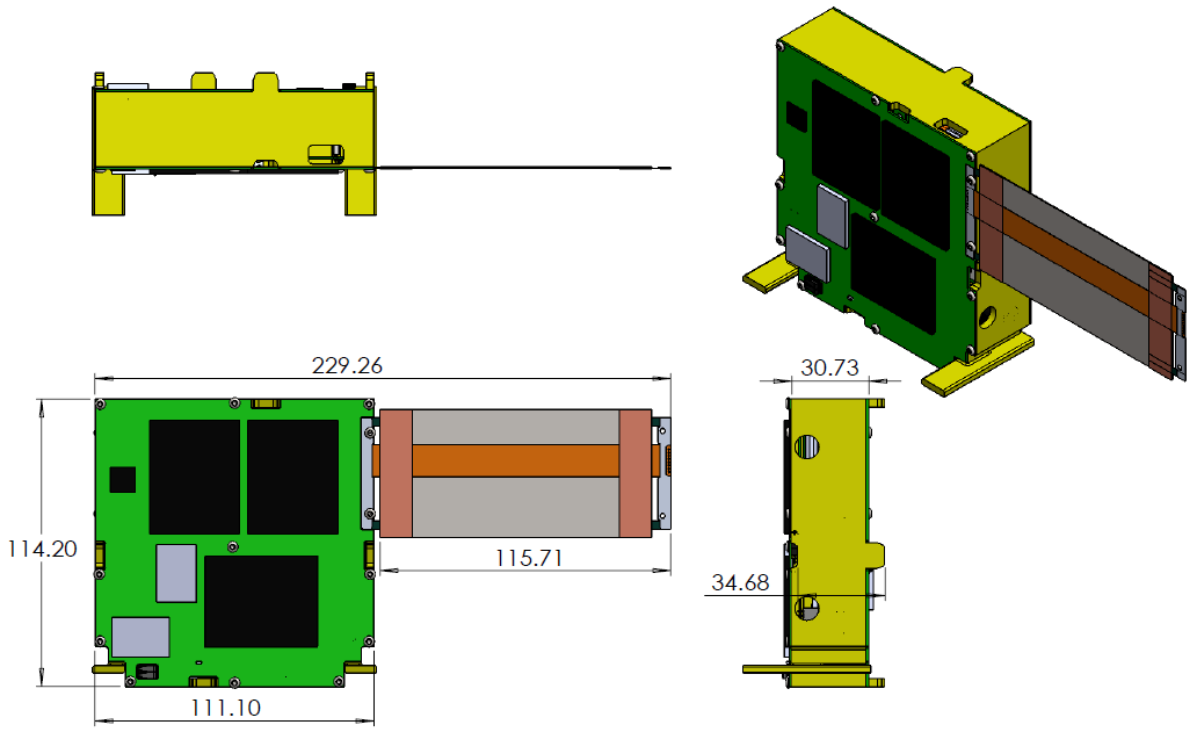


Figure 3 Double Frame ThinSat Unit Detail



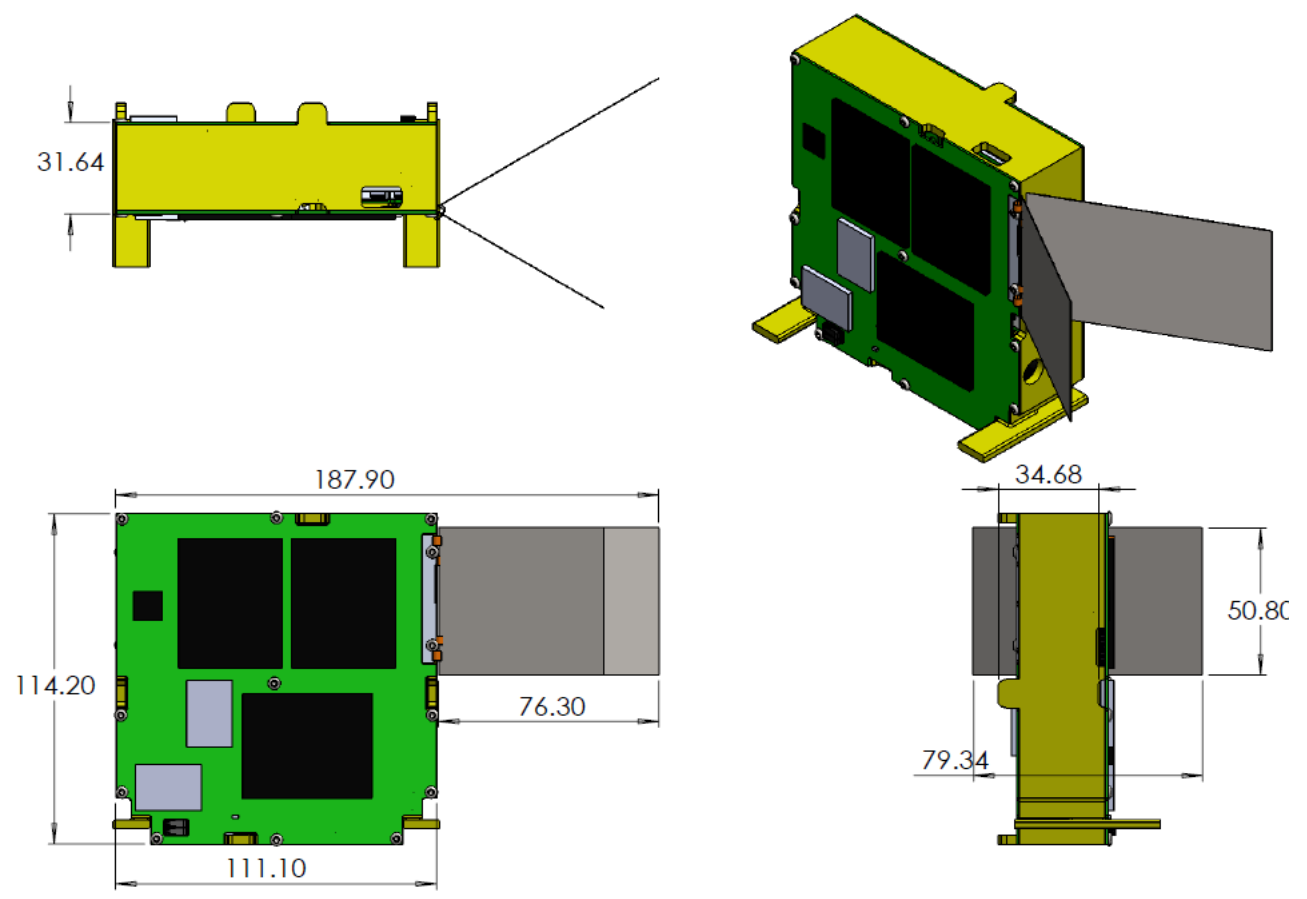



Figure 4 Double Frame ThinSat Unit with Drag Detail

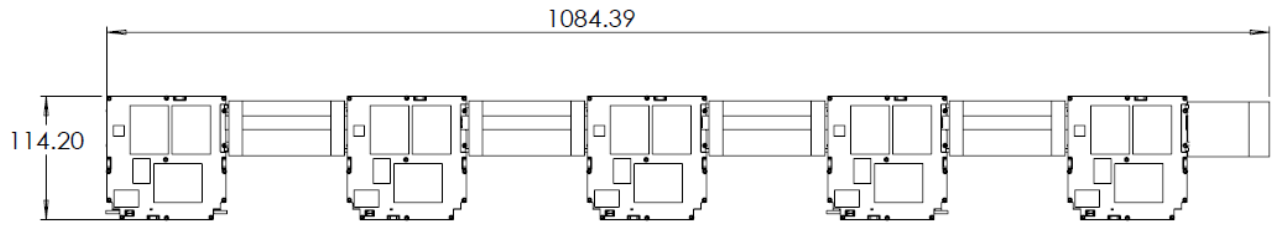


**Figure 5 ThinSats 2B and 2C, 2x 2Ts and 3x 1Ts
Max Mass 1995g**

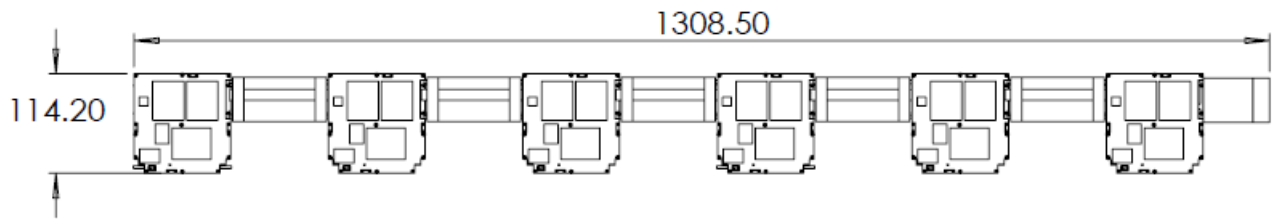


**Figure 6 ThinSat 2A, 1x 2T and 5x 1Ts
Max Mass 1995g**

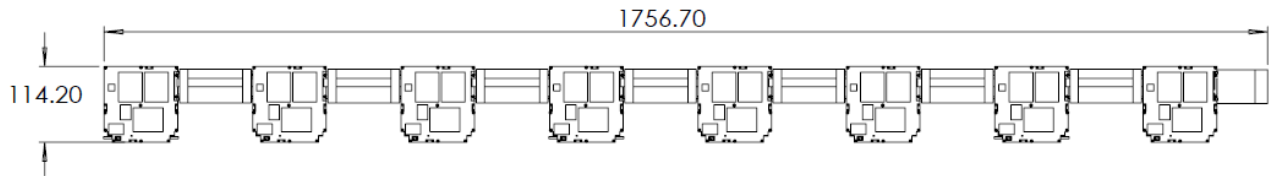

**Figure 7 ThinSat 2D, 1x 2T and 7x 1Ts
Max Mass 2565g**

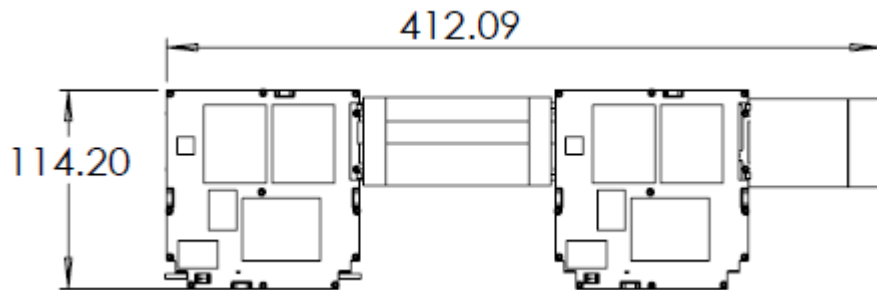

**Figure 8 ThinSat 2F, 1x 2T and 1x 1T
Max Mass 855g**

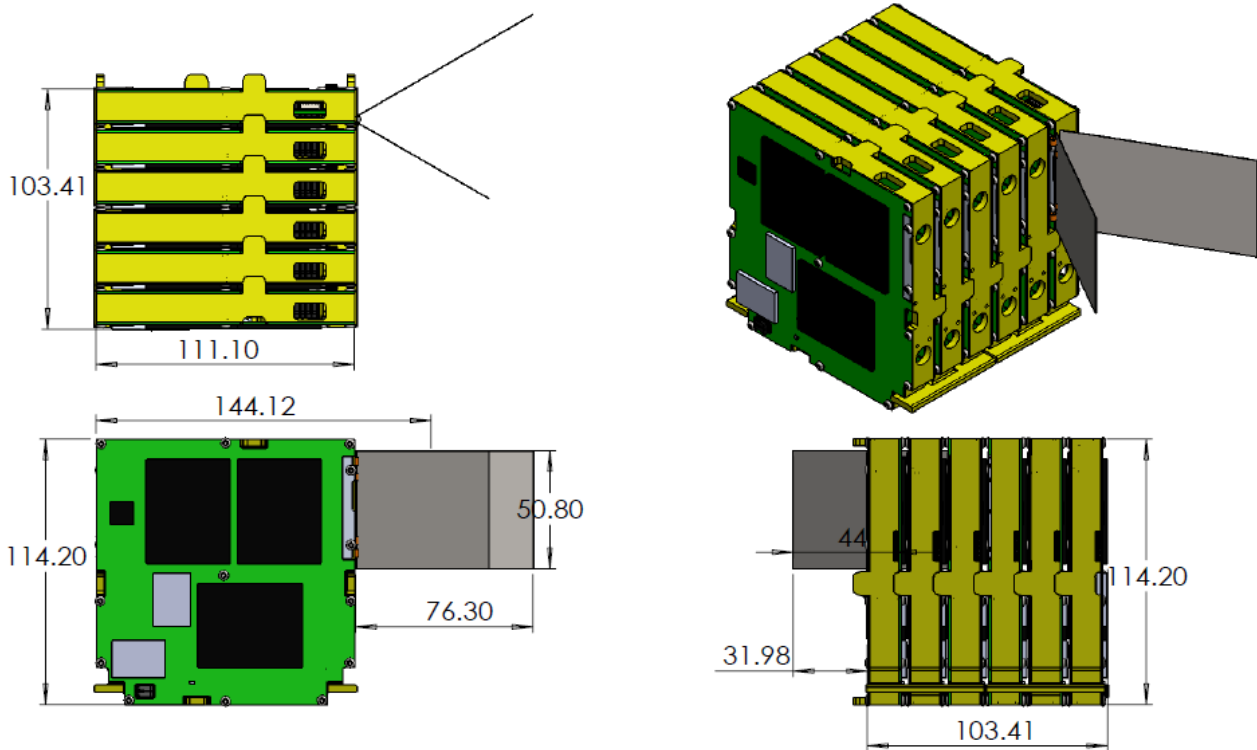

**Figure 9 ThinSat 2E, 1x 6T
Max Mass 1725g**

A unit is comprised of a single or double thickness aluminum frame as shown in Figures 1 and 2 above, printed circuit boards and small components including radio, antenna, and batteries, and the accordion folding photovoltaic panels.

The Appendix lists all of the components in each spacecraft, with the characteristics of each.

Hazards

There are no pressure vessels, hazardous, or exotic materials.

Batteries

The NSL battery NSL140743 is a pouch type cell, using Polymer Li-ion chemistry. It stores 700 mAh at 3.7 volts. The UL listing

number of the battery is BBCV2.MH50009. It is used with a battery circuit protection module providing over-charge/over-current protection and over-discharge circuitry.

Tests have been conducted to demonstrate compliance with JSC EP-WI-032 “Statement of Work: Engineering Evaluation, Qualification and Flight Acceptance Tests for Lithium-ion Cells and Battery Packs for Small Satellite Systems.”

NSL140743(UL Listing:BBCV2.MH50009)(UN38.4: ZKS1912000469-1)

Section 3: Assessment of Spacecraft Debris Released during Normal Operations

The assessment of spacecraft debris requires the identification of any object (>1 mm) expected to be released from the spacecraft any time after launch, including object dimensions, mass, and material.

Section 3 requires rationale/necessity for release of each object, time of release of each object, relative to launch time, release velocity of each object with respect to spacecraft, expected orbital parameters (apogee, perigee, and inclination) of each object after release, calculated orbital lifetime of each object, including time spent in Low Earth Orbit (LEO), and an assessment of spacecraft compliance with Requirements 4.3-1 and 4.3-2.

No releases are planned, therefore this section is not applicable.

Section 4: Assessment of Spacecraft Intentional Breakups and Potential for Explosions.

There are NO plans for designed spacecraft breakups, explosions, or intentional collisions.

The probability of battery explosion is very low, and, due to the very small mass of the satellites and their short orbital lifetimes the effect of an explosion on the far-term LEO environment is negligible, per HQ OSMA Policy Memo/Email to 8719.14: CubeSat Battery Non-Passivation, Suzanne Aleman to Justin Treptow, 10, March 2014

The batteries meet Reg. 56450 (4.4-2), per this reference, by virtue of the HQ OSMA policy regarding battery disconnect stating "Cube Sats as a satellite class need not disconnect their batteries if flown in LEO with orbital lifetimes less than 25 years."

Passivation of the batteries at end of mission is provided for in the command structure. However, the low amount of energy stored and small battery cells prevents a catastrophic failure; so that passivation at EOM is not necessary to prevent an explosion or deflagration large enough to release orbital debris. In addition, the plan is that the mission continues for the two weeks or less from deployment until demise, so that the spacecraft will demise before end of mission.

The spacecraft are being deployed from a low altitude, so any unanticipated debris created will have negligible effects to the space environment.

Assessment of spacecraft compliance with Requirements 4.4-1 through 4.4-4 shows that the ThinSats are compliant.

Section 5: Assessment of Spacecraft Potential for On Orbit Collisions

Calculation of spacecraft probability of collision with space objects larger than 10 *cm* in diameter during the orbital lifetime of the spacecraft takes into account both the mean cross sectional area (MCSA) and orbital lifetime.

This analysis considers both the nominal case where all of the spacecraft deploy and unfold, and aerodynamic forces orient them in the ram direction as planned, and the contingent cases where they do not unfold, and/or they tumble instead of orienting.

Case 1: Deployed with Aerodynamic Stabilization (Nominal)

Per NASA STD-8719.14, “..an object may be considered to be tumbling randomly, or it may be assumed to have a stable attitude relative to the velocity vector.” At the altitude deployed, atmospheric drag will be significant and is expected to stabilize attitude with minimal cross section in the ram direction.

Calculation of effective cross sectional area in stable flight at the velocities and altitudes addressed, must take into account the lack of interaction between atoms and molecules in the atmosphere at the low density. Drag interaction with the spacecraft is dominated by Brownian motion and thermal velocity. The thermal velocity of the atmospheric constituents is comparable to that of the spacecraft, so as the “train” of multiple units passes through the atmosphere, fills in behind the first unit edge, and the second, third and every unit experiences drag comparable to the first unit, in proportion to the area presented..

Thus in stabilized flight, the mean cross sectional area for drag purposes, and considering a perfectly rigid body presenting minimum cross section with zero angle of attack, would be the area of the faces of each of the external frames in the ram direction. From the dimensions given in Section 2, this would be

Satellite	Diagram	Cross Sectional Area, m ² RAM Stabilized
2A	Figure 6	0.0184
2B, 2C	Figure 5	0.0151
2D	Figure 7	0.0216
2E	Figure 9	0.0144
2F	Figure 8	0.0188
2G, 2H, 2I	Figure 2	0.0079

Table 2 MCSA for ThinSat Configurations, Deployed and Stabilized

For each of the 9 spacecraft, the total mass, obtained by summing the masses of the components of the spacecraft as shown in the Appendix, was used to determine the Area to Mass ratio for each, shown in the following Table 3. Table 3 also shows the orbit lifetime, and the probability of collision, provided by the DAS calculations. See Appendix for DAS Analysis Input Data and Output Results. The longest lifetime is about 6 days. If further analysis were done to take into account nonzero angle of attack, or oscillations, the lifetime would be reduced.

Spacecraft Name	Mass kg	Area/Mass m ² / kg	Orbit Lifetime Years (DAS)	Orbit Lifetime Days (DAS)	Probability of Collision (DAS)
ThinSat-2A	2.119	0.0087	0	6	0
ThinSat-2B	1.852	0.0081	0	6	0
ThinSat-2C	1.944	0.0078	0	6	0
ThinSat-2D	2.591	0.0083	0	6	0
ThinSat-2E	1.477	0.0097	0	6	0
ThinSat-2F	0.852	0.0139	0	4	0
ThinSat-2G	0.280	0.0282	0	2	0
ThinSat-2H	0.280	0.0282	0	2	0
ThinSat-2I	0.280	0.0282	0	2	0

**Table 3
Mass, Area to Mass Ratio, Lifetime and Probability of Collision for
each Spacecraft, Deployed and Stable
Assumed RAAN and Argument of Perigee both 0 Degrees**

Case 2: Deployed and Tumbling

A deployed, tumbling ThinSat can be regarded as a complex object. The formula for the MCSA of a complex object, tumbling, is given by NASA STD-8719.14.

$$\text{MCSA} = (A_{\text{max}} + A_1 + A_2)/2, \text{ where}$$

A_{max} is the area of the orthogonal view with the greatest area

A_1 and A_2 are the areas of the other two orthogonal views. Note that for the smallest side, referred to as RAM facing in Case 1, and A_2 here, the same assumption is made as in Case 1, e.g. the second, third and every unit experiences drag comparable to the first unit, in proportion to the area presented.

From this formula, the deployed MCSA of each satellite given in table 4. All dimensions given are in square meters.

For each of the 9 spacecraft, the total mass of the components shown in the Appendix was used to determine the area to mass ratio shown in the following table. Table 4 also shows the orbit lifetime, and the probability of collision, provided by the DAS calculations. See Appendix for DAS Analysis Input Data and Output Results. The tumbling case, which is not the expected case, yields significantly reduced lifetimes compared to the nominal case.

Spacecraft Name	Deployed and Tumbling MCSA m ²	Mass, kg	MCSA/Mass m ² / kg	Orbit Lifetime, Years	Orbital Lifetime, Days	Probability of Collision
ThinSat-2A	0.0676	2.119	0.0319	0	2	0
ThinSat-2B	0.0571	1.852	0.0308	0	2	0
ThinSat-2C	0.0571	1.944	0.0294	0	2	0
ThinSat-2D	0.0890	2.591	0.0344	0	2	0
ThinSat-2E	0.0212	1.477	0.0144	0	4	0
ThinSat-2F	0.0248	0.852	0.0291	0	2	0
ThinSat-2G	0.0130	0.280	0.0466	0	2	0
ThinSat-2H	0.0130	0.280	0.0466	0	2	0
ThinSat-2I	0.0130	0.280	0.0466	0	2	0

Table 4
Area to Mass Ratio, Lifetime and Probability of Collision for each
Spacecraft, Deployed and Tumbling

Case 3: Un-Deployed With Aerodynamic Stabilization

The longest orbit lifetime would result if an entire cluster, the contents of a canister did not deploy, and if it stabilized with the minimum area face in the direction of flight. This yields an area of 0.111 x 0.114, or 0.013 m² for each cluster. Given the same area, the cluster with the greatest mass would have the longest orbit lifetime. From Table 5, the maximum orbit lifetime in this contingency case, which is the maximum for all cases considered, would be 28 days.

Launcher Tube	Spacecraft in Un Deployed Cluster	RAM Area, m ²	Mass of Cluster, kg	Area to Mass Ratio	Orbit Life Years	Orbit Life Days	Probability of Collision
CSD-1	A, B, C	0.013	9.9	0.00131	0	28	0
CSD-2	D, E, F, G, H, I	0.013	9.2	0.00141	0	26	0

Table 5 Orbit Lifetime and Probability of Collision, Un-Deployed and Stable

Case 4: Un-Deployed with Tumbling

As a contingency we consider the unexpected case where all of the spacecraft, when ejected from the launcher tube, remained un deployed, e.g., do not unfold, and tumble. The cluster can be regarded as a convex object. The formula for the MCSA of a complex object, tumbling, is given by NASA STD-8719.14.

MCSA = Surface Area / 4 (which reduces to the formula used in Case 2 also)

Cluster 1 and Cluster 2 each have length of 366 mm, 0.366 m; all 3 dimensions are the same for both clusters.

From the cluster dimensions given in Case 3,

$$\text{Cluster MCSA} = \{[2 * (0.111 * 0.114)] + [2 * (0.111 * 0.366)] + [2 * 0.114 * 0.366]\} / 4$$

$$= 0.19 \text{ m}^2$$

This yields from DAS, a lifetime of 10 days for Cluster 1, and 8 days for Cluster 2.

Cluster	Spacecraft in Un Deployed Cluster	MCSA, m2	Mass of Cluster, kg	Area to Mass Ratio, m2/kg	Orbit Life, Years	Orbit Life, Days	Probability of Collision
1	A, B, C	0.0475	9.9	0.00480	0	10	0
2	D, E, F, G, H, I	0.0475	9.2	0.00516	0	8	0

Table 6 Orbit Lifetime and Probability of Collision, Un Deployed and Tumbling

Review of All Cases

In summary, the probability of any collision, in any configuration, with debris or meteoroids greater than 10 cm in diameter is “less than 0.00000”, per DAS for any configuration. This satisfies the 0.001 maximum probability requirement 4.5-1.

The spacecraft have no capability nor have plans for end-of- mission disposal, therefore requirement 4.5-2 is not applicable.

Assessment of spacecraft compliance with Requirements 4.5-1 shows all spacecraft to be compliant. Requirement 4.5-2 is not applicable to this mission.

Section 6: Assessment of Spacecraft Postmission Disposal Plans and Procedures

The spacecraft all will naturally decay from orbit within 25 years after end of the mission, satisfying requirement 4.6- 1.

Planning for spacecraft maneuvers to accomplish post-mission disposal is not applicable. Disposal is achieved via passive atmospheric reentry.

Summary of DAS 3.0.1 Orbital Lifetime Calculations:

DAS inputs are: 260 km maximum apogee 180 km maximum perigee altitudes with an inclination of 51.6° at deployment Q1, 2021.

From Section 5, Table 3, in the nominal operation case, the lifetimes of the 9 spacecraft are estimated to be between 2 and 6 days, depending on the Area / Mass ratio of each.

As an extreme outer limit for orbit lifetime, the contingency mode of total non deployment of an entire canister compliment of satellites, clustered as when contained in the canister and assumed stable in flight, yields a value of 28 days. There is no mode in which any of the spacecraft would be estimated to stay in orbit longer than 28 days even without deploy.

The assessment of the spacecraft illustrates they are compliant with Requirements 4.6-1 through 4.6-5.

Section 7: Assessment of Spacecraft Reentry Hazards

A detailed assessment of the components of the spacecraft was performed using DAS 3.0.1, to verify Requirement 4.7-1. See Appendix for a complete log of DAS inputs and outputs for all cases. The analysis provides a bounding analysis for characterizing the survivability of a component during re-entry. It is conservative in that when it shows terminal energy of a component surviving reentry, it does not consider any loss material from ablation or charring. Both of these may for some materials decrease the mass and dimensions of the re-entering components, reducing the risk below that calculated.

The surviving components are shown in Table 7.

Surviving Component	Original Mass, kg	Terminal Energy, Joules	Casualty Area	Total Spacecraft Risk of Human Casualty, All Spacecraft
Mu Metal Damping Plate	0.01	5.2	0.38	
Sensor 2B5	0.01	1.1	0.40	
Fasteners	0.0022	0.7	1.48	
Solar Foldout	0.034	0.6	2.66	
Solar Cell (B)	0.005	0.06	0.46	
Separation Switch	0.0003	0.02	1.84	
Breadboard Spring	0.0017	0.000095	2.2	
				1:100000000

Table 7: Surviving Component Analysis

If a component survives to the ground but has less than 15 Joules of kinetic energy, it is not included in the Debris Casualty Area that inputs into the Probability of Human Casualty calculation. This is why all of the spacecraft have a calculated Risk of Human Casualty from DAS, of 1:100000000. The maximum terminal energy among all the surviving components is 5.2 Joule.

The majority of components demise upon reentry and all spacecraft comply with the less than 1:10,000 probability of Human Casualty Requirement 4.7-1.

The ThinSats thus are in compliance with Requirement 4.7-1 of NASA-STD-8719.14A.

Section 8: Assessment for Tether Missions

No tethers are used. Requirement 4.8-1 is satisfied.

Section 9 through 14:

ODAR sections 9 through 14 pertain to the launch vehicle, and are not covered here.

Appendix

The document “Appendix to ThinSat-2 ODAR: DAS Activity Log”, file [ActivityLog.pdf](#), is incorporated by reference into this document.