


Frequency Range	470- 700MHz
Gain	12dbi
VSWR	< 1.3
Radiation Pattern	Vertical 90°
Polarization	Horizontal or Vertical
Connector	F connector
Impedance	50 ohm
F/B	>15db
Protection Mode	Direct Ground
Maximum Power	50 Watts
Weight	395 grams
Dimensions	850 mm
Wind Survivability	200 Km/h (125 mph)
Part Number	ANT-O-TVWS-CPE-1

Azimuth Chart, Vertical

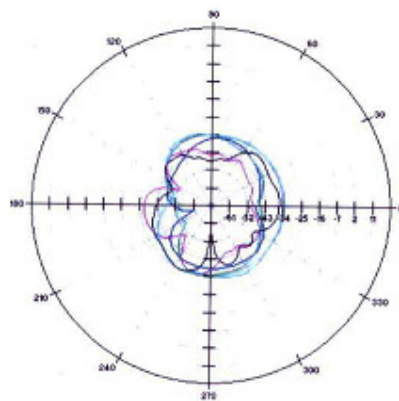

— Frequency 474.000 MHz [dB] — Frequency 530.000 MHz [dB]
— Frequency 666.000 MHz [dB] — Frequency 754.000 MHz [dB]
— Frequency 794.000 MHz [dB]