

Appendix A

RF Test Data for BT LE V4.2 (Conducted Measurement)

Product Name: RGB LED Photography Video Light

Trade Mark: Neewer


Test Model: RGB660

Environmental Conditions

Temperature:	24.6° C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Kay Hu
Supervised by:	Li Huan


A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

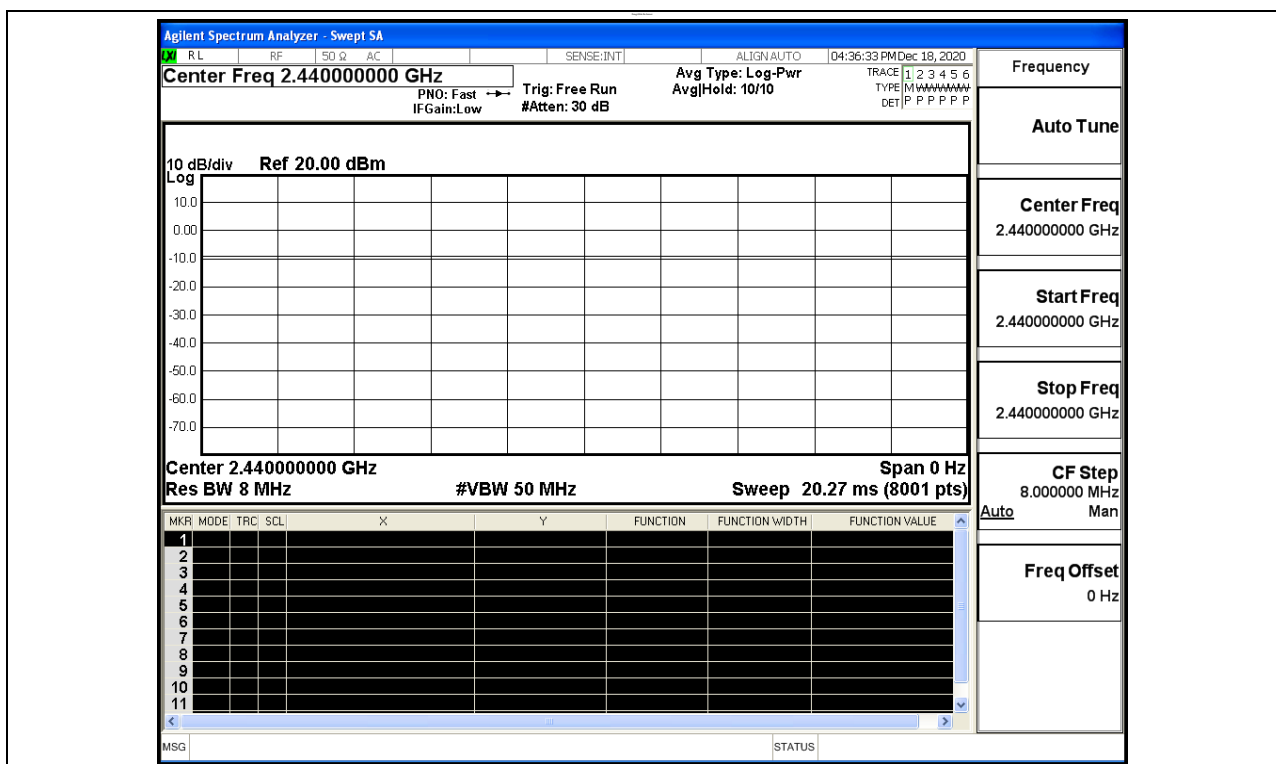

A.2 Maximum Conducted Peak Output Power



Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.429	30	PASS
BT LE	MCH	-1.201	30	PASS
BT LE	HCH	-2.536	30	PASS

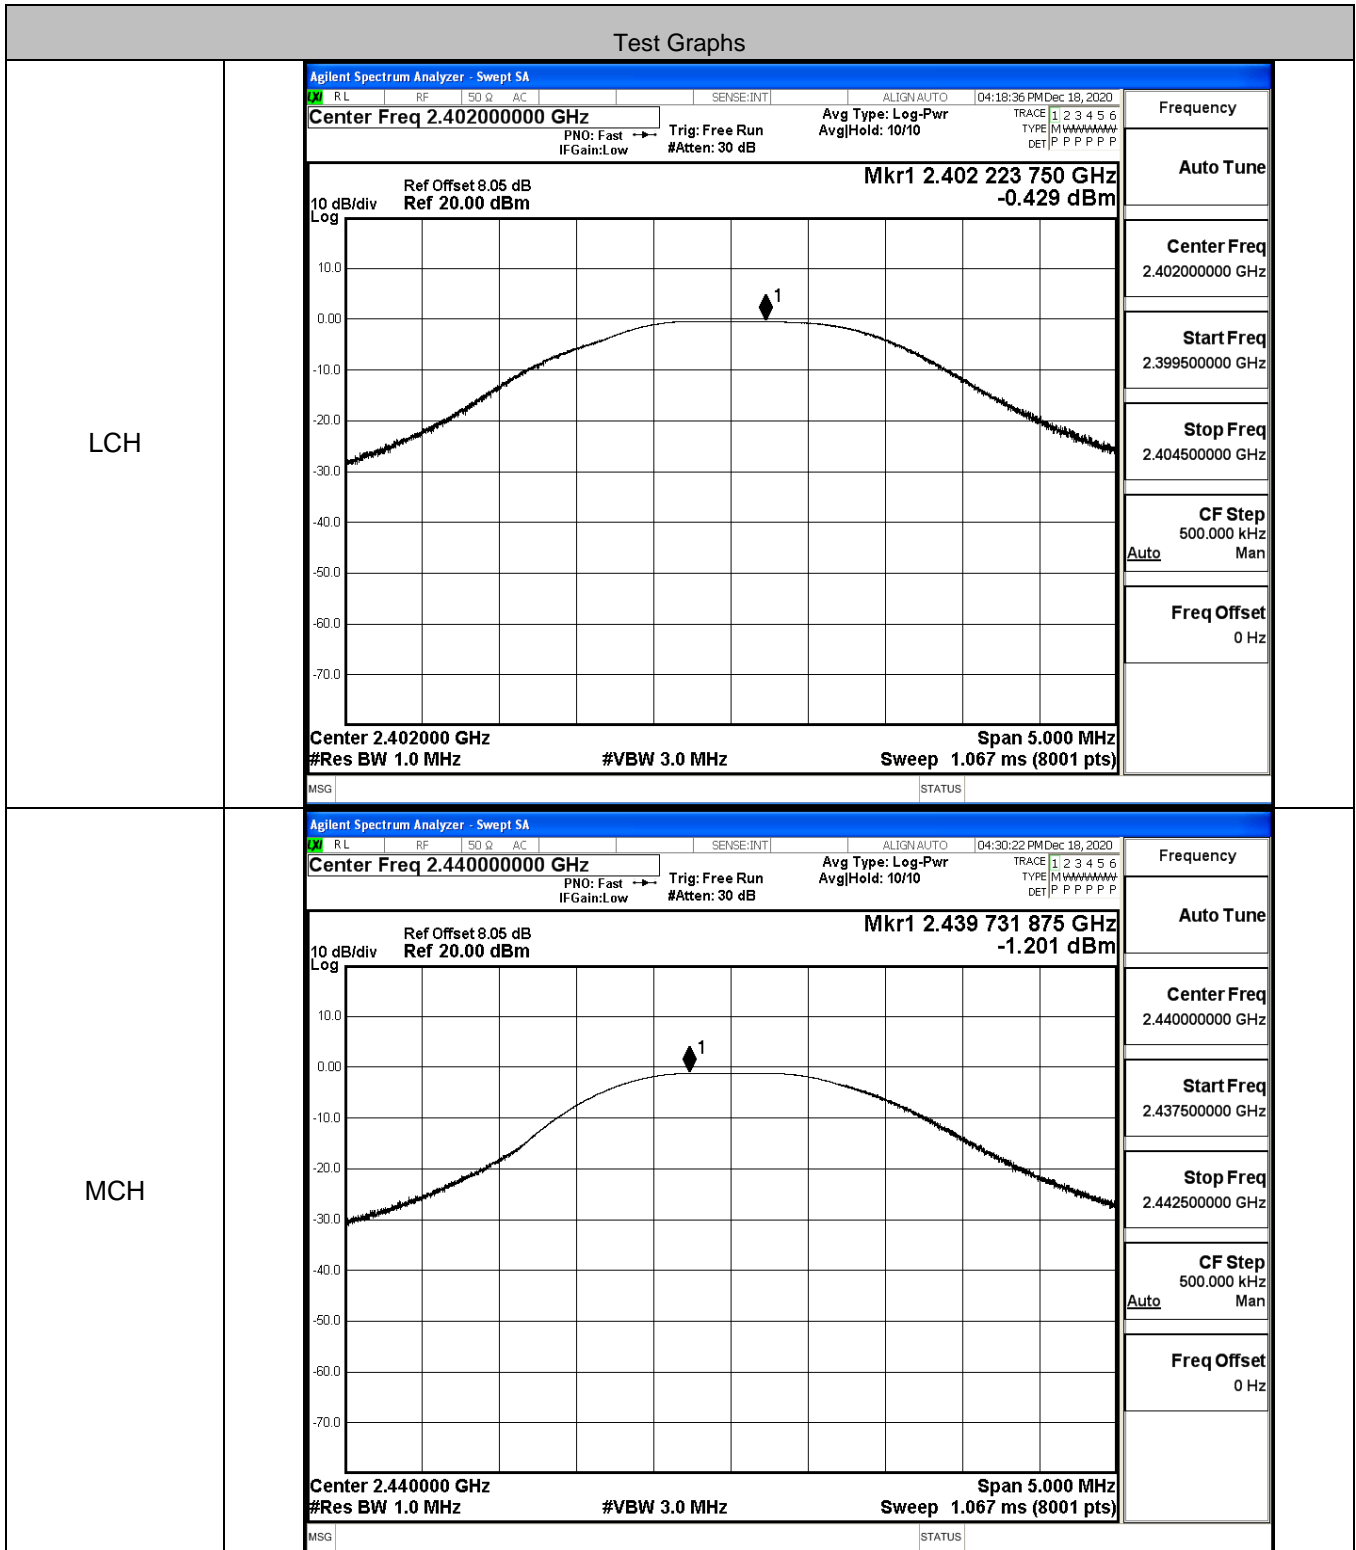


A.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-14.675	8	PASS
BT LE	MCH	-14.795	8	PASS
BT LE	HCH	-15.895	8	PASS

Test Graphs

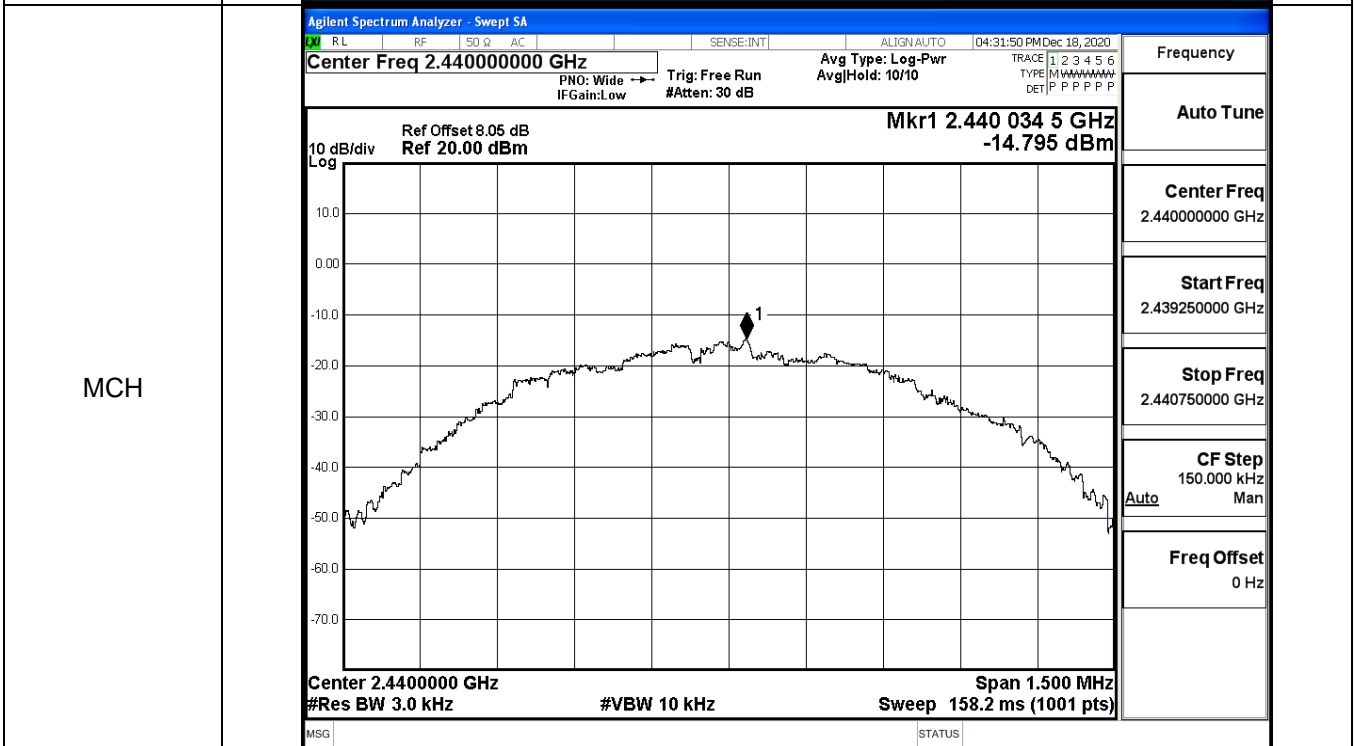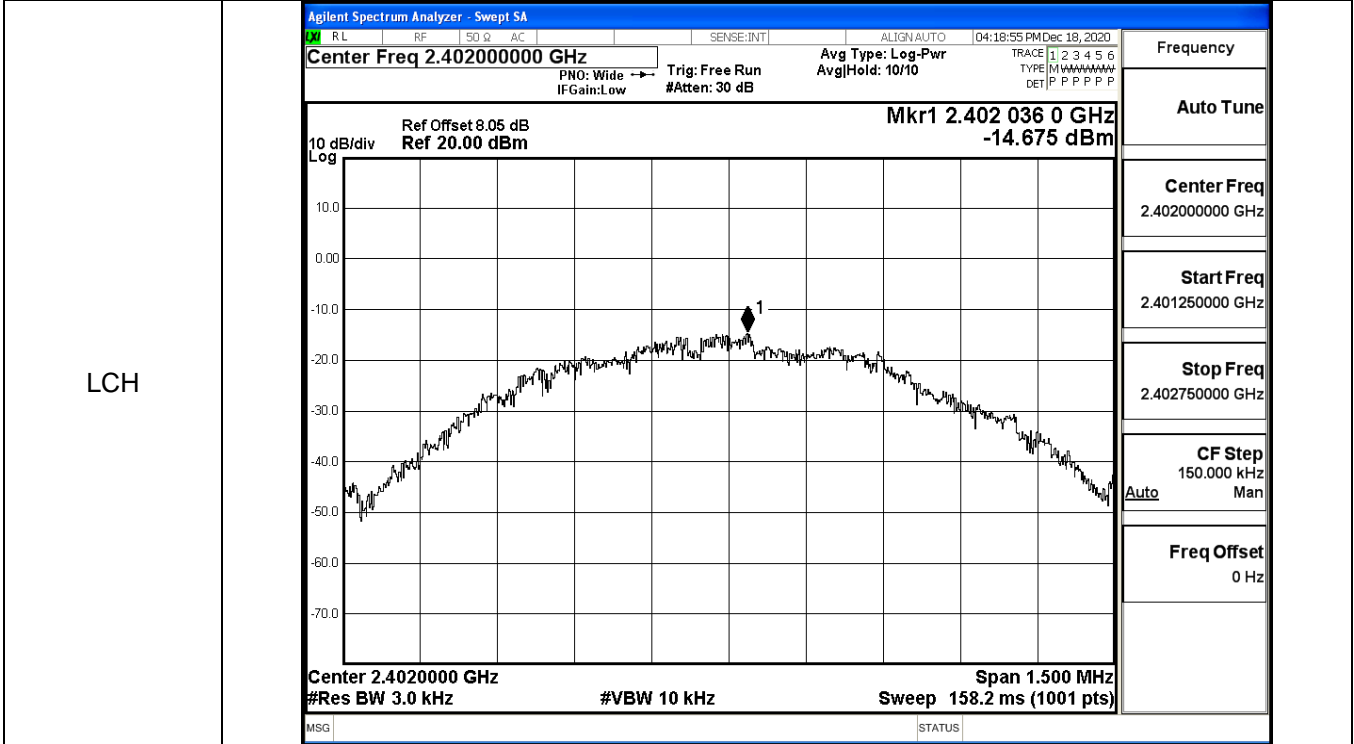

HCH

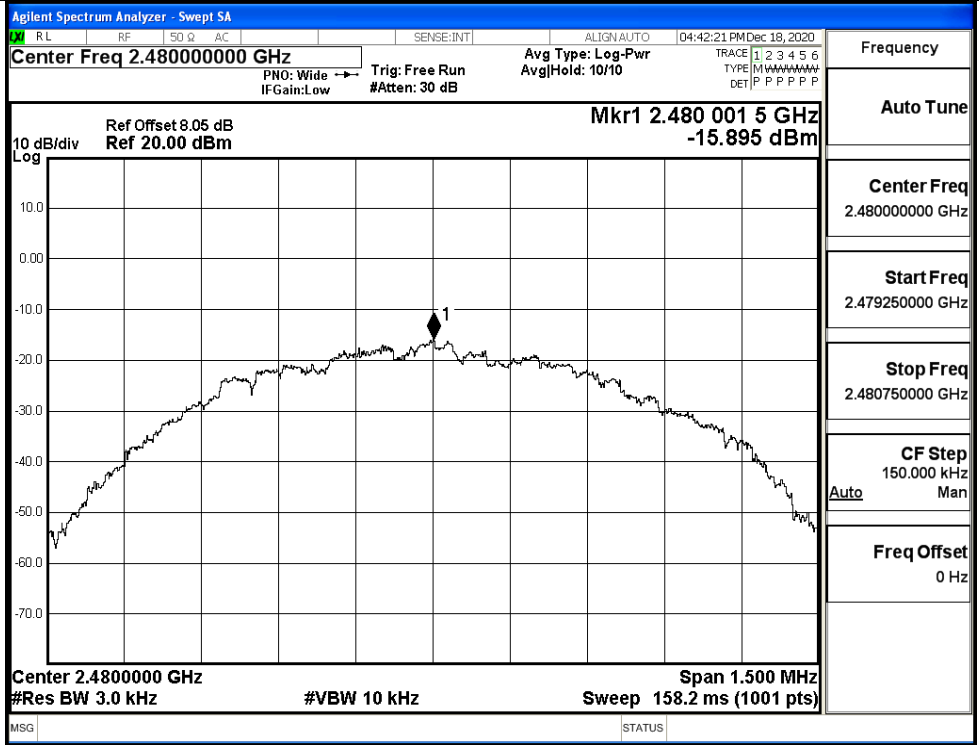

A.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.7207	≥0.5	PASS
BT LE	MCH	0.6936	≥0.5	PASS
BT LE	HCH	0.6920	≥0.5	PASS

Test Graphs																			
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 04:17:11 PM Dec 18, 2020</p> <p style="margin: 0;">Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None Trig: Free Run AvgHold: >1/1 #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="text-align: right; margin: 0;">Mkr1 2.4019895 GHz -0.58258 dBm</p> </div> <p style="font-size: small; margin: 0;">Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">6.99 dBm</td> </tr> <tr> <td style="text-align: center;">1.5150 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>32.922 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>720.7 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	6.99 dBm	1.5150 MHz			Transmit Freq Error	32.922 kHz	OBW Power	x dB Bandwidth	720.7 kHz	x dB			99.00 %			-6.00 dB
Occupied Bandwidth	Total Power	6.99 dBm																	
1.5150 MHz																			
Transmit Freq Error	32.922 kHz	OBW Power																	
x dB Bandwidth	720.7 kHz	x dB																	
		99.00 %																	
		-6.00 dB																	
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 04:25:52 PM Dec 18, 2020</p> <p style="margin: 0;">Center Freq: 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="text-align: right; margin: 0;">Mkr1 2.4400274 GHz -1.3845 dBm</p> </div> <p style="font-size: small; margin: 0;">Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">5.95 dBm</td> </tr> <tr> <td style="text-align: center;">1.2167 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>56.034 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>693.6 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	5.95 dBm	1.2167 MHz			Transmit Freq Error	56.034 kHz	OBW Power	x dB Bandwidth	693.6 kHz	x dB			99.00 %			-6.00 dB
Occupied Bandwidth	Total Power	5.95 dBm																	
1.2167 MHz																			
Transmit Freq Error	56.034 kHz	OBW Power																	
x dB Bandwidth	693.6 kHz	x dB																	
		99.00 %																	
		-6.00 dB																	

HCH

Agilent Spectrum Analyzer - Occupied BW

RL	RF	50 Ω	AC	SENSE:INT	ALIGN:AUTO	04:39:15 PM Dec 18, 2020
Center Freq 2.480000000 GHz			Center Freq: 2.480000000 GHz		Radio Std: None	
			Trig: Free Run		AvgHold: 1/1	
#IFGain:Low			#Atten: 30 dB		Radio Device: BTS	

10 dB/div
Log

Mkr1 2.480036 GHz
-2.7052 dBm

Center 2.48 GHz	#VBW 300 kHz	Span 3 MHz
#Res BW 100 kHz	Sweep 1.067 ms	

Occupied Bandwidth	Total Power	4.57 dBm
1.1198 MHz		
Transmit Freq Error	35.448 kHz	OBW Power
x dB Bandwidth	692.0 kHz	x dB
		99.00 %
		-6.00 dB

Frequency

Center Freq
2.480000000 GHz

CF Step
300.000 kHz
Auto Man

Freq Offset
0 Hz


A.5 Occupied Bandwidth

Mode	Channel	99% Bandwidth [MHz]	Verdict
BT LE	LCH	1.1825	PASS
BT LE	MCH	1.0467	PASS
BT LE	HCH	1.0257	PASS

Test Graphs


LCH	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>15 dB/div</p> <p>Log</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1825 MHz</p> <p>Total Power 7.38 dBm</p> <p>Transmit Freq Error 66.088 kHz</p> <p>x dB Bandwidth 1.425 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>
MCH	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>15 dB/div</p> <p>Log</p> <p>Center 2.44 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.0467 MHz</p> <p>Total Power 6.85 dBm</p> <p>Transmit Freq Error 15.998 kHz</p> <p>x dB Bandwidth 1.281 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.44000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>

HCH

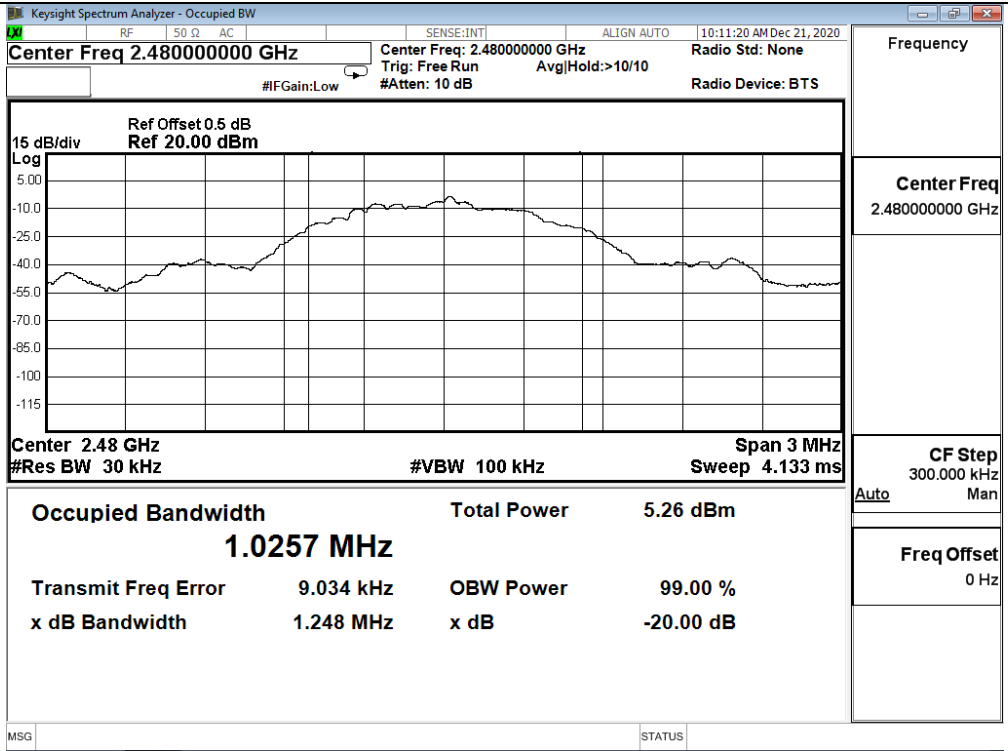


A.6 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.555	-36.179	-20.555	PASS
BT LE	MCH	-1.399	-36.585	-21.399	PASS
BT LE	HCH	-2.658	-36.667	-22.658	PASS

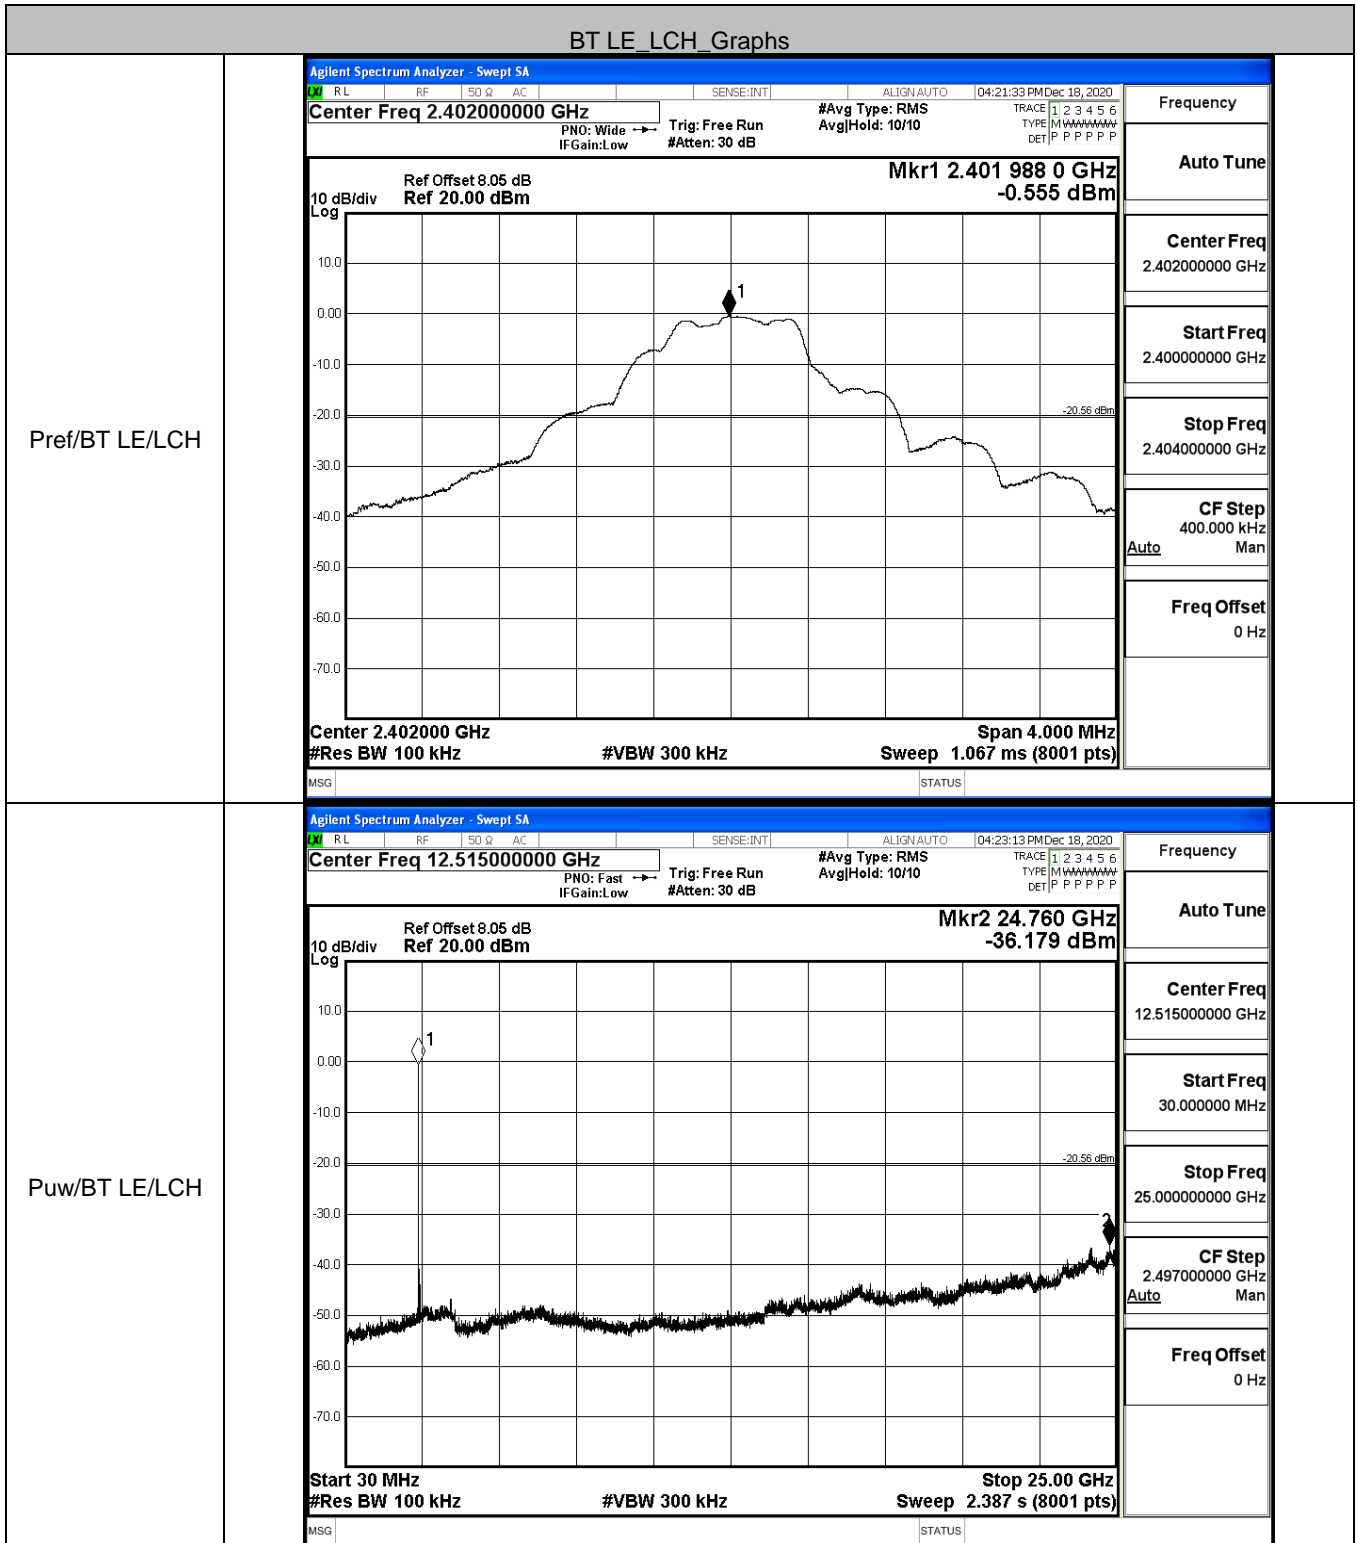


BT LE_MCH_Graphs

Pref/BT LE/MCH

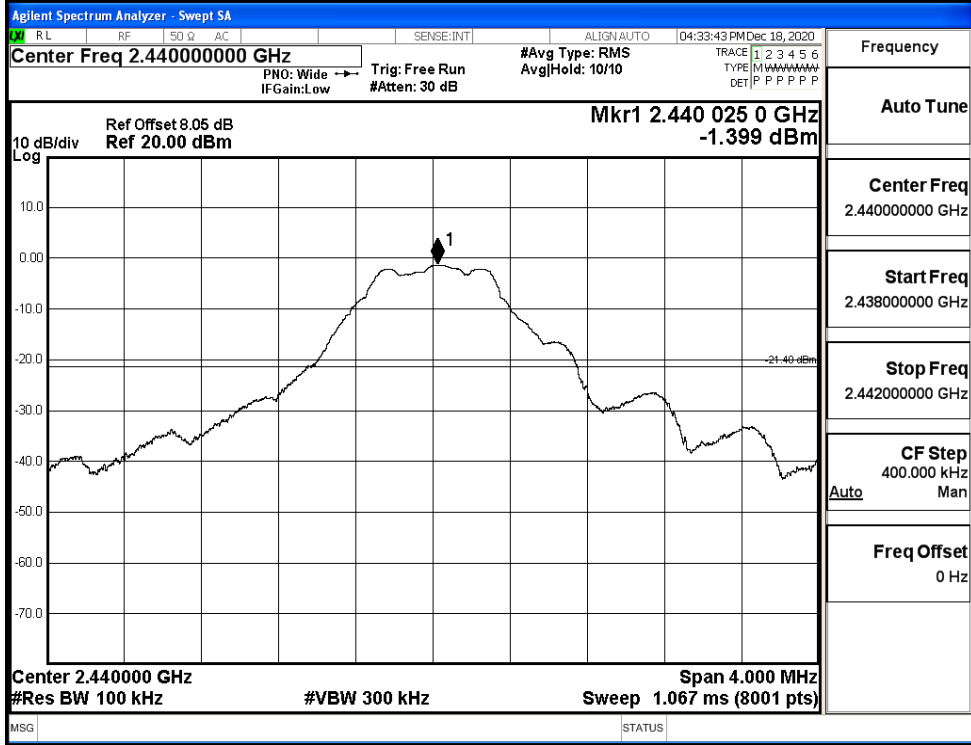


Puw/BT LE/MCH

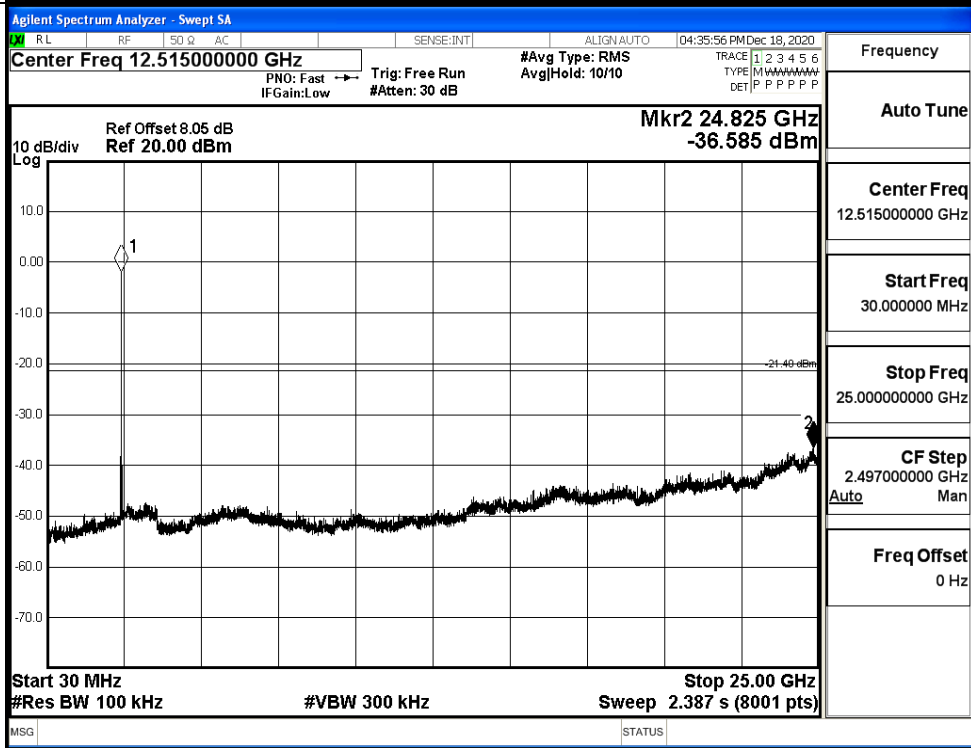


BT LE_HCH_Graphs

Pref/BT LE/HCH

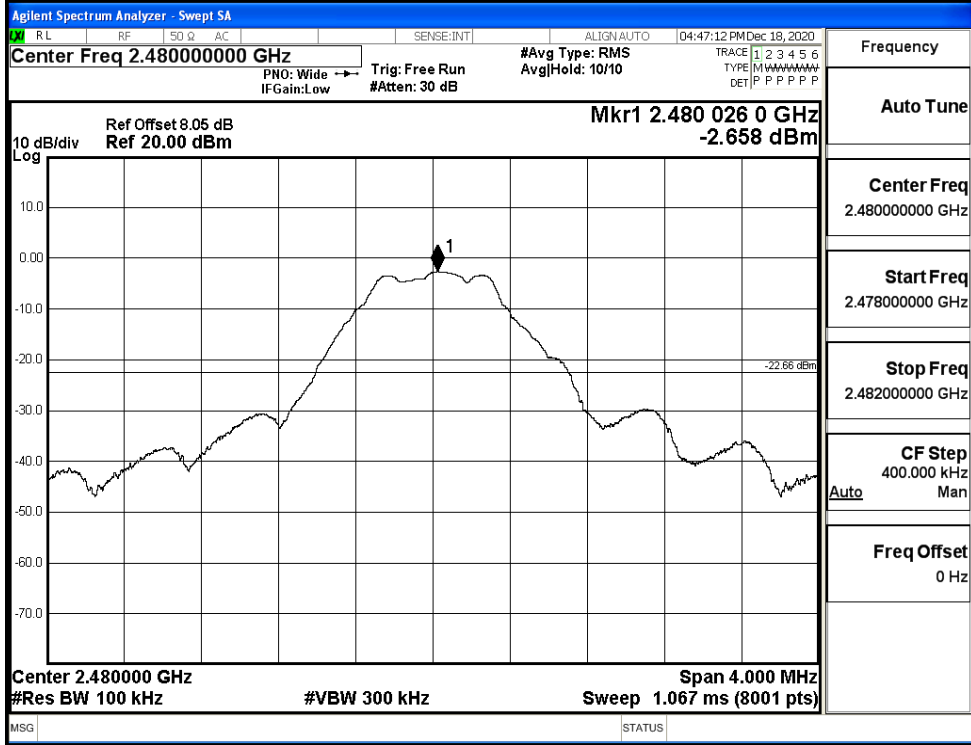



Puw/BT LE/HCH

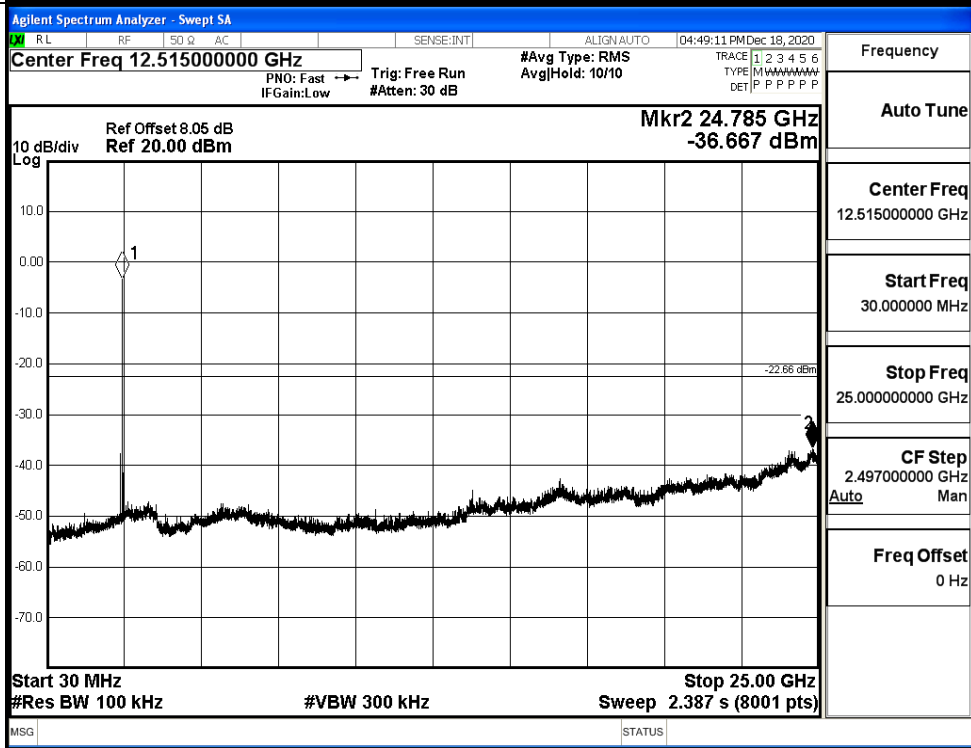

A.7 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.693	-49.892	-20.69	PASS
BT LE	HCH	-2.458	-36.411	-22.46	PASS


Test Graphs

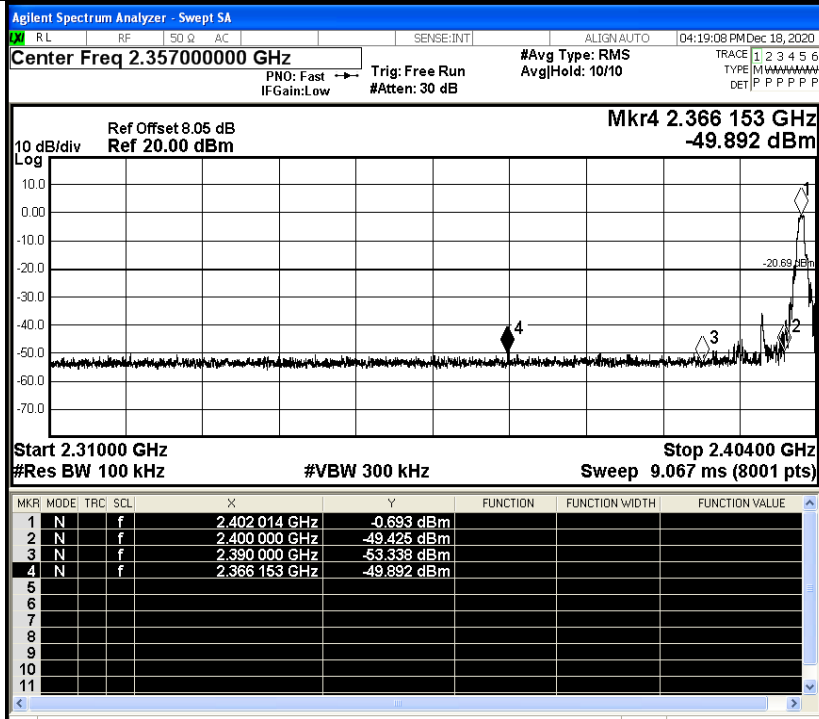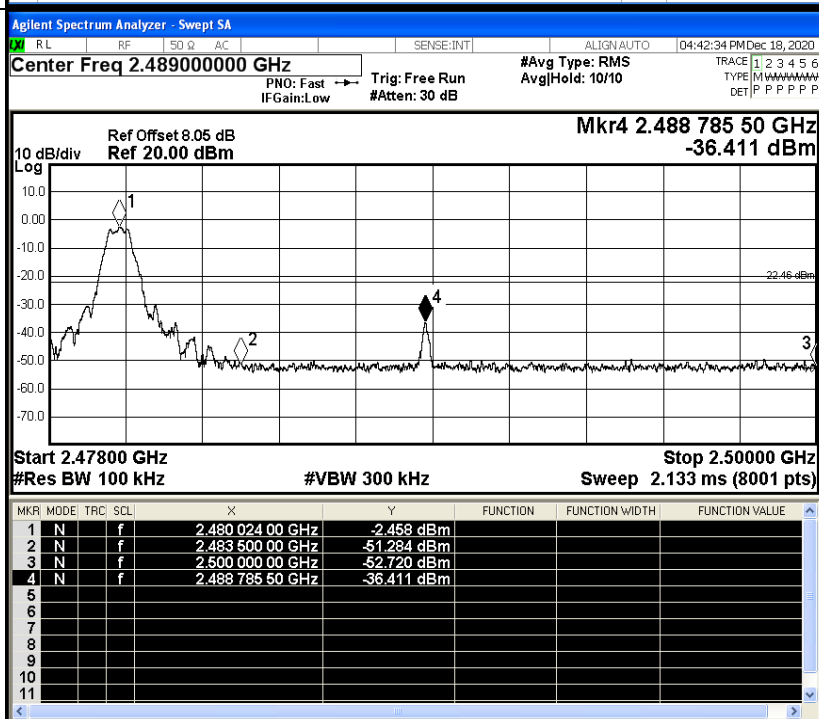LCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.357000000 GHz #Ave Type: RMS AvgHold: 10/10 Mkr4 2.366 153 GHz -49.892 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40400 GHz Sweep 9.067 ms (8001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.402 014 GHz</td><td>-0.693 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-49.425 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-53.338 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.366 153 GHz</td><td>-49.892 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.402 014 GHz	-0.693 dBm				2	N	f		2.400 000 GHz	-49.425 dBm				3	N	f		2.390 000 GHz	-53.338 dBm				4	N	f		2.366 153 GHz	-49.892 dBm				Frequency Auto Tune Center Freq 2.357000000 GHz Start Freq 2.310000000 GHz Stop Freq 2.404000000 GHz CF Step 9.400000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.402 014 GHz	-0.693 dBm																																										
2	N	f		2.400 000 GHz	-49.425 dBm																																										
3	N	f		2.390 000 GHz	-53.338 dBm																																										
4	N	f		2.366 153 GHz	-49.892 dBm																																										
HCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz #Ave Type: RMS AvgHold: 10/10 Mkr4 2.488 785 50 GHz -36.411 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.133 ms (8001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.480 024 00 GHz</td><td>-2.458 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 00 GHz</td><td>-51.284 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-52.720 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.488 785 50 GHz</td><td>-36.411 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.480 024 00 GHz	-2.458 dBm				2	N	f		2.483 500 00 GHz	-51.284 dBm				3	N	f		2.500 000 00 GHz	-52.720 dBm				4	N	f		2.488 785 50 GHz	-36.411 dBm				Frequency Auto Tune Center Freq 2.489000000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.480 024 00 GHz	-2.458 dBm																																										
2	N	f		2.483 500 00 GHz	-51.284 dBm																																										
3	N	f		2.500 000 00 GHz	-52.720 dBm																																										
4	N	f		2.488 785 50 GHz	-36.411 dBm																																										


A.8 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-41.63	2.0	0	53.63	PEAK	74	PASS
		Ant1	2310.0	-53.43	2.0	0	41.83	AV	54	PASS
		Ant1	2390.0	-36.66	2.0	0	58.59	PEAK	74	PASS
		Ant1	2390.0	-53.13	2.0	0	42.13	AV	54	PASS
	2480	Ant1	2483.5	-37.14	2.0	0	58.12	PEAK	74	PASS
		Ant1	2483.5	-52.30	2.0	0	42.96	AV	54	PASS
		Ant1	2500.0	-41.21	2.0	0	54.05	PEAK	74	PASS
		Ant1	2500.0	-52.35	2.0	0	42.91	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

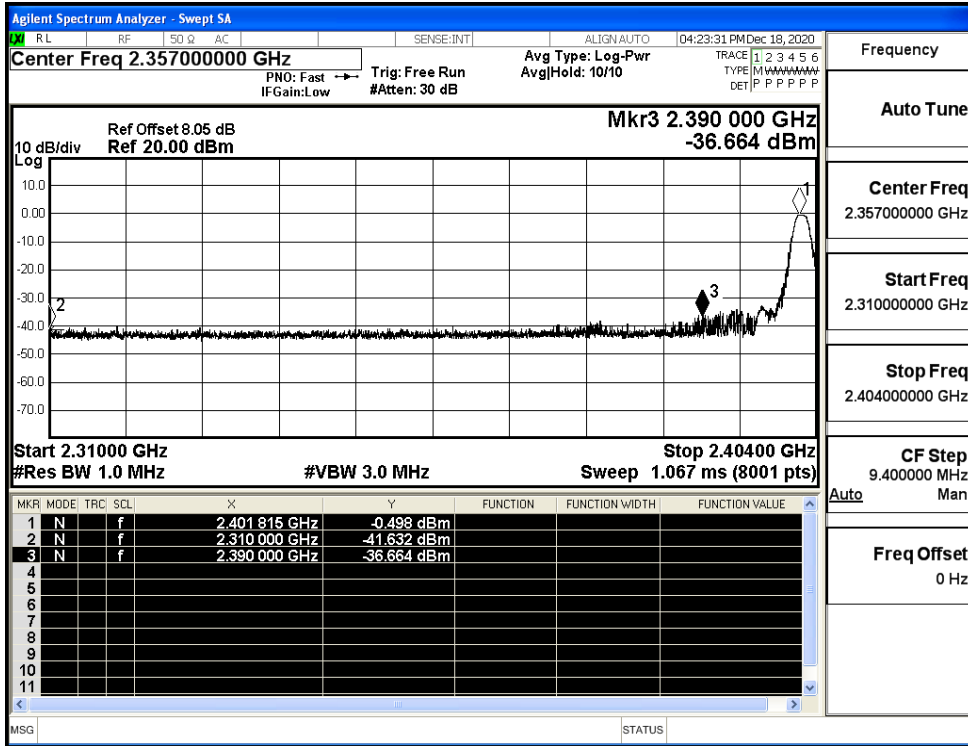

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

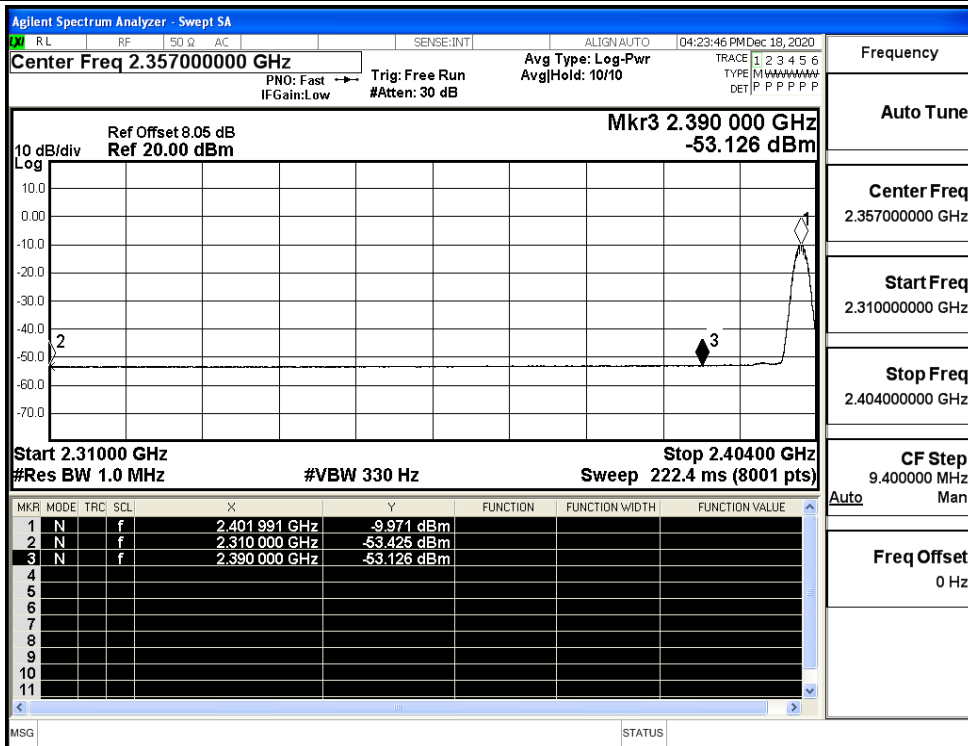

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

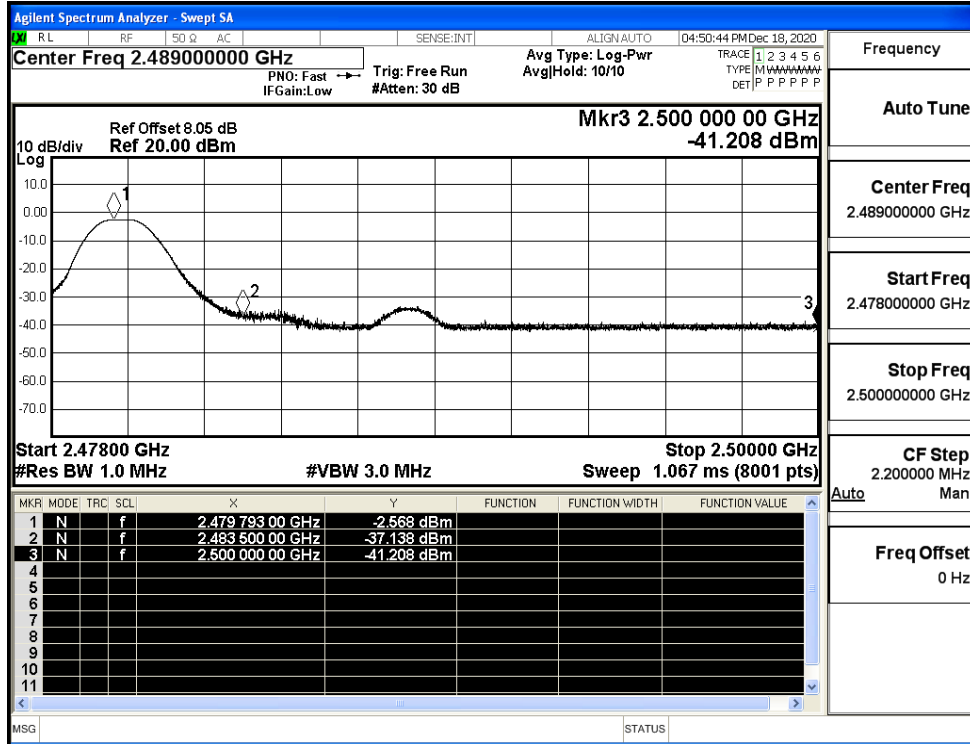

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

