

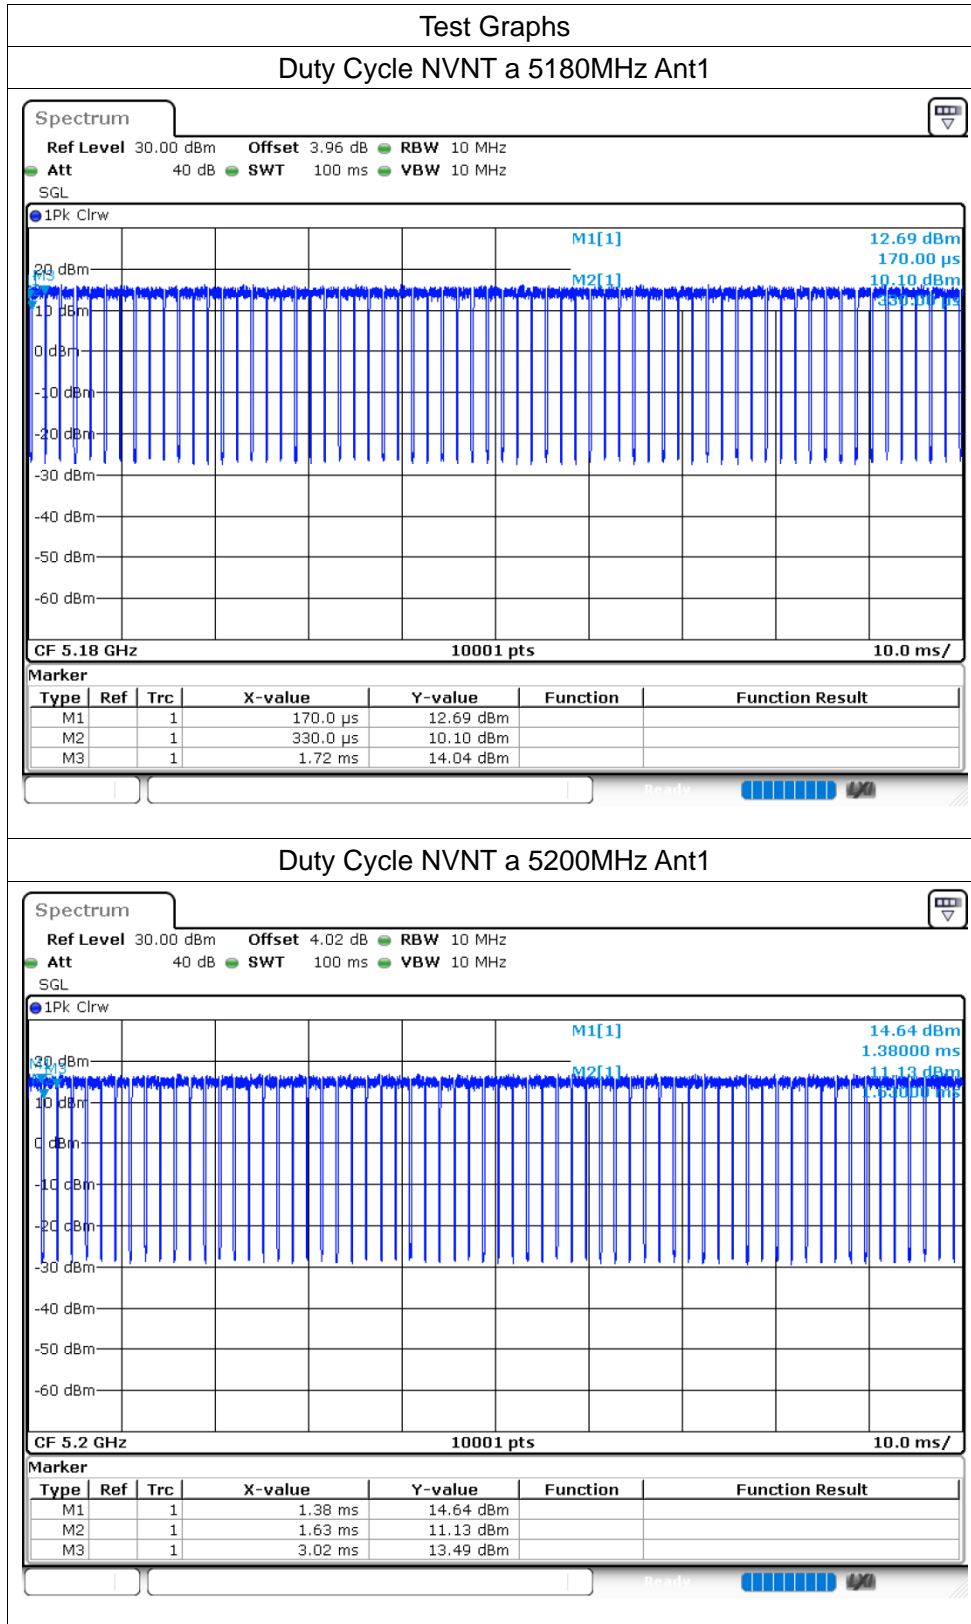




5.2G WIFI:

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	88.66	0.52	0.72
NVNT	a	5200	Ant1	89.16	0.5	0.72
NVNT	a	5240	Ant1	88.92	0.51	0.72
NVNT	n20	5180	Ant1	87.44	0.58	0.85
NVNT	n20	5200	Ant1	87.57	0.58	0.85
NVNT	n20	5240	Ant1	87.46	0.58	0.85
NVNT	n40	5190	Ant1	77.65	1.1	1.72
NVNT	n40	5230	Ant1	77.33	1.12	1.69
NVNT	ac20	5180	Ant1	87.4	0.58	0.84
NVNT	ac20	5200	Ant1	87.59	0.58	0.85
NVNT	ac20	5240	Ant1	87.4	0.58	0.85
NVNT	ac40	5190	Ant1	77.78	1.09	1.69
NVNT	ac40	5230	Ant1	77.36	1.11	1.69
NVNT	ac80	5210	Ant1	64.42	1.91	3.33

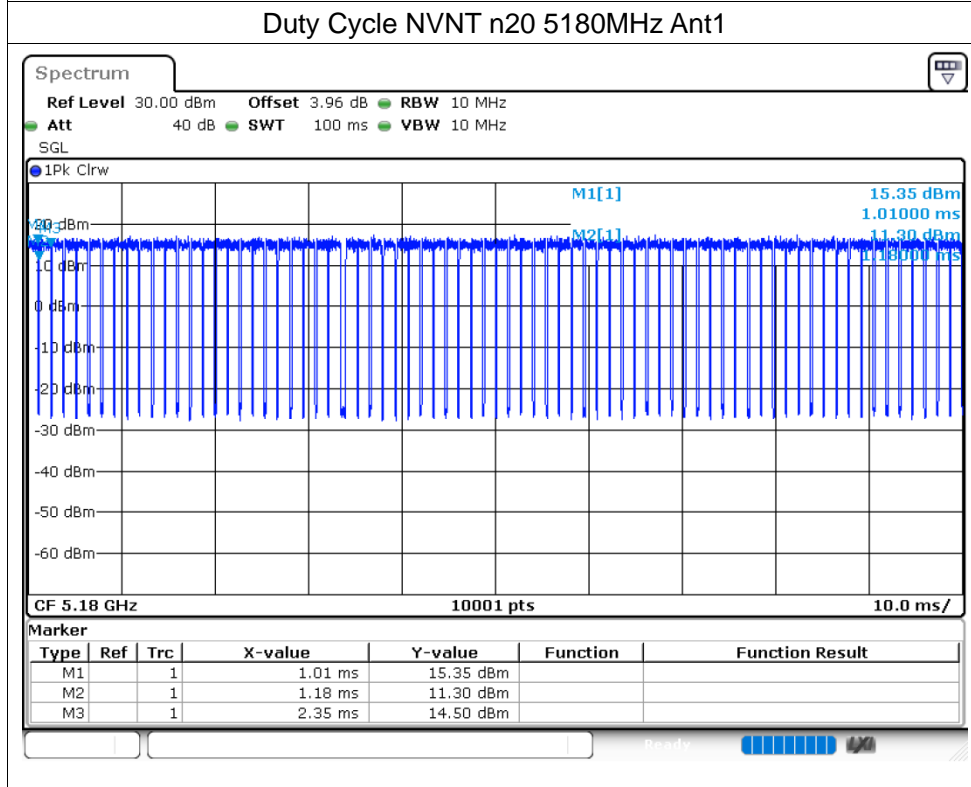

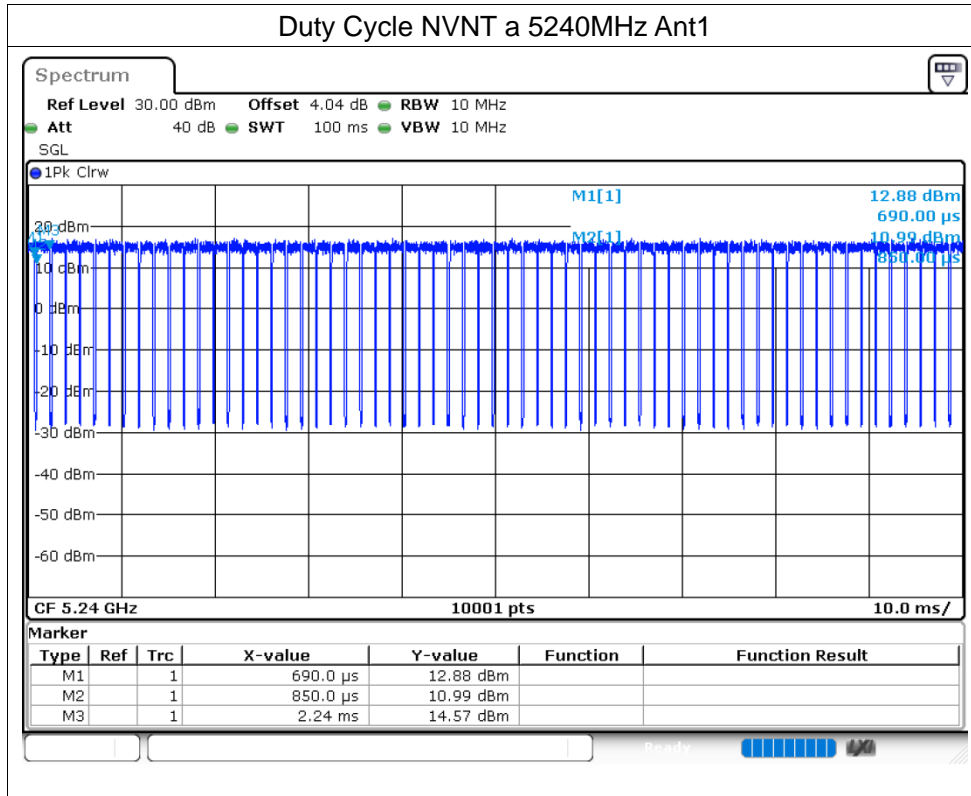

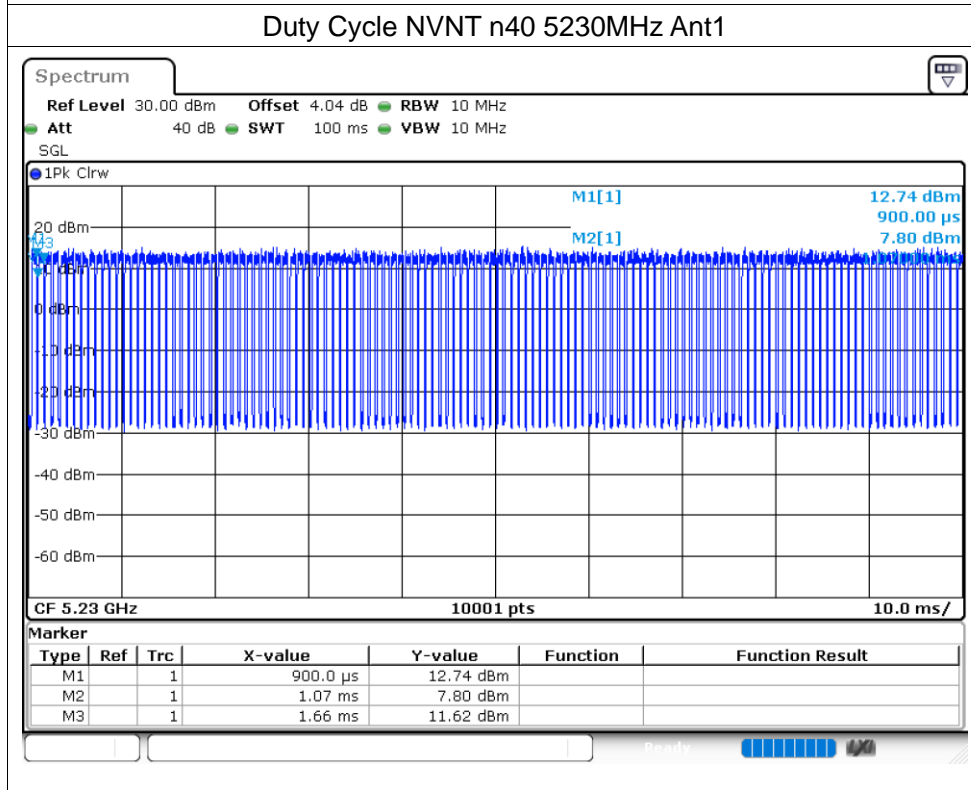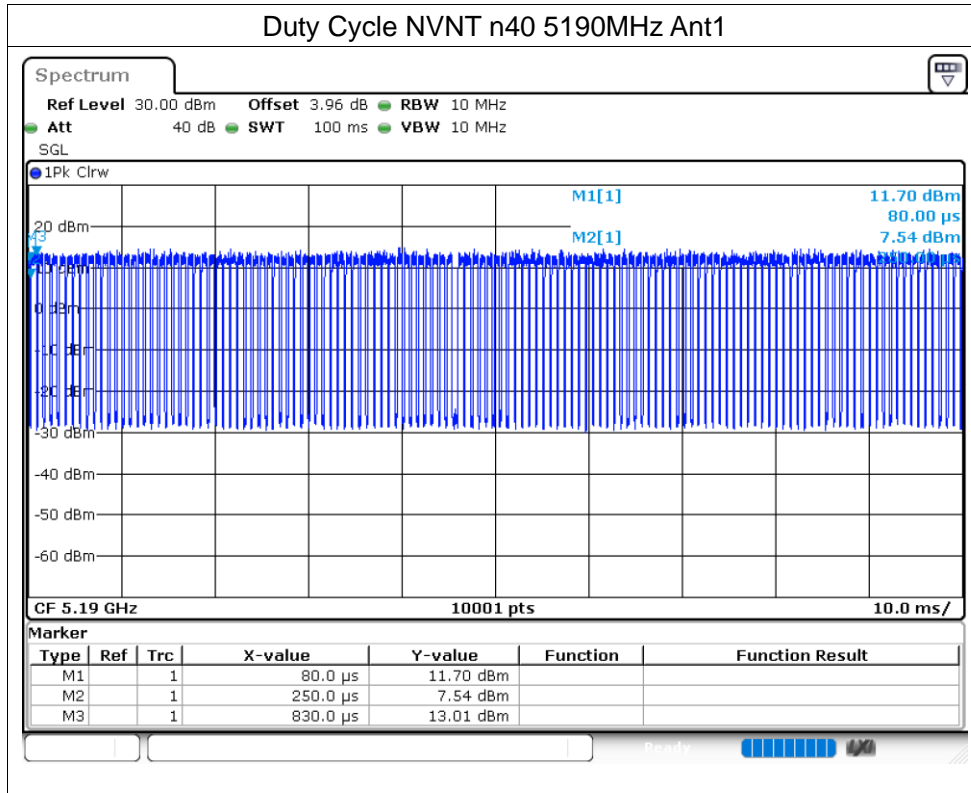

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	11.44	0.52	11.96	30	Pass
NVNT	a	5200	Ant1	10.76	0.5	11.26	30	Pass
NVNT	a	5240	Ant1	10.65	0.51	11.16	30	Pass
NVNT	n20	5180	Ant1	12.34	0.58	12.92	30	Pass
NVNT	n20	5200	Ant1	11.72	0.58	12.3	30	Pass
NVNT	n20	5240	Ant1	11.57	0.58	12.15	30	Pass
NVNT	n40	5190	Ant1	11.72	1.1	12.82	30	Pass
NVNT	n40	5230	Ant1	11.19	1.12	12.31	30	Pass
NVNT	ac20	5180	Ant1	12.35	0.58	12.93	30	Pass
NVNT	ac20	5200	Ant1	11.63	0.58	12.21	30	Pass
NVNT	ac20	5240	Ant1	11.6	0.58	12.18	30	Pass
NVNT	ac40	5190	Ant1	11.74	1.09	12.83	30	Pass
NVNT	ac40	5230	Ant1	11.14	1.11	12.25	30	Pass
NVNT	ac80	5210	Ant1	11.53	1.91	13.44	30	Pass

-26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	19.437	Pass
NVNT	a	5200	Ant1	20.589	Pass
NVNT	a	5240	Ant1	20.172	Pass
NVNT	n20	5180	Ant1	27.268	Pass
NVNT	n20	5200	Ant1	19.947	Pass
NVNT	n20	5240	Ant1	21	Pass
NVNT	n40	5190	Ant1	59.568	Pass
NVNT	n40	5230	Ant1	55.932	Pass
NVNT	ac20	5180	Ant1	23.952	Pass
NVNT	ac20	5200	Ant1	23.409	Pass
NVNT	ac20	5240	Ant1	21.009	Pass
NVNT	ac40	5190	Ant1	54.54	Pass
NVNT	ac40	5230	Ant1	55.608	Pass
NVNT	ac80	5210	Ant1	86.952	Pass



Test Graphs



-26dB Bandwidth NVNT a 5180MHz Ant1


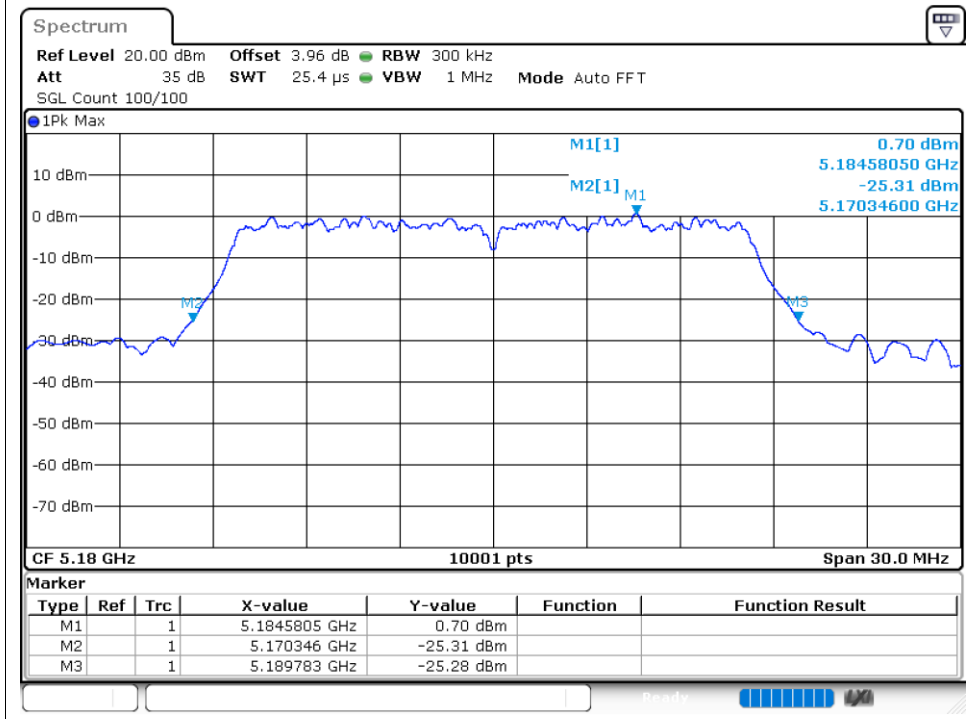




-26dB Bandwidth NVNT a 5200MHz Ant1


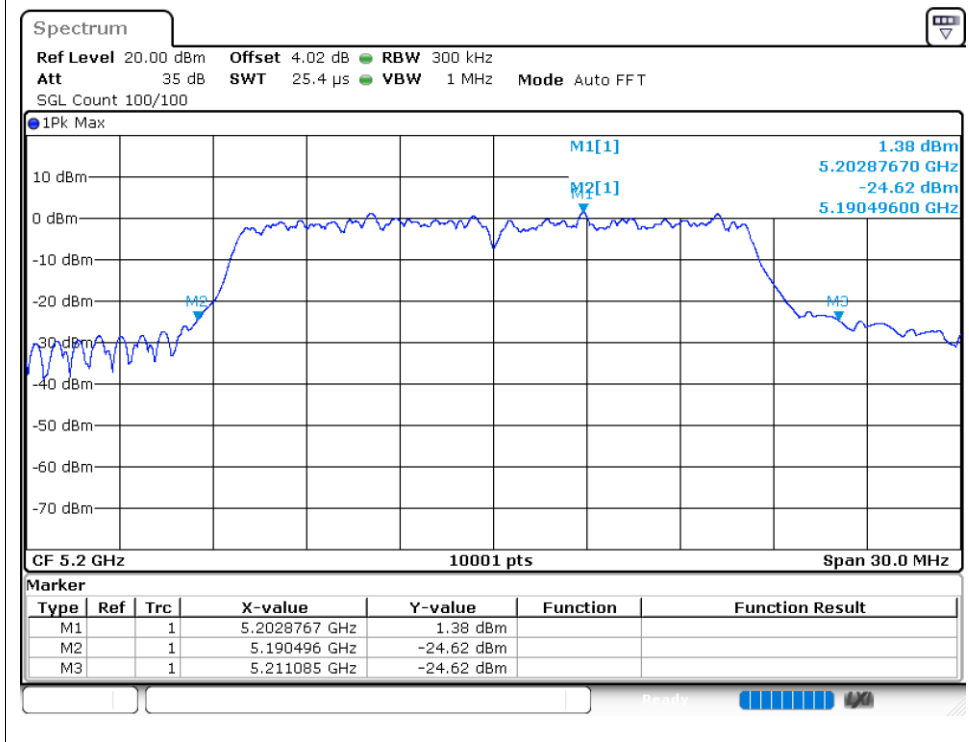


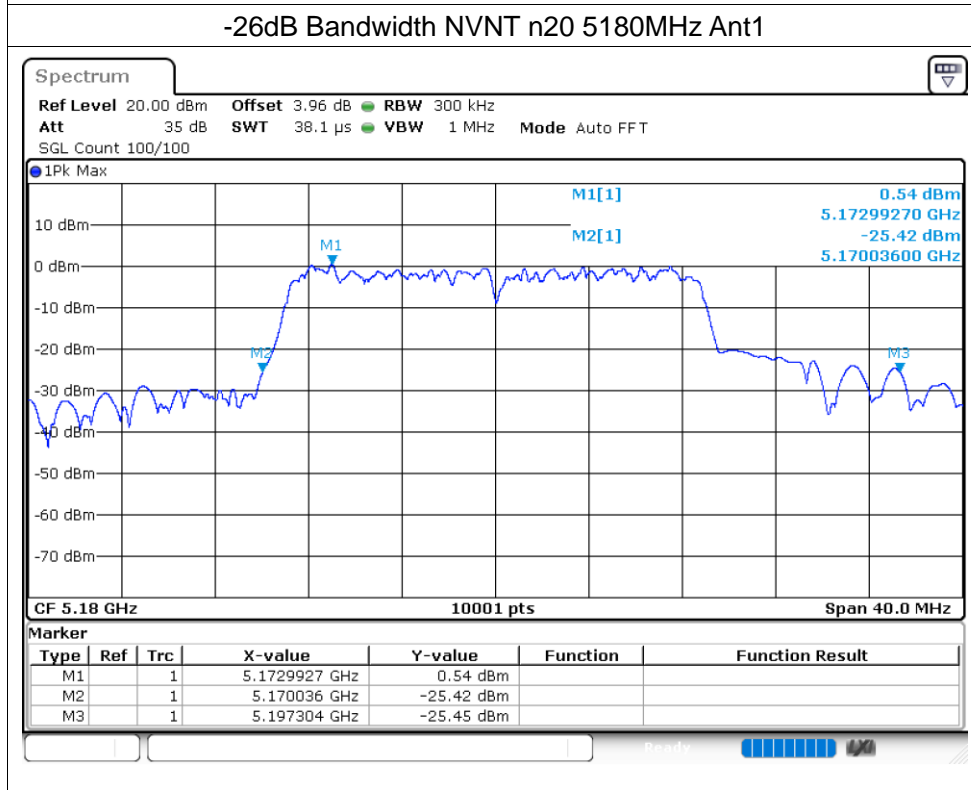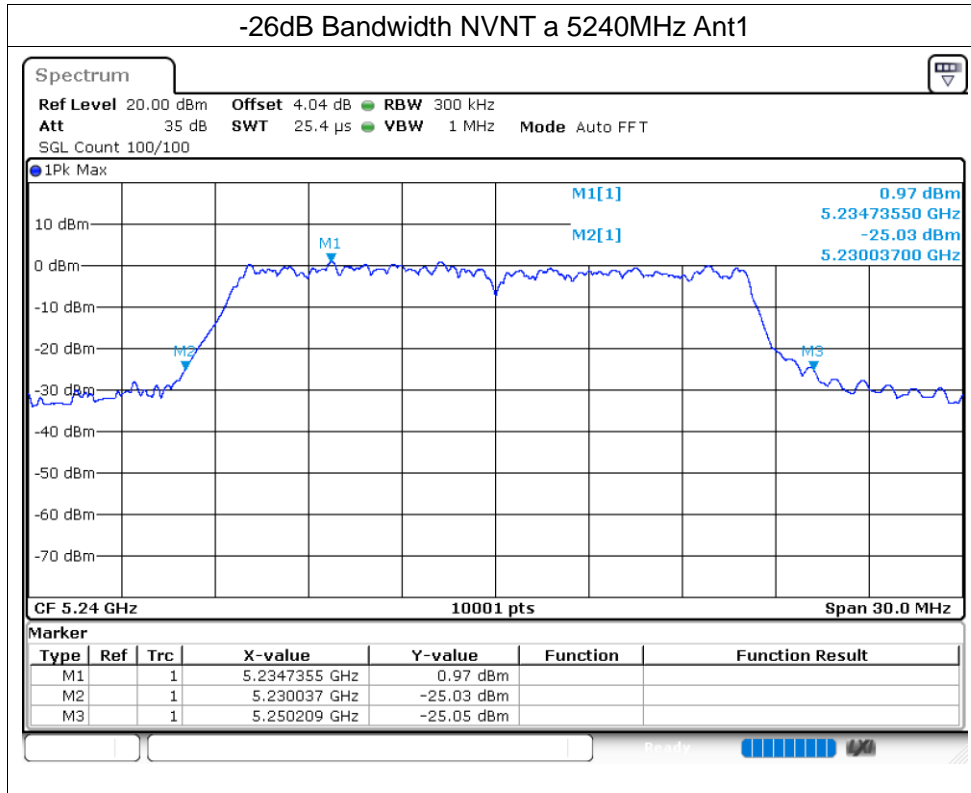

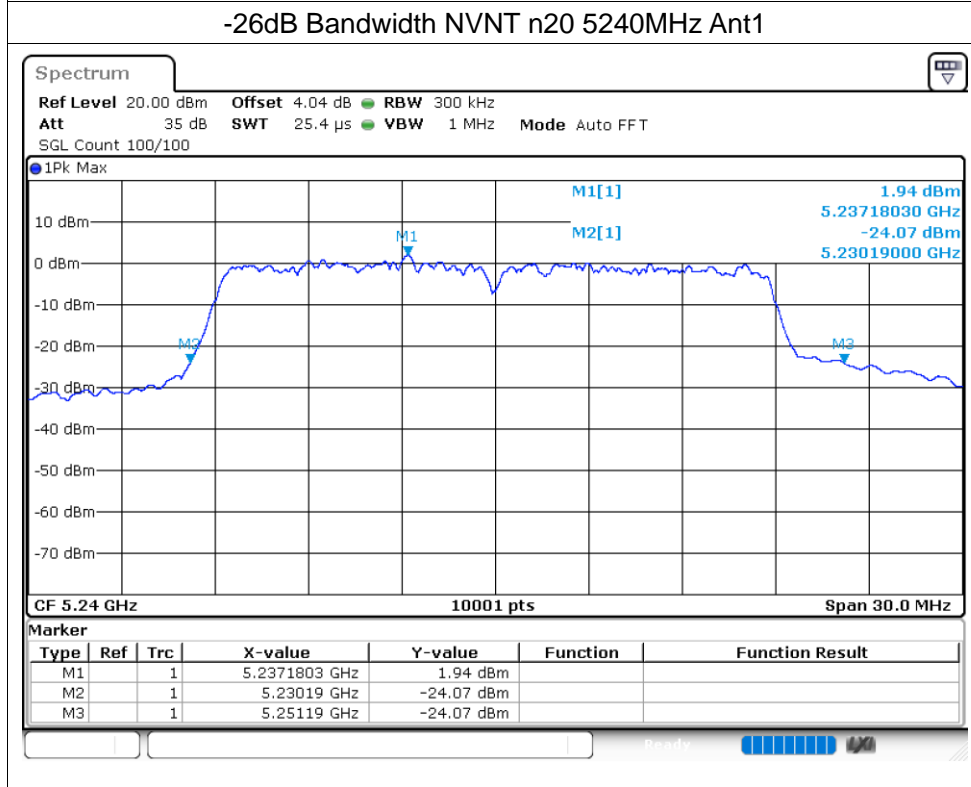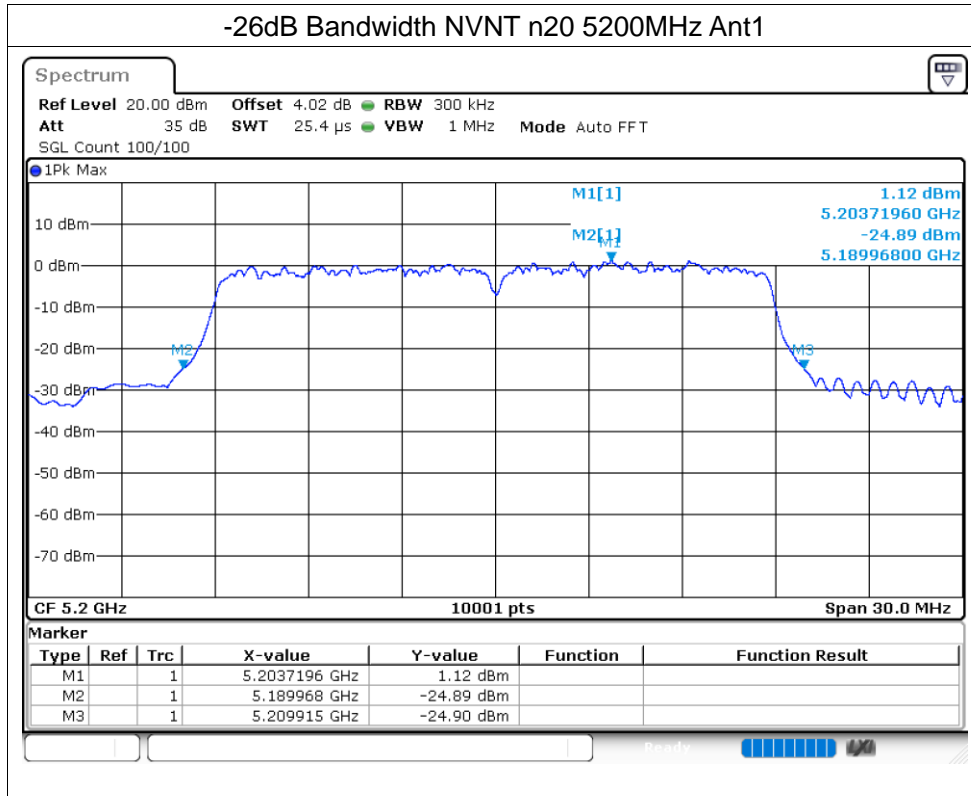

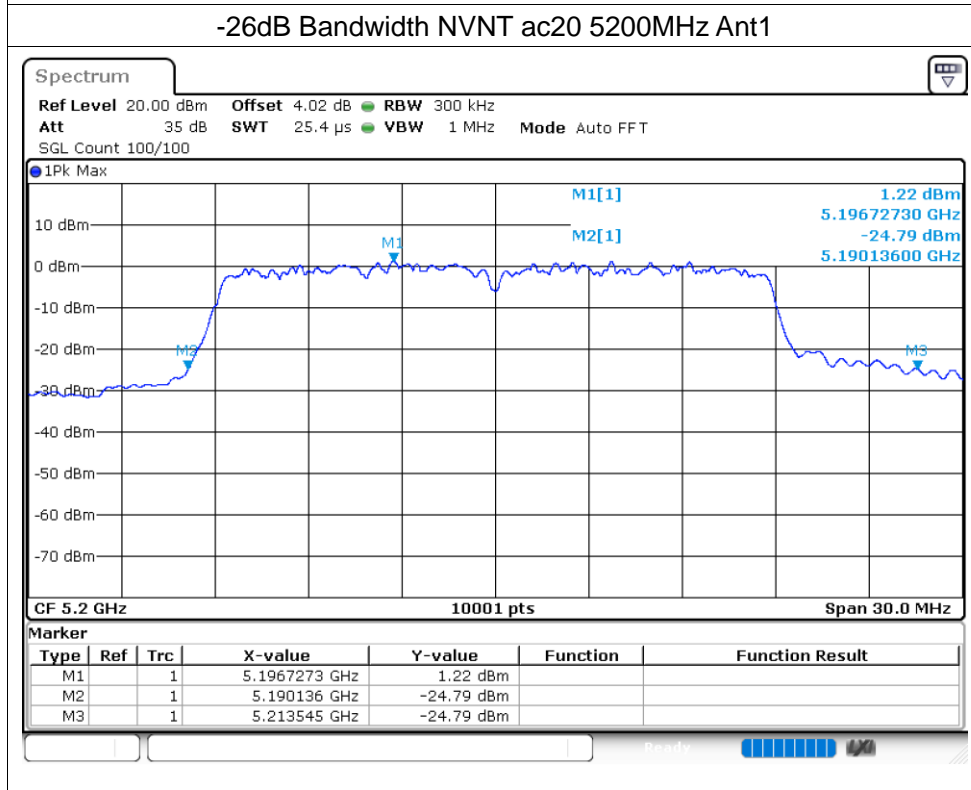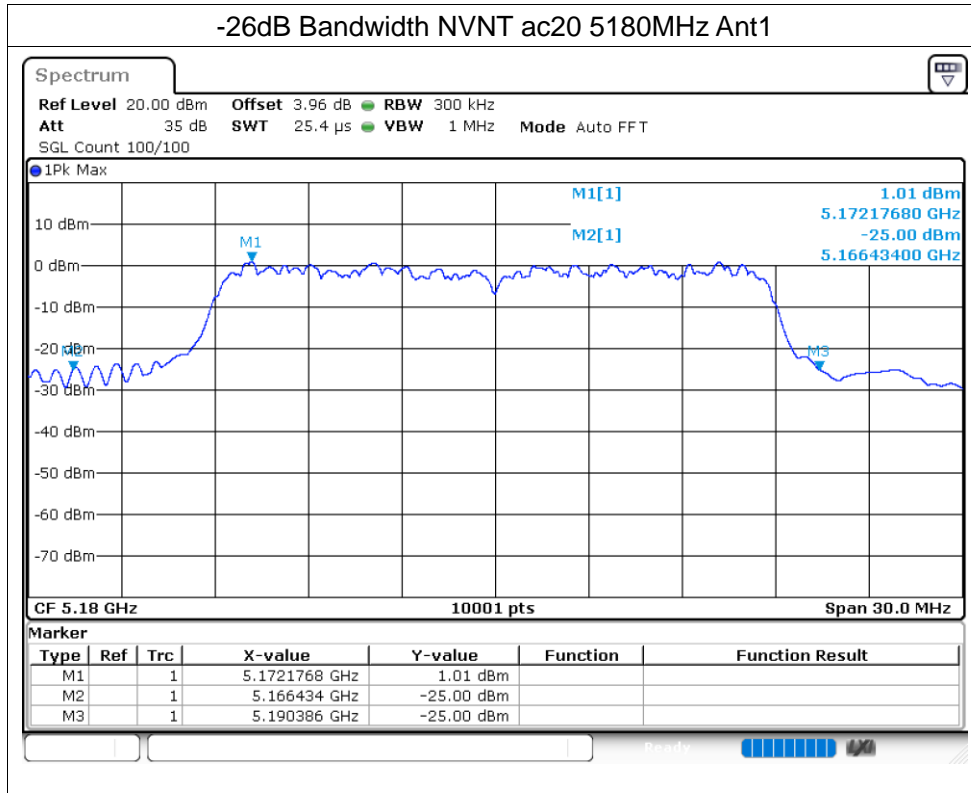

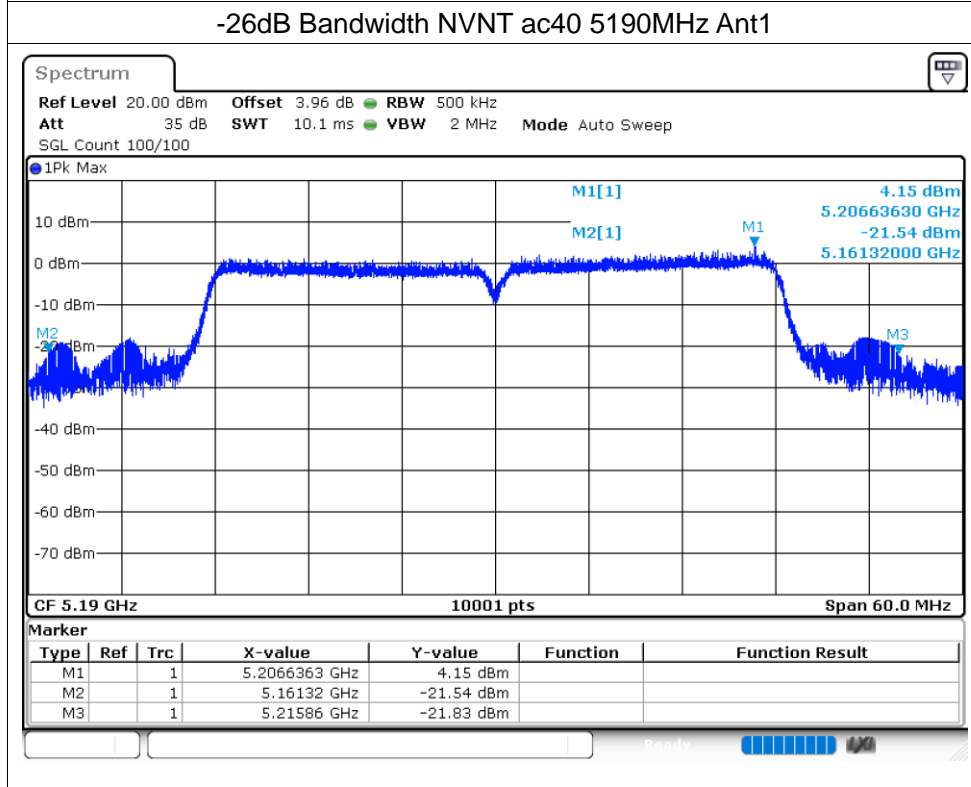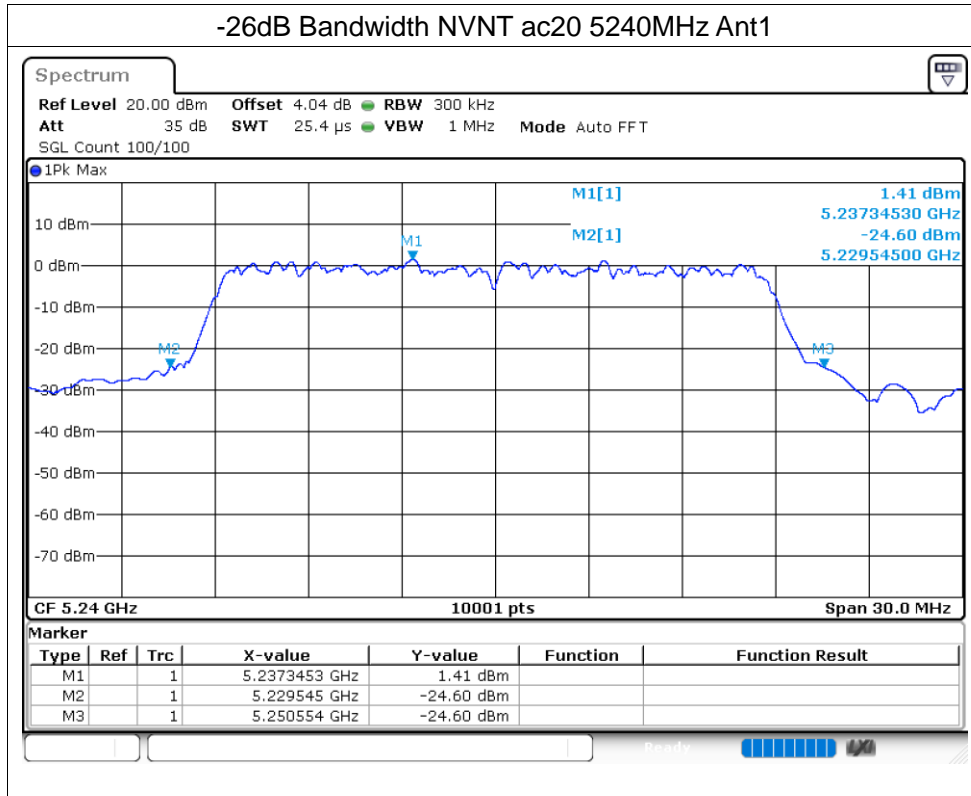

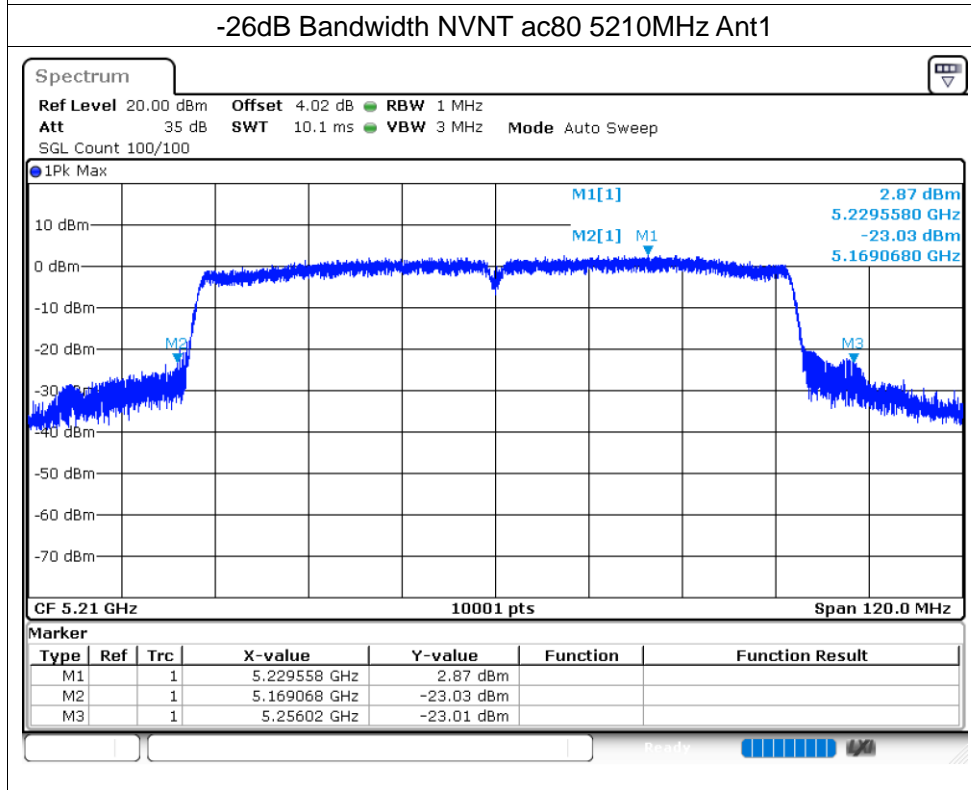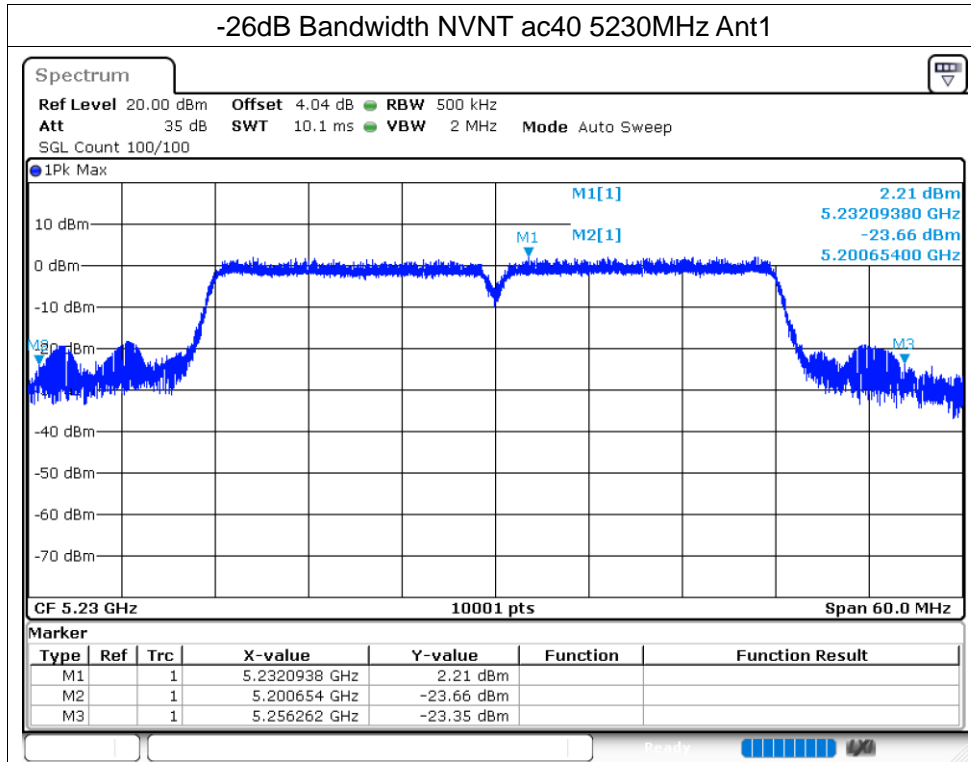


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.549
NVNT	a	5200	Ant1	16.504
NVNT	a	5240	Ant1	16.678
NVNT	n20	5180	Ant1	17.917
NVNT	n20	5200	Ant1	17.767
NVNT	n20	5240	Ant1	17.599
NVNT	n40	5190	Ant1	36.488
NVNT	n40	5230	Ant1	36.362
NVNT	ac20	5180	Ant1	17.626
NVNT	ac20	5200	Ant1	17.632
NVNT	ac20	5240	Ant1	17.641
NVNT	ac40	5190	Ant1	36.5
NVNT	ac40	5230	Ant1	36.386
NVNT	ac80	5210	Ant1	75.22



Test Graphs



OBW NVNT a 5180MHz Ant1


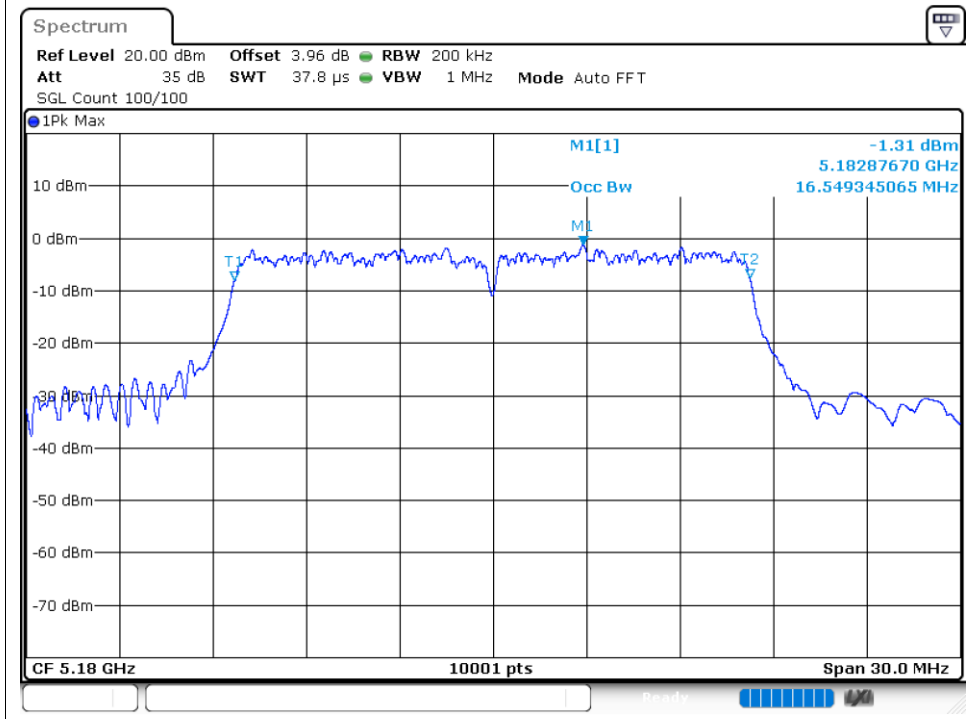




OBW NVNT a 5200MHz Ant1


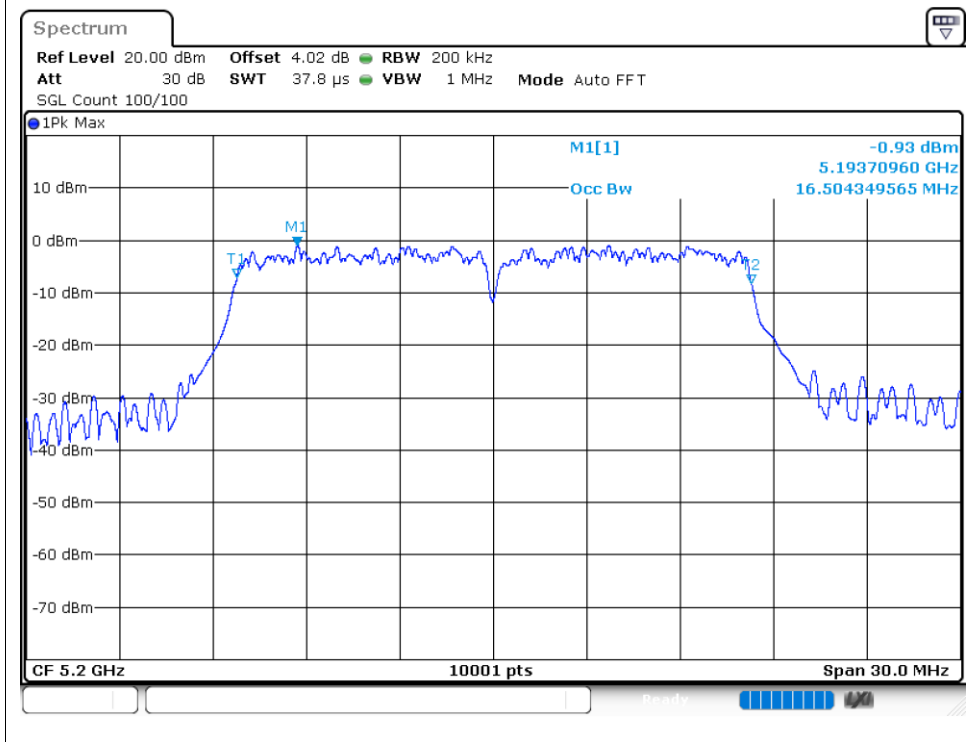


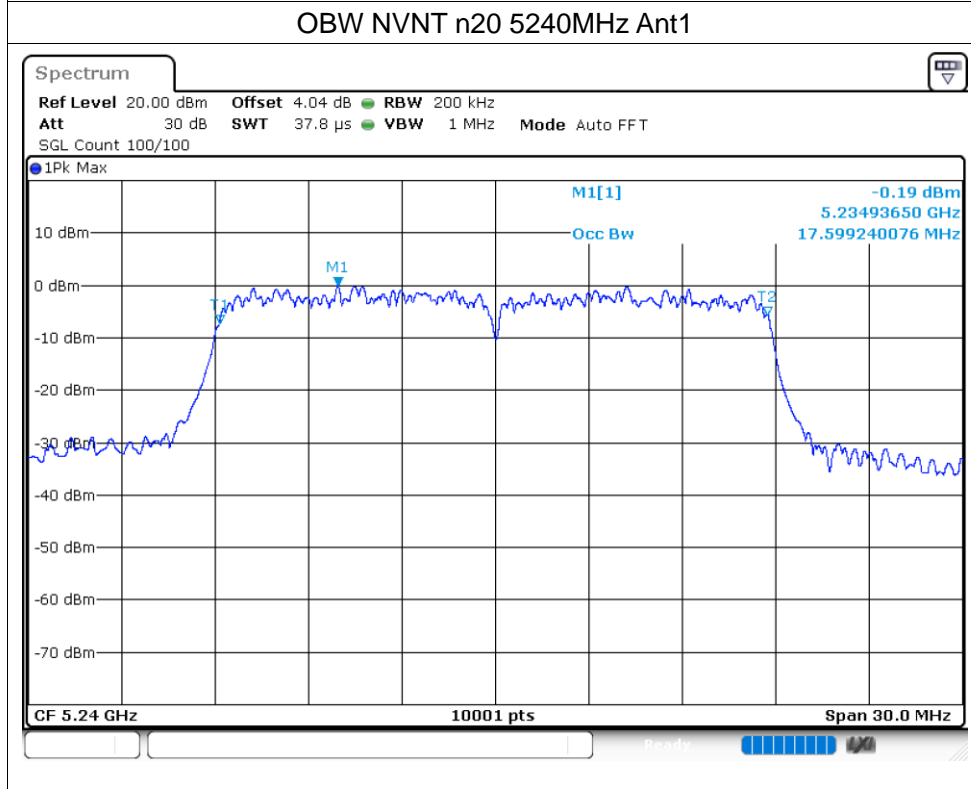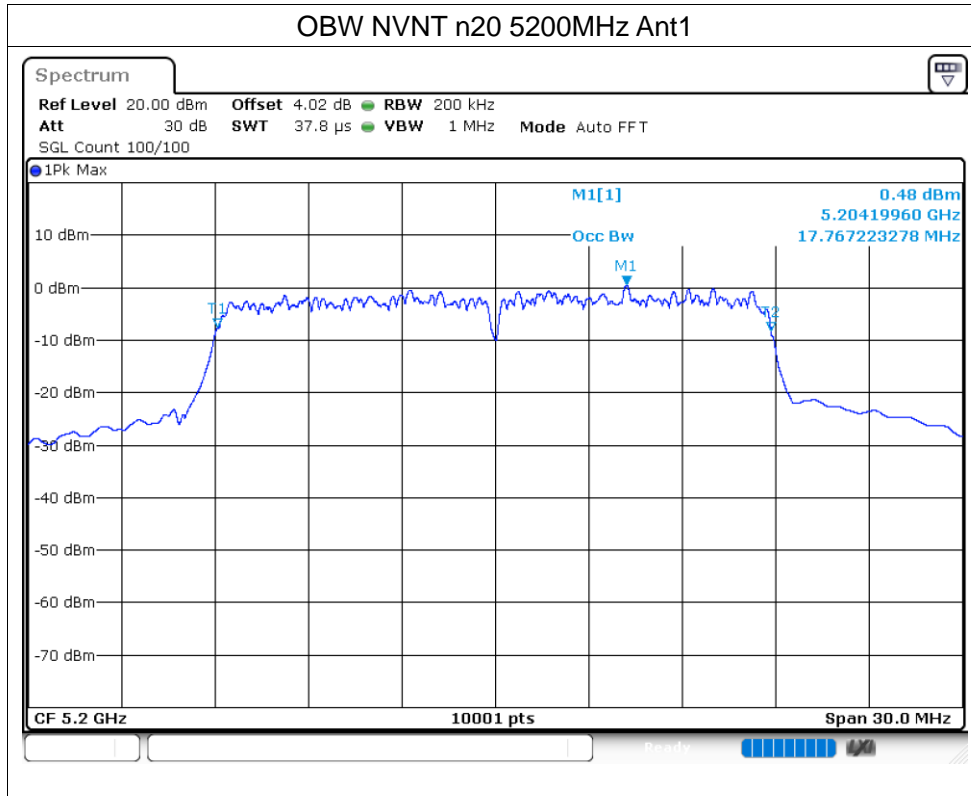

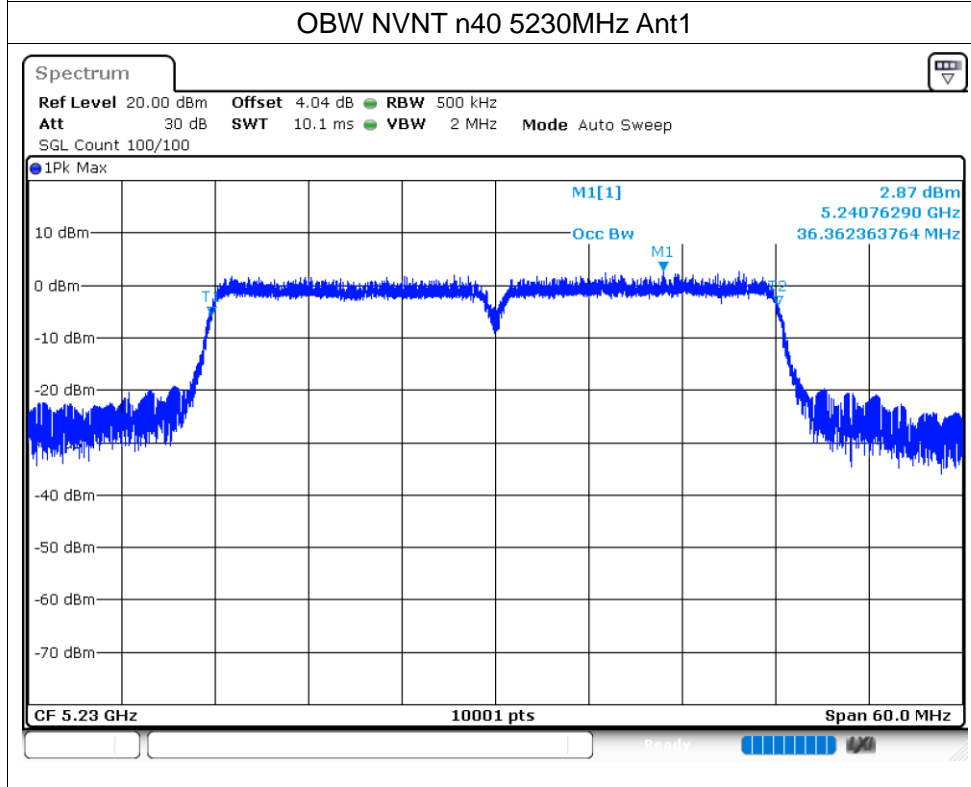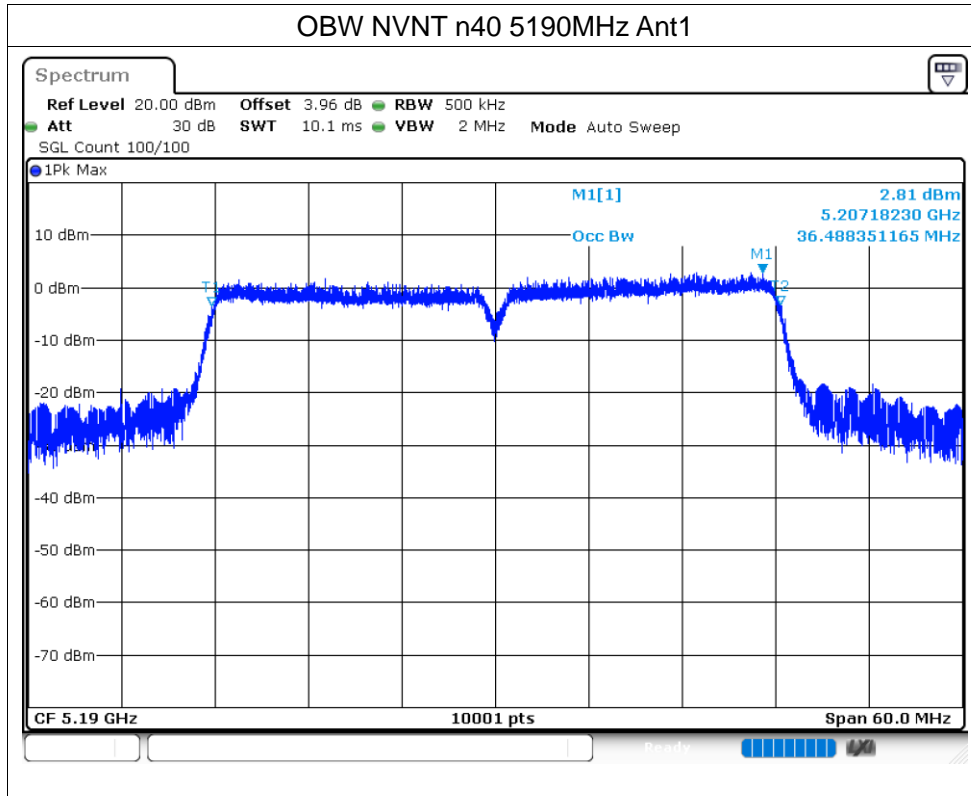

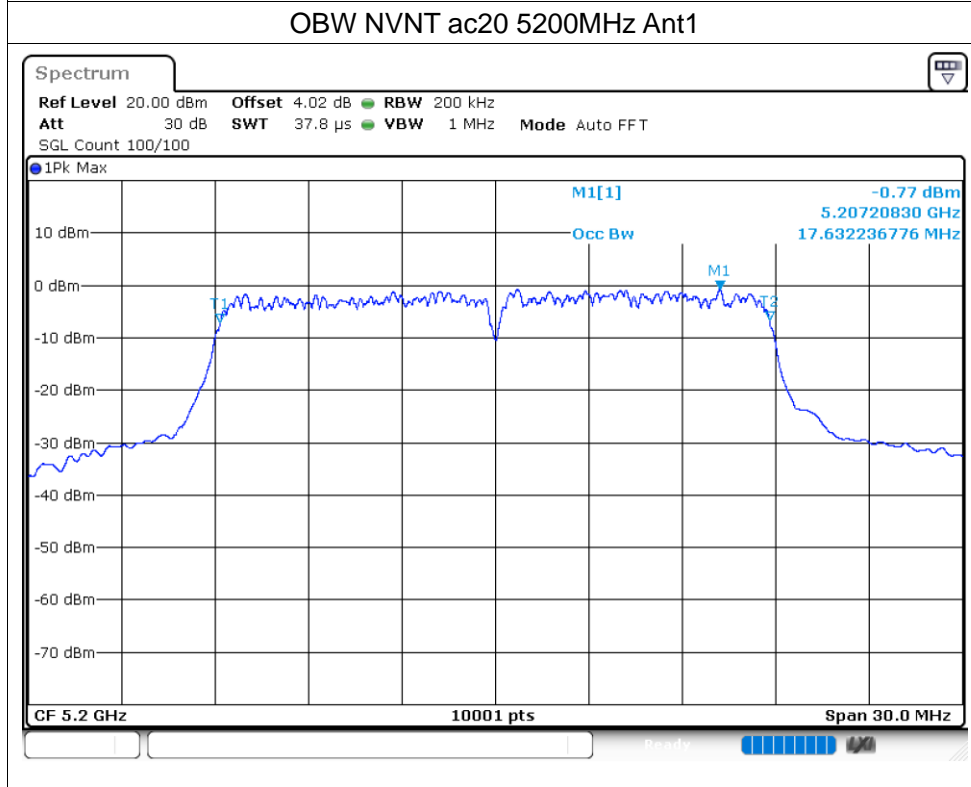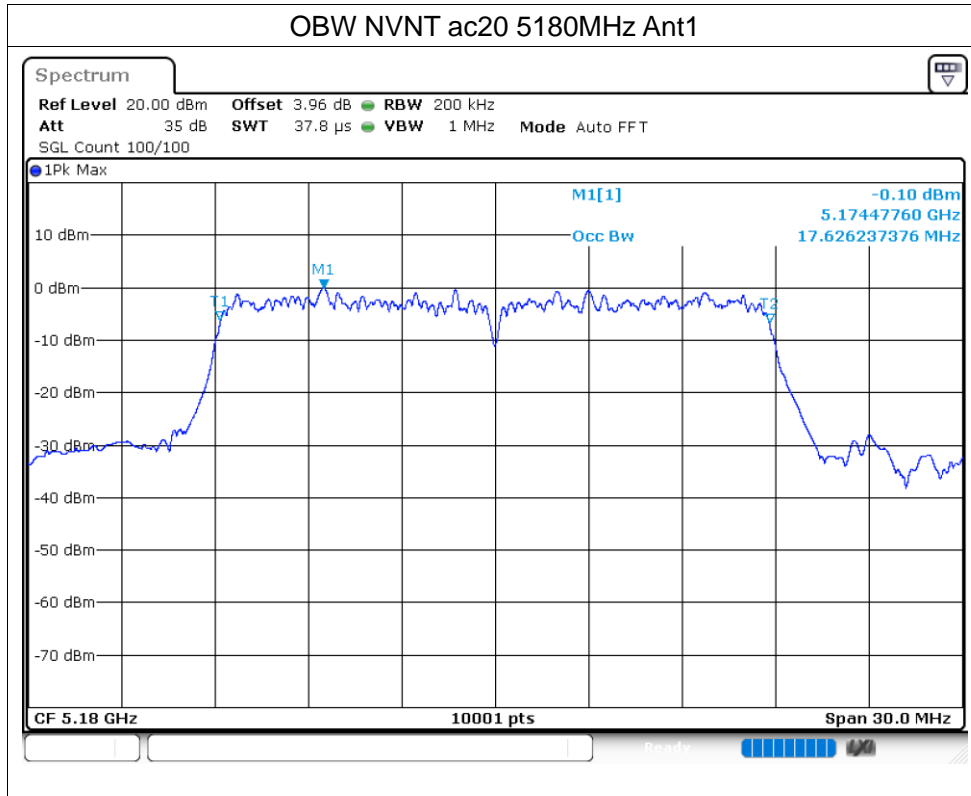

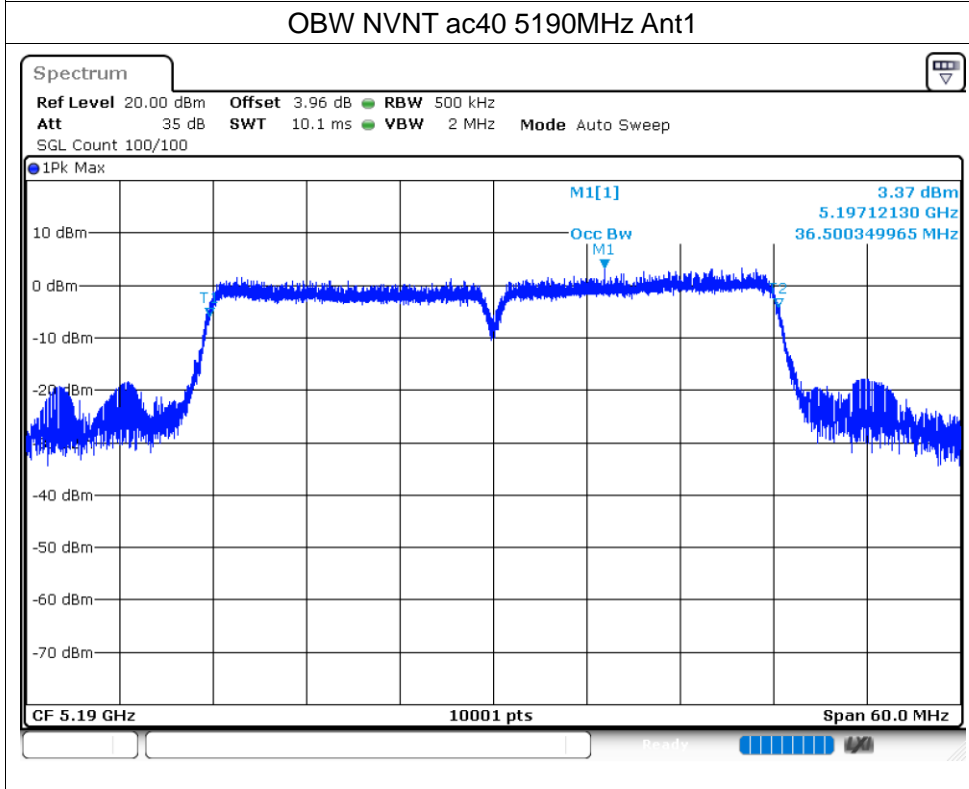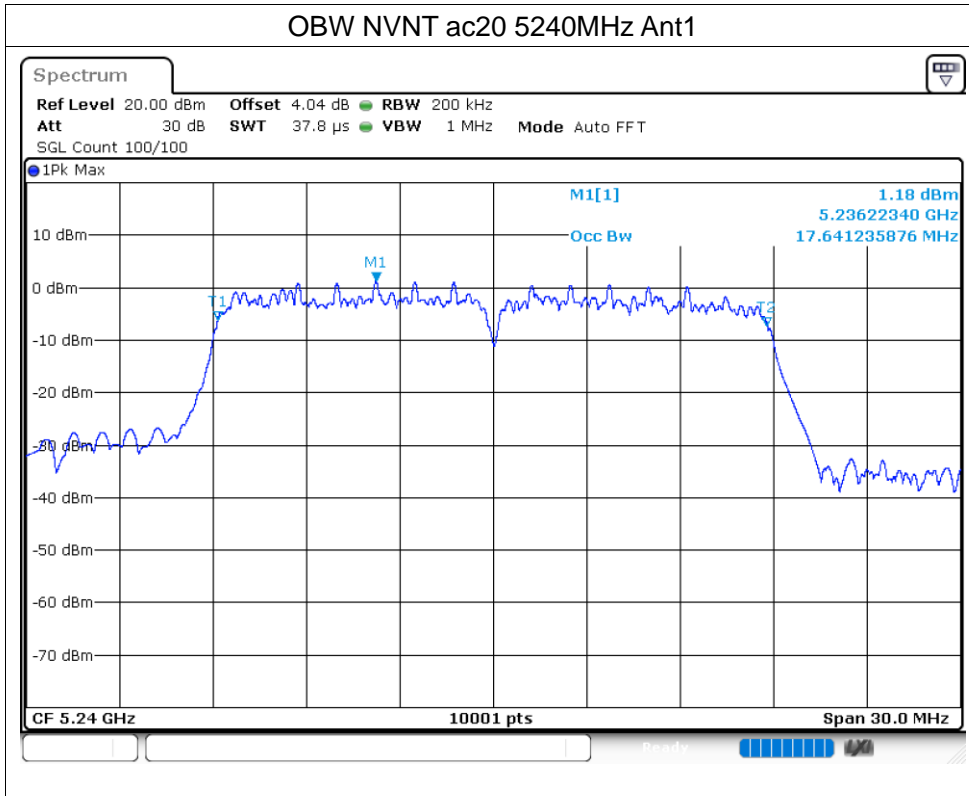

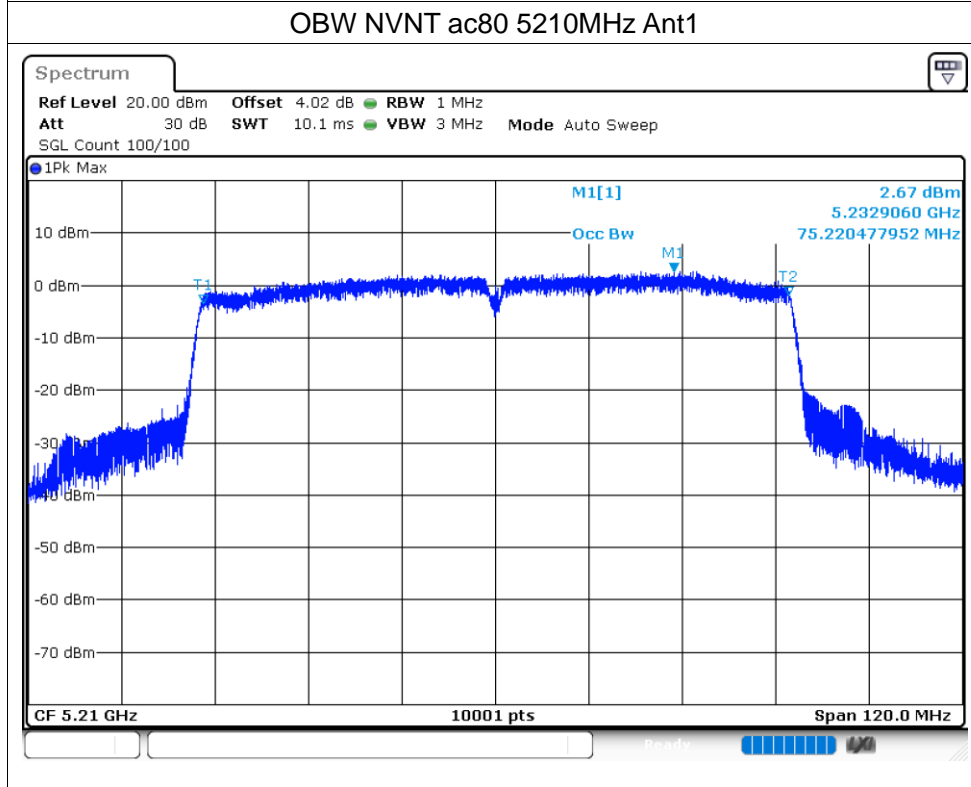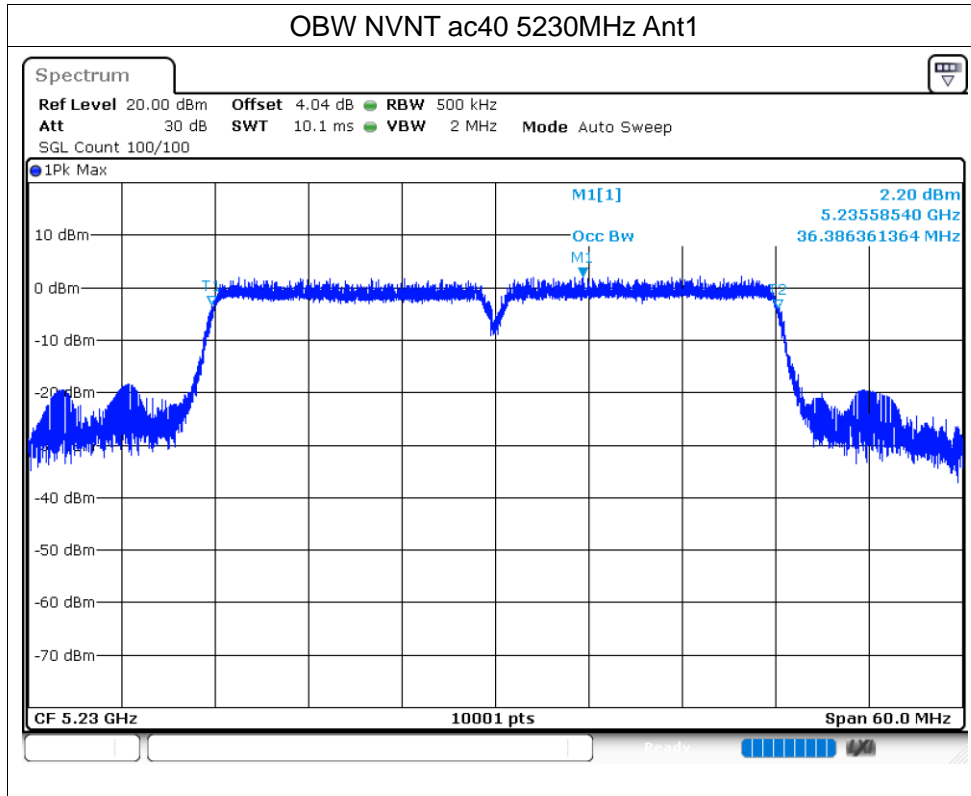


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-7.26	0.52	-6.74	11	Pass
NVNT	a	5200	Ant1	-7.38	0.5	-6.88	11	Pass
NVNT	a	5240	Ant1	-6.82	0.51	-6.31	11	Pass
NVNT	n20	5180	Ant1	-7.47	0.58	-6.89	11	Pass
NVNT	n20	5200	Ant1	-7.08	0.58	-6.5	11	Pass
NVNT	n20	5240	Ant1	-6.73	0.58	-6.15	11	Pass
NVNT	n40	5190	Ant1	-14.52	1.1	-13.42	11	Pass
NVNT	n40	5230	Ant1	-11.23	1.12	-10.11	11	Pass
NVNT	ac20	5180	Ant1	-7	0.58	-6.42	11	Pass
NVNT	ac20	5200	Ant1	-7.04	0.58	-6.46	11	Pass
NVNT	ac20	5240	Ant1	-5.85	0.58	-5.27	11	Pass
NVNT	ac40	5190	Ant1	-14.66	1.09	-13.57	11	Pass
NVNT	ac40	5230	Ant1	-15.46	1.11	-14.35	11	Pass
NVNT	ac80	5210	Ant1	-18.73	1.91	-16.82	11	Pass



Test Graphs



PSD NVNT a 5180MHz Ant1


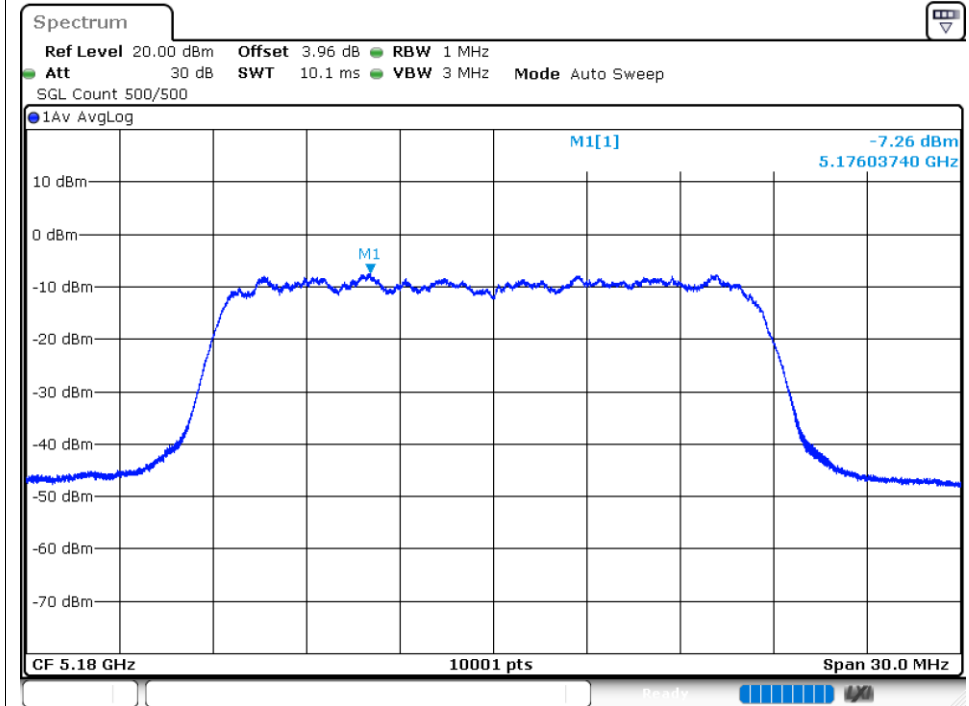




PSD NVNT a 5200MHz Ant1


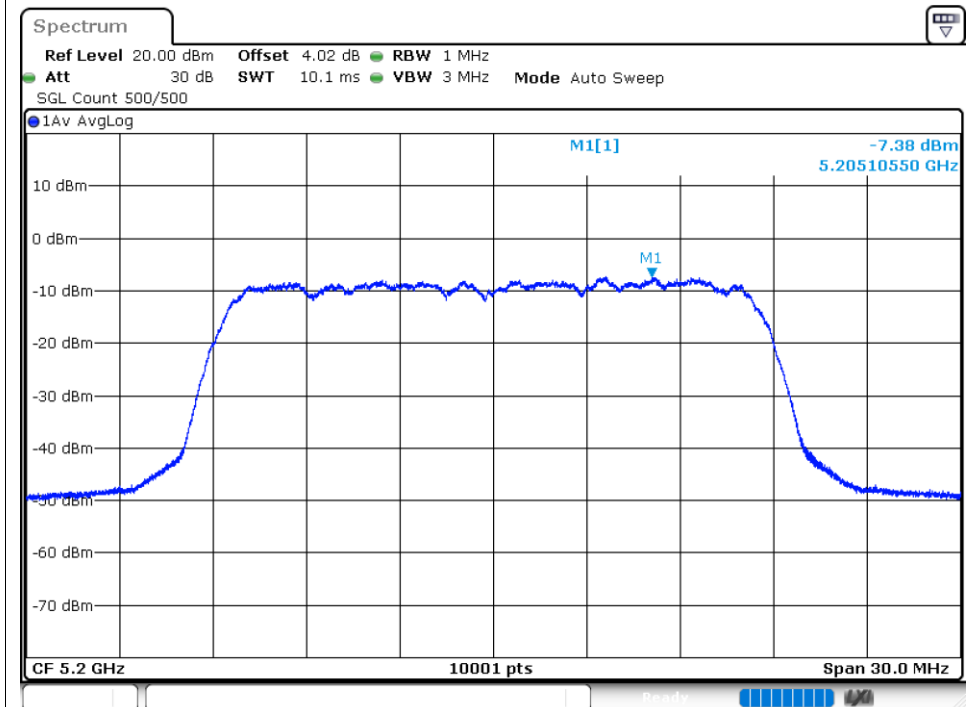


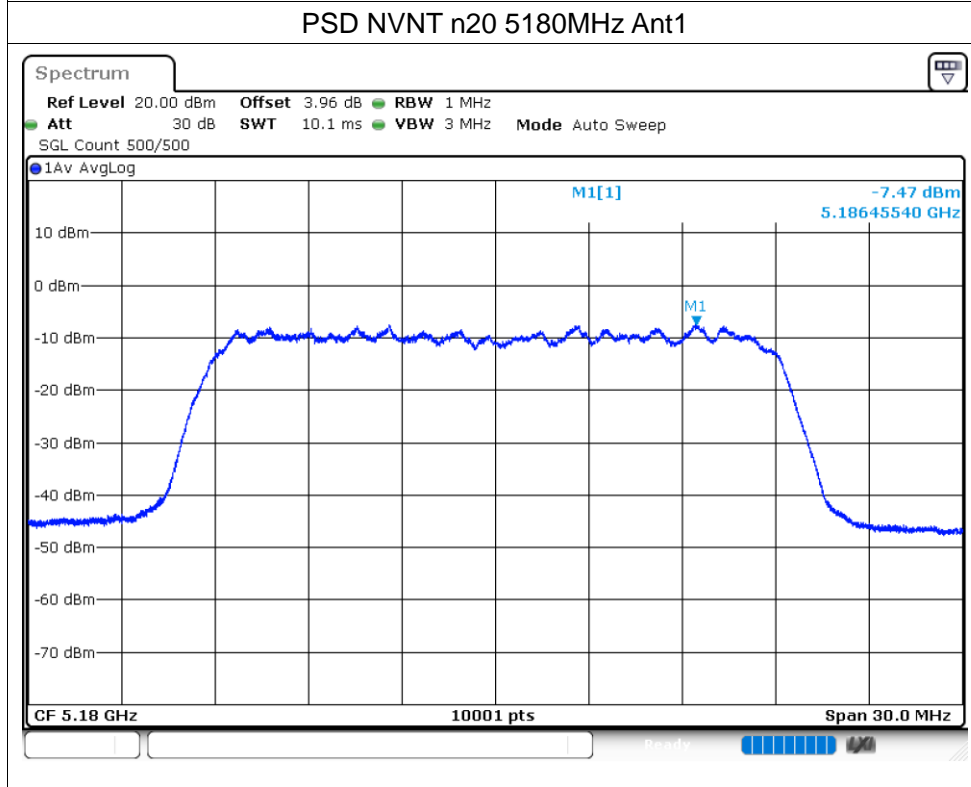
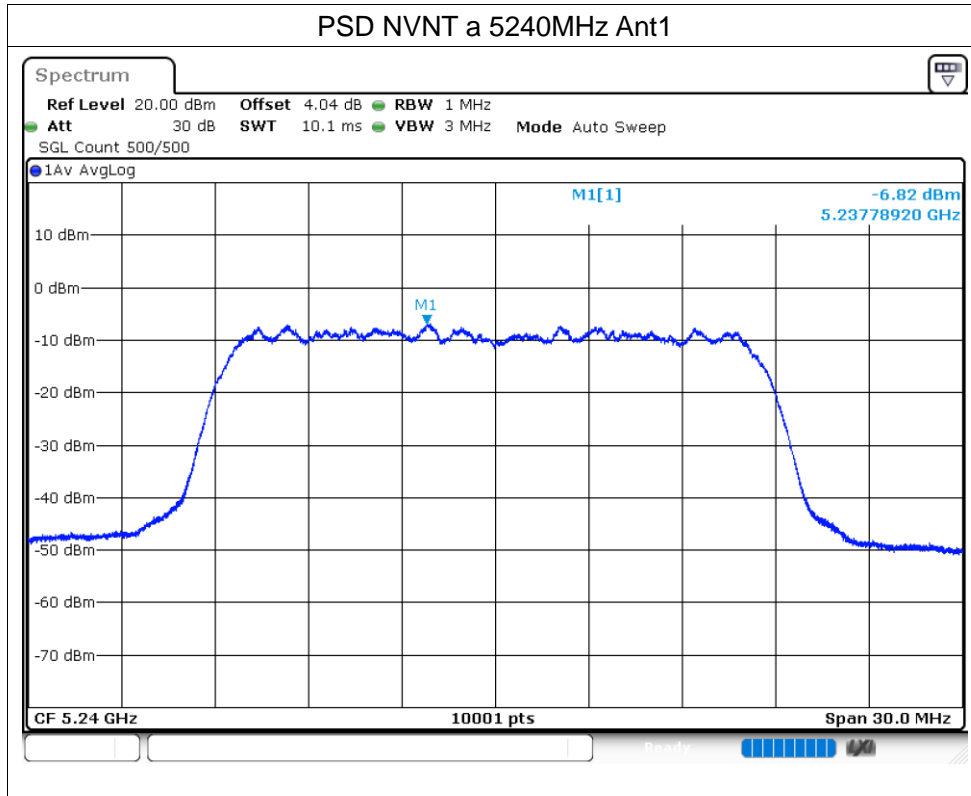


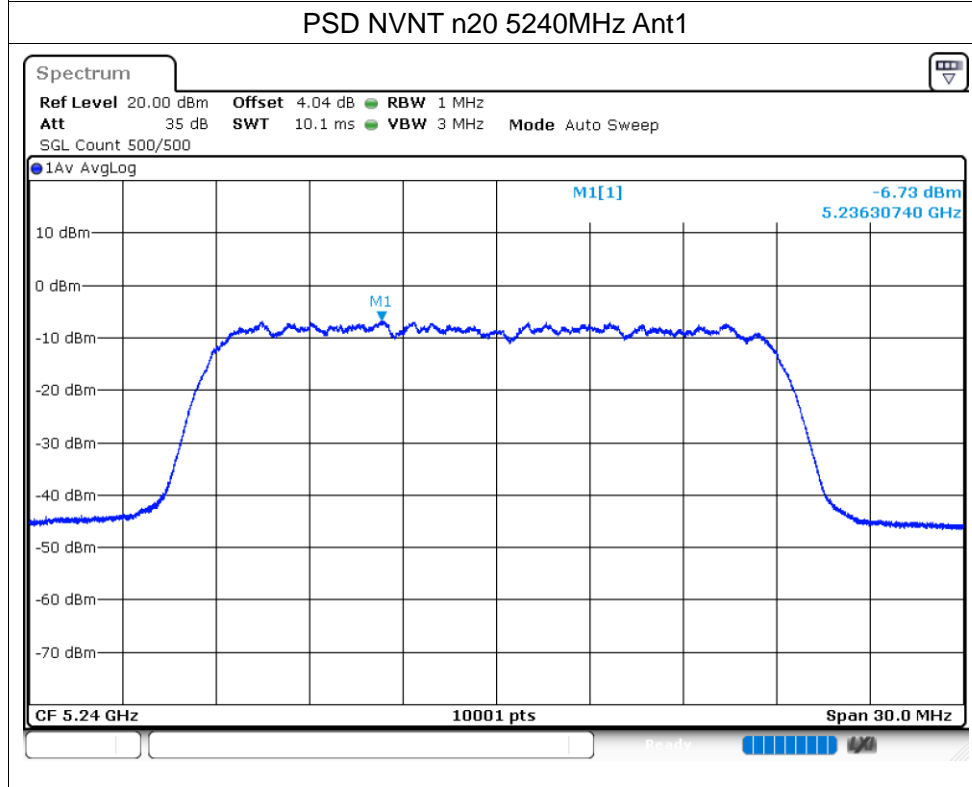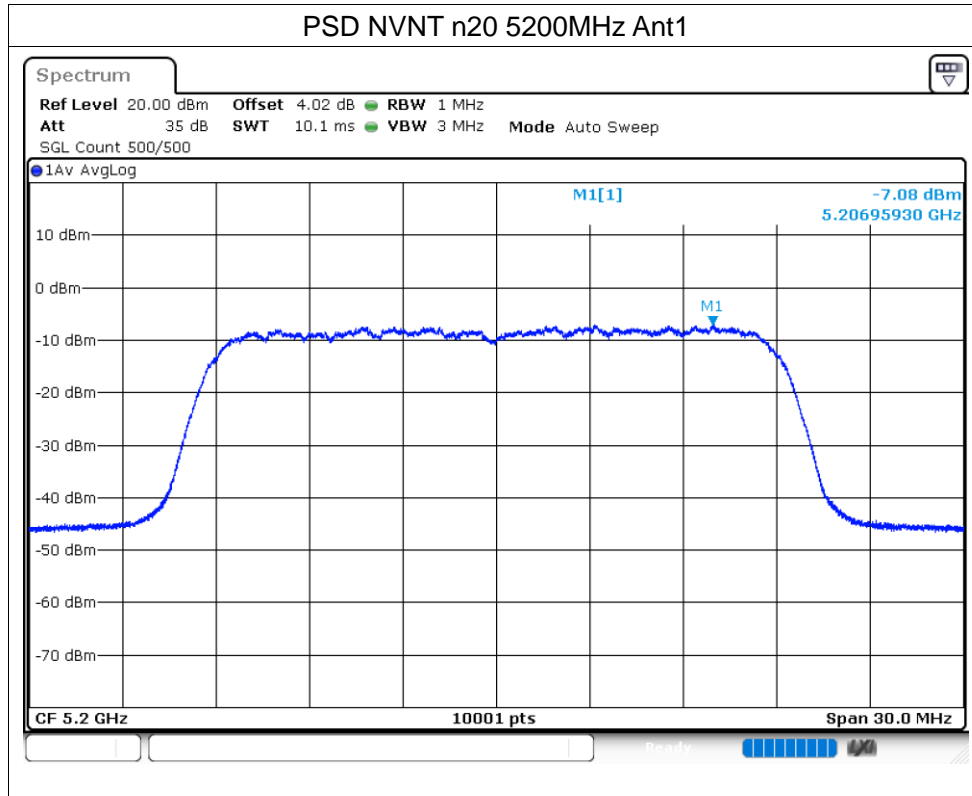

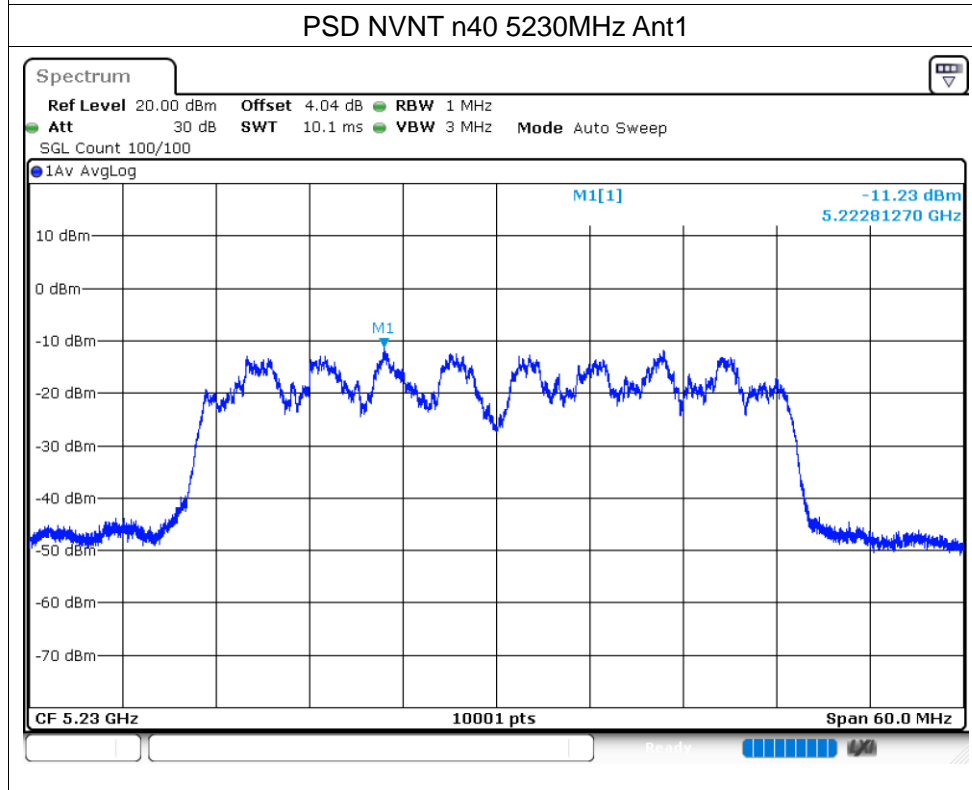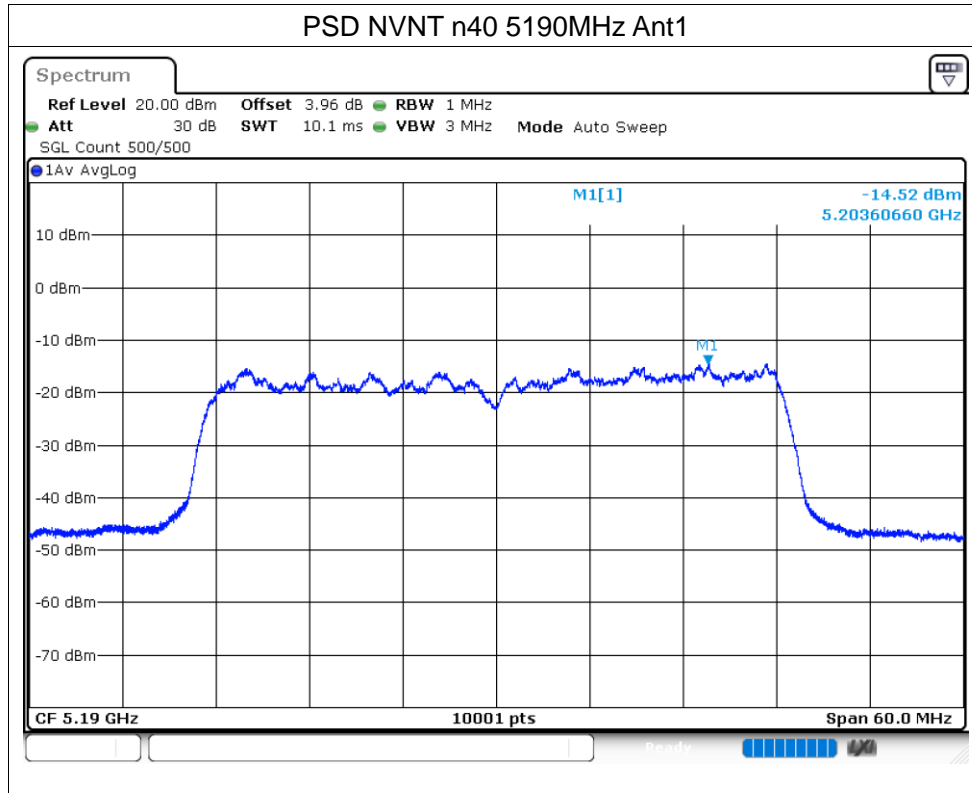

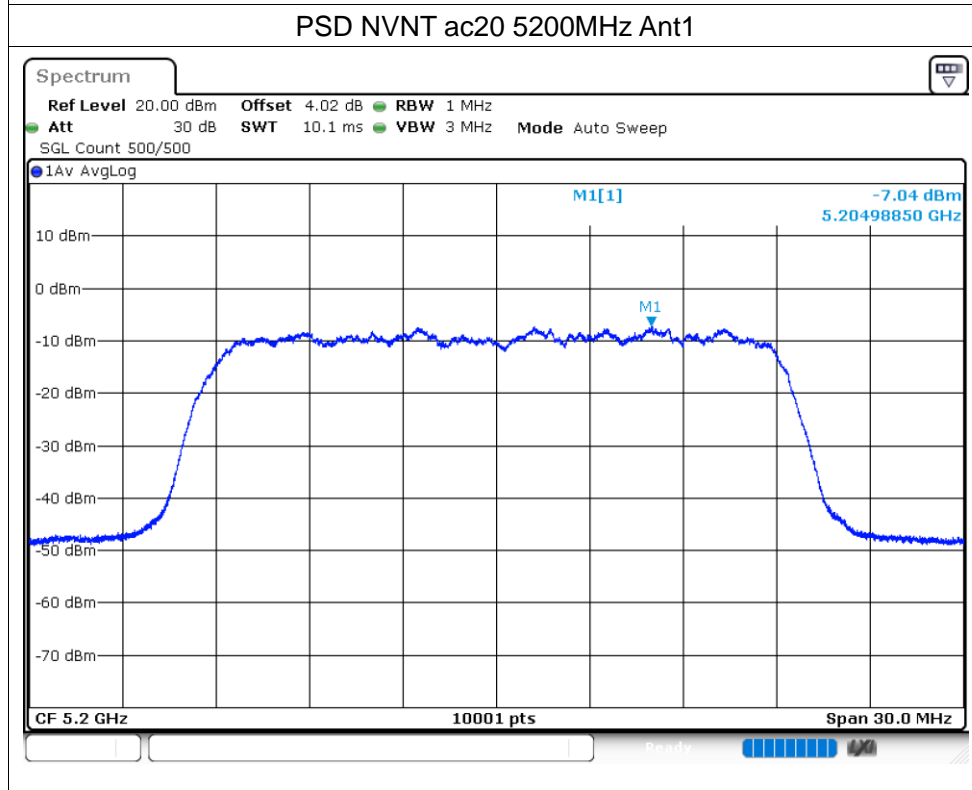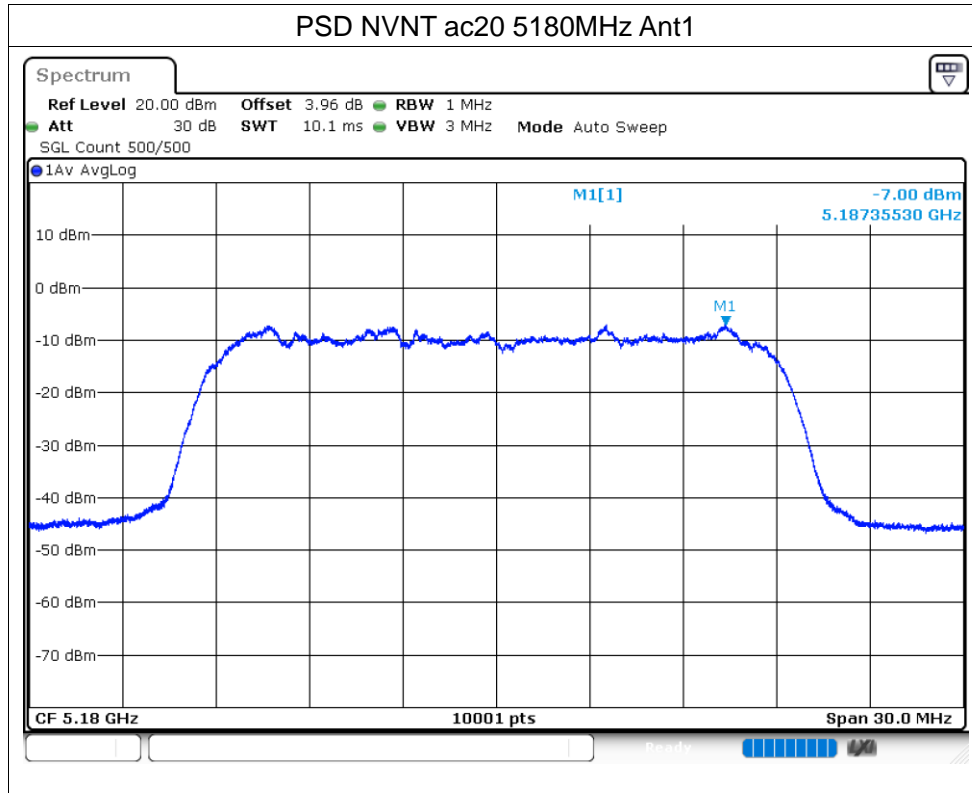

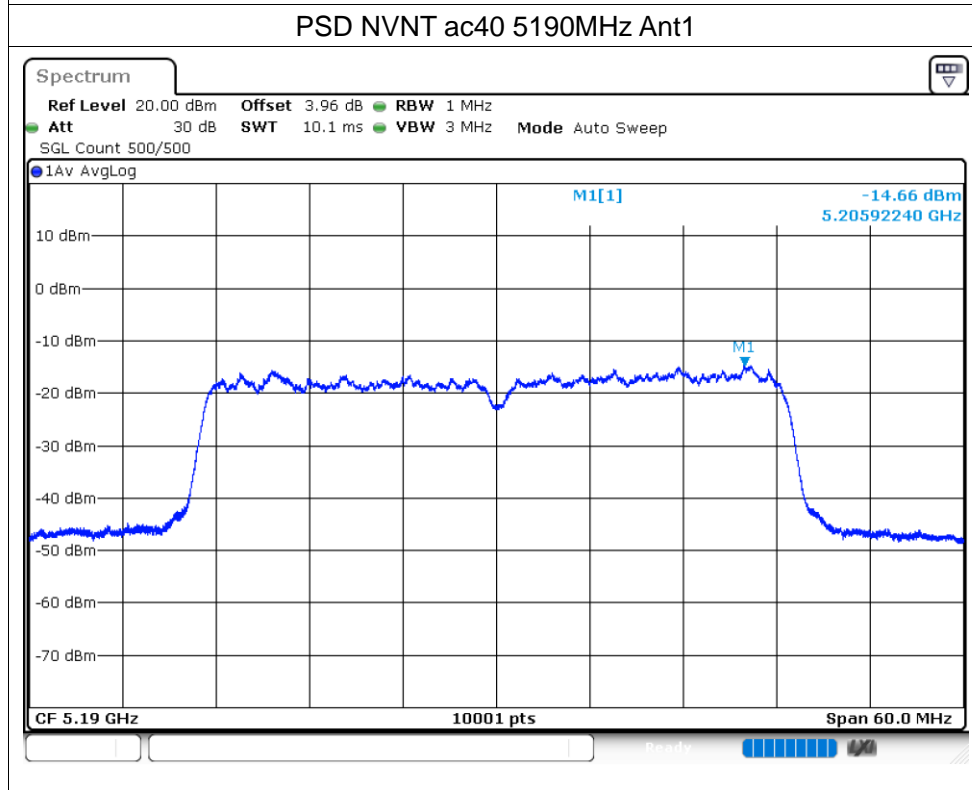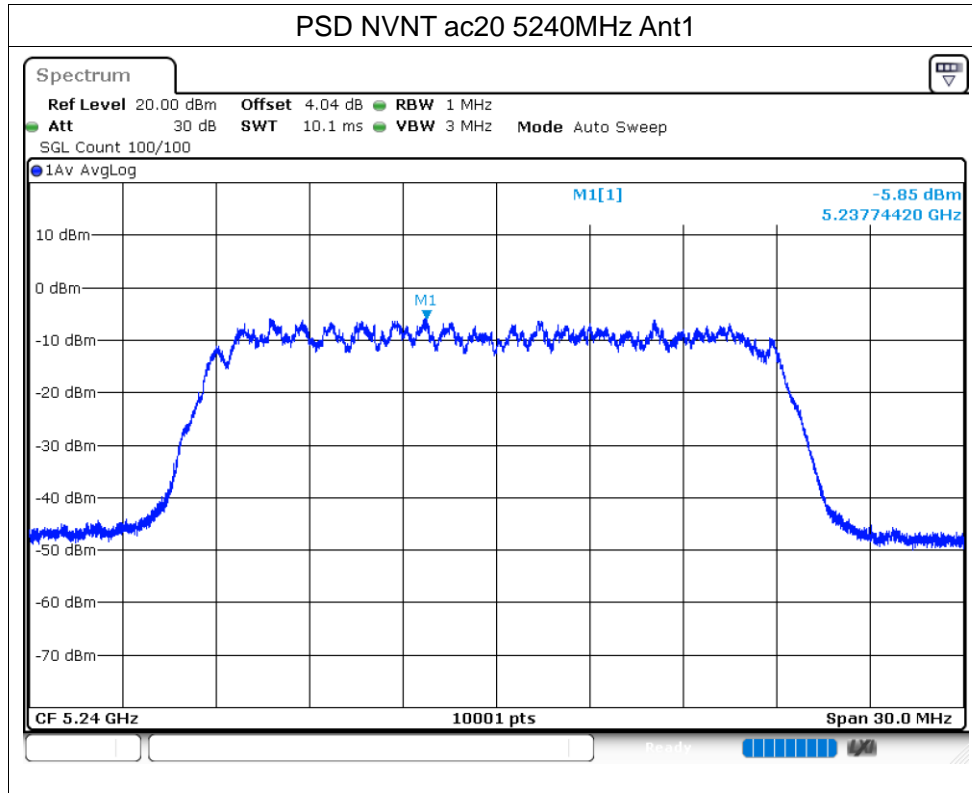

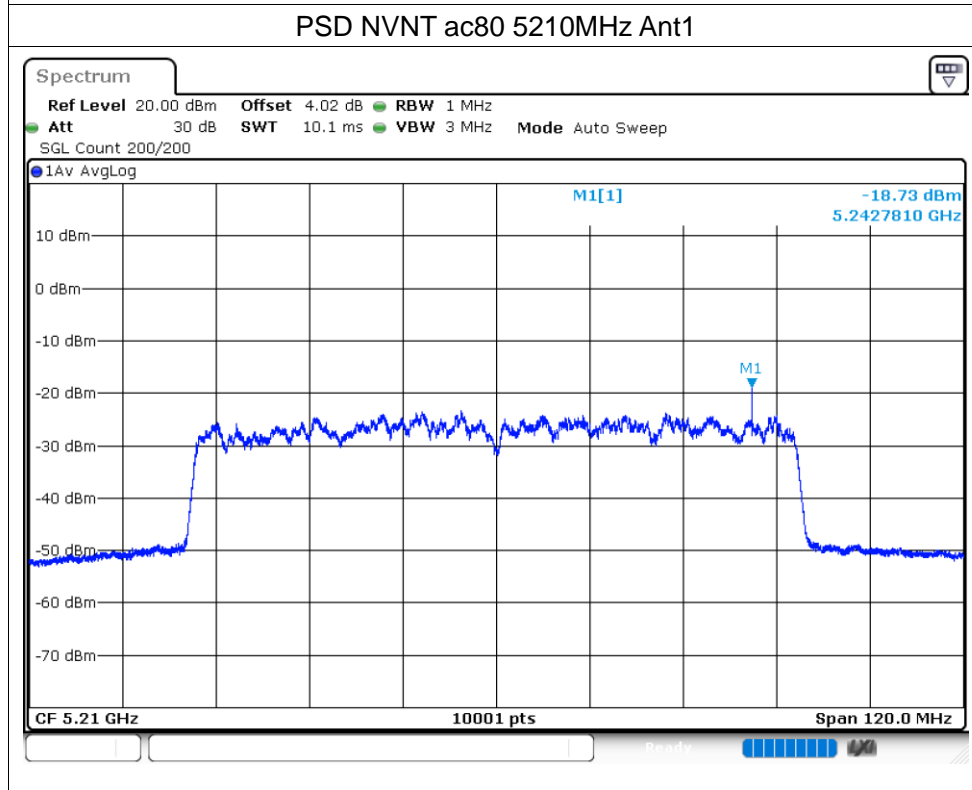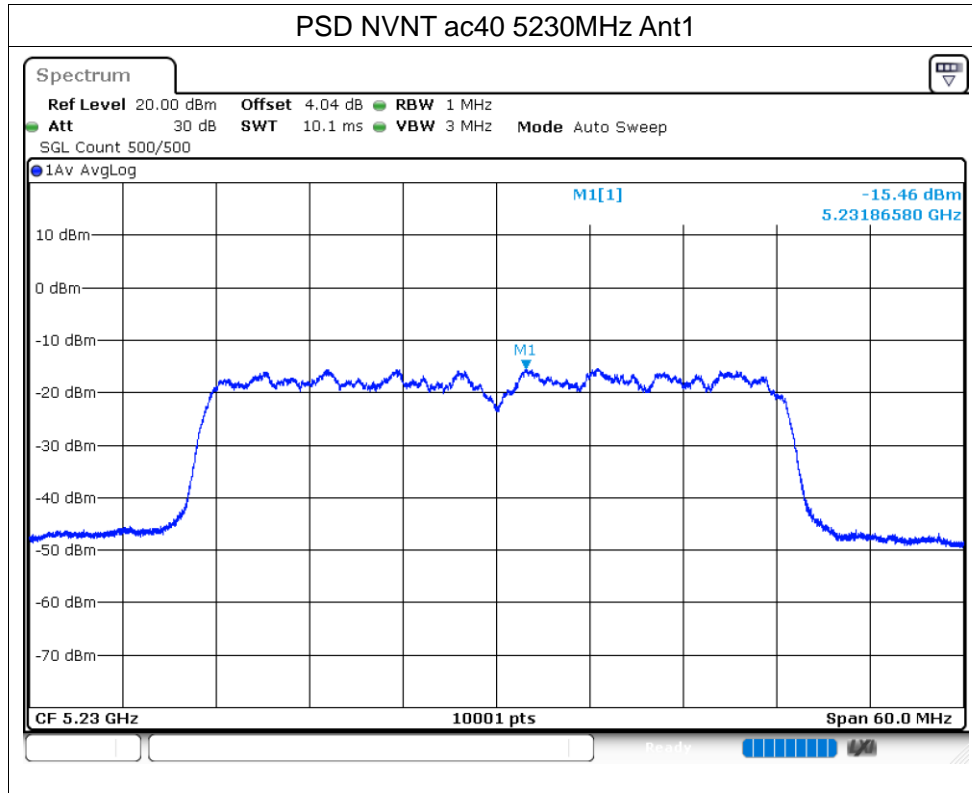


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-32.21	-27	Pass
NVNT	a	5240	Ant1	-37.45	-27	Pass
NVNT	n20	5180	Ant1	-31.77	-27	Pass
NVNT	n20	5240	Ant1	-37	-27	Pass
NVNT	n40	5190	Ant1	-28.2	-27	Pass
NVNT	n40	5230	Ant1	-43.31	-27	Pass
NVNT	ac20	5180	Ant1	-31.71	-27	Pass
NVNT	ac20	5240	Ant1	-36.82	-27	Pass
NVNT	ac40	5190	Ant1	-30.94	-27	Pass
NVNT	ac40	5230	Ant1	-43.72	-27	Pass
NVNT	ac80	5210	Ant1	-46.65	-27	Pass



Test Graphs



Band Edge NVNT a 5180MHz Low Ant1


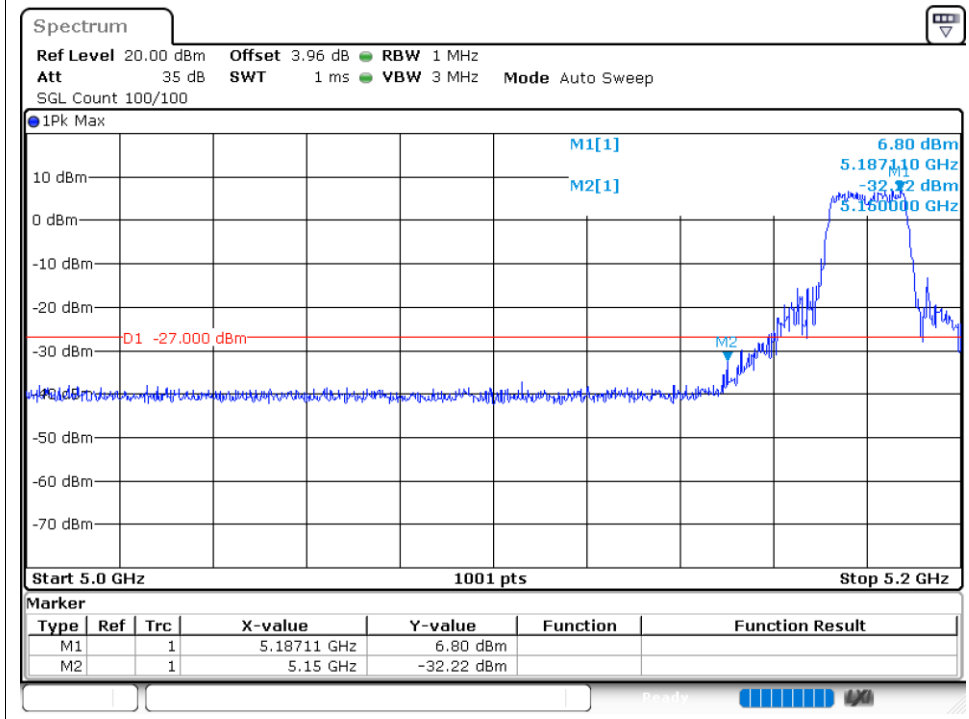




Band Edge NVNT a 5240MHz High Ant1

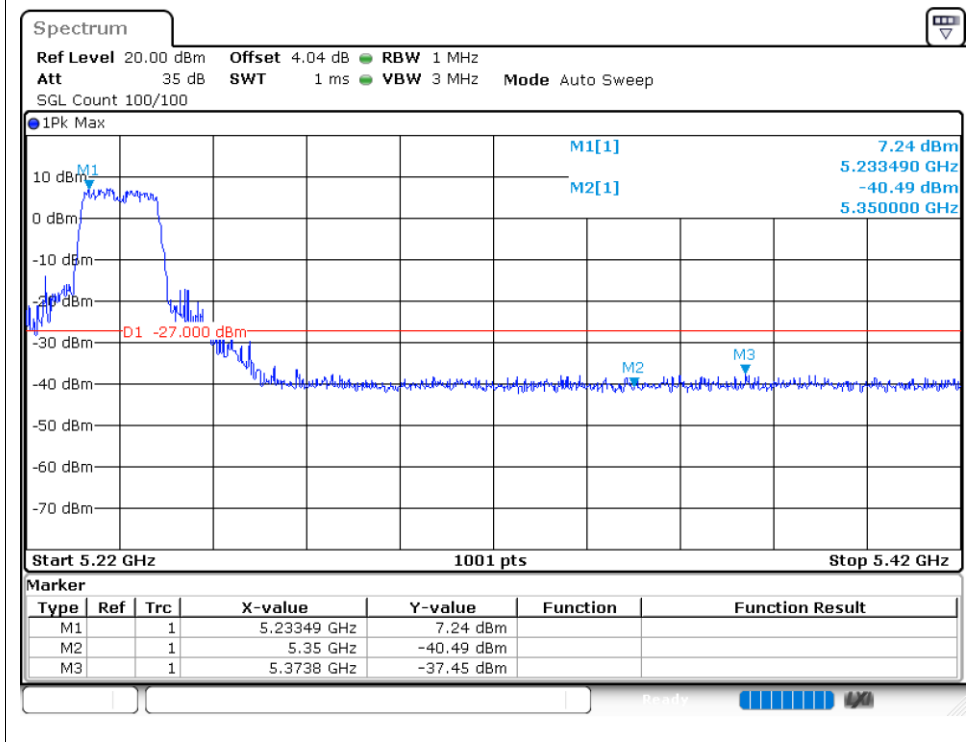


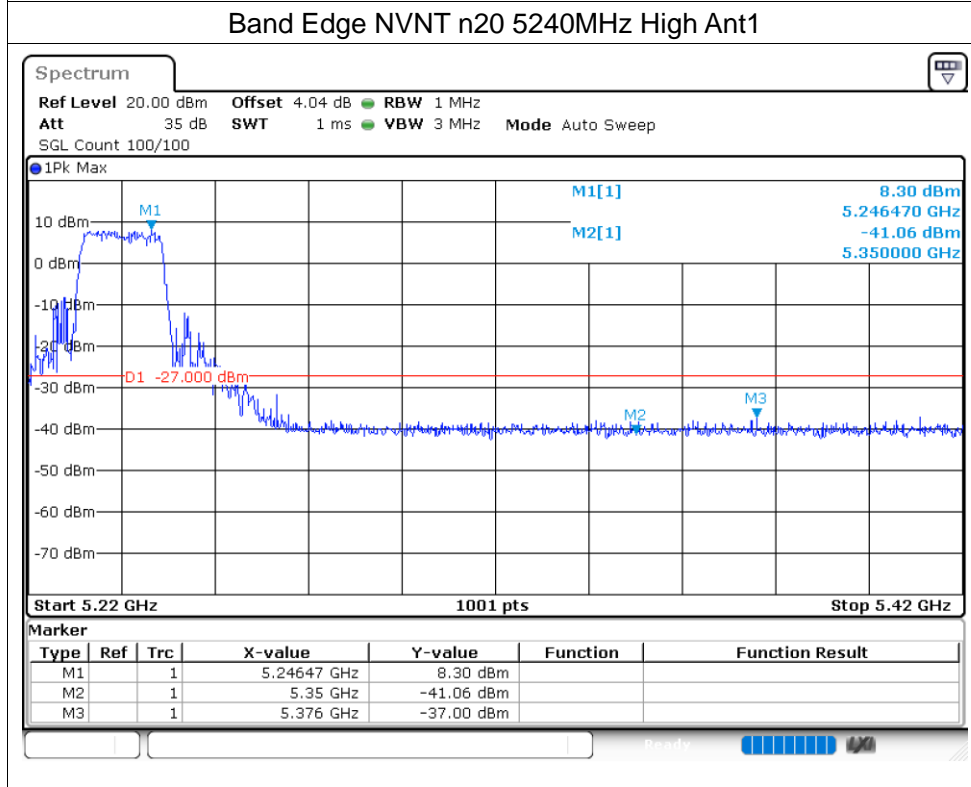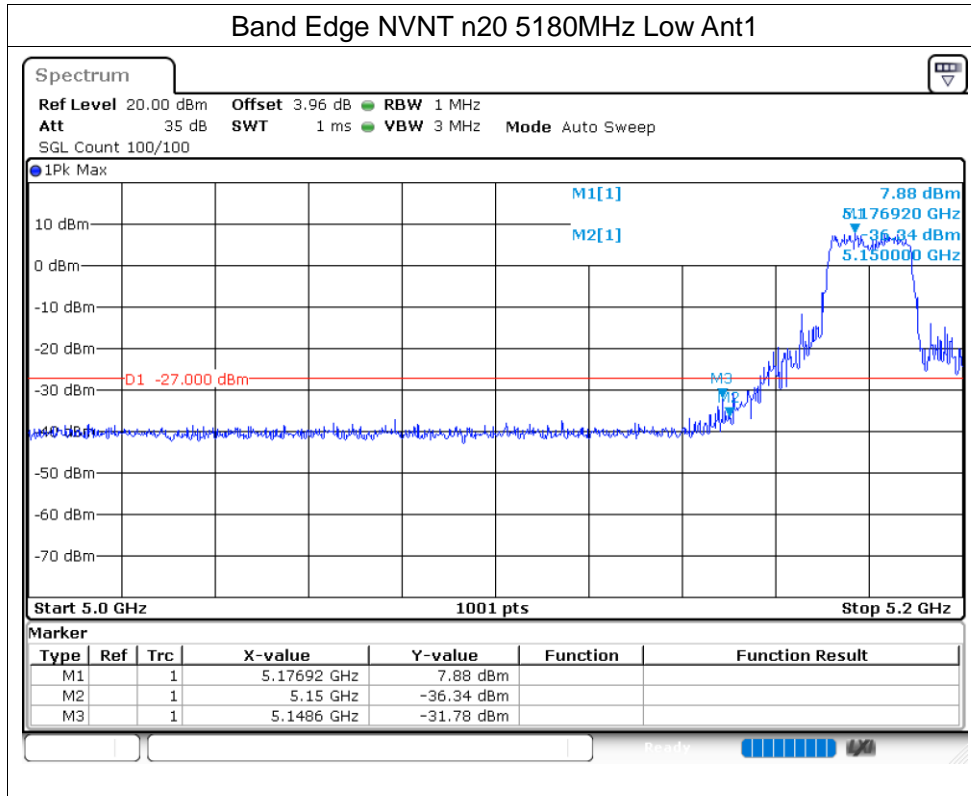

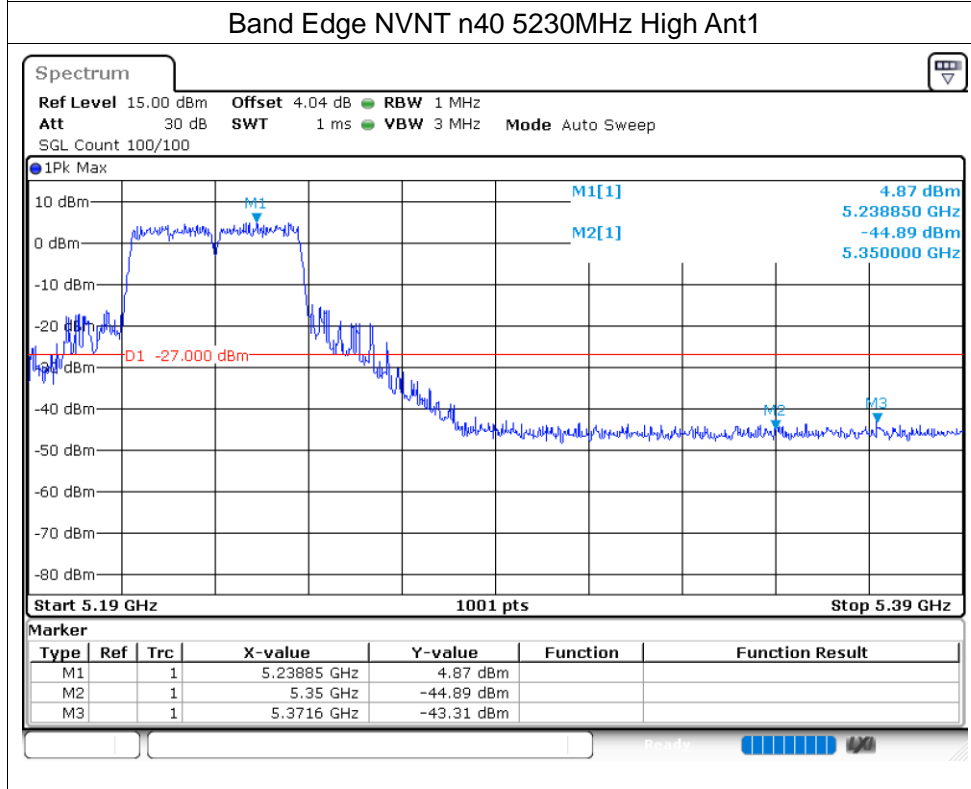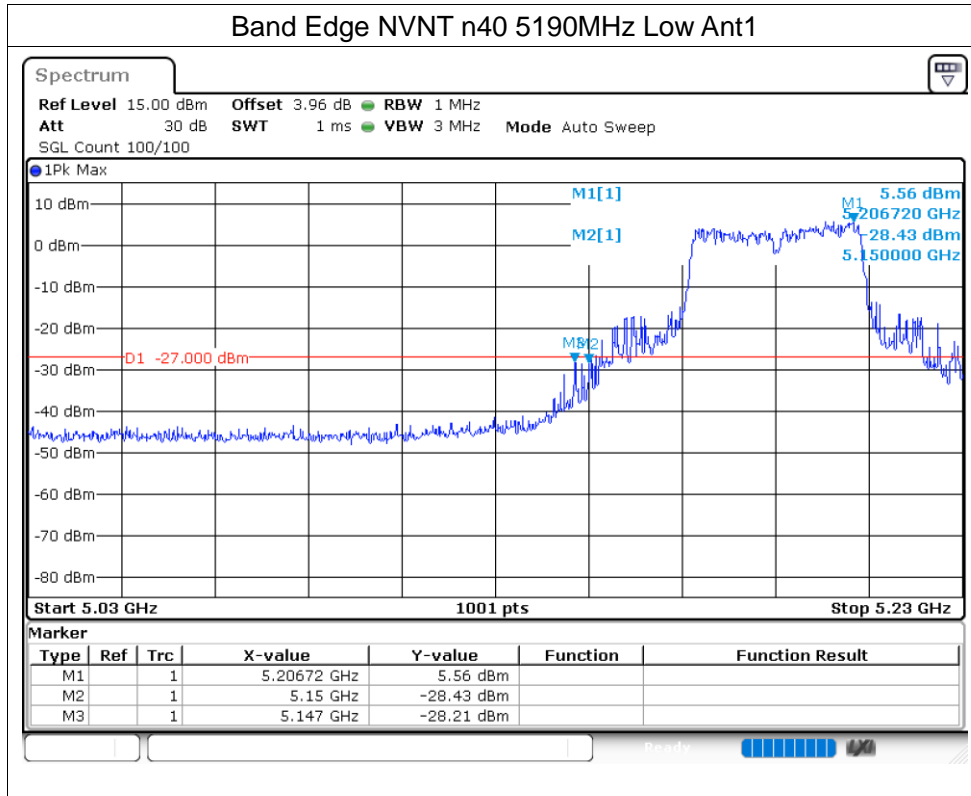

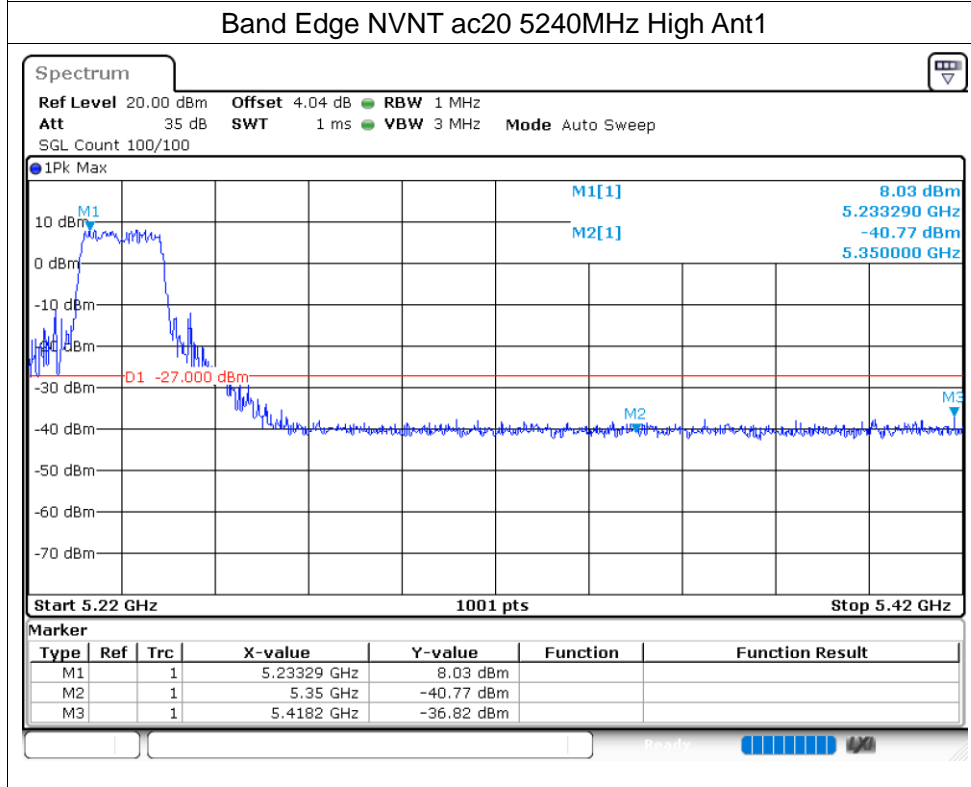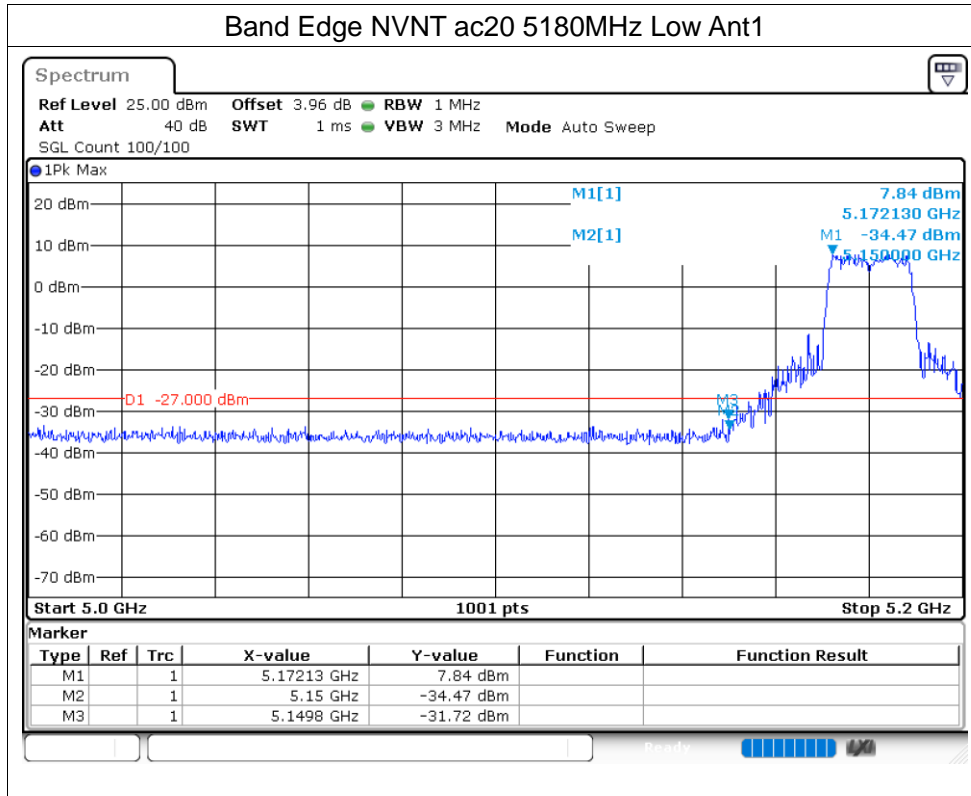

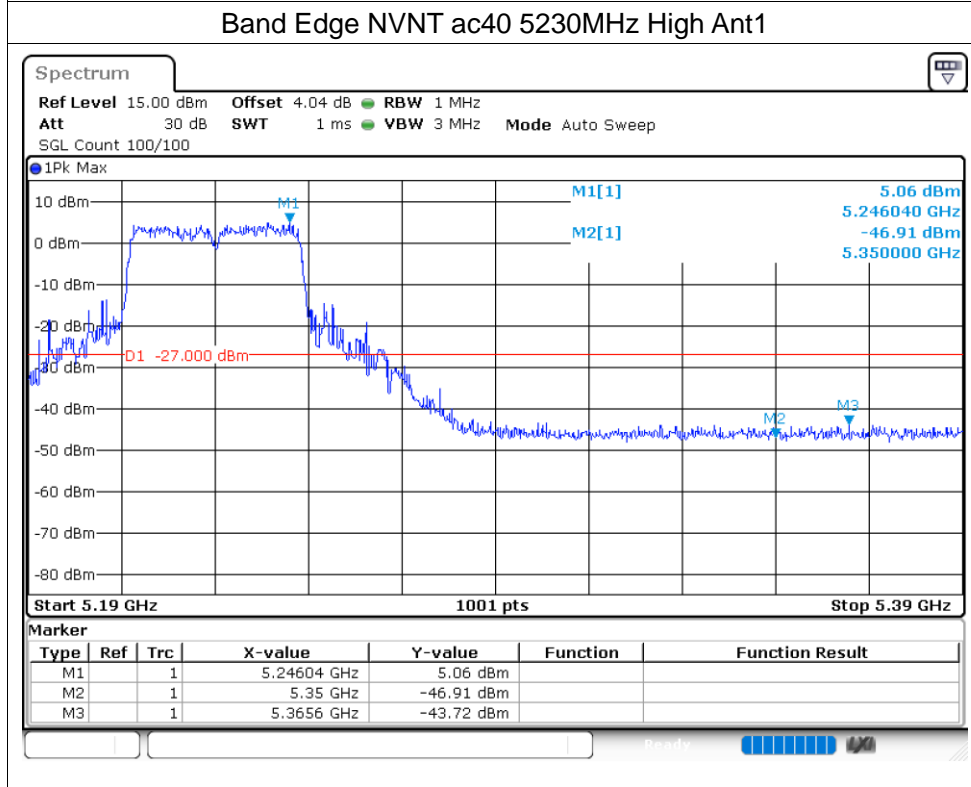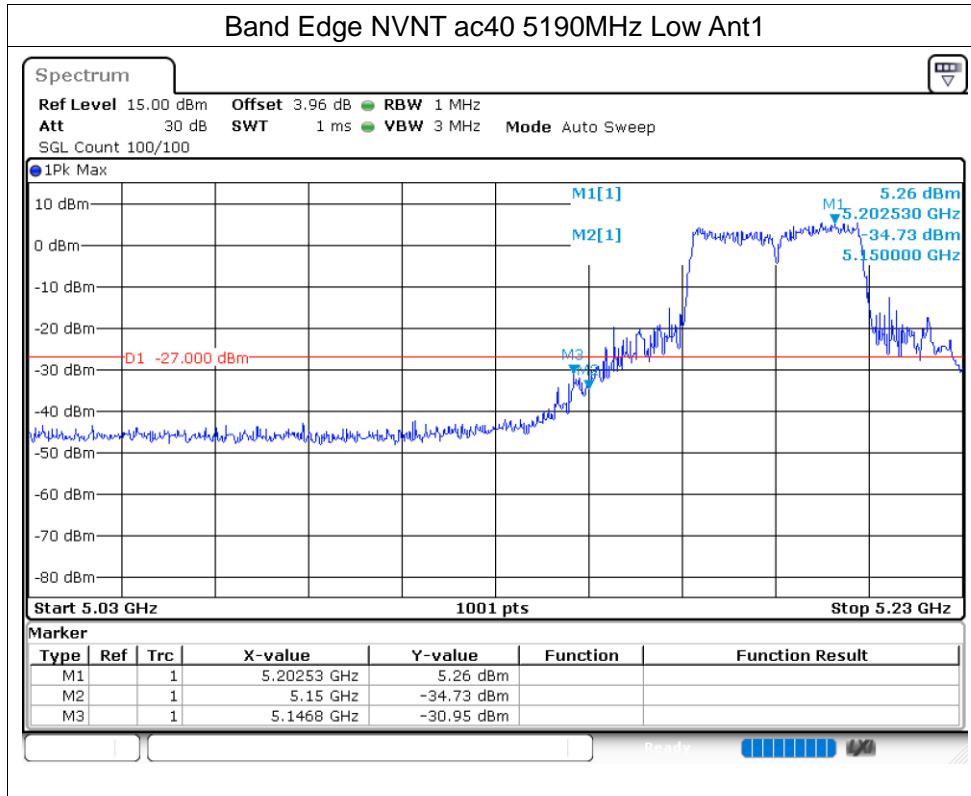

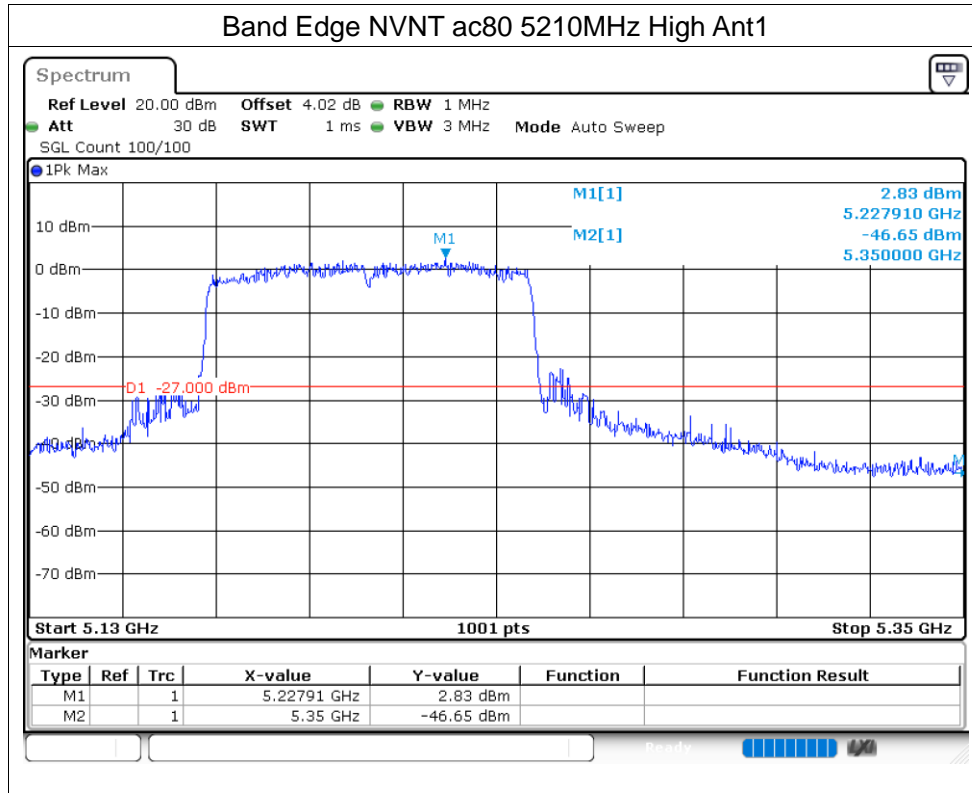


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-33.5	-27	Pass
NVNT	a	5200	Ant1	-34	-27	Pass
NVNT	a	5240	Ant1	-32.93	-27	Pass
NVNT	n20	5180	Ant1	-35.11	-27	Pass
NVNT	n20	5200	Ant1	-34.97	-27	Pass
NVNT	n20	5240	Ant1	-34.91	-27	Pass
NVNT	n40	5190	Ant1	-34.59	-27	Pass
NVNT	n40	5230	Ant1	-34.68	-27	Pass
NVNT	ac20	5180	Ant1	-33.53	-27	Pass
NVNT	ac20	5200	Ant1	-33.17	-27	Pass
NVNT	ac20	5240	Ant1	-33.62	-27	Pass
NVNT	ac40	5190	Ant1	-34.16	-27	Pass
NVNT	ac40	5230	Ant1	-35.33	-27	Pass
NVNT	ac80	5210	Ant1	-34.3	-27	Pass

Test Graphs

Tx. Spurious NVNT a 5180MHz Ant1 Emission

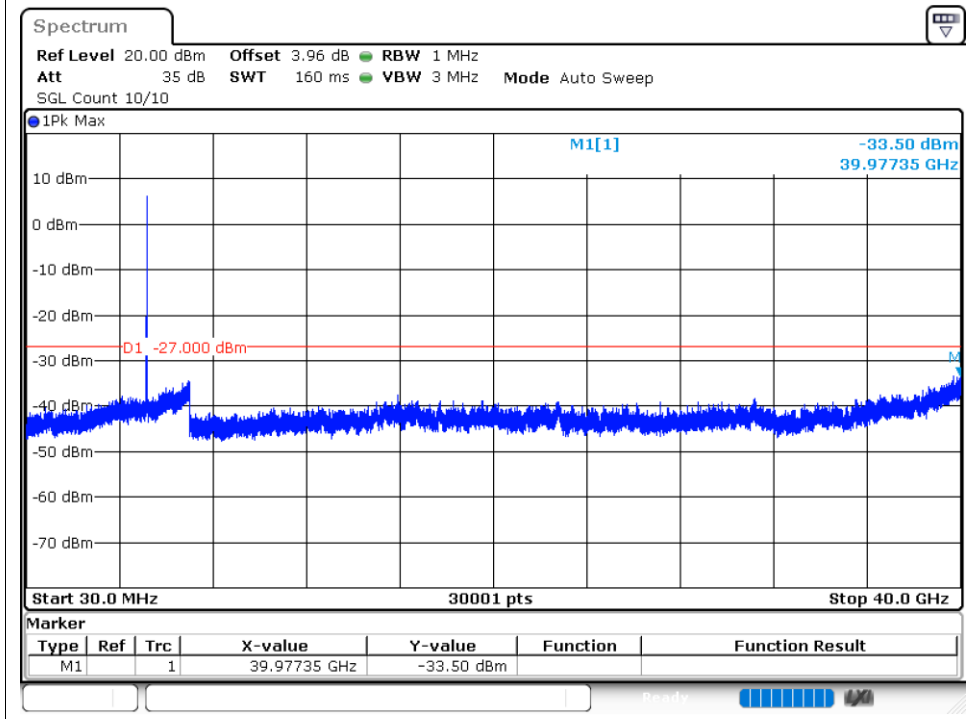

Tx. Spurious NVNT a 5200MHz Ant1 Emission

