

Appendix B

RF Test Data for BT V4.1(BT LE) (Conducted Measurement)

Product Name: Tablet pc

Trade Mark: DayMark


Test Model: MATT85

Environmental Conditions

Temperature:	23.9 ° C
Relative Humidity:	52.8%
ATM Pressure:	100.0 kPa
Test Engineer:	Mina Xu
Supervised by:	Jayden Zhuo


B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

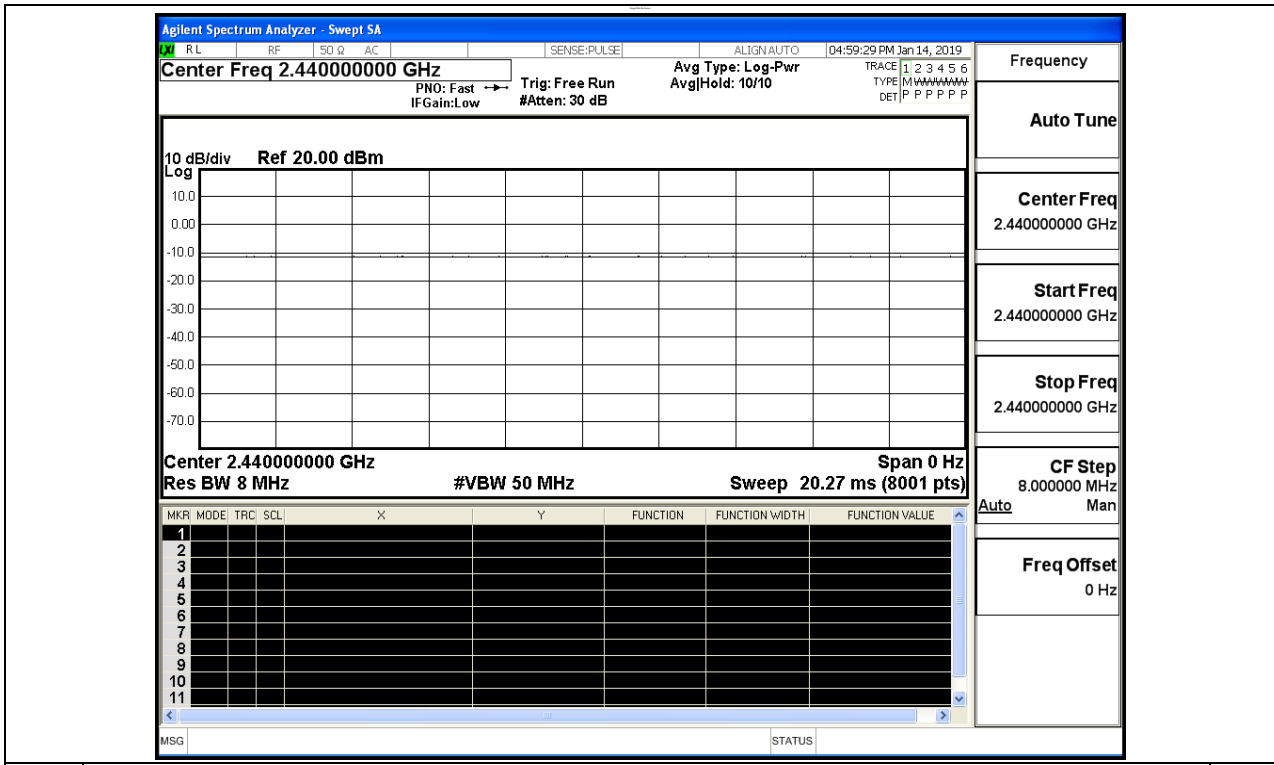


B.2 Maximum Conducted Peak Output Power


Mode	Channel	Conduct Peak Power[dBm]	Conduct Average Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-2.797	-2.963	30	PASS
BT LE	MCH	-3.644	-3.832	30	PASS
BT LE	HCH	-4.1	-4.268	30	PASS

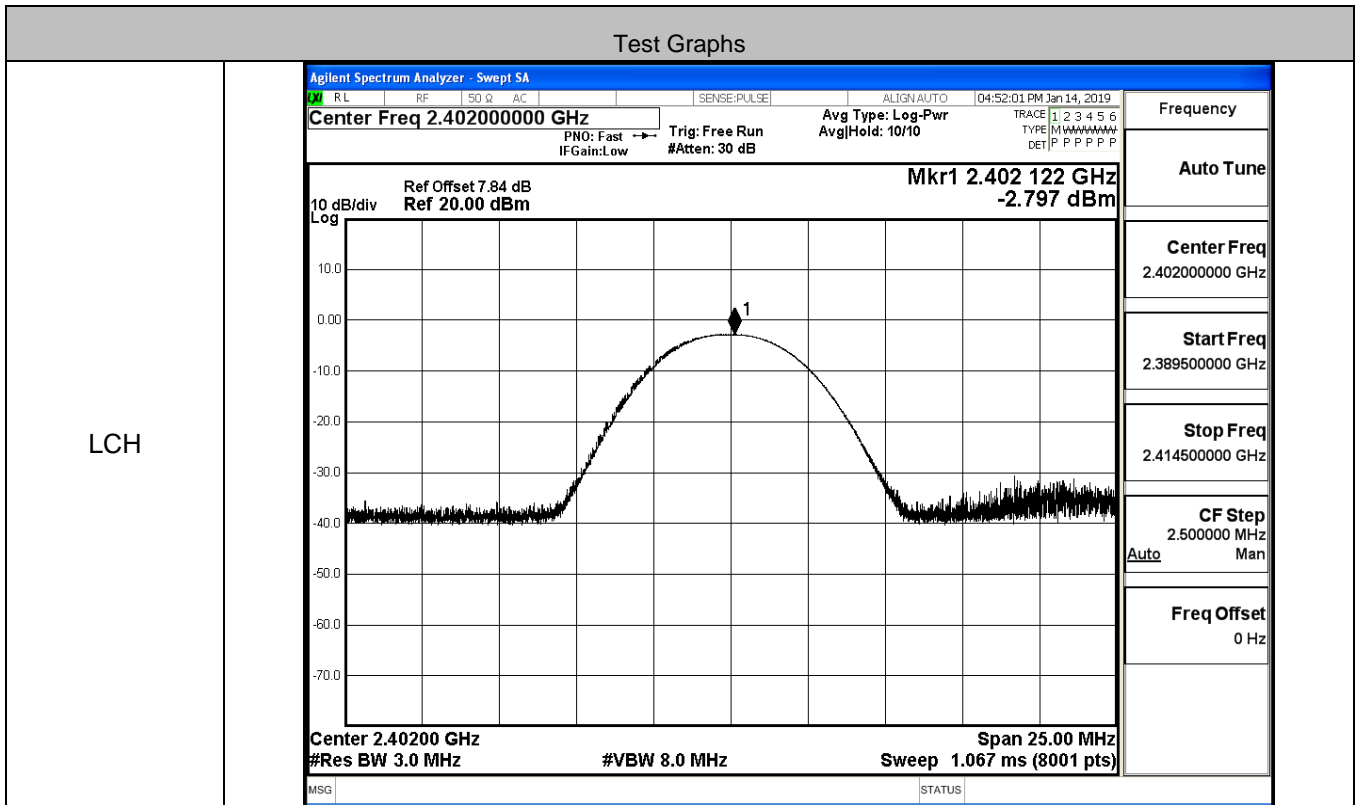

MCH

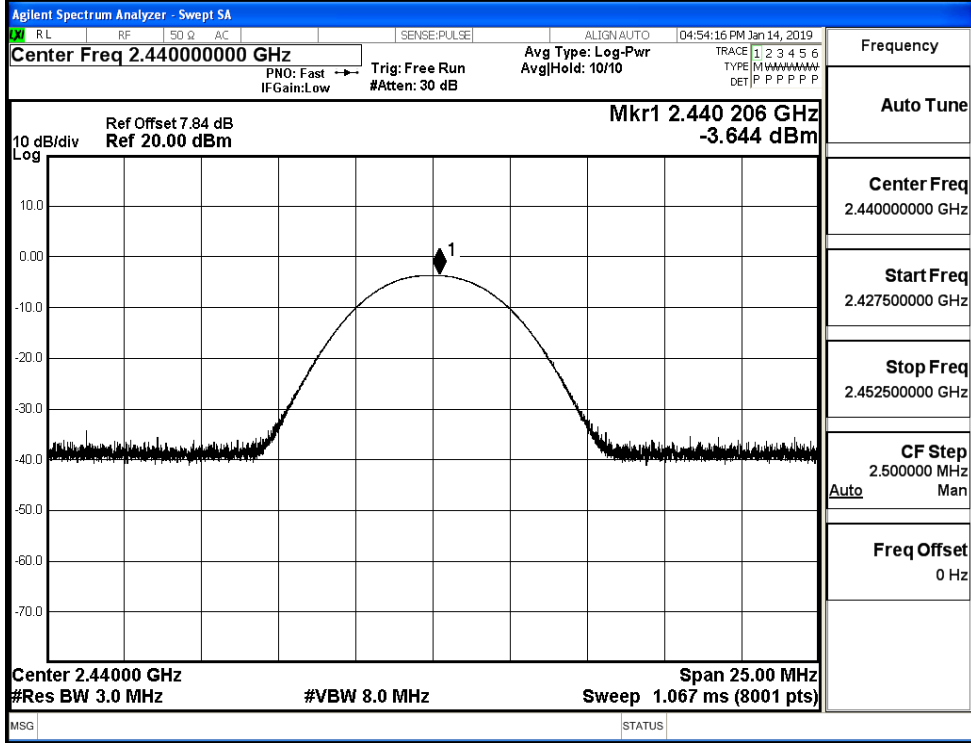



HCH

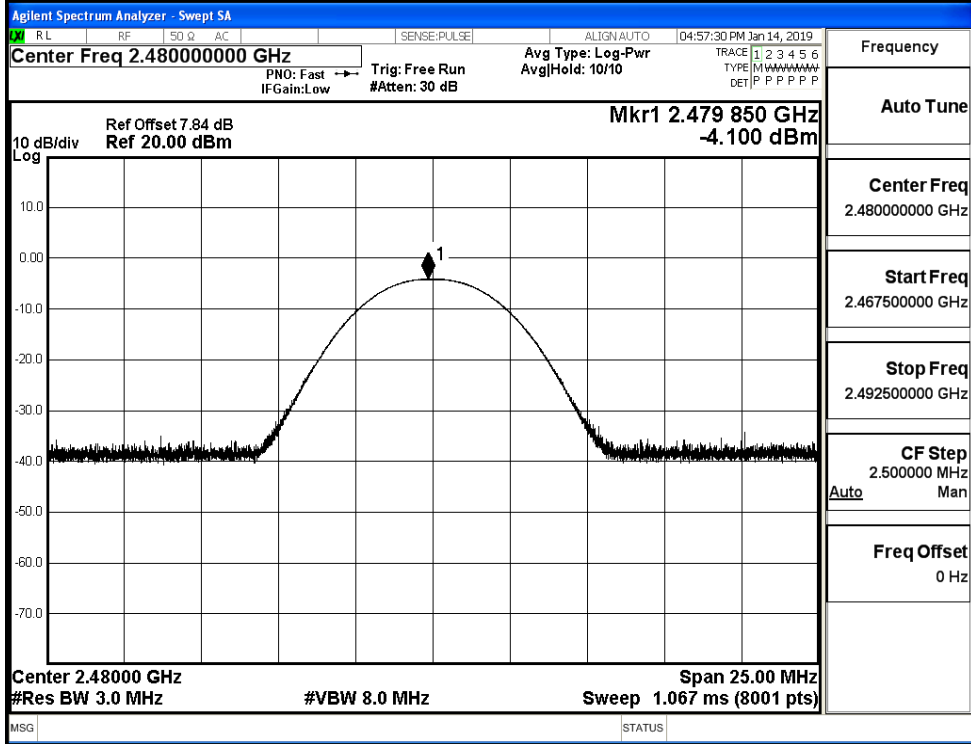


B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-18.354	8	PASS
BT LE	MCH	-19.543	8	PASS
BT LE	HCH	-19.577	8	PASS

Test Graphs

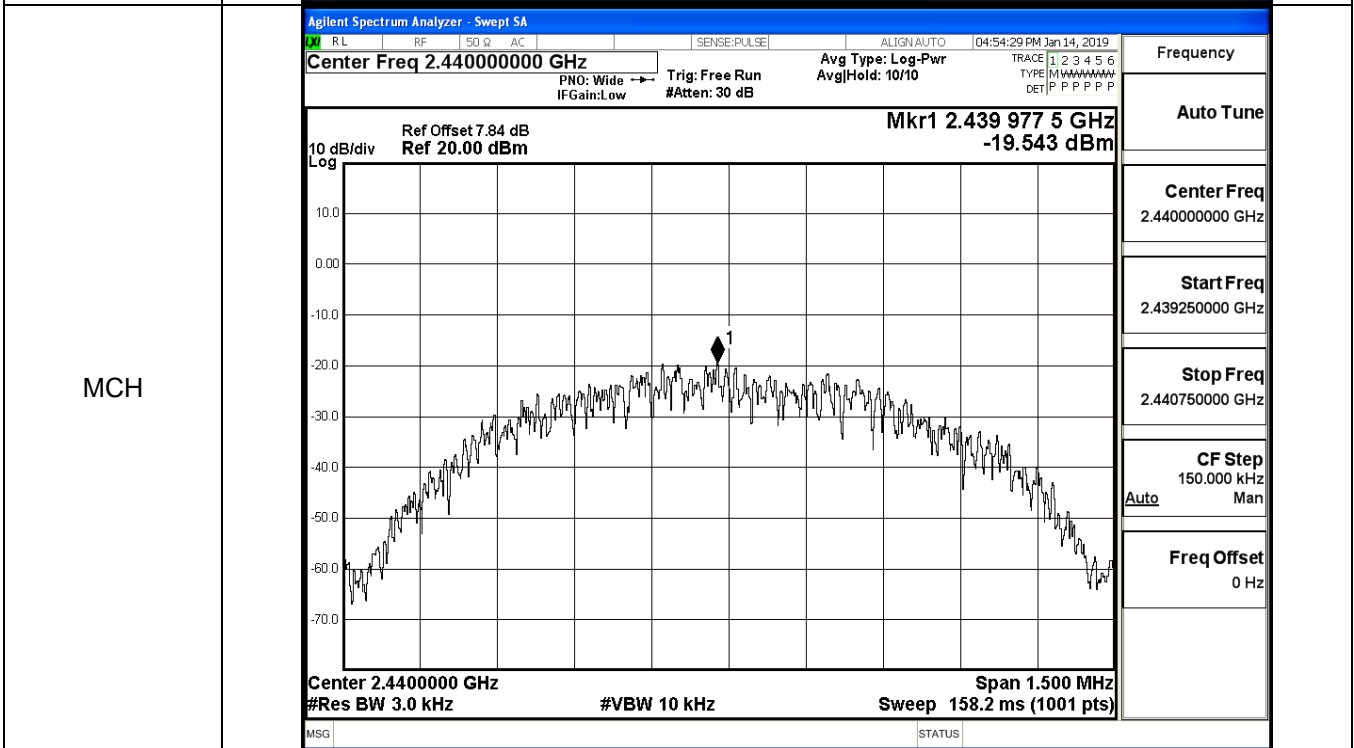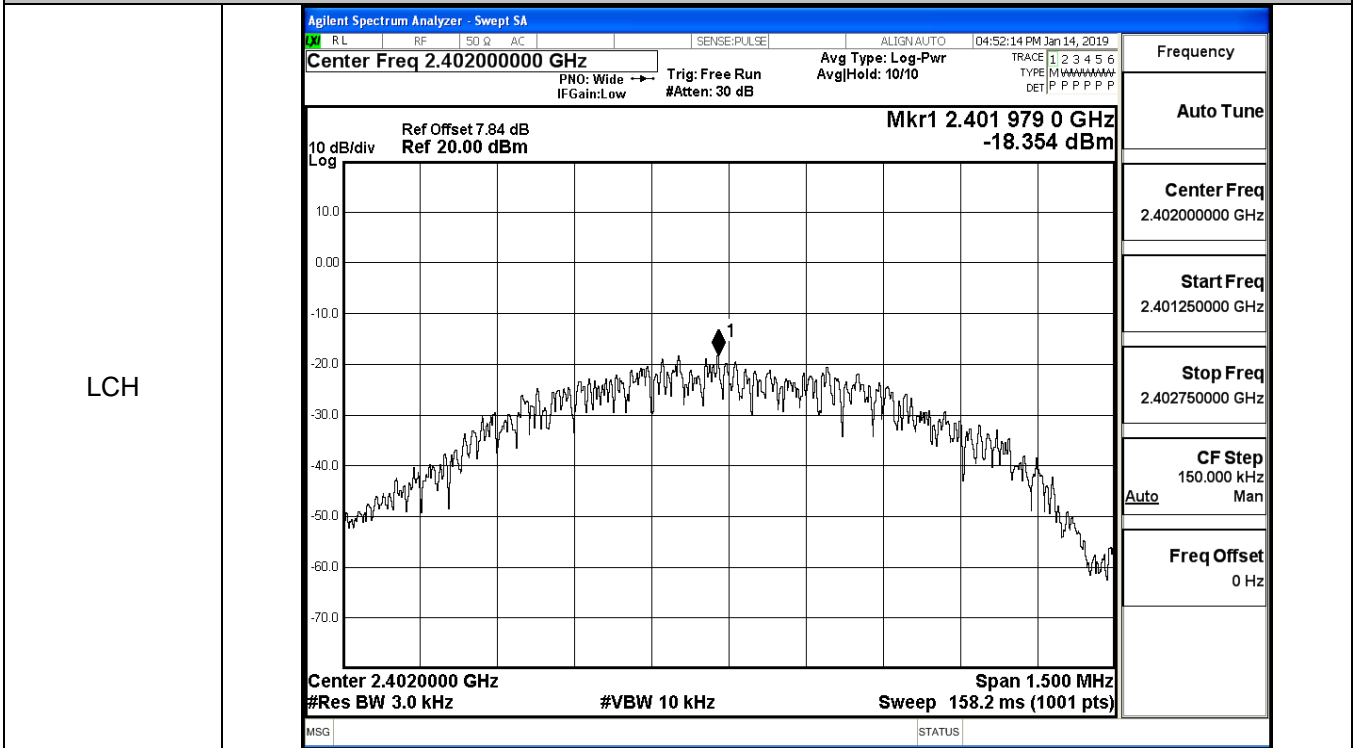
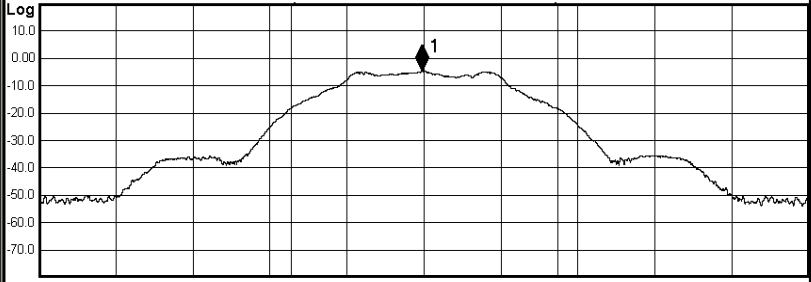


HCH

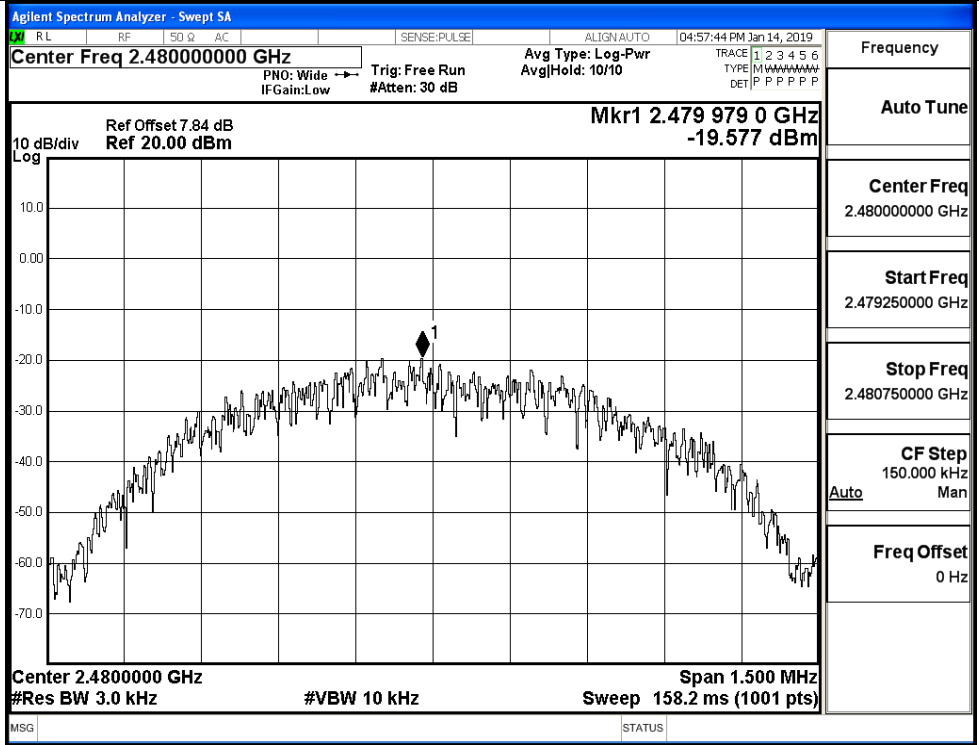

B.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6713	≥0.5	PASS
BT LE	MCH	0.6814	≥0.5	PASS
BT LE	HCH	0.6855	≥0.5	PASS

Test Graphs																																					
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 04:51:50 PM Jan 14, 2019</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p style="margin: 0;">Trig: Free Run AvgHold: >1/1</p> <p style="margin: 0;">#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px; margin: 5px 0;"> <p style="font-size: x-small; margin: 0;">10 dB/div Ref Offset 7.84 dB Mkr1 2.4019895 GHz</p> <p style="font-size: x-small; margin: 0;">Log Ref 20.00 dBm -3.8993 dBm</p>  </div> <p style="font-size: x-small; margin: 0;">Center 2.402 GHz Span 3 MHz</p> <p style="font-size: x-small; margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">3.05 dBm</td> </tr> <tr> <td style="text-align: center;">1.1812 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-66.129 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>671.3 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div> <div style="border: 1px solid black; padding: 5px; margin-top: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 04:54:05 PM Jan 14, 2019</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p style="margin: 0;">Trig: Free Run AvgHold: 1/1</p> <p style="margin: 0;">#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px; margin: 5px 0;"> <p style="font-size: x-small; margin: 0;">10 dB/div Ref Offset 7.84 dB Mkr1 2.4399933 GHz</p> <p style="font-size: x-small; margin: 0;">Log Ref 20.00 dBm -4.6806 dBm</p>  </div> <p style="font-size: x-small; margin: 0;">Center 2.44 GHz Span 3 MHz</p> <p style="font-size: x-small; margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">2.43 dBm</td> </tr> <tr> <td style="text-align: center;">1.0314 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>3.557 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>681.4 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	3.05 dBm	1.1812 MHz			Transmit Freq Error	-66.129 kHz	OBW Power	x dB Bandwidth	671.3 kHz	x dB			99.00 %			-6.00 dB	Occupied Bandwidth	Total Power	2.43 dBm	1.0314 MHz			Transmit Freq Error	3.557 kHz	OBW Power	x dB Bandwidth	681.4 kHz	x dB			99.00 %			-6.00 dB
Occupied Bandwidth	Total Power	3.05 dBm																																			
1.1812 MHz																																					
Transmit Freq Error	-66.129 kHz	OBW Power																																			
x dB Bandwidth	671.3 kHz	x dB																																			
		99.00 %																																			
		-6.00 dB																																			
Occupied Bandwidth	Total Power	2.43 dBm																																			
1.0314 MHz																																					
Transmit Freq Error	3.557 kHz	OBW Power																																			
x dB Bandwidth	681.4 kHz	x dB																																			
		99.00 %																																			
		-6.00 dB																																			

HCH

Agilent Spectrum Analyzer - Occupied BW

RL	RF	50 Ω	AC	SENSE:PULSE	ALIGN:AUTO	04:57:19 PM Jan 14, 2019
Center Freq 2.48000000 GHz			Center Freq: 2.48000000 GHz		Radio Std: None	
			Trig: Free Run		AvgHold: 1/1	
#IFGain:Low			#Atten: 30 dB		Radio Device: BTS	

10 dB/div	Ref Offset 7.84 dB	Mkr1 2.480008 GHz
Log	Ref 20.00 dBm	-5.1528 dBm

Center 2.48 GHz	#VBW 300 kHz	Span 3 MHz
#Res BW 100 kHz		Sweep 1.067 ms

Occupied Bandwidth	Total Power	1.95 dBm
1.0287 MHz		
Transmit Freq Error	4.057 kHz	OBW Power
x dB Bandwidth	685.5 kHz	x dB
		99.00 %
		-6.00 dB

Frequency
Center Freq 2.48000000 GHz
CF Step 300.000 kHz Auto Man
Freq Offset 0 Hz

MSG
STATUS

B.5 Occupied Bandwidth

Mode	Channel	Occupied Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	1.1054	≥0.5	PASS
BT LE	MCH	1.0205	≥0.5	PASS
BT LE	HCH	1.0207	≥0.5	PASS

Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz SENSE:PULSE ALIGN:AUTO 04:50:40 PM Jan 14, 2019</p> <p>Center Freq: 2.40200000 GHz Radio Std: None</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <p>Ref Offset 7.84 dB Ref 20.00 dBm</p> <p>Center 2.402 GHz Span 4 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 4.267 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>3.21 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;">1.1054 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-30.910 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>665.6 kHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p>MSG STATUS</p>	Occupied Bandwidth	Total Power	3.21 dBm	1.1054 MHz			Transmit Freq Error	-30.910 kHz	OBW Power 99.00 %	x dB Bandwidth	665.6 kHz	x dB -6.00 dB	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 400.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	Occupied Bandwidth	Total Power	3.21 dBm											
1.1054 MHz														
Transmit Freq Error	-30.910 kHz	OBW Power 99.00 %												
x dB Bandwidth	665.6 kHz	x dB -6.00 dB												
MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz SENSE:PULSE ALIGN:AUTO 04:51:06 PM Jan 14, 2019</p> <p>Center Freq: 2.44000000 GHz Radio Std: None</p> <p>Trig: Free Run Avg/Hold: 10/10</p> <p>#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <p>Ref Offset 7.84 dB Ref 20.00 dBm</p> <p>Center 2.44 GHz Span 4 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 4.267 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>2.38 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;">1.0205 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>8.441 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>663.9 kHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p>MSG STATUS</p>	Occupied Bandwidth	Total Power	2.38 dBm	1.0205 MHz			Transmit Freq Error	8.441 kHz	OBW Power 99.00 %	x dB Bandwidth	663.9 kHz	x dB -6.00 dB	<p>Frequency</p> <p>Center Freq 2.44000000 GHz</p> <p>CF Step 400.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	Occupied Bandwidth	Total Power	2.38 dBm											
1.0205 MHz														
Transmit Freq Error	8.441 kHz	OBW Power 99.00 %												
x dB Bandwidth	663.9 kHz	x dB -6.00 dB												

HCH

Agilent Spectrum Analyzer - Occupied BW

RL	RF	50 Ω	AC	SENSE:PULSE	ALIGN:AUTO	04:51:28 PM Jan 14, 2019
Center Freq 2.480000000 GHz			Center Freq: 2.480000000 GHz		Radio Std: None	
			Trig: Free Run		AvgHold: 10/10	
			#IFGain:Low		#Atten: 30 dB	
					Radio Device: BTS	

10 dB/div
Log

Ref Offset 7.84 dB
Ref 20.00 dBm

Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 4 MHz
Sweep 4.267 ms

Occupied Bandwidth		Total Power	
1.0207 MHz		1.97 dBm	
Transmit Freq Error	8.359 kHz	OBW Power	99.00 %
x dB Bandwidth	658.6 kHz	x dB	-6.00 dB

Frequency

Center Freq
2.480000000 GHz


CF Step
400.000 kHz
Auto Man

Freq Offset
0 Hz

MSG
STATUS


B.6 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-3.856	-44.440	-23.856	PASS
BT LE	MCH	-4.69	-45.041	-24.690	PASS
BT LE	HCH	-5.166	-43.672	-25.166	PASS

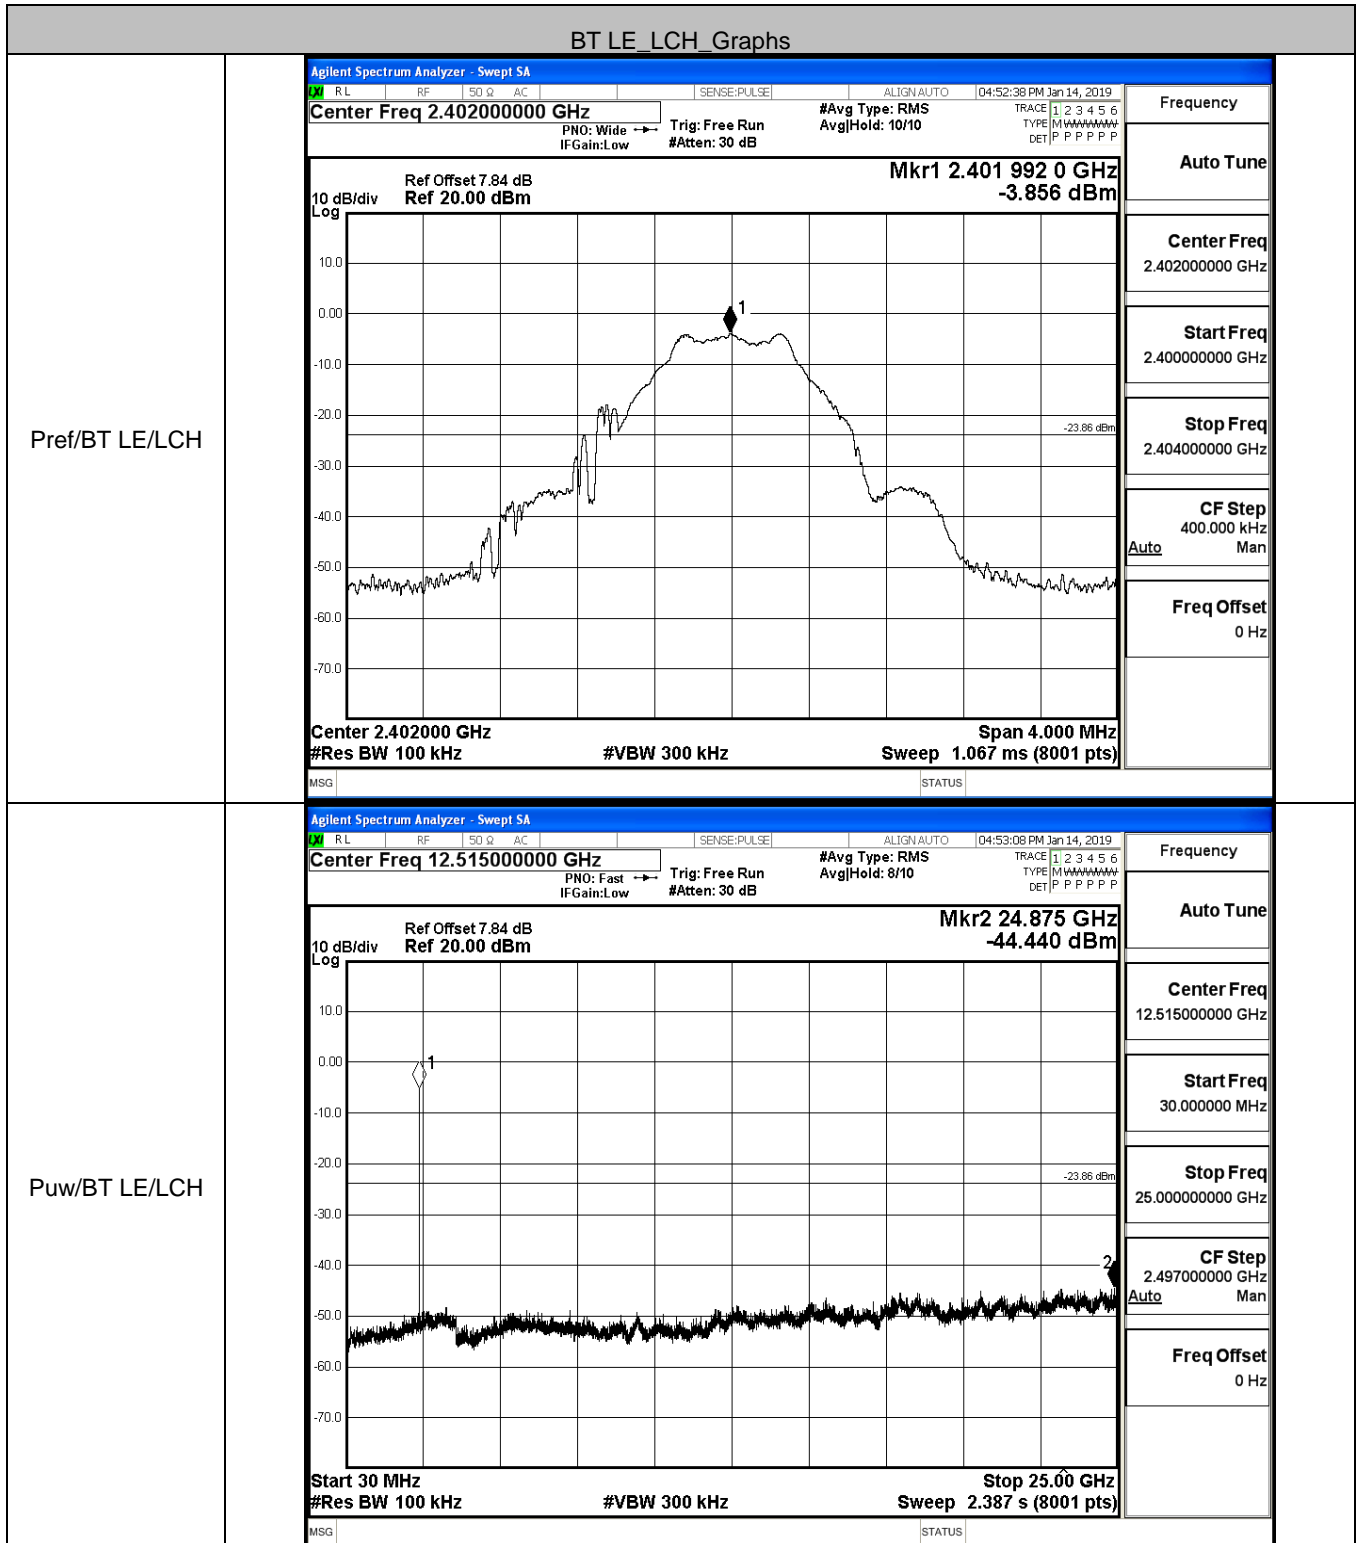


BT LE_MCH_Graphs

Pref/BT LE/MCH

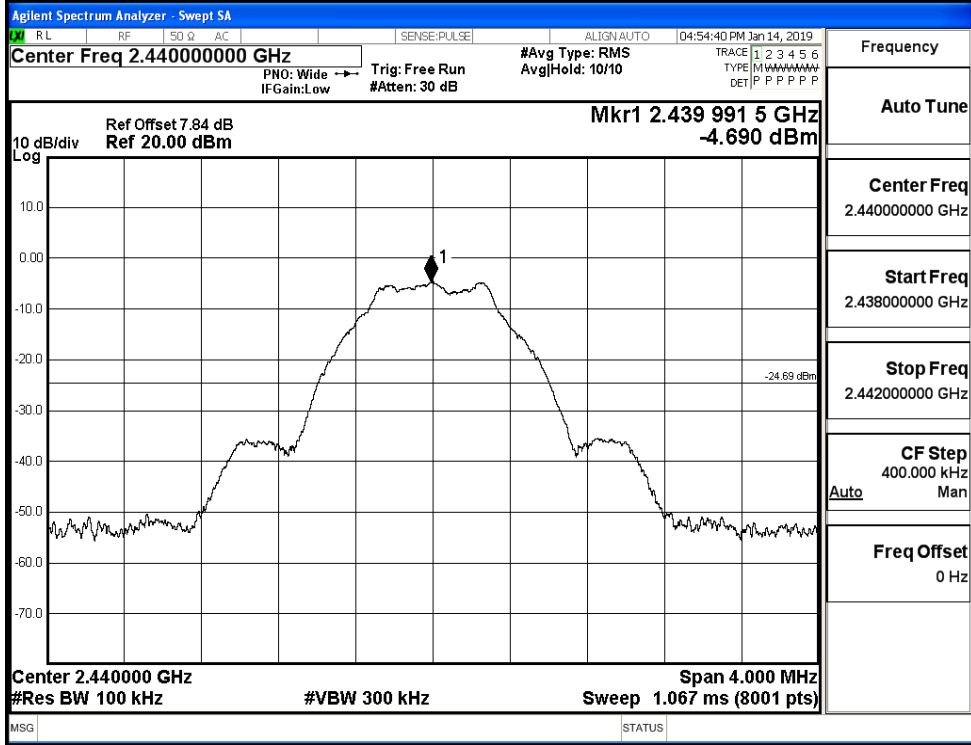


Puw/BT LE/MCH

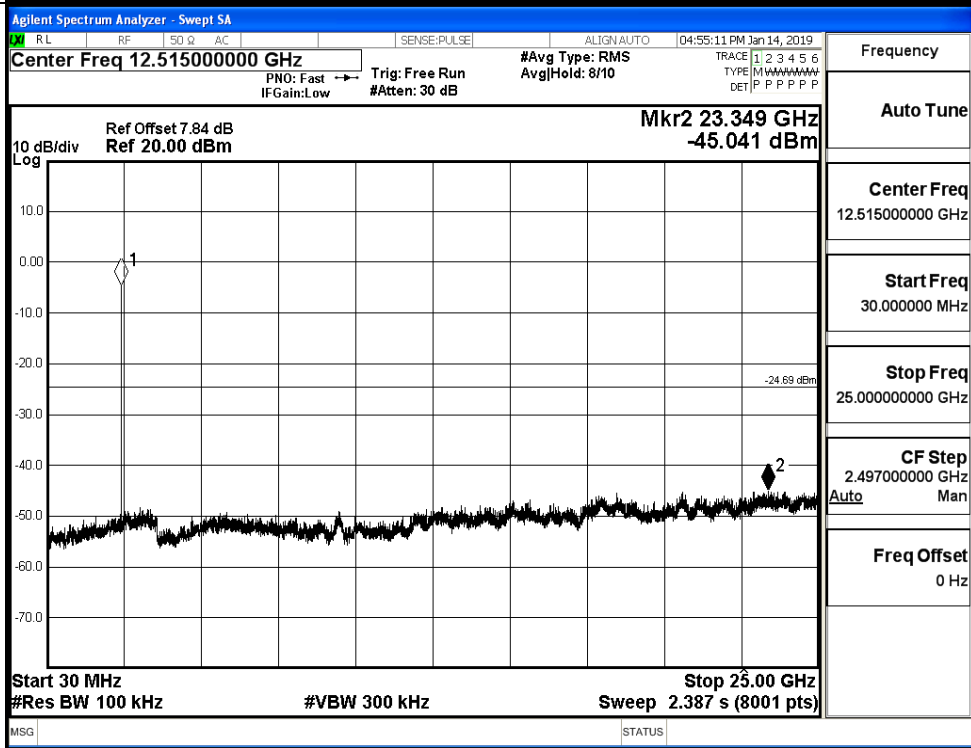


BT LE_HCH_Graphs

Pref/BT LE/HCH

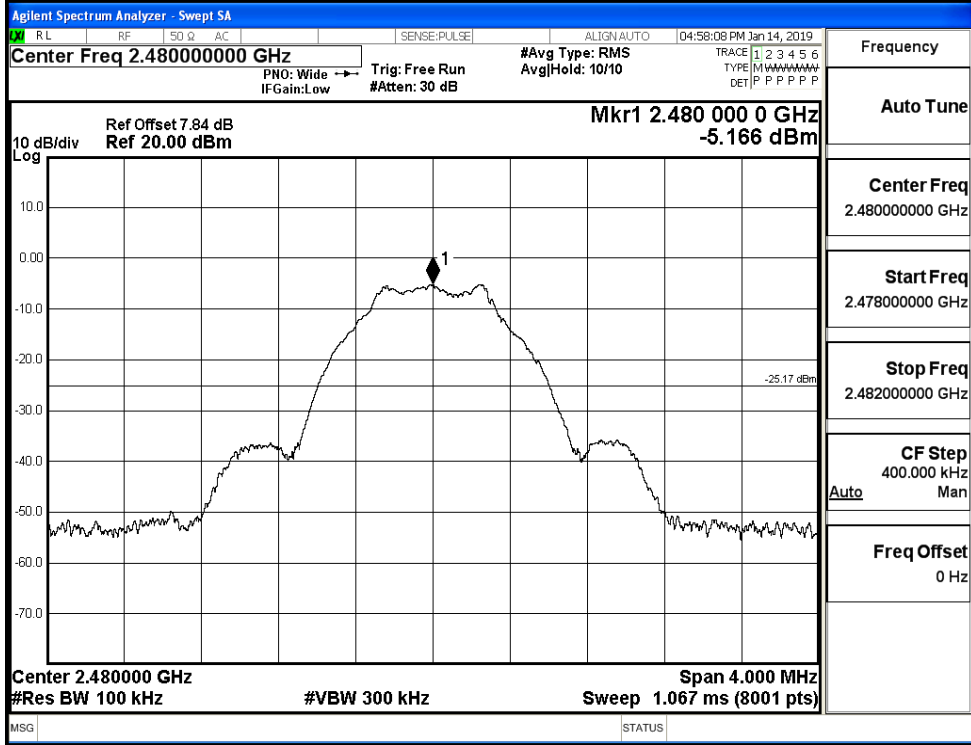

Puw/BT LE/HCH

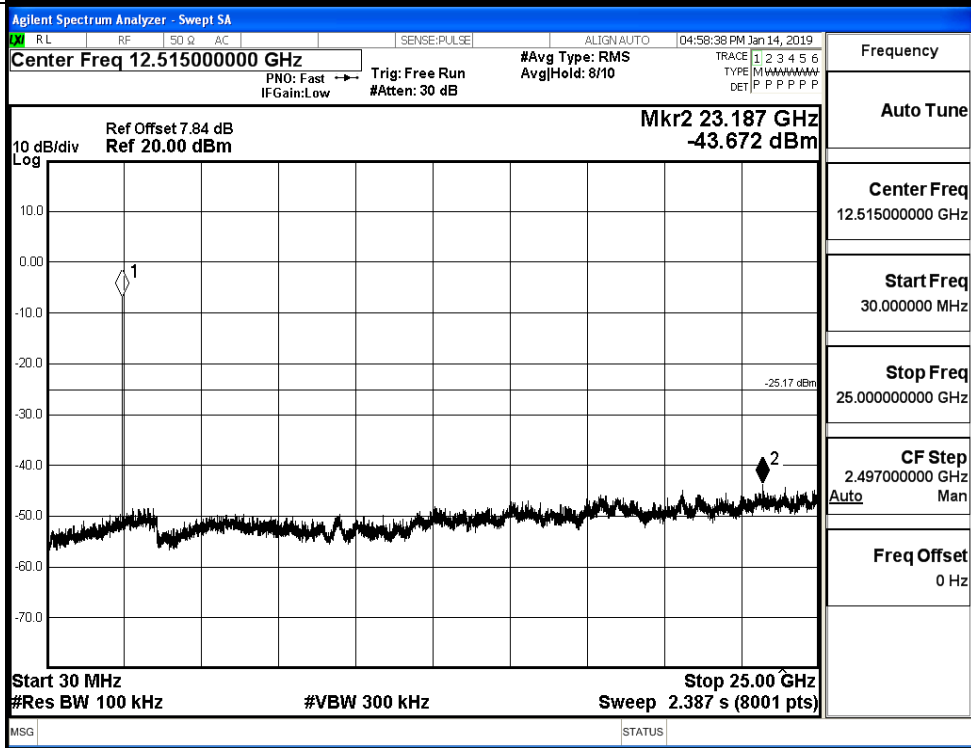

B.7 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-4.210	-50.890	-24.21	PASS
BT LE	HCH	-5.056	-25.06	PASS	

Test Graphs

LCH

Agilent Spectrum Analyzer - Swept SA
 Center Freq 2.35700000 GHz
 Max Spurious Level -50.890 dBm
 Mkr4 2.376 623 GHz
 Start 2.31000 GHz Stop 2.40400 GHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 9.067 ms (8001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.402 238 GHz	-4.210 dBm			
2	N	f		2.400 000 GHz	-53.047 dBm			
3	N	f		2.390 000 GHz	-53.220 dBm			
4	N	f		2.376 623 GHz	-50.890 dBm			

Frequency

Auto Tune

Center Freq
2.35700000 GHz

Start Freq
2.31000000 GHz

Stop Freq
2.40400000 GHz

CF Step
9.400000 MHz

Freq Offset
0 Hz

HCH

Agilent Spectrum Analyzer - Swept SA
 Center Freq 2.48900000 GHz
 Max Spurious Level -49.982 dBm
 Mkr4 2.497 318 75 GHz
 Start 2.47800 GHz Stop 2.50000 GHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (8001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.480 007 50 GHz	-5.056 dBm			
2	N	f		2.483 500 00 GHz	-53.401 dBm			
3	N	f		2.500 000 00 GHz	-52.643 dBm			
4	N	f		2.497 318 75 GHz	-49.982 dBm			

Frequency

Auto Tune

Center Freq
2.48900000 GHz

Start Freq
2.47800000 GHz

Stop Freq
2.50000000 GHz


CF Step
2.200000 MHz

Freq Offset
0 Hz


B.8 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
BT LE	2402	Ant1	2310.0	-42.66	2.0	0	54.60	PEAK	74	PASS
		Ant1	2310.0	-54.26	2.0	0	43.00	AV	54	PASS
		Ant1	2390.0	-44.07	2.0	0	53.19	PEAK	74	PASS
		Ant1	2390.0	-54.02	2.0	0	43.24	AV	54	PASS
	2480	Ant1	2483.5	-43.00	2.0	0	54.26	PEAK	74	PASS
		Ant1	2483.5	-53.82	2.0	0	43.44	AV	54	PASS
		Ant1	2500.0	-44.31	2.0	0	52.95	PEAK	74	PASS
		Ant1	2500.0	-53.63	2.0	0	43.62	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

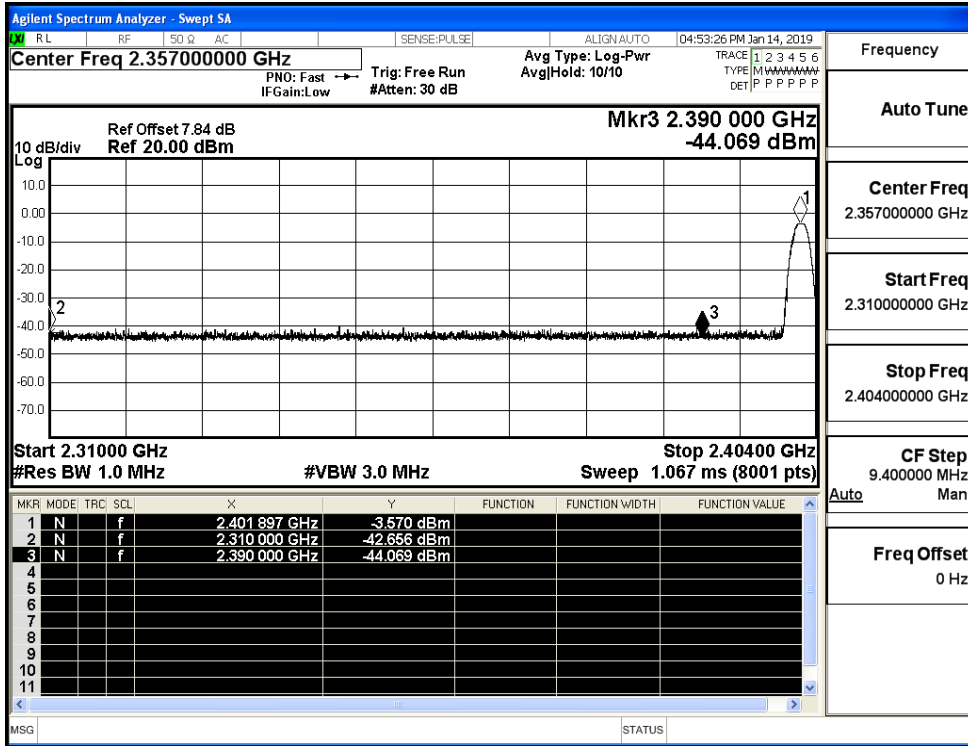

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

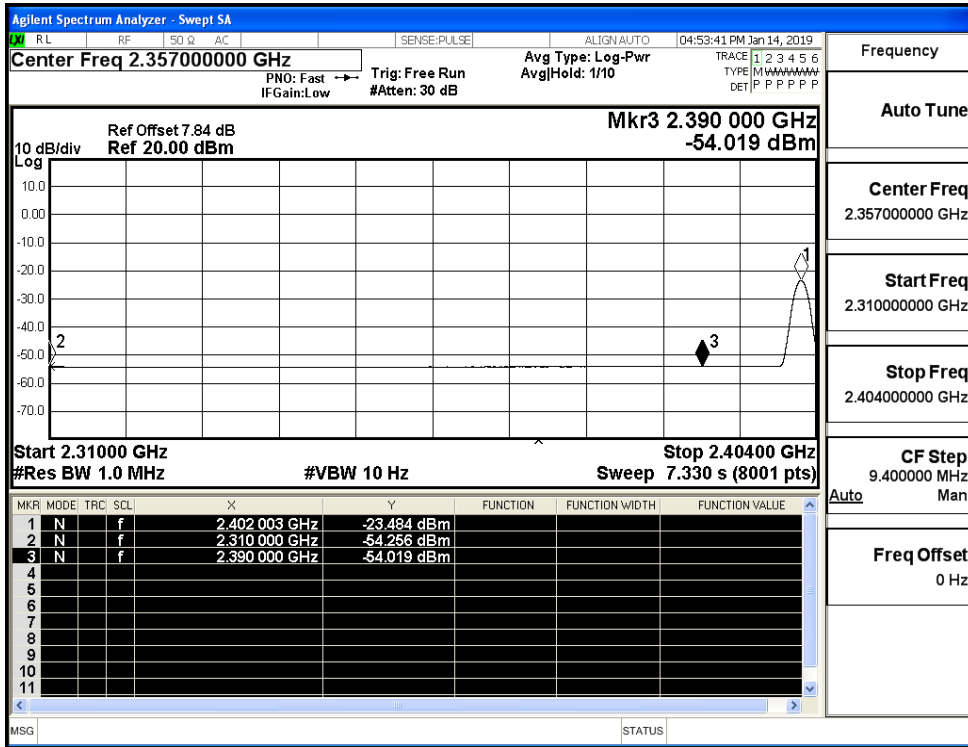

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

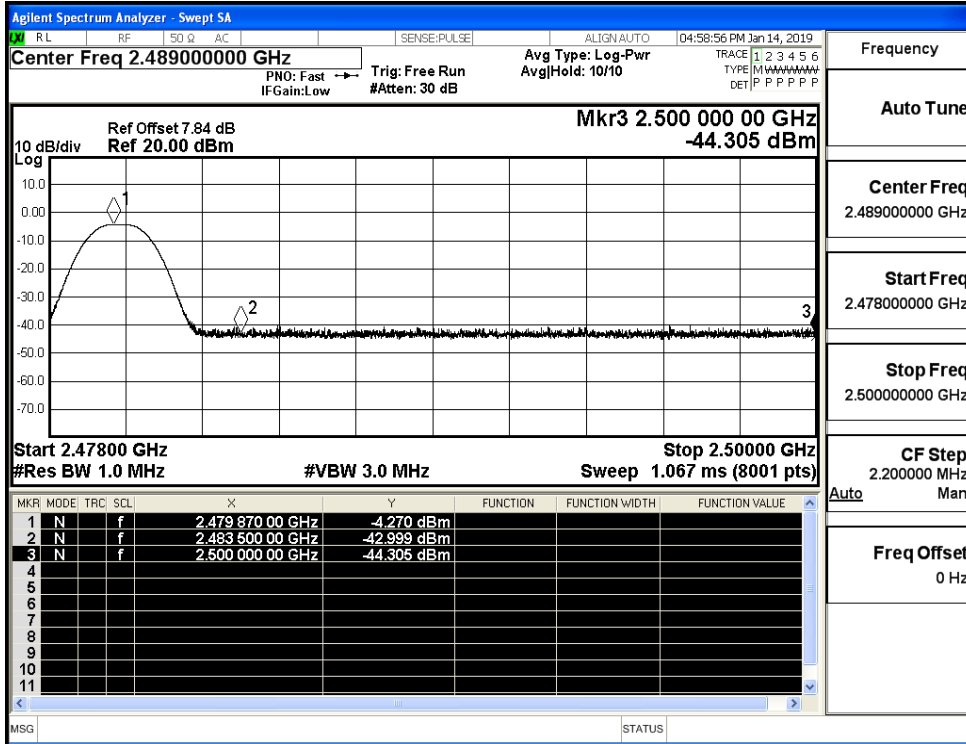

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

